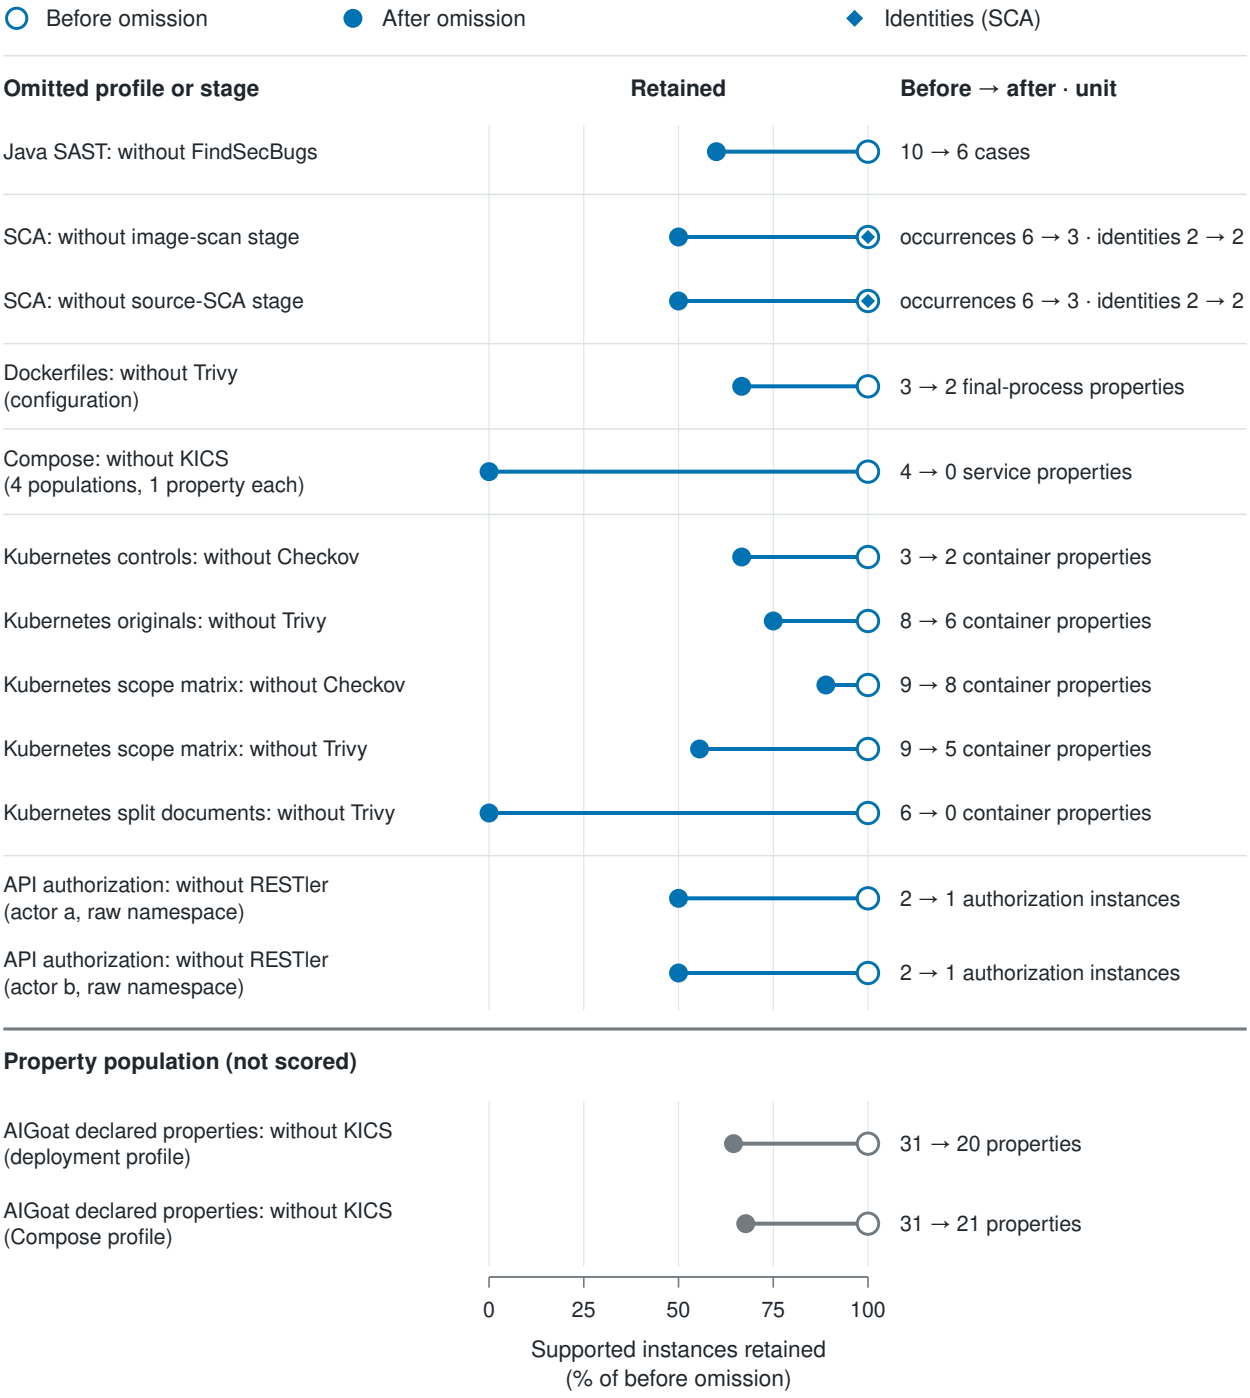
Before omission
After omission
Identities (SCA)
Omitted profile or stage
Retained
Before → after · unit
Java SAST: without FindSecBugs
10 → 6 cases
SCA: without image-scan stage
occurrences 6 → 3 · identities 2 → 2
SCA: without source-SCA stage
occurrences 6 → 3 · identities 2 → 2
Dockerfiles: without Trivy (configuration)
3 → 2 final-process properties
Compose: without KICS (4 populations, 1 property each)
4 → 0 service properties
Kubernetes controls: without Checkov
3 → 2 container properties
Kubernetes originals: without Trivy
8 → 6 container properties
Kubernetes scope matrix: without Checkov
9 → 8 container properties
Kubernetes scope matrix: without Trivy
9 → 5 container properties
Kubernetes split documents: without Trivy
6 → 0 container properties
API authorization: without RESTler (actor a, raw namespace)
2 → 1 authorization instances
API authorization: without RESTler (actor b, raw namespace)
2 → 1 authorization instances
Property population (not scored)
AIGoat declared properties: without KICS (deployment profile)
31 → 20 properties
AIGoat declared properties: without KICS (Compose profile)
31 → 21 properties
0
25
50
75
100
Supported instances retained (% of before omission)