(a) Decisions by reference class

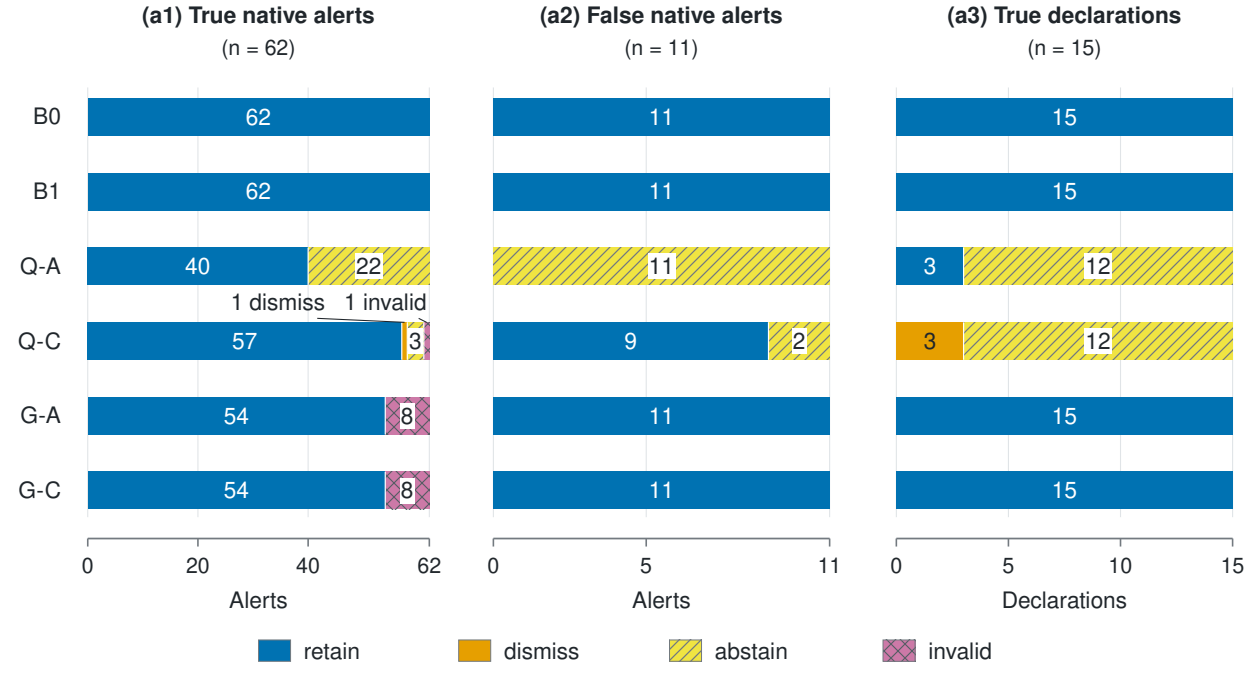

(b) Operational confusion matrices for native alerts after conservative fallback (n = 73)

B0, B1, Q-A, G-A, G-C

	Kept	Removed
True native	62	0
False native	11	0

Q-C

	Kept	Removed
True native	61	1
False native	11	0