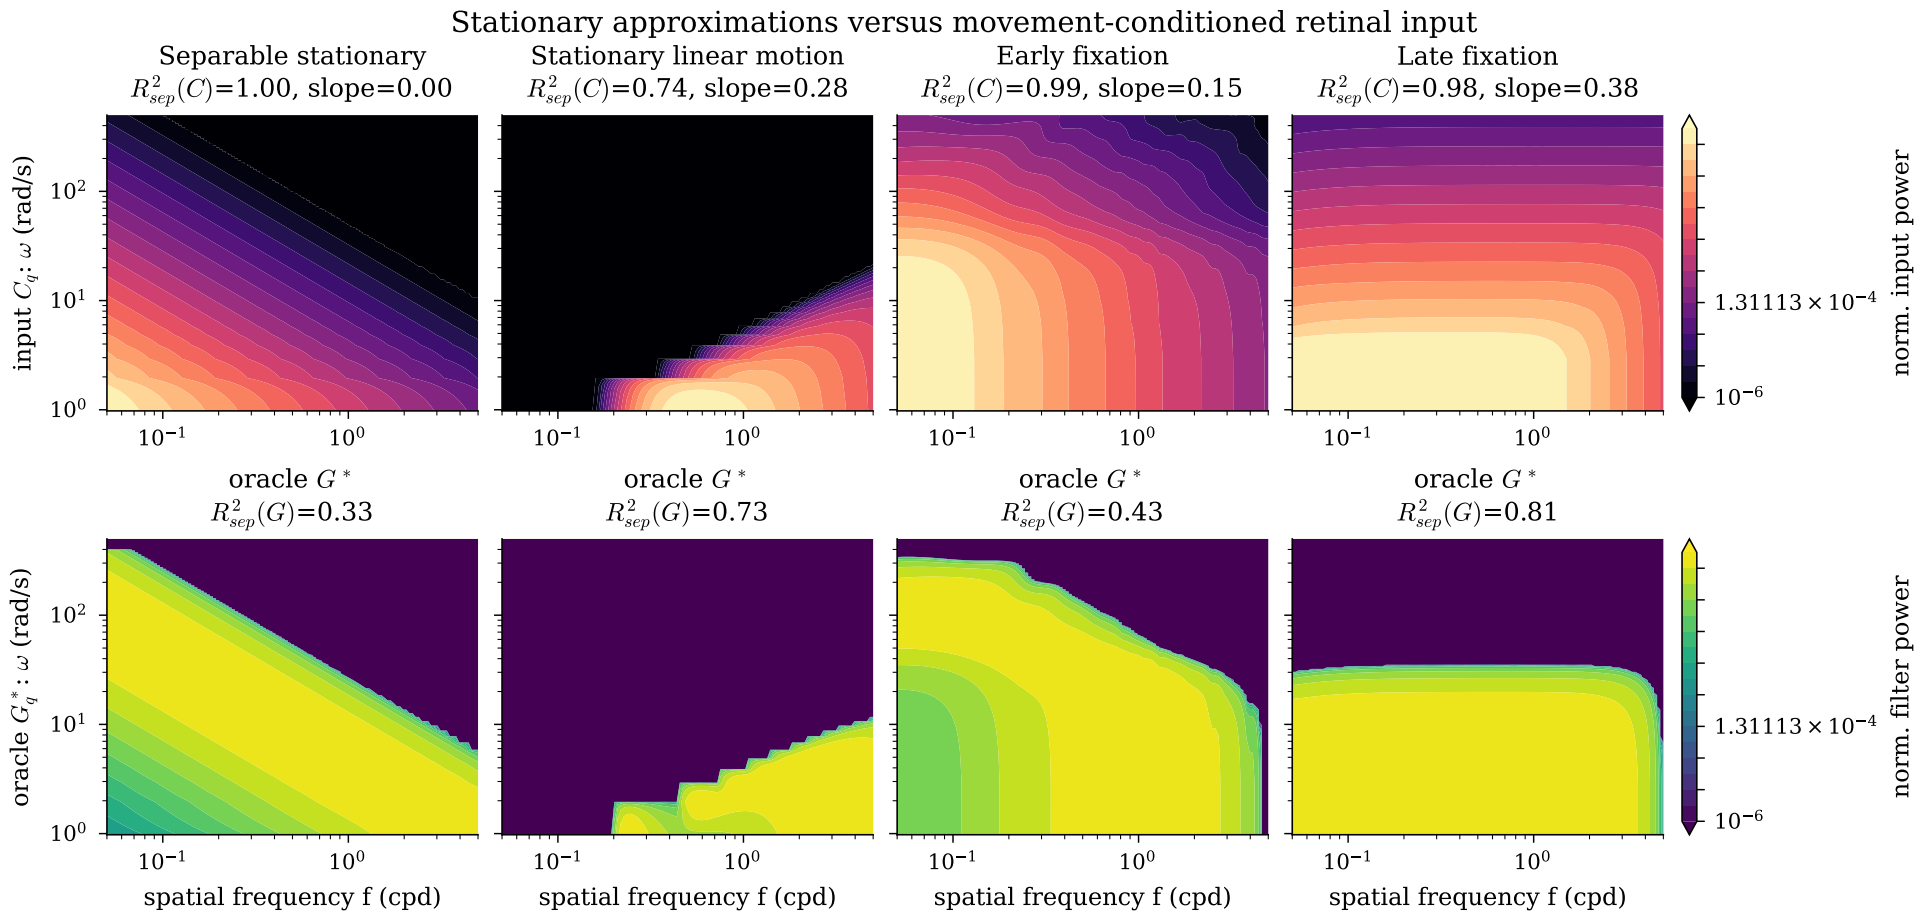
Stationary approximations versus movement-conditioned retinal input
Separable stationary
$R^2_{sep}(C)$=1.00, slope=0.00
Stationary linear motion
$R^2_{sep}(C)$=0.74, slope=0.28
Early fixation
$R^2_{sep}(C)$=0.99, slope=0.15
Late fixation
$R^2_{sep}(C)$=0.98, slope=0.38
input C_q: ω (rad/s)
10^2
10^1
10^0
10^{-1}
10^0
1.31113×10^{-4}
10^{-6}
norm. input power
oracle G^*
$R^2_{sep}(G)$=0.33
oracle G^*
$R^2_{sep}(G)$=0.73
oracle G^*
$R^2_{sep}(G)$=0.43
oracle G^*
$R^2_{sep}(G)$=0.81
oracle G^*_q: ω (rad/s)
norm. filter power
spatial frequency f (cpd)