

Rubber Distributor







We live in a fast-moving time. It is also frequently necessary to make modifications to power distribution systems. Power distributors used in industrial buildings, production facilities, laboratories, harbour docks, markets, tunnel, road construction sites and many other locations therefore frequently need to be adapted to their external conditions. In extreme applications, these distribution systems are often exposed to very harsh environmental conditions.

That's where the MODBOX® is the ideal solution. The patented MODBOX® Rubber Distributor Series combines all the demands placed on power distributors up to a maximum degree of protection of IP67.

When it comes to toughness, the MODBOX® leaves no wish unfulfilled. The material properties of the MODBOX® are unique: its robustness and resistance to ageing, temperature, oil and acid are unbeatable characteristics that can not be achieved by other

distributor housings. The MODBOX® is, of course, also fully insulated, UV-resistant and halogen-free as well as flame-resistant and self-extinguishing.

The truly innovative enclosure design allows existing installations to be adapted quickly. Order separation attachments are provided in the enclosure. This makes it easier to install strong-current and weak-current systems.

An outstanding feature is that MODBOX® units can be easily connected next to each as modules without any modifications needing to be made to the basic installation.

The MODBOX® is freely configurable. Four openings in the side of the MODBOX® allow modules to be added in any direction. Another feature are the yellow connecting and end corners. To further improve safety, the luminous end corners (luminescence time up to 7 hours) are recommended.

Technical Data


- Maximum Protection degree IP67
- MODBOX MIDI with user-friendly OTC operating window
- Modular expansion on all 4 sides possible
- Yellow end corners for increased safety
- Cover available on request with or without rain roof
- Hard Rubber mixture with hardness grade of 99 shore
- Corners and stability framework are made of cured glass-fibre-reinforced Polyamide
- Outer corners luminous on request
- Fully insulated

Material properties

- Impact-resistant
- UV-resistant
- Halogen-free
- Resistant to ageing, temperature, oil and acid
- Excellent resistance to chemicals
- Flame-resistant, self-extinguishing



- Enclosure made of high-quality, impact-resistant solid rubber
- User-friendly OTC operating window
- Modular extension
- Hardness grade of 99 shore
- Resistant to ageing, temperature, oil and acid
- Excellent resistance to chemicals
- Flame-resistant, self-extinguishing
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Black top and bottom section with yellow end corners

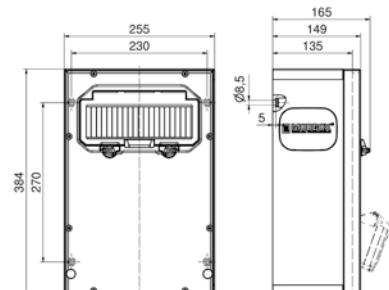

Depth X (mm)

Component	IP44	IP67
OTC operating window	165	165
Domestic socket	152	195
CEE 16A 3p	190	190
CEE 16A 4p	194	192
CEE 16A 5p	197	195
CEE 32A 3p / 4p	201	203
CEE 32A 5p	203	204
30 MB 218	219	221
CEE 63A 3p / 4p / 5p	219	221

Ref. no. 5401882

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)

Fuse:

3 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402775



Ref. no. 5401884

Components:

6 Domestic sockets 16A, 230V ~
(type F - German standard)

Fuse:

6 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402776



Ref. no. 5401886

Components:

2 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402510



Ref. no. 5401892

Components:

2 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402777



Ref. no. 5401894

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



Ref. no. 5402794

Components:

2 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 double data socket RJ45 CAT6a IP55

Fuse:


2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 2 x M20 and 2x M32

Connection option:
for 2 cables up to 5 x 25 mm²



- Enclosure made of high-quality, impact-resistant solid rubber
- Modular extension
- Hardness grade of 99 shore
- Resistant to ageing, temperature, oil and acid
- Excellent resistance to chemicals
- Flame-resistant, self-extinguishing
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free
QUICK-CONNECT technology
- Black top and bottom section with yellow end corners

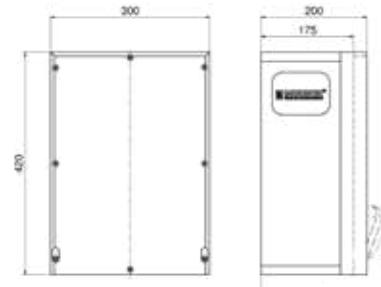

Depth X (mm)

Component	IP44	IP67
Domestic socket	192	235
CEE 16A 3p	230	230
CEE 16A 4p	234	232
CEE 16A 5p	237	235
CEE 32A 3p / 4p	241	243
CEE 32A 5p	243	244
CEE 63A 3p / 4p / 5p	259	261

13 MB 109

Ref. no. 5401455**Components:**

3 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402778

**Ref. no. 5401343****Components:**

3 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 16 mm²

with RCCB B type: 5402438

**Ref. no. 5401662****Components:**

3 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

3 Neozed D01, 1p
1 Neozed D01, 3p
1 Neozed D02, 3p

Cable entry at top and bottom:
each with 2x M40

Connection option:

**Ref. no. 5401567****Components:**

3 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 32A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
2 C-type MCBs 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402779

**Ref. no. 5401668****Components:**

3 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

3 Neozed D01, 1p
1 Neozed D01, 3p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402780

**Ref. no. 5402044****Components:**

2 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 32A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
2 C-type MCBs 32A, 3p
1 RCCB 630.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



Ref. no. 5401302

Components:

2 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402511



Ref. no. 5401453

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402783



Ref. no. 5402047

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

4 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



Ref. no. 5402059

Components:

2 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 double data socket RJ45 CAT6a IP55

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 2x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



Ref. no. 5402046

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 16A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402782



Ref. no. 5402795

Components:

2 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
2 RJ45 CAT6a below operating window

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 2x M20 and 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402796



Ref. no. 5401274

Components:

2 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402784



Ref. no. 5402060

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 double data socket RJ45 CAT6a IP55

Fuse:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 2x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



Ref. no. 5402159**Components:**

4 Domestic sockets 16A, 230V ~
(type F - German standard)

Fuse:

4 C-type MCBS 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry at bottom:
1x M12, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402787

**Ref. no. 5402160****Ref. no. 5402160****Components:**

3 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p

Fuse:

3 C-type MCBS 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at bottom:
1x M12, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402788

**Ref. no. 5402161****Ref. no. 5402162****Components:**

2 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p

Fuse:

2 C-type MCBS 16A, 1p
2 C-type MCBS 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at bottom:
1x M12, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402789

**Ref. no. 5402163****Ref. no. 5402164****Components:**

2 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

2 C-type MCBS 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at bottom:
1x M12, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402790

**Ref. no. 5402165****Ref. no. 5402166****Components:**

3 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:


3 C-type MCBS 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at bottom:
1x M12, 2x M40

Connection option:



- Enclosure made of high-quality, impact-resistant solid rubber
- Space for up to 18 modules under operating window
- Hardness grade of 97 shore
- Hinged lid
- Resistant to ageing, temperature, oil and acid
- Flame-resistant, self-extinguishing
- All CEE sockets with screwless, maintenance-free
QUICK-CONNECT technology



13 MB 117

Depth X (mm)

Component	IP44	IP67	Component	IP44	IP67
Domestic socket	172	215	CEE 32A 3p / 4p	221	223
CEE 16A 3p	210	210	CEE 32A 5p	223	224
CEE 16A 4p	214	212	CEE 63A 3p / 4p / 5p	239	241
CEE 16A 5p	217	215			

Ref. no. 5402049

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

4 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

with RCCB B type: 5402633



Ref. no. 5402051

Components:

2 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 Neozed D02, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



Ref. no. 5402053

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Fuse:

4 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p

Cable entry at top and bottom:
each with 2x M40



Ref. no. 5402050

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

4 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 C-type MCB 32A, 3p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



Ref. no. 5402052

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Fuse:

4 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



Ref. no. 5402054

Components:



2 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Fuse:

2 Neozed D01, 1p
1 Neozed D01, 3p
2 Neozed D02, 3p



- Enclosure made of high-quality, impact-resistant solid rubber
- Small, compact design
- Top and bottom in signal yellow
- Handle made of stainless steel



13 MB 123

Depth X (in mm)

Component	IP44	IP67	Component	IP44	IP67
Operating window	90		CEE 16A 5p	127	130
Domestic socket	98.5	114	CEE 32A 3p / 4p	130	135
CEE 16A 3p	121	127	CEE 32A 5p	139	139
CEE 16A 4p	123	128			

Ref. no. 576086

1 CEE socket 16A, 400V, 5p
1 electricity meter 10/65A

Cable entry/inlet:

CEE plug 16A, 400V, 5p with lead 2 m H07RN-F5G1,5

**Ref. no. 57623****Components:**

4 Domestic sockets 16A, 230V ~ (type F - German standard)

Cable entry/inlet:

Domestic plug 16A, 230V, 3p
4 m cable H07RN-F3G2,5

**Ref. no. 57255****Components:**

2 Domestic sockets 16A, 230V ~ (type F - German standard)
1 CEE socket 16A, 400V, 5p

Fuse:

1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE plug 16A, 400V, 5p with lead 2 m H07RN-F5G2,5

**Ref. no. 57148****Components:**

2 Domestic sockets 16A, 230V ~ (type F - German standard)
2 CEE sockets 16A, 400V, 5p

Cable entry/inlet:

CEE plug 16A, 400V, 5p with lead 2 m H07RN-F5G2,5

**Ref. no. 57996****Components:**

2 Domestic sockets 16A, 230V ~ (type F - German standard)
1 CEE socket 16A, 400V, 5p
1 rotary field measuring device

Fuse:

1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE phase inverter 16A, 400V, 5p with lead 2 m H07RN-F5G2,5

**Ref. no. 57143****Components:**


3 Domestic sockets 16A, 230V ~ (type F - German standard)
1 CEE socket 16A, 400V, 5p

Cable entry/inlet:

CEE plug 16A, 400V, 5p with lead 2 m H07RN-F5G2,5



- Enclosure made of high-quality, impact-resistant solid rubber
- Ideally suited to tough, harsh and difficult conditions
- Convenient and compact design
- With moulded carrying handle

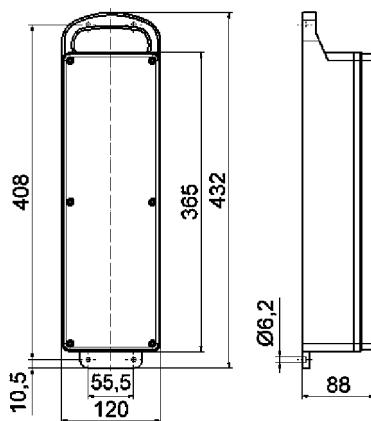

13 MB 7

Ref. no. 530179

Components:

- 1 Domestic socket 16A, 230V ~
(type F - German standard)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Fuse:

- 1 C-type MCB 16A, 1p
- 1 C-type MCB 16A, 3p

Cable entry/inlet:

CEE plug 32A, 400V, 5p with
lead 1.8 m H07RN-F5G2,5



Ref. no. 53141

Components:

- 4 Domestic sockets 16A, 230V ~
(type F - German standard)

Fuse:

- 1 RCCB 25/0.03A, 2p

Cable entry/inlet:

Domestic plug 16A, 230V, 3p with 2 m
lead H07RN-F3G2,5



Ref. no. 53420

Components:

- 2 CEE sockets 16A, 400V, 5p

Fuse:

- 2 C-type MCBs 16A, 3p

Cable entry/inlet:

CEE plug 32A, 400V, 5p with
lead 2 m H07RN-F5G6



Ref. no. 5310

Components:

- 3 CEE sockets 16A, 400V, 5p

Cable entry/inlet:

CEE plug 16A, 400V, 5p with
lead 1.8 m H07RN-F5G2,5



Ref. no. 53525

Components:

- 3 CEE sockets 32A, 400V, 5p

Cable entry/inlet:

CEE plug 32A, 400V, 5p with
lead 2 m H07RN-F5G4



Ref. no. 53290

Components:

- 4 Domestic sockets 16A, 230V ~
(type F - German standard)
- 1 CEE socket 16A, 400V, 5p

Cable entry/inlet:

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5



Ref. no. 530003

Components:

2 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p

Fuse:

2 C-type MCBS 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5

**Ref. no. 530**

Components:

2 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p

Fuse:

1 RCCB 40/0.03A, 4p

Cable entry/inlet:
CEE plug 16A, 400V, 5p with
lead 1.8 m H07RN-F5G2,5

**Ref. no. 5311**

Components:

2 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p

Cable entry/inlet:

CEE plug 16A, 400V, 5p with
lead 1.8 m H07RN-F5G2,5

**Ref. no. 5350**

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)

Cable entry/inlet:
Domestic plug 16A, 230V, 3p
with 2 m cable H07RN-F3G2,5

**Ref. no. 53247**

Components:

6 Domestic sockets 16A, 230V ~
(type F - German standard)

Cable entry/inlet:

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5

**Ref. no. 53213**

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)

Fuse:

1 RCCB 40/0.03A, 4p

Cable entry/inlet:
CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5

**Ref. no. 5321**

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)

Fuse:

1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5

**Ref. no. 530321**

Components:

3 CEE sockets 16A, 400V, 5p


Fuse:

1 RCCB 40/0.03A, 4p

Cable entry/inlet:
CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5



- Enclosure made of high-quality, impact-resistant solid rubber
- Ideally suited to tough, harsh and difficult conditions
- Convenient and compact design
- With moulded carrying handle

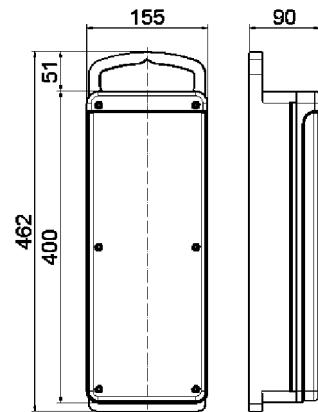

13 MB 54

Ref. no. 53909

Components:

6 Domestic sockets 16A, 230V ~
(type F - German standard)

Fuse:

3 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:
CEE plug 32A, 400V, 5p with
lead 2 m H07RN-F5G4




Ref. no. 53679

Components:

12 Domestic sockets 16A, 230V ~
(type F - German standard)

Cable entry/inlet:
CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5



Ref. no. 530425

Components:

6 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:
CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5



Ref. no. 53681

Components:

6 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p

Fuse:

1 RCCB 40/0.03A, 4p

Cable entry/inlet:
CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5



Ref. no. 530090

Components:

6 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 32A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:
CEE plug 32A, 400V, 5p with
lead 2 m H07RN-F5G4



Ref. no. 530426

Components:

2 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p


Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p

Cable entry/inlet:
CEE plug 32A, 400V, 5p with
lead 2 m H07RN-F5G4



- Enclosure made of high-quality, impact-resistant solid rubber
- Ideally suited to tough, harsh and difficult conditions
- Robust solid-rubber handle with hook for cable
- Lockable stainless-steel quick-release fasteners
- Hinged lid, user-friendly access to protective equipment
- Stackable, foot attachment on enclosure cover
- High rubber feet to avoid dirt at floor level

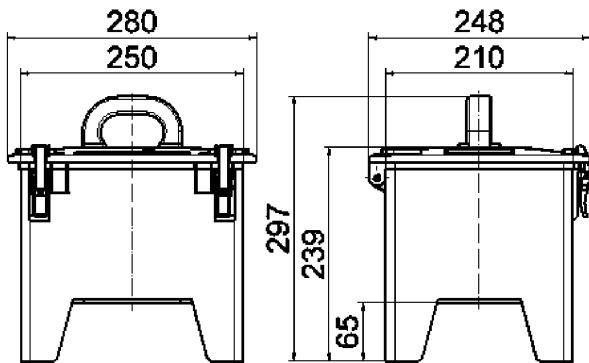

13 MB 43

Ref. no. 5226

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

2 Neozed D01, 1p
2 Neozed D01, 3p

Cable entry/inlet:

CEE inlet 32A, 400V, 5p



Ref. no. 522590

Components:

6 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 rotary field measuring device

Fuse:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE phase inverter 32A, 400V, 5p



Ref. no. 5201558

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE inlet 32A, 400V, 5p



Ref. no. 5201047

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

4 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE inlet 32A, 400V, 5p



Ref. no. 522144

Components:

2 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Fuse:

1 Neozed D01, 1p
1 Neozed D01, 3p

Ref. no. 5201015

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE plug 32A, 400V, 5p with
lead 2 m H07RN-F5G4



Ref. no. 5201926

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE plug 32A, 400V, 5p with
3 m cable H07RN-F5G6



Ref. no. 5200568

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)
3 CEE sockets 32A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE inlet 32A, 400V, 5p



Ref. no. 5225

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p

Cable entry/inlet:

CEE inlet 16A, 400V, 5p



Ref. no. 5200917

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE inlet 32A, 400V, 5p



Ref. no. 5202236

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE inlet 32A, 400V, 5p



Ref. no. 524449

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 32A, 400V, 5p

Fuse:

4 C-type MCBs 16A, 1p

Cable entry/inlet:

CEE inlet 32A, 400V, 5p



Ref. no. 5201004

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE inlet 32A, 400V, 5p



Ref. no. 5202237

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE plug 32A, 400V, 5p with
lead 3 m H07RN-F5G4



Ref. no. 526

Components:

5 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p

Cable entry/inlet:

CEE inlet 16A, 400V, 5p

**Ref. no. 522143**

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

3 Neozed D01, 1p
1 Neozed D01, 3p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE inlet 32A, 400V, 5p

**Ref. no. 5201555**

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE inlet 32A, 400V, 5p

**Ref. no. 522589**

Components:

6 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p
1 rotary field measuring device

Fuse:

3 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE phase inverter 16A, 400V, 5p

**Ref. no. 5202238**

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Fuse:

4 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE inlet 32A, 400V, 5p

**Ref. no. 52638**

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p

Fuse:

1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE plug 16A, 400V, 5p with lead 2 m H07RN-F5G2,5

**Ref. no. 52480**

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p

Fuse:

1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE inlet 16A, 400V, 5p

**Ref. no. 523291**

Components:

6 Domestic sockets 16A, 230V ~
(type F - German standard)

Fuse:

6 C-type MCBs 16A, 1p


1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE plug 32A, 400V, 5p with lead 3 m H07RN-F5G4



- Enclosure made of high-quality, impact-resistant solid rubber
- Ideally suited to tough, harsh and difficult conditions
- Robust solid-rubber handle with hook for cable
- Lockable stainless-steel quick-release fasteners
- Hinged lid, user-friendly access to protective equipment
- Stackable, foot attachment on enclosure cover
- High rubber feet to avoid dirt at floor level

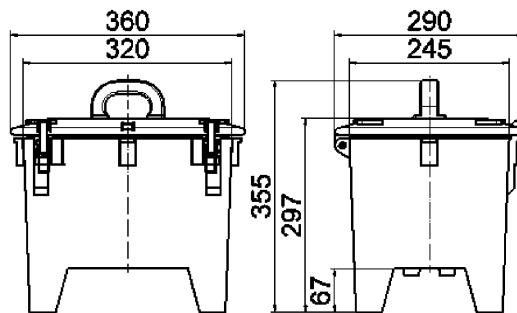

13 MB 36

Ref. no. 5202239

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Fuse:

4 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
2 C-type MCBs 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry/inlet:

CEE plug 63A, 400V, 5p with
lead 2 m H07RN-F5G10



Ref. no. 5202240

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry/inlet:

CEE plug 63A, 400V, 5p with
lead 3 m H07RN-F5G10



Ref. no. 524443

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
3 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

2 Neozed D01, 1p
3 Neozed D01, 3p

Cable entry/inlet:

CEE plug 32A, 400V, 5p with
lead 3 m H07RN-F5G4



Ref. no. 522167

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
3 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

2 Neozed D01, 1p
3 Neozed D01, 3p

Cable entry/inlet:

CEE inlet 32A, 400V, 5p



Ref. no. 521828

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
4 CEE sockets 32A, 400V, 5p

Fuse:

4 Neozed D01, 1p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE inlet 32A, 400V, 5p



Ref. no. 5202241

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry/inlet:

CEE inlet 63A, 400V, 5p



Ref. no. 524446

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Fuse:

2 Neozed D01, 1p
1 Neozed D01, 3p
1 Neozed D02, 3p
1 RCCB 63/0.03A, 4p

Cable entry/inlet:

CEE plug 63A, 400V, 5p with
lead 3 m H07RN-F5G10

**Ref. no. 5202469**

Components:

6 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Fuse:

6 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry/inlet:

CEE inlet 63A, 400V, 5p

**Ref. no. 5202244**

Components:

8 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

4 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE inlet 32A, 400V, 5p

**Ref. no. 5202245**

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
2 C-type MCBS 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry/inlet:

CEE plug 63A, 400V, 5p with
lead 3 m H07RN-F5G10

**Ref. no. 5202242**

Components:

6 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Fuse:

6 C-type MCBS 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry/inlet:

CEE plug 63A, 400V, 5p with
lead 2 m H07RN-F5G16

**Ref. no. 5202243**

Components:

8 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

4 C-type MCBS 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/inlet:

CEE plug 32A, 400V, 5p with
lead 3 m H07RN-F5G4

**Ref. no. 5201003**

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Fuse:

3 C-type MCBS 16A, 1p
1 C-type MCB 16A, 3p
2 C-type MCBS 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry/inlet:

CEE inlet 63A, 400V, 5p

**Ref. no. 5202470**

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Fuse:

2 C-type MCBS 16A, 1p
2 C-type MCBS 16A, 3p
2 C-type MCBS 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry/inlet:

CEE inlet 63A, 400V, 5p



- Enclosure made of high-quality, impact-resistant solid rubber
- Small, compact design
- Variable configuration
- Fuse protection and data systems safely protected behind an operating window
- Top and bottom in signal yellow
- Hanging bracket made of V2A stainless steel
- Easy connection and disconnection of loads by means of knob or handle bracket
- Unproblematic connection of supply cable by means of specially developed clamping ring

Depth X (in mm)					
Component	IP44	IP67	Component	IP44	IP67
Operating window	90		CEE 16A 5p	127	130
Domestic socket	98,5	114	CEE 32A 3p / 4p	130	135
CEE 16A 3p	121	127	CEE 32A 5p	139	139
CEE 16A 4p	123	128			

Ref. no. 57092

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)

Cable entry:
1x M25

Connection option:
for 1 cable up to 5 x 10 mm²



Ref. no. 57078

Components:

2 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p

Cable entry:
1x M25

Connection option:
for 1 cable up to 5 x 10 mm²



Ref. no. 57116

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p
1 compressed air connection:
Input: 1/2" pipe with external thread
Output: 1/2" quick-release connector

Cable entry:
1x M25

Connection option:
for 1 cable up to 5 x 10 mm²



Ref. no. 57076

Components:

3 Domestic sockets 16A, 230V ~
(type F - German standard)
1 CEE socket 16A, 400V, 5p

Cable entry:
1x M25

Connection option:
for 1 cable up to 5 x 10 mm²



Ref. no. 57117

Components:

2 Domestic sockets 16A, 230V ~
(type F - German standard)
2 CEE sockets 16A, 400V, 5p
1 compressed air connection:
Input: 1/2" pipe with external thread
Output: 1/2" quick-release connector

Cable entry:
1x M25

Connection option:
for 1 cable up to 5 x 10 mm²



Ref. no. 57119

Components:

4 Domestic sockets 16A, 230V ~
(type F - German standard)
1 compressed air connection:
Input: 1/2" pipe with external thread
Output: 1/2" quick-release connector

Cable entry:
1x M25

Connection option:
for 1 cable up to 5 x 10 mm²



Ref. no. 571121

Components:

3 Domestic sockets 16A, 230V ~
 (type F - German standard)
 1 CEE socket 16A, 400V, 5p
 1 compressed air connection
 Input: 1/2" hose connector NW 13 mm
 Output: 1/2" two-way quick-release connector

Cable entry:
 2x M25 (2 circuits)

Connection option:
 for 2 cables up to 5 x 10 mm²

**Ref. no. 57829**

Components:

2 Domestic sockets 16A, 230V ~
 (type F - German standard)
 1 CEE socket 16A, 400V, 5p

Protection:
 1 RCCB 40/0.03A, 4p

Cable entry:
 1x M25

Connection option:
 for 1 cable up to 5 x 10 mm²

**Ref. no. 576277**

Components:

3 Domestic sockets 16A, 230V ~
 (type F - German standard)
 1 Overvoltage protection 230 LA

Cable entry:
 1x M20

Connection option:
 for 1 cable up to 5 x 10 mm²

**Ref. no. 571276**

Components:

3 Domestic sockets 16A, 230V ~
 (type F - German standard)

Protection:
 1 RCCB 40/0.03A, 4p

Cable entry:
 1x M25

Connection option:
 for 1 cable up to 5 x 10 mm²

**Ref. no. 573395**

Components:

3 Domestic sockets 16A, 230V ~
 (type F - German standard)
 4 data sockets RJ45/ Cat. 6

Cable entry:
 1x M25, 1x M32

Connection option:
 for 1 cable up to 5 x 10 mm²

Ref. no. 57250

Components:

2 Domestic sockets 16A, 230V ~
 (type F - German standard)
 1 CEE socket 16A, 400V, 5p
 1 CEE socket 32A, 400V, 5p

Cable entry:
 1x M25, 1x M32

Connection option:
 for 2 cables up to 5 x 10 mm²

**Ref. no. 57074**

Components:

4 CEE sockets 16A, 400V, 5p

Cable entry:
 1x M25

Connection option:
 for 1 cable up to 5 x 10 mm²

**Ref. no. 570531**

Components:

2 Domestic sockets 16A, 230V ~
 (type F - German standard)
 1 CEE socket 16A, 400V, 5p
 1 empty space for data sockets

Cable entry:
 2x M25

Connection option:
 for 1 cable up to 5 x 10 mm²

Ref. no. 573143**Components:**

3 Domestic sockets 16A, 230V ~
(type F - German standard)
2 RJ45 CAT6a below operating window,
can be closed with the plugs plugged in

Cable entry:
2x M25

Connection option:
for 1 cable up to 5 x 10 mm²

**Ref. no. 572238****Components:**

3 Domestic sockets 16A, 230V ~
(type F - German standard)
1 Emergency off

Cable entry:
1 x M20, 1 x M25

Connection option:
for 1 cable up to 5 x 10 mm²

**Ref. no. 576282****Components:**

4 Domestic sockets 16A, 230V ~
(type F - German standard)
2 RJ45 CAT6a below operating window,
can be closed with the plugs plugged in

Cable entry:
2 x M20
1 x M25 with multiple sealing insert

Connection option:
for 1 cable up to 5 x 10 mm²

**Ref. no. 57360****Components:**

3 Domestic sockets 16A, 230V ~
(type F - German standard)
1 empty space for data sockets

Cable entry:
2x M25

Connection option:
for 1 cable up to 5 x 10 mm²

**Ref. no. 572301****Components:**

3 Domestic sockets 16A, 230V ~
(type F - German standard)
2 Potential equalisation plug

Cable entry:
1 x M16, 1 x M25

Connection option:
for 1 cable up to 5 x 10 mm²

**Ref. no. 570451****Components:**

4 Domestic sockets 16A, 230V ~
(type F - German standard)

Protection:
1 RCCB 40/0.03A, 4p

Cable entry:
1x M20

Connection option:
for 1 cable up to 5 x 10 mm²

**Ref. no. 573151****Components:**

6 Domestic sockets 16A, 230V ~
(type F - German standard)
2 RJ45 CAT6a below operating window,
can be closed with the plugs plugged in

Cable entry:
2x M25

Connection option:
for 1 cable up to 5 x 10 mm²

**Ref. no. 571370****Components:**

2 Domestic sockets 16A, 230V ~
(type F - German standard)
with child protection
2 Laboratory sockets yellow/green, earth
potential

2 Laboratory sockets 2x blue and 2x red
DC extra-low voltage

2 Laboratory sockets yellow, AC
extra-low voltage

Cable entry:
4x M20



Cable gland

- Black
- Protection degree IP67



Thread	Sealing range	Ref. no.
M12	3-6 mm	580647
M20	8-13 mm	580648
M25	11-17 mm	580649
M32	15-21 mm	580650
M40	19-28 mm	580651
für M25	2x8 mm	580652
für M32	4x8 mm	580653
Sealing plug for multiple sealing insert Packaging unit 100 pieces		581273

Cable gland with pressure equalisation

The use of pressure equalisation cable glands allows the internal pressure to adjust to the ambient pressure. The type-tested protection degree of the enclosure is fully retained. Temperature fluctuations, intense sunlight, or a sudden change in weather can cause condensation to form in combination enclosures. Basically, condensation can form in all sealed solid-rubber distributors. The higher the protection degree is, the more likely the formation of condensation will be.

We therefore recommend, especially in the case of distributors with protection degree IP67, the use of pressure equalisation cable glands.

- Minimised condensation formation and therefore reduction in downtimes and time-consuming and expensive repair work
- No expensive and high-maintenance ventilation technology required
- No drip holes which reduce the level of protection
- With air ducts for pressure equalisation
- Black
- Protection degree IP67



Thread	Sealing range	Ref. no.
M20	6-13 mm	580656
M25	9-17 mm	580657
M32	13-21 mm	580658
M40	16-28 mm	580659

Mounting set

- MODBOX and MODBOX-Midi
- Consisting of:
 - 4 screws 6 x 60 mm
 - 4 screw anchors 8 x 51 mm

Ref. no. 580640



Order no. 580642

- For MODBOX-Midi OTC window
- With long shackle and 2 Keys

Order no. 58037-BE

- For MODBOX operating window
- With locking cylinder and 2 Keys

Lock set



Portable stand

- Hot-dip galvanised steel tubing
- Folding
- Weight 4 kg
- Dimensions: 350/570 x 780 x 540 mm (W x H x D)

Ref. no. 580721

- For MODBOX and MODBOX-Midi



Power-Port floor-standing distributor without door


- Only for MODBOX-Midi
- Enclosure dimensions 1300 x 350 x 275 mm (H x W x D)
- Enclosure made of high-quality V2A stainless steel
- Ground metal surface
- Moveable panel for concealing cables
- Base plate suitable for pedestal mounting
- Available in different colours (optional)

Order no. 580589




Power-Port oor-standing distributor with door

- Only for MODBOX-Midi
- Enclosure dimensions 1300 x 350 x 415 mm (H x W x D)
- Enclosure made of high-quality V2A stainless steel
- Ground metal surface
- Moveable panel for concealing cables
- Base plate suitable for pedestal mounting
- Door with box lock and single profile cylinder, internal hinges
- Brush seal prevents dirt and dust from entering when door is closed
- Available in different colours (optional)




Positioners

The positioner is an effective helper in the area of workplace ergonomics: it easily enables the simple, height-variable positioning of supply units. The smooth-running height adjustment facilitates an ergonomic provision of the power supply. The braking force can be simply adjusted using the adjustment screw located on the side. With this product, you can position the Bals power distributors even more easily and more flexibly in their application area. Simply lifting or pulling down is enough to individually adjust the height.

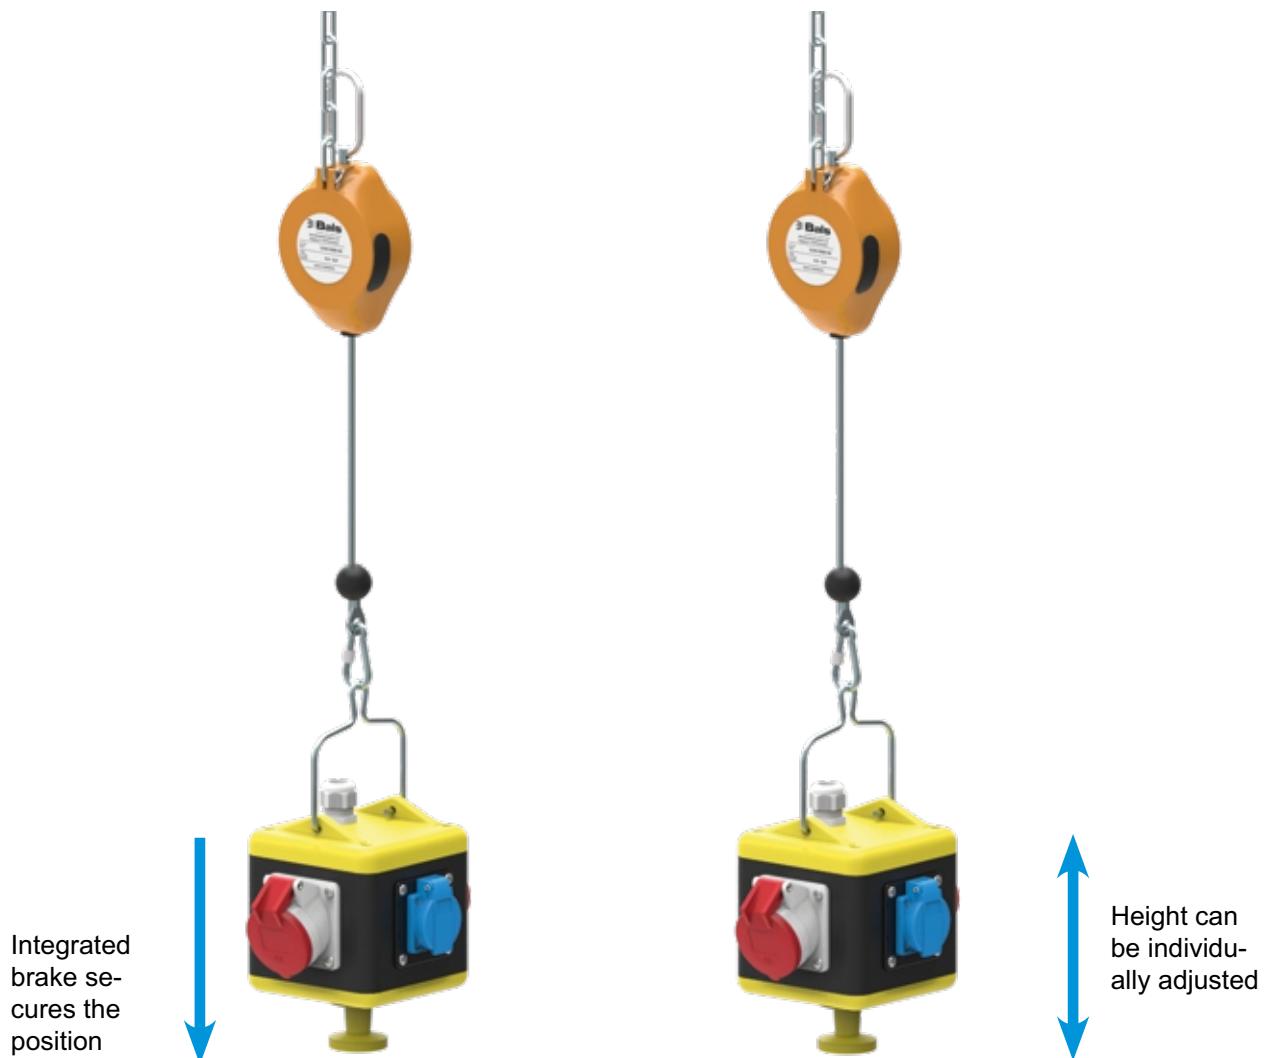



1 Safety suspension
 2 Fall protection
 3 Nameplate
 4 Elastic cable stop buffer
 5 Cover (adjustment screw for brake)
 6 Load hook

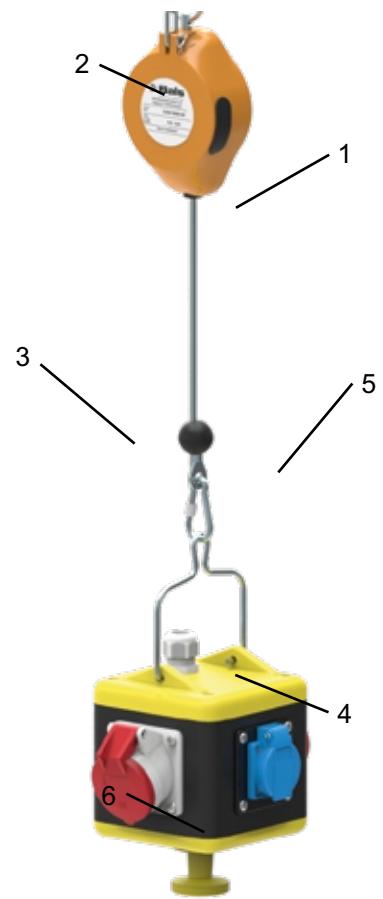

Version:

Housing made of extremely impact-resistant special plastic Load attached via secure screw-type spring hook Braking force adjustable via adjustment screw located on the side

Safety device:


- Fall protection equipped as standard
- Riveted special spring for retracting the suspension rope
- Isolated suspension
- Very dimensionally stable construction

Technical parameters:

- Net weight: 0.8 kg
- Cable travel: 1.5 meters

Ref. No. 581433

-Braking force: 2.0 - 7.0 kg

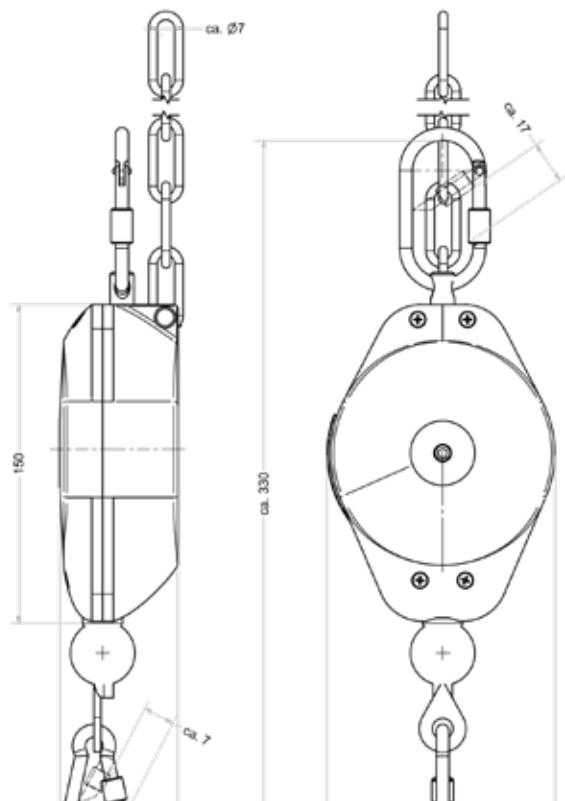



Neptune India Limited: A-11, Sector 59,
Noida, Uttar Pradesh- 110009, India
Phone: 0555 500 000