

Exercise 3.3 Yaw Assensoh Opoku

Step 1.

Query Query History

1

2

SELECT category_id, name

FROM category

Data Output Messages Notifications

Showing rows: 1 to 16

Page No: 1

of 1

	category_id [PK] integer	name character varying (25)
1	1	Action
2	2	Animation
3	3	Children
4	4	Classics
5	5	Comedy
6	6	Documentary
7	7	Drama
8	8	Family
9	9	Foreign
10	10	Games
11	11	Horror
12	12	Music
13	13	New
14	14	Sci-Fi
15	15	Sports
16	16	Travel

Total rows: 16

Query complete 00:00:00.097

LF

Ln 1, Col 25

Step 2.

```
1  ✓ INSERT INTO category (category_id, name)
2  VALUES
3      (17, 'Thriller'),
4      (18, 'Crime'),
5      (19, 'Mystery'),
6      (20, 'Romance'),
7      (21, 'War');
```

Data Output Messages Notifications

INSERT 0 5

Query returned successfully in 36 msec.

The **CREATE** statement below shows the constraints on the category table. Write a short paragraph explaining the various constraints that have been applied to the columns. What do these constraints do exactly? Why are they important?

```
CREATE TABLE category
(
    category_id integer NOT NULL DEFAULT nextval('category_category
_id_seq'::regclass),
```

```
name text COLLATE pg_catalog."default" NOT NULL,  
last_update timestamp with time zone NOT NULL DEFAULT now(),  
CONSTRAINT category_pkey PRIMARY KEY (category_id)  
);
```

These constraints makes it easier to manage the relationship between tables, prevents duplicate and maintain a clean and well organized database.

Step 3.

The screenshot shows a PostgreSQL client interface with the following components:

- Top Bar:** Displays the connection name "Rockbuster/postgres@PostgreSQL 17".
- Query Editor:** Contains a SQL query:

```
1 SELECT film_id  
2 FROM film  
3 WHERE title like 'African Egg'
```
- Execution Button:** A button labeled "Execute script" with a play icon and a keyboard shortcut "F5".
- Data Output Panel:** Shows the results of the query. It includes a header for "film_id [PK] integer" and a single row with the value "5".
- Footer:** A green status bar at the bottom right indicates "Table rows counted: 1".

3b

The screenshot shows a PostgreSQL query editor interface. The title bar indicates the connection is 'Rockbuster/postgres@PostgreSQL 17'. The 'Query' tab is active, displaying the following SQL statement:

```
1 UPDATE film_category
2 SET category_id = 17
3 WHERE film_id = 5
```

A tooltip for the 'Execute script' button (F5) is visible. Below the query, the 'Data Output' tab shows the result: 'UPDATE 1' and 'Query returned successfully in 64 msec.'. At the bottom right, a green status bar indicates 'Table rows counted: 16'.

4.


The screenshot shows the same PostgreSQL query editor interface. The title bar now includes additional tabs: 'Dependencies', 'Dependents', 'Processes', 'SQL', and 'Rockbuster/postgres@PostgreSQL 17*'. The 'Query' tab is active, displaying the following SQL statement:

```
1 DELETE FROM category
2 WHERE category_id = 19
```

A tooltip for the 'Explain' button (F7) is visible. Below the query, the 'Data Output' tab shows the result: 'DELETE 1' and 'Query returned successfully in 52 msec.'. At the bottom right, a green status bar indicates 'Table rows counted: 16'.

5. I already knew what my answer was going to be before I even finished reading the question and that's Excel. Hear me out, might be that Excel was the first tool I learnt on this journey but it was quite easy to work with easy to manipulate and meanly because it had such a small data as compared to SQL but I think with time SQL is going to be one of my favorite tools if I'm able to master the commands from the cheat table.

6

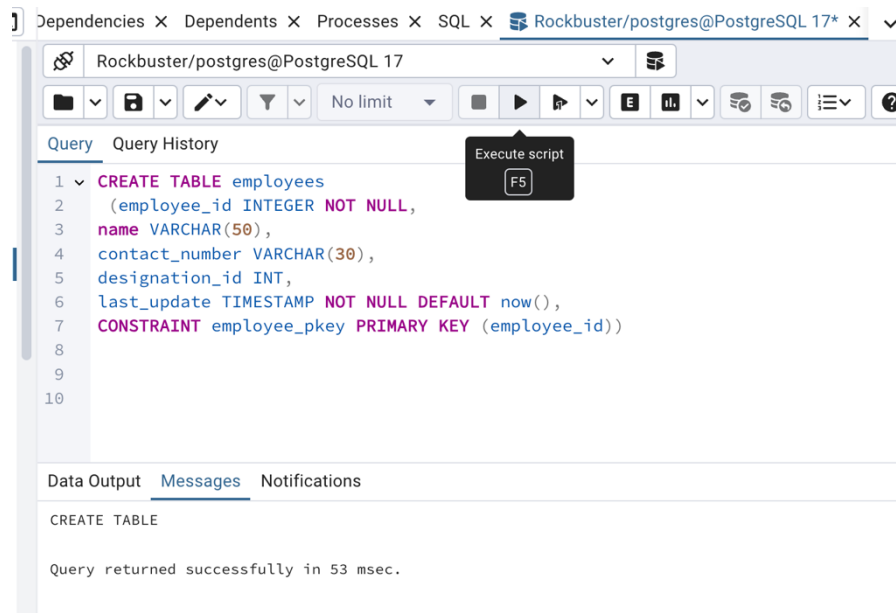

The screenshot shows a PostgreSQL client interface with a tab titled 'Rockbuster/postgres@PostgreSQL 17*'. The main window displays a SQL query in a text editor, which is a 'CREATE TABLE' statement for a table named 'employees'. The query includes columns for 'employee_id' (INTEGER NOT NULL), 'name' (VARCHAR(50)), 'contact_number' (VARCHAR(30)), 'designation_id' (INT), and 'last_update' (TIMESTAMP NOT NULL DEFAULT now()). A primary key constraint 'employee_pkey' is defined on the 'employee_id' column. Below the query editor, the 'Messages' tab is active, showing the output 'CREATE TABLE' and a confirmation message: 'Query returned successfully in 53 msec.'.

```
1 CREATE TABLE employees
2 (employee_id INTEGER NOT NULL,
3  name VARCHAR(50),
4  contact_number VARCHAR(30),
5  designation_id INT,
6  last_update TIMESTAMP NOT NULL DEFAULT now(),
7  CONSTRAINT employee_pkey PRIMARY KEY (employee_id))
8
9
10
```

CREATE TABLE

Query returned successfully in 53 msec.

Actually the program did make some suggestions on where correction needed to be made I tried. It's getting interesting gradually and might have to take back my answer from question 5.