

# Gossip Online Learning: Exchanging Local Models to Track Dynamics

Anonymous Authors<sup>1</sup>

## Abstract

## 1. Introduction

For any online algorithm  $A \in \mathcal{A}$ , the previous dynamic regret  $\tilde{\mathcal{R}}_T^A$  is defined by

$$\tilde{\mathcal{R}}_T^A = \sum_{i=1}^n \sum_{t=1}^T (g_{i,t}(\mathbf{x}_{i,t}) - g_{i,t}(\mathbf{x}_t^*)), \quad (1)$$

In the paper, we make the following notations.

- For any  $i \in [n]$  and  $t \in [T]$ , the random variable  $\xi_{i,t}$  is subject to a distribution  $D_t$ , that is,  $\xi_{i,t} \sim D_t$ . Besides, a set of random variables  $\Xi_{n,T}$  and the corresponding set of distributions are defined by

$$\Xi_{n,T} = \{\xi_{i,t}\}_{1 \leq i \leq n, 1 \leq t \leq T}, \text{ and } \mathcal{D}_T = \{D_t\}_{1 \leq t \leq T},$$

respectively. For math brevity, we use the notation  $\Xi_{n,T} \sim \mathcal{D}_T$  to represent that  $\xi_{i,t} \sim D_t$  holds for any  $i \in [n]$  and  $t \in [T]$ .  $\mathbb{E}$  represents mathematical expectation.

- For a decentralized network, we use  $\mathbf{W} \in \mathbb{R}^{n \times n}$  to represent its confusion matrix. It is a symmetric doubly stochastic matrix, which implies that every element of  $\mathbf{W}$  is non-negative,  $\mathbf{W}\mathbf{1} = \mathbf{1}$ , and  $\mathbf{1}^T \mathbf{W} = \mathbf{1}^T$ . We use  $\{\lambda_i\}_{i=1}^n$  with  $\lambda_1 \geq \lambda_2 \geq \dots \geq \lambda_n$  to represent its eigenvalues.
- $\partial$  and  $\nabla$  represent sub-gradient and gradient operators, respectively.  $\|\cdot\|$  represents the  $\ell_2$  norm in default.
- $\lesssim$  represents “less than equal up to a constant factor”.

<sup>1</sup>Anonymous Institution, Anonymous City, Anonymous Region, Anonymous Country. Correspondence to: Anonymous Author <anon.email@domain.com>.

## 2. Related work

Online learning has been studied for decades of years. The static regret of a sequential online convex optimization method can achieve  $\mathcal{O}(\sqrt{T})$  and  $\mathcal{O}(\log T)$  bounds for convex and strongly convex loss functions, respectively (Hazan, 2016; Shalev-Shwartz, 2012). Recently, both the decentralized online learning and the dynamic regret have drawn much attention due to their wide existence in the practical big data scenarios.

### 2.1. Decentralized online learning

Online learning in a decentralized network has been studied in (Shahrampour and Jadbabaie, 2018; Kamp et al., 2014; Koppel et al., 2018; Zhang et al., 2018a; 2017b; Xu et al., 2015; Akbari et al., 2017; Lee et al., 2016; Nedi et al., 2015; Lee et al., 2018; Benczúr et al., 2018; Yan et al., 2013). Shahrampour and Jadbabaie (2018) studies decentralized online mirror descent, and provides  $\mathcal{O}(n\sqrt{nTM})$  dynamic regret. Here,  $n$ ,  $T$ , and  $M$  represent the number of nodes in the network, the number of iterations, and the budget of dynamics (defined in (3)), respectively. When the Bregman divergence in the decentralized online mirror descent is chosen appropriately, the decentralized online mirror descent becomes identical to the decentralized online gradient descent. Using the same definition of dynamic regret (defined in (1)), our method obtains  $\mathcal{O}(n\sqrt{TM})$  dynamic regret for a decentralized online gradient descent, which is better than  $\mathcal{O}(n\sqrt{nTM})$  in Shahrampour and Jadbabaie (2018). The improvement of our bound benefits from a better bound of network error (see Lemma 1). Kamp et al. (2014) studies decentralized online prediction, and presents  $\mathcal{O}(\sqrt{nT})$  static regret. It assumes that all data, used to yield the loss, is generated from an unknown distribution. The strong assumption is not practical in the dynamic environment, and thus limits its novelty for a general online learning task. Additionally, many decentralized online optimization methods are proposed, for example, decentralized online multi-task learning (Zhang et al., 2018a), decentralized online ADMM (Xu et al., 2015), decentralized online sub-gradient descent (Akbari et al., 2017), decentralized continuous-time online saddle-point method (Lee et al., 2016), decentralized on-

line Nesterov’s primal-dual method (Nedi et al., 2015; Lee et al., 2018). Those previous methods are proved to yield  $\mathcal{O}(\sqrt{T})$  static regret, which do not have theoretical guarantee of regret in the dynamic environment. Besides, Yan et al. (2013) provides necessary and sufficient conditions to preserve privacy for decentralized online learning methods, which is interesting to extend our method to be privacy-preserving in the future work.

## 2.2. Regret in dynamic environment

Dynamic regret has been widely studied for decades of years (Zinkevich, 2003; Hall and Willett, 2015; 2013; Jadbabaie et al., 2015; Yang et al., 2016; Bedi et al., 2018; Zhang et al., 2017a; Mokhtari et al., 2016; Zhang et al., 2018b; György and Szepesvári, 2016; Wei et al., 2016; Zhao et al., 2018). Zinkevich (2003) first defines the dynamic regret by (1), and then proposes an online gradient descent method. The method yields  $\mathcal{O}(\sqrt{TM})$  by choosing an appropriate learning rate. The following researches achieve the sub-linear dynamic regret, but extend the analysis of regret by using different reference points. For example, Hall and Willett (2015; 2013) choose the reference points  $\{\mathbf{x}_t^*\}_{t=1}^T$  satisfying  $\sum_{t=1}^{T-1} \|\mathbf{x}_{t+1}^* - \Phi(\mathbf{x}_t^*)\| \leq M$ , where  $\Phi(\mathbf{x}_t^*)$  is the predictive optimal decision variable. When the function  $\Phi$  predicts accurately, a small  $M$  is enough to bound the dynamics. The dynamic regret is thus effectively decreased. Jadbabaie et al. (2015); Yang et al. (2016); Bedi et al. (2018); Zhang et al. (2017a); Mokhtari et al. (2016); Zhang et al. (2018b) chooses the reference points  $\{\mathbf{y}_t^*\}_{t=1}^T$  with  $\mathbf{y}_t^* = \arg\min_{\mathbf{z} \in \mathcal{X}} f_t(\mathbf{z})$ , where  $f_t$  is the loss function at the  $t$ -th iteration. György and Szepesvári (2016) provides a new analysis framework, which achieves  $\mathcal{O}(\sqrt{TM})$  dynamic regret<sup>1</sup> for any given reference points. Besides, Zhao et al. (2018) presents that the lower bound of the dynamic regret defined by 1 is  $\Omega(\sqrt{TM})$ . The previous definition of the regret, i.e., (1), is a special case of our new definition. When setting  $\beta = 1$ , we achieve the state-of-the-art regret, that is,  $\mathcal{O}(\sqrt{TM})$ .

In some literatures, the regret in a dynamic environment is measured by the number of changes of a reference point over time. It is usually denoted by shifting regret or tracking regret. (Herbster and Warmuth, 1998; György et al., 2005; György et al., 2012; György and Szepesvári, 2016; Mourada and Maillard, 2017; Adamskiy et al., 2016; Wei et al., 2016; Cesa-Bianchi et al., 2012; Mohri and Yang, 2018; Jun et al., 2017). Both the shifting regret and the tracking regret can be considered as a variation of the dynamic regret, and

<sup>1</sup>György and Szepesvári (2016) uses the notation of “shifting regret” instead of “dynamic regret”. In the paper, we keep using “dynamic regret” as used in most previous literatures.

is usually studied in the setting of “learning with expert advice”. But, the dynamic regret is usually studied in a general setting of online learning.

## 3. Problem formulation

For any online algorithm  $A \in \mathcal{A}$ , we define its dynamic regret  $\mathcal{R}_T^A$  by

$$\mathcal{R}_T^A := \mathbb{E}_{\Xi_n, T \sim \mathcal{D}_T} \left( \sum_{i=1}^n \sum_{t=1}^T f_{i,t}(\mathbf{x}_{i,t}; \zeta_{i,t}, \xi_{i,t}) \right) - \mathbb{E}_{\Xi_n, T \sim \mathcal{D}_T} \left( \sum_{i=1}^n \sum_{t=1}^T f_{i,t}(\mathbf{x}_t^*; \zeta_{i,t}, \xi_{i,t}) \right), \quad (2)$$

where  $n$  is the number of nodes in the decentralized network.  $\{\mathbf{x}_t^*\}_{t=1}^T$  is the sequence of reference points.  $\mathbf{x}_{i,t}$  is the decision variable played by an online algorithm  $A$  at the  $t$ -th round. The local loss function  $f_{i,t}(\mathbf{x}; \zeta_{i,t}, \xi_{i,t})$  is defined by

$$f_{i,t}(\mathbf{x}; \zeta_{i,t}, \xi_{i,t}) := \beta g_{i,t}(\mathbf{x}; \zeta_{i,t}) + (1 - \beta) h_t(\mathbf{x}; \xi_{i,t})$$

with  $0 < \beta < 1$ .  $\zeta_{i,t}$  represents the adversary data.  $\xi_{i,t}$  represents the stochastic data, which is drawn from the distribution  $D_t$ . The expectation is taken with respect to  $\{\xi_{i,t}\}_{1 \leq i \leq n, 1 \leq t \leq T}$ . Note that  $g_{i,t}$  is an adversary loss function, which is caused by the adversary data.  $h_t(\cdot; \xi_{i,t})$  is a stochastic loss function, which depends on the stochastic data  $\xi_{i,t}$ . The expectation of  $h_t(\cdot; \xi_{i,t})$  is a global model, and does not depend on the  $i$ -th node.

The sequence of reference points  $\{\mathbf{x}_t^*\}_{t=1}^T$  satisfies

$$\{\mathbf{x}_t^*\}_{t=1}^T \in \left\{ \{\mathbf{z}_t\}_{t=1}^T : \sum_{t=1}^{T-1} \|\mathbf{z}_t - \mathbf{z}_{t+1}\| \leq M \right\}.$$

Here,  $M$  is the budget of the dynamics, that is,

$$\sum_{t=1}^{T-1} \|\mathbf{x}_{t+1}^* - \mathbf{x}_t^*\| \leq M. \quad (3)$$

When  $M = 0$ , all  $\mathbf{x}_t^*$ s are same, and it degenerates to the static online learning problem. When the dynamic environment changes significantly,  $M$  becomes large to model the dynamics.

Recall that the previous definition of the dynamic regret is (1). Using (1), the classic online learning in a decentralized network only considers the loss function, i.e.,  $g_{i,t}$ , incurred by the adversary data on every node. Comparing with it, our definition of the dynamic regret, i.e., (2), still considers the loss function, i.e.,  $h_t(\cdot; \xi_{i,t})$ . It is incurred by the stochastic data. In many practical scenarios, data usually consists of both adversary and stochastic parts. For example, when we conduct online music recommendation, user’s preference

Besides, we denote

$$H_t(\cdot) = \mathbb{E}_{\xi_{i,t} \sim D_t} h_t(\cdot; \xi_{i,t}) \quad \text{for } \forall i \in [n],$$

and

$$F_{i,t}(\cdot) = \mathbb{E}_{\xi_{i,t} \sim D_t} f_{i,t}(\cdot; \xi_{i,t}).$$

## 4. Decentralized online gradient method

### 4.1. Algorithm

**Algorithm 1** DOG: Decentralized Online Gradient method.

**Require:** The learning rate  $\eta$ , number of iterations  $T$ , and the confusion matrix  $\mathbf{W}$ .  $\mathbf{x}_{i,1} = \mathbf{0}$  for any  $i \in [n]$ .

- 1: **for**  $t = 1, 2, \dots, T$  **do**
- 2:   For the  $i$ -th node with  $i \in [n]$ :
- 3:   Predict  $\mathbf{x}_{i,t}$ .
- 4:   Observe the loss function  $f_{i,t}$ , and suffer loss  $f_{i,t}(\mathbf{x}_{i,t}; \xi_{i,t})$ .
- 5:   Update:
- 6:   Query a sub-gradient  $\partial f_{i,t}(\mathbf{x}_{i,t}; \xi_{i,t})$ .
- 7:    $\mathbf{x}_{i,t+1} = \sum_{j=1}^n \mathbf{W}_{i,j} \mathbf{x}_{j,t} - \eta \partial f_{i,t}(\mathbf{x}_{i,t}; \xi_{i,t})$ .
- 8: **end for**

The decentralized online gradient method, namely DOG, is presented in Algorithm 1. At every iteration, every node needs to collect the decision variable, e.g.,  $\mathbf{x}_{i,t}$ , from its neighbours, and then update its decision variable. Denote  $\bar{\mathbf{x}}_t = \frac{1}{n} \sum_{i=1}^n \mathbf{x}_{i,t}$ . We can verify that  $\bar{\mathbf{x}}_{t+1} = \bar{\mathbf{x}}_t - \frac{\eta}{n} \sum_{i=1}^n \partial f_{i,t}(\mathbf{x}_{i,t}; \xi_{i,t})$  (see Lemma ??).

### 4.2. Theoretical analysis

We make following commonly used assumptions to analyze the dynamic regret theoretically.

**Assumption 1.** We make the following assumptions.

- For any  $i \in [n]$ ,  $t \in [T]$ , and  $\mathbf{x}$ , there exists a constant  $G$  such that

$$\max \left\{ \mathbb{E}_{\xi_{i,t} \sim D_t} \|\nabla h_t(\mathbf{x}; \xi_{i,t})\|^2, \|\partial g_{i,t}(\mathbf{x}; \xi_{i,t})\|^2 \right\} \leq G,$$

and

$$\mathbb{E}_{\xi_{i,t} \sim D_t} \|\nabla h_t(\mathbf{x}; \xi_{i,t}) - \nabla H_t(\mathbf{x})\|^2 \leq \sigma^2.$$

- For given vectors  $\mathbf{x}$  and  $\mathbf{y}$ , we assume  $\|\mathbf{x} - \mathbf{y}\|^2 \leq R$ .
- For any  $i \in [n]$  and  $t \in [T]$ , we assume the function  $f_{i,t}$  is convex, but may be non-smooth.

- Given a symmetric doubly stochastic matrix  $\mathbf{W}$ , and a constant  $\rho$  with  $\rho := \max\{|\lambda_2(\mathbf{W})|, |\lambda_n(\mathbf{W})|\}$ , we assume  $\rho < 1$ .

**Theorem 1.** Denote constants  $C_0$ , and  $C_1$  by

$$C_0 := 1 + \frac{1}{2(1-\rho)^2} + 16\beta;$$

$$C_1 := \frac{L + 2\eta L^2 + 4(1-\beta)^2 L^2 \eta}{(1-\rho)^2} + 2L.$$

Using Assumption 1, and choosing  $\eta > 0$  in Algorithm 1, we have

$$\begin{aligned} & \mathbb{E}_{\Xi_{n,T} \sim \mathcal{D}_T} \sum_{t=1}^T \sum_{i=1}^n f_{i,t}(\mathbf{x}_{i,t}; \xi_{i,t}) - f_{i,t}(\mathbf{x}_t^*; \xi_{i,t}) \\ & \leq C_0 \eta T n \beta G + (1-\beta) \eta T \sigma^2 + 4n(1-\beta) T \eta G \\ & \quad + C_1 n T \eta^2 G + \frac{n}{2\eta} (4\sqrt{R}M + R). \end{aligned}$$

By choosing an approximate learning rate  $\eta$ , we obtain sublinear regret as follows.

**Corollary 1.** Using Assumption 1, and choosing

$$\eta = \sqrt{\frac{M\sqrt{R} + R}{TG}}$$

in Algorithm 1, we have

$$\begin{aligned} \mathcal{R}_T^{\text{DOG}} & \lesssim \frac{n\sqrt{T(M + \sqrt{R})}G}{(1-\rho)^2} + (1-\beta)\sqrt{T(M + \sqrt{R})}\sigma^2 \\ & \quad + \frac{nM}{(1-\rho)^2} + n\sqrt{TM} + n\sqrt{T}. \end{aligned} \quad (4)$$

First, corollary 1 shows that the dynamic regret of DOG is sublinear. Second, we would like make some comments on the effects of different parameters on the dynamic regret. The regret becomes large with the increase of the budget of dynamics  $M$ . When  $n = 1$  and  $\rho = 0$ , the dynamic regret is  $\mathcal{O}(\sqrt{TM} + \sqrt{T})$ , which is tight in the case of  $n = 1$  (Zhao et al., 2018). When  $\beta < 1$ , the second item of (4) depends on the variance  $\sigma^2$ , instead of  $n\sigma^2$ . It benefits from the communication among nodes in the decentralized setting. Since every node shares its decision variable with its neighbours, the variance of the average of stochastic gradients  $\frac{1}{n} \sum_{i=1}^n \nabla h_t(\mathbf{x}_{i,t}; \xi_{i,t})$  is decreased to be  $\frac{\sigma^2}{n}$ , thus eventually reducing the regret caused by the stochastic data. Additionally, the regret is affected by the topology of the network, which is measured by  $\rho$  with  $0 \leq \rho < 1$ . For a fully connected network<sup>2</sup>,  $\rho = 0$ , then the regret is better than those for other topologies.

<sup>2</sup>When a network is fully connected, a decentralized method de-generates to a centralized method.

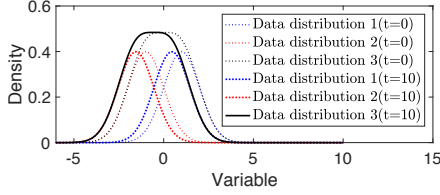


Figure 1. The illustration of the dynamics caused by the time-varying distributions of data. Data distribution 1 and 2 are Normal distributions with 1 variance and  $1 + \sin(t)$  mean, and 1 variance and  $-1 + \sin(t)$  mean, respectively. Data distribution 3 is the sum of them, which changes over time.

### 4.3. Connections with previous work

Using the classic dynamic regret defined in (1), Shahrampour and Jadbabaie (2018) has provided a  $\mathcal{O}(n\sqrt{nTM})$  regret for DOG, which is a special case of our dynamic regret when  $\beta = 1$ . In addition, compared with the result in Shahrampour and Jadbabaie (2018), our regret enjoys the state-of-the-art dependence on  $T$  and  $M$ , and meanwhile improves the dependence on  $n$ . This improvement is achieved by a better bound on the difference between  $\mathbf{x}_{i,t}$  and  $\bar{\mathbf{x}}_t$ .

**Lemma 1.** *Using Assumption 1, and setting  $\eta > 0$  in Algorithm 1, we have*

$$\mathbb{E}_{\Xi_{n,T} \sim \mathcal{D}_T} \sum_{i=1}^n \sum_{t=1}^T \|\mathbf{x}_{i,t} - \bar{\mathbf{x}}_t\|^2 \leq \frac{nT\eta^2 G}{(1-\rho)^2}.$$

## 5. Empirical studies

We conduct online logistic regression in the empirical studies. We let  $f_{i,t}(\mathbf{x}; \xi_{i,t}) = \log(1 + \exp(-\mathbf{y}_{i,t} \mathbf{A}_{i,t}^T \mathbf{x})) + \frac{\gamma}{2} \|\mathbf{x}\|^2$ , where  $\gamma = 10^{-3}$  is the given hyper-parameter. The compared methods include our Decentralized Online Gradient method (DOG) and the Centralized Online Gradient method (COG). The learning rate  $\eta$  is set to be  $C\sqrt{\frac{M}{T}}$  with  $10^{-2} \leq C \leq 20$ , and we tune  $C$  for different datasets. In experiment, we use the average loss  $\frac{1}{nT} \sum_{i=1}^n \sum_{t=1}^T f_{i,t}(\mathbf{x}_{i,t}; \xi_{i,t})$ , instead of the dynamic regret  $\mathbb{E}_{\Xi_{n,T} \sim \mathcal{D}_{n,T}} \sum_{i=1}^n \sum_{t=1}^T (f_{i,t}(\mathbf{x}_{i,t}; \xi_{i,t}) - f_{i,t}(\mathbf{x}_t^*))$  as a metric to measure the quality of a learning model. The reason is that the learning models yielded by both DOG and COG have the same reference point  $\{\mathbf{x}_t^*\}_{t=1}^T$ .

### 5.1. Datasets

**Synthetic data** We generate a data matrix  $\mathbf{A} = \mathbf{A}_1 + \mathbf{A}_2 + \dots + \mathbf{A}_n$ , where  $\mathbf{A}_i$  is placed on the  $i$ -th node, and  $\mathbf{A}_i = 0.1\tilde{\mathbf{A}}_i + 0.9\hat{\mathbf{A}}_i$ , where  $\tilde{\mathbf{A}}_i$  represents the adversary part of data, and  $\hat{\mathbf{A}}_i$  represents the stochastic part of data.

<sup>3</sup>Shahrampour and Jadbabaie (2018) denotes  $\|\mathbf{x}_{i,t} - \bar{\mathbf{x}}_t\|$  by “network error”.

$\mathbf{y}_i \in \{1, -1\}$  is the label of an instance  $\hat{\mathbf{A}}_{i,t}$ . The dimension of every instance is  $d = 10$ . Specifically, elements of  $\tilde{\mathbf{A}}_i$  is sampled from the interval  $[-0.5 + \sin(i), 0.5 + \sin(i)]$  randomly. Note that  $\tilde{\mathbf{A}}_i$  and  $\tilde{\mathbf{A}}_j$  with  $i \neq j$  are drawn from different distributions. Besides,  $\mathbf{y}_{i,t} \in \{1, -1\}$  is generated randomly. When  $\mathbf{y}_{i,t} = 1$ ,  $\hat{\mathbf{A}}_{i,t}$  is generated by sampling from a time-varying Normal distribution  $\hat{\mathbf{A}}_{i,t} \sim N((1 + 0.5 \sin(t)) \cdot \mathbf{1}, \mathbf{I})$ . When  $\mathbf{y}_{i,t} = -1$ ,  $\hat{\mathbf{A}}_{i,t}$  is generated by sampling from another time-varying Normal distribution  $\hat{\mathbf{A}}_{i,t} \sim N((-1 + 0.5 \sin(t)) \cdot \mathbf{1}, \mathbf{I})$ . As illustrated in Figure 1, we use those time-varying distributions of data to simulate the dynamics in the environment, which leads to the change of the optimal learning model over time. In the setting, dynamic regret is practical and necessary to measure goodness of a learning model.

**Real data** We use three real datasets: *room-occupancy*<sup>4</sup>, *usenet2*<sup>5</sup>, and a *spam*<sup>6</sup>. *room-occupancy* is a time-series dataset, where the dynamics exists naturally in those practical scenarios. Both *usenet2* and *spam* contain “concept drift” (Katakis et al., 2010), which is the source of the dynamics. Thus, the dynamic regret is practical and necessary to measure an online learning method to handle those datasets.

### 5.2. Results

First, we want to test whether DOG has a comparable performance with COG. We simulate a decentralized network consisting of 100 nodes to handle the synthetic data, and a network consisting of 5 nodes to handle the real data. Those nodes are connected by using a ring topology. As shown in Figure 2, both DOG and COG are effective to optimize the decision variable, and they have very similar performance.

Second, we want to verify whether DOG has a good performance with the increase of the network size. As shown in Figure 3, the performance of DOG is not sensitive to the network size, which confirms our theoretical result, that is, the average regret  $\frac{1}{nT} \mathbb{E}_{\Xi_{n,T} \sim \mathcal{D}_{n,T}} \sum_{i=1}^n \sum_{t=1}^T (f_{i,t}(\mathbf{x}_{i,t}; \xi_{i,t}) - f_{i,t}(\mathbf{x}_t^*))$  does not increase over the number of nodes.

Third, we want to test whether the performance of DOG is sensitive to the topology of the network. We generate four different topologies. Besides the ring topology, the *Fully connected* means all nodes are connected, where DOG degenerates to be COG. The topology *WattsStrogatz* represents a Watts-Strogatz small-world graph. There is a parameter can be tuned, e.g., 0.5 or 1 in the legend of Figure 4, to control the number of random edges. As illustrated in Figure

<sup>4</sup><https://archive.ics.uci.edu/ml/datasets/Occupancy+Detection+>

<sup>5</sup>[http://mlkd.csd.auth.gr/concept\\_drift.html](http://mlkd.csd.auth.gr/concept_drift.html)

<sup>6</sup>[http://mlkd.csd.auth.gr/concept\\_drift.html](http://mlkd.csd.auth.gr/concept_drift.html)



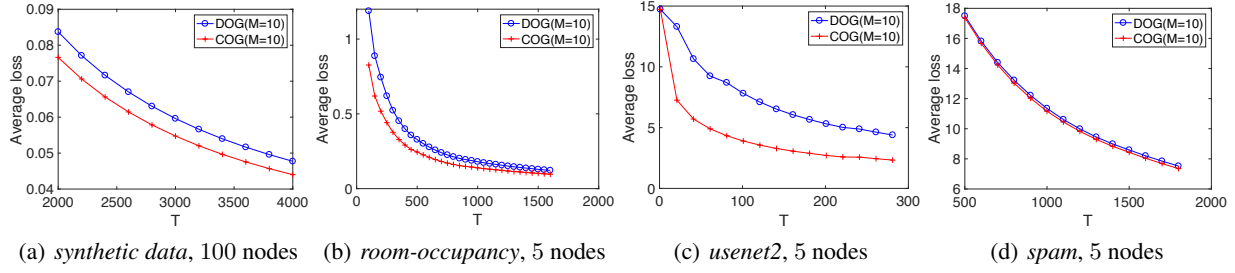


Figure 2. The average loss yielded by DOG is comparable to that yielded by COG.

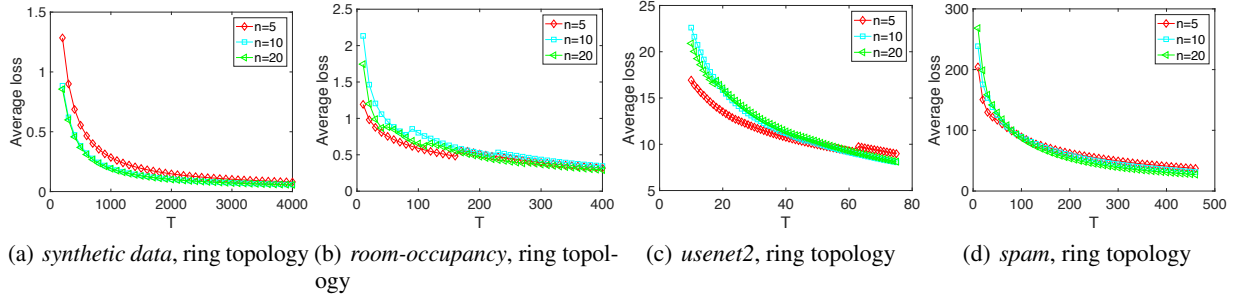


Figure 3. The average loss yielded by DOG is insensitive to the network size.

4, *Fully connected* has the best performance because that  $\rho = 0$  in the topology, and  $\rho > 0$  in other topologies.

## 6. Conclusion

We investigate a new online learning problem in a decentralized network, where the loss incurs by both adversary and stochastic data. We provide a new analysis framework, which achieves sublinear regret. Extensive empirical studies verify the theoretical result.

## References

- D. Adamskiy, W. M. Koolen, A. Chernov, and V. Vovk. A closer look at adaptive regret. *Journal of Machine Learning Research*, 17(23):1–21, 2016.
- M. Akbari, B. Ghahesifard, and T. Linder. Distributed online convex optimization on time-varying directed graphs. *IEEE Transactions on Control of Network Systems*, 4(3):417–428, Sep. 2017.
- A. S. Bedi, P. Sarma, and K. Rajawat. Tracking moving agents via inexact online gradient descent algorithm. *IEEE Journal of Selected Topics in Signal Processing*, 12(1):202–217, Feb 2018.
- A. A. Benczúr, L. Kocsis, and R. Pálóvics. Online Machine Learning in Big Data Streams. *CoRR*, 2018.
- N. Cesa-Bianchi, P. Gaillard, G. Lugosi, and G. Stoltz. Mirror Descent Meets Fixed Share (and feels no regret). In *NIPS 2012*, page Paper 471, 2012.
- A. György and C. Szepesvári. Shifting regret, mirror descent, and matrices. In *Proceedings of the 33rd International Conference on International Conference on Machine Learning - Volume 48*, ICML’16, pages 2943–2951. JMLR.org, 2016.
- A. György, T. Linder, and G. Lugosi. Tracking the Best of Many Experts. *Proceedings of Conference on Learning Theory (COLT)*, 2005.
- A. Gyorgy, T. Linder, and G. Lugosi. Efficient tracking of large classes of experts. *IEEE Transactions on Information Theory*, 58(11):6709–6725, Nov 2012.
- E. C. Hall and R. Willett. Dynamical Models and tracking regret in online convex programming. In *Proceedings of International Conference on International Conference on Machine Learning (ICML)*, 2013.
- E. C. Hall and R. M. Willett. Online Convex Optimization in Dynamic Environments. *IEEE Journal of Selected Topics in Signal Processing*, 9(4):647–662, 2015.
- E. Hazan. Introduction to online convex optimization. *Foundations and Trends in Optimization*, 2(3-4):157–325, 2016.
- M. Herbster and M. K. Warmuth. Tracking the best expert. *Machine Learning*, 32(2):151–178, Aug 1998.

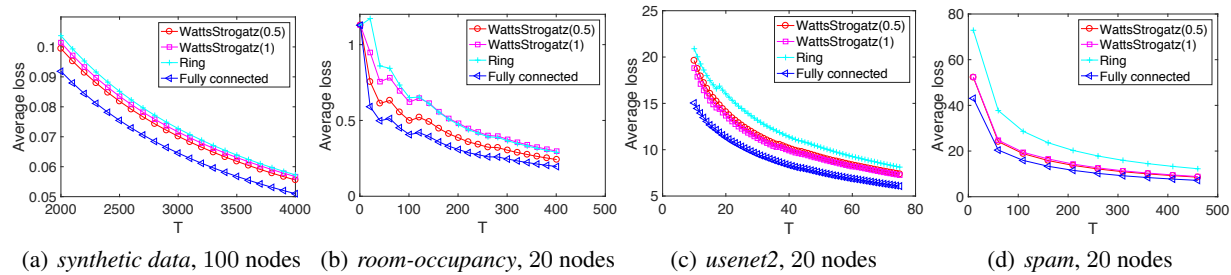


Figure 4. The average loss yielded by DOG is insensitive to the topology of the network.

- A. Jadbabaie, A. Rakhlin, S. Shahrampour, and K. Sridharan. Online Optimization : Competing with Dynamic Comparators. In *Proceedings of International Conference on Artificial Intelligence and Statistics (AISTATS)*, pages 398–406, 2015.
- K.-S. Jun, F. Orabona, S. Wright, and R. Willett. Improved strongly adaptive online learning using coin betting. In A. Singh and J. Zhu, editors, *Proceedings of the 20th International Conference on Artificial Intelligence and Statistics (AISTATS)*, volume 54, pages 943–951, 20–22 Apr 2017.
- M. Kamp, M. Boley, D. Keren, A. Schuster, and I. Sharfman. Communication-efficient distributed online prediction by dynamic model synchronization. In *Proceedings of the 2014th European Conference on Machine Learning and Knowledge Discovery in Databases - Volume Part I, ECMLPKDD’14*, pages 623–639, Berlin, Heidelberg, 2014. Springer-Verlag.
- I. Katakis, G. Tsoumakas, and I. Vlahavas. Tracking recurring contexts using ensemble classifiers: An application to email filtering. *Knowledge and Information Systems*, 22(3):371–391, 2010.
- A. Koppel, S. Paternain, C. Richard, and A. Ribeiro. Decentralized online learning with kernels. *IEEE Transactions on Signal Processing*, 66(12):3240–3255, June 2018.
- S. Lee, A. Ribeiro, and M. M. Zavlanos. Distributed continuous-time online optimization using saddle-point methods. In *2016 IEEE 55th Conference on Decision and Control (CDC)*, pages 4314–4319, Dec 2016.
- S. Lee, A. Nedi, and M. Raginsky. Coordinate dual averaging for decentralized online optimization with nonseparable global objectives. *IEEE Transactions on Control of Network Systems*, 5(1):34–44, March 2018.
- M. Mohri and S. Yang. Competing with automata-based expert sequences. In A. Storkey and F. Perez-Cruz, editors, *Proceedings of the Twenty-First International Conference on Artificial Intelligence and Statistics*, volume 84, pages 1732–1740, 09–11 Apr 2018.
- A. Mokhtari, S. Shahrampour, A. Jadbabaie, and A. Ribeiro. Online optimization in dynamic environments: Improved regret rates for strongly convex problems. In *Proceedings of IEEE Conference on Decision and Control (CDC)*, pages 7195–7201. IEEE, 2016.
- J. Mourtada and O.-A. Maillard. Efficient tracking of a growing number of experts. *arXiv.org*, Aug. 2017.
- A. Nedi, S. Lee, and M. Raginsky. Decentralized online optimization with global objectives and local communication. In *2015 American Control Conference (ACC)*, pages 4497–4503, July 2015.
- S. Shahrampour and A. Jadbabaie. Distributed online optimization in dynamic environments using mirror descent. *IEEE Transactions on Automatic Control*, 63(3):714–725, March 2018.
- S. Shalev-Shwartz. Online Learning and Online Convex Optimization. *Foundations and Trends® in Machine Learning*, 4(2):107–194, 2012.
- C.-Y. Wei, Y.-T. Hong, and C.-J. Lu. Tracking the best expert in non-stationary stochastic environments. In D. D. Lee, M. Sugiyama, U. V. Luxburg, I. Guyon, and R. Garnett, editors, *Proceedings of Advances in Neural Information Processing Systems*, pages 3972–3980, 2016.
- H.-F. Xu, Q. Ling, and A. Ribeiro. Online learning over a decentralized network through admm. *Journal of the Operations Research Society of China*, 3(4):537–562, Dec 2015.
- F. Yan, S. Sundaram, S. V. N. Vishwanathan, and Y. Qi. Distributed autonomous online learning: Regrets and intrinsic privacy-preserving properties. *IEEE Transactions on Knowledge and Data Engineering*, 25(11):2483–2493, Nov 2013.
- T. Yang, L. Zhang, R. Jin, and J. Yi. Tracking Slowly Moving Clairvoyant - Optimal Dynamic Regret of Online Learning with True and Noisy Gradient. In *Proceedings of the 34th International Conference on Machine Learning (ICML)*, 2016.

- C. Zhang, P. Zhao, S. Hao, Y. C. Soh, B. S. Lee, C. Miao, and S. C. H. Hoi. Distributed multi-task classification: a decentralized online learning approach. *Machine Learning*, 107(4):727–747, Apr 2018a.
- L. Zhang, T. Yang, J. Yi, R. Jin, and Z.-H. Zhou. Improved Dynamic Regret for Non-degenerate Functions. In *Proceedings of Neural Information Processing Systems (NIPS)*, 2017a.
- L. Zhang, T. Yang, rong jin, and Z.-H. Zhou. Dynamic regret of strongly adaptive methods. In *Proceedings of the 35th International Conference on Machine Learning (ICML)*, pages 5882–5891, 10–15 Jul 2018b.
- W. Zhang, P. Zhao, W. Zhu, S. C. H. Hoi, and T. Zhang. Projection-free distributed online learning in networks. In D. Precup and Y. W. Teh, editors, *Proceedings of the 34th International Conference on Machine Learning*, pages 4054–4062, International Convention Centre, Sydney, Australia, 06–11 Aug 2017b.
- Y. Zhao, S. Qiu, and J. Liu. Proximal Online Gradient is Optimum for Dynamic Regret. *CoRR*, cs.LG, 2018.
- M. Zinkevich. Online convex programming and generalized infinitesimal gradient ascent. In *Proceedings of International Conference on Machine Learning (ICML)*, pages 928–935, 2003.