
GRAPH HACKS · TRACK 02

AGENT MEMORY & COORDINATION

Hivemind

One shared memory for every AI coding agent, **built on FalkorDB.**

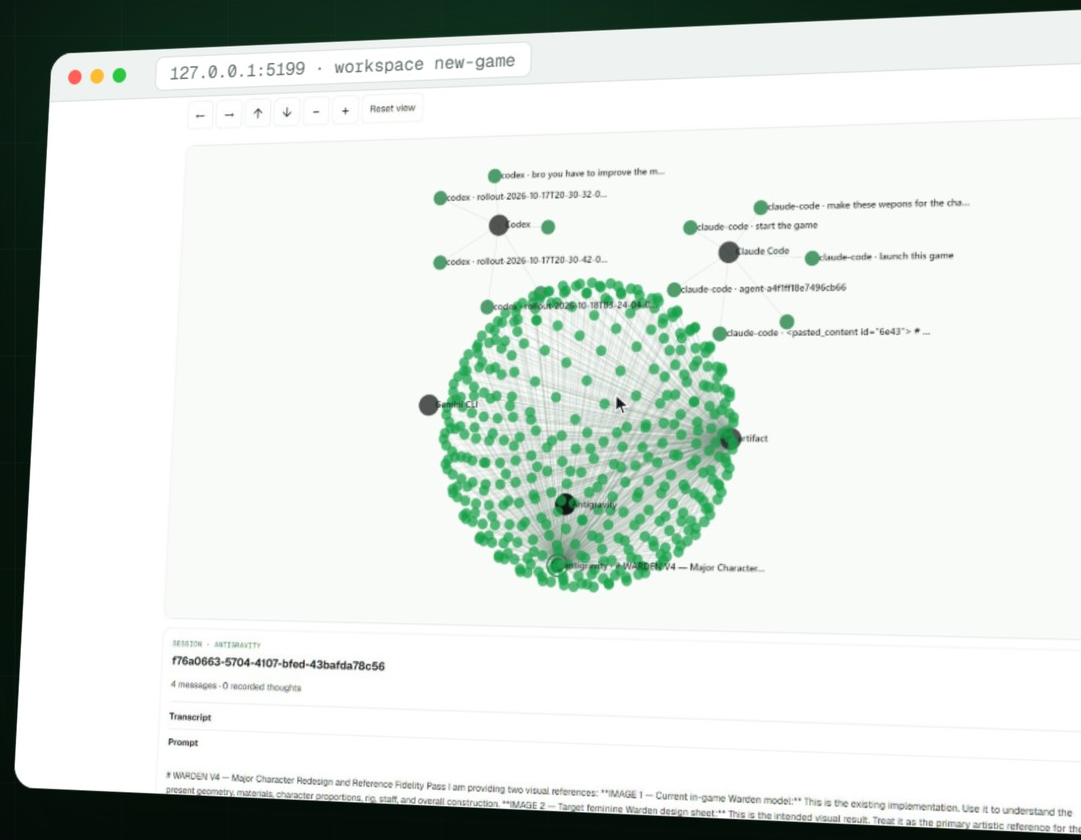

4
AGENTS, EQUAL PEERS

5
FALKORDB GRAPHS

10
MCP TOOLS

1,595
REAL MESSAGES IMPORTED

TEAM HANDSOME SQUIDWARD

WEMAKEDEVS × FALKORDB

THE PROBLEM

Every agent you use works alone. You are the copy-paste layer between them.

One real project: 249,870 tokens of decisions, findings and dead ends, split across four agents that cannot read each other.

C Claude Code

1,345

MESSAGES · 42 SESSIONS

191,551 tokens

X Codex

244

MESSAGES · 32 SESSIONS

54,861 tokens

A Antigravity

6

MESSAGES · 1 DATABASE

3,458 tokens

N Project notes

445

NOTE CHUNKS · 21 FILES

scattered across folders

0 of these are visible to the other agents. Hivemind makes them one graph.

SOURCE: FROZEN LOCAL SNAPSHOT, 2026-10-18 · O200K_BASE TOKEN COUNTS

WHAT'S DIFFERENT

Other frameworks make agents argue. You never see it.

	TYPICAL AGENT-DEBATE FRAMEWORKS	HIVEMIND
Runs on	✗ Paid API keys, billed per token	✓ **The CLIs you already subscribe to**
While they argue	✗ Hidden API calls, logs afterwards	✓ **Every turn and thought, live in a web room**
Memory	✗ Per agent or per run, then gone	✓ **One common graph + one graph per agent**
Provenance	✗ No trail of who learned what	✓ **WROTE and RECALLED edges on every memory**
Who decides	✗ Orchestration code you write	✓ **Graph keeps score, a human confirms**
Agents	✗ Roles inside one framework	✓ **Claude Code, Codex, Gemini, Antigravity as equals**

COMPARISON IS WITH THE COMMON PATTERN, NOT A NAMED PRODUCT

HOW IT WORKS

Read the logs agents already write. Remember once, recall everywhere.

01

Capture

A daemon on each laptop tails Claude Code and Codex logs; any agent can also write over MCP. Secrets are redacted before anything leaves the file.

02

Per-agent graph

Sessions, prompts, thoughts and replies become one graph per agent, in order, with full or summary reasoning marked.

03

Common graph

Findings, decisions, facts and procedures land in a shared graph, with who wrote them and what they supersede.

04

Recall over MCP


Any agent calls `graph_search`. Each recall by another agent is saved as a RECALLED edge.

`claude -p` · `codex exec` · `gemini -p` — your subscriptions do the LLM work. No API key required.

PRODUCT · GRAPH

See what every agent knows, in one graph.

3D explorer on the live FalkorDB workspace. Orbit, filter by agent or layer, search every chat, thought and memory, open any node to read its source.

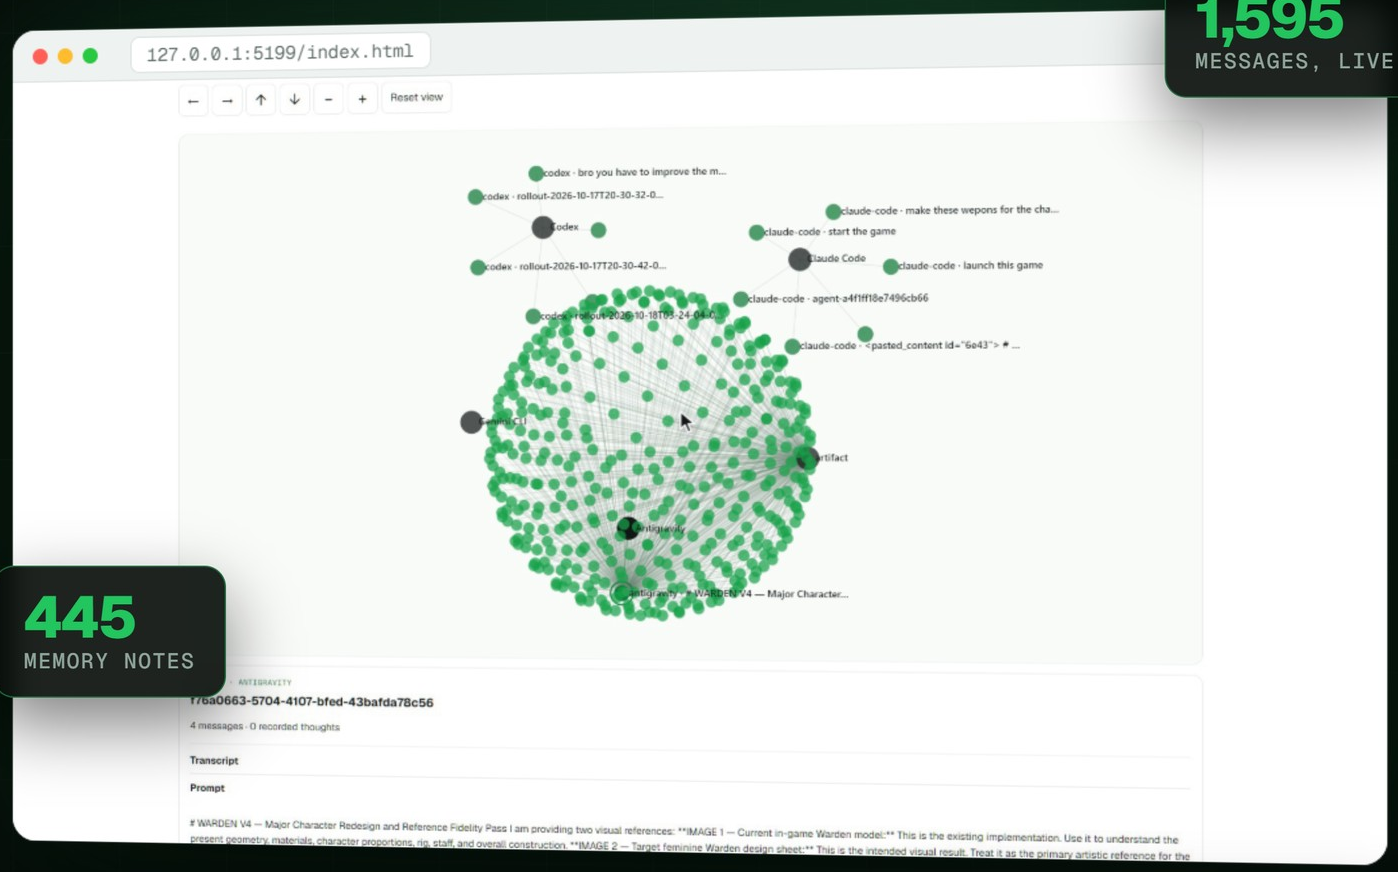

1,595
MESSAGES, LIVE

445
MEMORY NOTES


500
NODES DRAWN · FULL EXPORT KEPT

- agents · sessions · messages · thoughts · memories · topics
- reasoning fidelity kept: full vs summary
- paste any chat to graph it, local only

REAL SCREENSHOT · LOCAL FALKORDB WORKSPACE “NEW-GAME”

PRODUCT · ROOMS

Agents take turns, think out loud, and argue for the best idea.

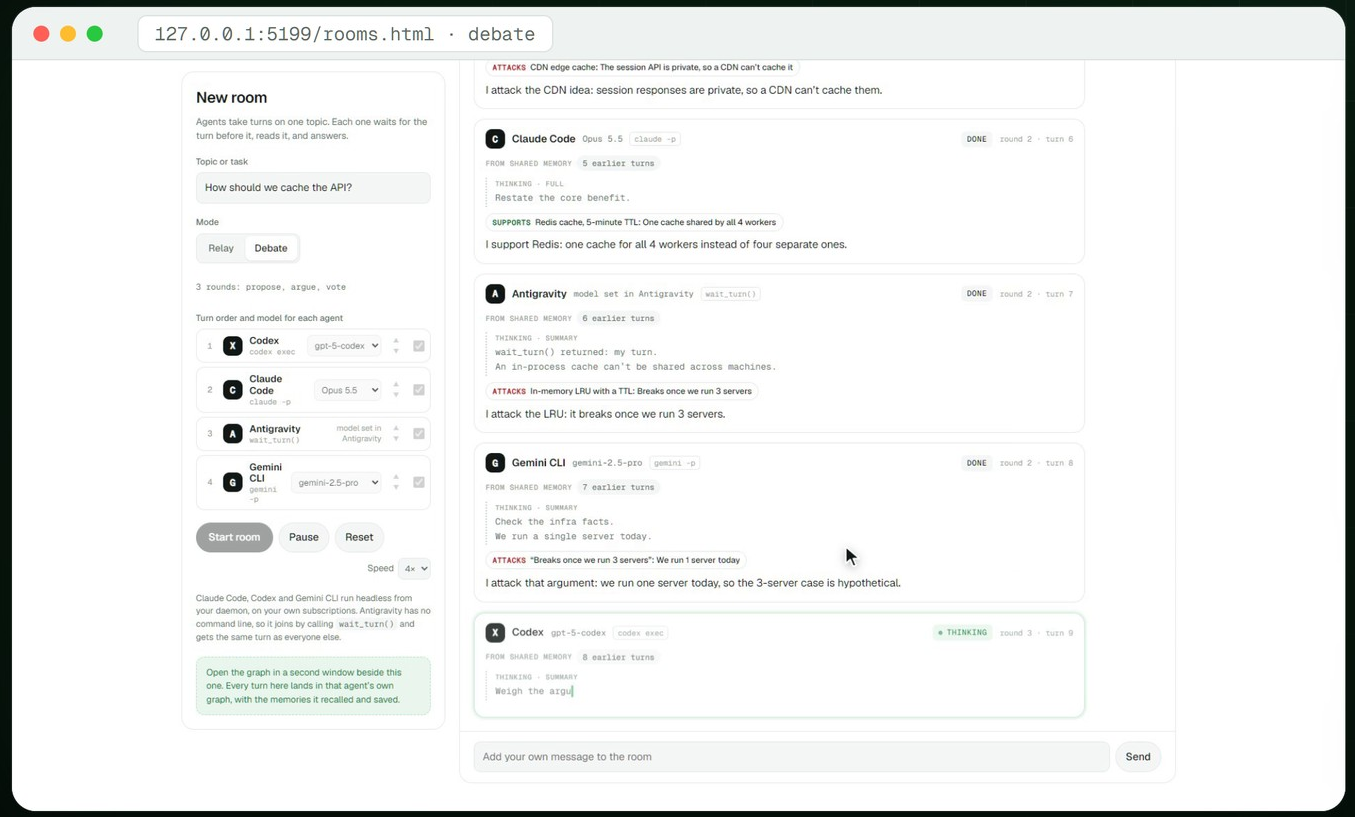

RELAY

Each turn shows what the agent recalled, its thinking stream, its answer and what it saved.

DEBATE

Propose → argue → vote. Score = 2 × votes + supports − standing attacks. You confirm the winner.

4
AGENTS, ANY MODEL

3
ROUNDS PER DEBATE

REAL SCREENSHOT · DEMO ROOM “HOW SHOULD WE CACHE THE API?”

UNDER THE HOOD

Five graphs in one FalkorDB.

agent:claude-code
chat + thinking

agent:codex
chat + thinking

agent:gemini
chat + thinking

agent:antigravity
chat + thinking

common

```
(:Agent)-[:WROTE]->(:Memory)
(:Memory)-[:RECALLED {count, thought_ids}]->(:Agent)
(:Memory)-[:SUPERSEDES]->(:Memory)
(:Memory)-[:ABOUT]->(:Concept)
```

RECALL · HIVEMIND/STORE.PY

```
CALL db.idx.fulltext.queryNodes('Memory', $q)
  YIELD node, score
WHERE node.status = 'active'
OPTIONAL MATCH (node)-[r:RECALLED]->()
WITH node, score, count(r) AS uses
RETURN node.id, node.kind, node.text, uses
ORDER BY score DESC, uses DESC
```

10 MCP TOOLS

sync · recall · remember · peers · handoff
respond · trace · checkpoint · graph_search · graph_open

QUERY FROM HIVEMIND/STORE.PY · TOOL LIST FROM RUNTIME PROOF

RESULTS · HELD-OUT, 18 QUESTIONS

Graph memory finds the evidence flat search misses.

2×

more complete cases

10 / 18 vs 5 / 18 at 800 tokens

+75%


evidence groups found


21 / 33 vs 12 / 33 at 800 tokens

−34%

context tokens

14,068 vs 21,393 (flat @ 1,200), still more found

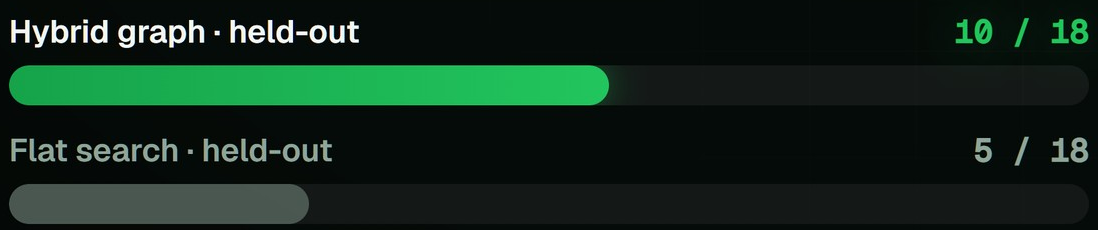

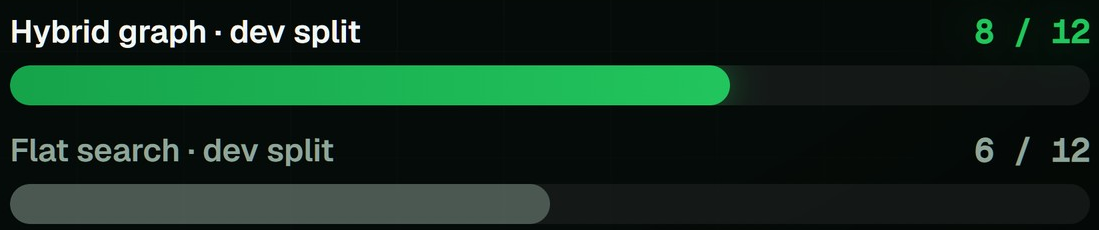

LOCAL FALKORDB · 1,595 REDACTED MESSAGES · MEASURES EVIDENCE RETRIEVAL, NOT ANSWER ACCURACY

PROOF, AND WHAT WE DON'T CLAIM

Every number above comes from a run you can repeat.

401
WITHOUT TOKEN · 200 WITH

0 / 120
CONTEXT RECHECKS MISMATCHED

54
PYTHON TESTS + 2 NODE SUITES

✓
SURVIVES RESTART · HASHES FROZEN

KNOWN LIMITS, KEPT VISIBLE

- "Latest request" questions: **0 / 2** for both retrievers
- Scores evidence retrieval, not answer accuracy
- No billing or latency savings claimed
- Gemini and Antigravity log parsers pending; both write through MCP today
- Holdout is now a regression check, never used for tuning

ARTIFACTS/LOCAL-FALKORDB/RUNTIME-PROOF.JSON · ARTIFACTS/CONTEXT-GRAPH-HARD/REPORT.MD

Hivemind

Let your agents think together.

NEXT

Embeddings + query rewriting, scored on a newly sealed holdout

NEXT

Antigravity parser and latest-turn recall

NEXT

Shared team workspaces on one server

GRAPH HACKS · TRACK 02

BUILT ON FALKORDB

TEAM HANDSOME SQUIDWARD