

# First Two-Class Appointment Simulation: Day-Level Formulation

## v2

Alexandre SEPULVEDA de DIETRICH  
Under the supervision of Pr. Carri Chan

June 3, 2026

## Contents

|          |                                               |           |
|----------|-----------------------------------------------|-----------|
| <b>1</b> | <b>Introduction</b>                           | <b>2</b>  |
| 1.1      | Purpose and Reader Map . . . . .              | 2         |
| 1.1.1    | What Changed from the Previous Note . . . . . | 2         |
| <b>2</b> | <b>Model Formulation</b>                      | <b>3</b>  |
| 2.1      | Model at a Glance . . . . .                   | 3         |
| 2.2      | Day-Level State . . . . .                     | 4         |
| 2.2.1    | Patient Audit Record . . . . .                | 4         |
| 2.3      | Patient Classes and Behavior . . . . .        | 4         |
| 2.3.1    | Working Behavior Profile . . . . .            | 5         |
| 2.3.2    | Balking Function . . . . .                    | 5         |
| 2.3.3    | No-Show Function . . . . .                    | 6         |
| <b>3</b> | <b>Simulation Mechanics</b>                   | <b>8</b>  |
| 3.1      | Daily Simulation Order . . . . .              | 8         |
| 3.2      | Calendar and Booking Logic . . . . .          | 9         |
| 3.2.1    | Day-Level Calendar Picture . . . . .          | 9         |
| 3.2.2    | FCFS Booking Rule . . . . .                   | 9         |
| 3.3      | Worked Day-Level Example . . . . .            | 9         |
| <b>4</b> | <b>Outputs and Code Mapping</b>               | <b>11</b> |
| 4.1      | Performance Measures . . . . .                | 11        |
| 4.2      | Implementation Mapping . . . . .              | 12        |
| <b>5</b> | <b>Literature and Scope</b>                   | <b>12</b> |

|       |                                      |    |
|-------|--------------------------------------|----|
| 5.1   | Relation to the Literature . . . . . | 12 |
| 5.1.1 | Common Mechanism . . . . .           | 12 |
| 5.1.2 | Green and Savin (2008) . . . . .     | 13 |
| 5.1.3 | Liu and Ziya (2014) . . . . .        | 13 |
| 5.1.4 | Liu (2015) . . . . .                 | 13 |
| 5.1.5 | Why Only FCFS Here . . . . .         | 14 |
| 6     | References                           | 14 |

# 1 Introduction

## 1.1 Purpose and Reader Map

This v2 note is the day-level replacement for the earlier slot-level formulation. The earlier note remains useful because it showed the model through concrete pictures: a time-evolution graph, a rolling calendar table, a cancellation-hazard plot, and a worked FCFS appointment book. This version keeps that teaching style, but changes the model state to day/class counts.

### Core Modeling Choice

The simulation clock is the day  $D$ . The model state records how many patients of each class are scheduled on each residual day. The code may keep internal slot positions to enforce capacity and audit utilization, but slot position  $m$  is no longer a model state variable.

### 1.1.1 What Changed from the Previous Note

The table below records what the old note used to help a reader understand the simulator and the equivalent object in the day-level formulation.

| Old explanatory device                     | What it taught                                                                    | Day-level v2 replacement                                                                                                                            |
|--------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Slot epoch $t = (D, s)$ and rollover graph | how the simulator moved through slots inside a day                                | daily epoch graph $D \rightarrow D + 1$ with the seven explicit daily events                                                                        |
| Slot calendar $Y_t(r, m)$                  | where each booked appointment sat in the rolling calendar                         | class-count state $X_{i,r}^D$ plus aggregate occupancy $N_r^D$ by residual day                                                                      |
| Colored $H \times S$ appointment book      | how FCFS filled slots and how holes appeared                                      | colored residual-day table showing total load, open capacity, and future-only offers                                                                |
| No-show and cancellation plots             | how baseline step rules differ from the smoother legacy delay-sensitive functions | baseline $\xi_i(\tau)$ and $\phi_i$ in solid lines, with advanced $\tilde{\xi}_i(\tau)$ and $\tilde{\phi}_i(\tau, r)$ shown as dashed later options |
| Worked FCFS example                        | how a request becomes an offer, booking, balk, no-show, or service                | day-level progression example with cancellations, arrivals, offers, balking, service, metrics, and calendar advance                                 |
| Metric tables                              | how logs map to access and utilization measures                                   | same metrics, plus the <b>daily_progression</b> audit table that records every daily step                                                           |

## 2 Model Formulation

### 2.1 Model at a Glance

The simulator keeps the same operational feedback loop as the earlier model and the motivating appointment-queueing literature.

#### Core Feedback Loop

more backlog  $\Rightarrow$  larger offered delay  
 $\Rightarrow$  more balking, cancellation, or no-show risk  
 $\Rightarrow$  lower realized service.

The day-level objects are:

- $D$ : current calendar day.
- $S$ : number of appointment slots available per day.
- $H$ : rolling booking horizon in days.
- $\mathcal{I}$ : set of patient classes, equal to  $\{1, 2\}$  in the first experiments.
- $r \in \{0, 1, \dots, H - 1\}$ : residual delay, where  $r = 0$  means appointments scheduled for today.
- $\tau$ : original offered delay accepted by a booked patient.

The main distinction remains:

### Residual Delay vs. Original Delay

Residual delay  $r$  belongs to the day-level state and decreases as days pass. Original delay  $\tau$  is stored with the booked patient because balking, optional advanced cancellation rules, and no-show behavior may depend on the delay the patient accepted.

## 2.2 Day-Level State

At the start of day  $D$ , after the future-day cancellation step and before processing new arrivals, define

$$X_{i,r}^D = \text{number of class-}i \text{ patients scheduled for day } D + r.$$

The state vector is

$$X^D = (X_{i,r}^D : i \in \mathcal{I}, r = 0, \dots, H - 1).$$

For each residual day, aggregate occupancy is

$$N_r^D = \sum_{i \in \mathcal{I}} X_{i,r}^D,$$

and daily capacity imposes

$$N_r^D \leq S.$$

Slot positions inside a day are not part of  $X^D$ . The implementation still keeps an internal list of  $S$  slots per day so it can find open capacity, produce service-slot logs, and compute empty-slot utilization. That internal detail is an audit layer, not the mathematical state.

### 2.2.1 Patient Audit Record

When a class- $i$  patient accepts an offer with delay  $\tau$ , the state count is incremented on the selected residual day, and the implementation also stores a patient audit record

$$(i, \tau).$$

The audit record is needed because:

- $b_i(\tau)$  determines balking when the offer is made;
- baseline  $\xi_i(\tau)$  determines no-show at appointment time;
- advanced no-show experiments may instead use  $\tilde{\xi}_i(\tau)$ ;
- optional advanced cancellation functions may use  $\phi_i(\tau, r)$ ;
- cohort logs and delay metrics need the originally offered delay.

## 2.3 Patient Classes and Behavior

Each class is described by

$$C_i = \{\lambda_i, b_i(\tau), \phi_i, \xi_i(\tau)\}.$$

| Object                    | Meaning                                                                                                          |
|---------------------------|------------------------------------------------------------------------------------------------------------------|
| $\lambda_i$               | expected number of class- $i$ arrivals per day                                                                   |
| $b_i(\tau)$               | probability that class- $i$ declines an offered appointment with delay $\tau$                                    |
| $\phi_i$                  | scalar daily cancellation probability for class- $i$ patients scheduled on future days                           |
| $\tilde{\phi}_i(\tau, r)$ | advanced daily cancellation rule using original delay and residual delay; not used in the baseline FCFS analysis |
| $\xi_i(\tau)$             | baseline step no-show probability at appointment time if the patient has not canceled                            |
| $\tilde{\xi}_i(\tau)$     | advanced delay-sensitive no-show rule; not used in the baseline FCFS analysis                                    |

The baseline cancellation input is  $\phi_i$ . It is applied directly once per day to every class- $i$  patient still scheduled on a future day  $D + r$ ,  $r \in \{1, \dots, H - 1\}$ , when the daily cancellation step is executed. It is not converted from an eventual cancellation probability.

For two-class experiments, demand can also be parameterized by total daily arrival volume  $\lambda$  and class-1 share  $p$ :

$$\lambda_1 = p\lambda, \quad \lambda_2 = (1 - p)\lambda.$$

### 2.3.1 Working Behavior Profile

The first FCFS experiments use a concrete two-class profile. The numbers below are not required by the model, but they make the figures and examples reproducible.


| Object       | Class 1: MRI-like diagnostic                                                                                        | Class 2: behavioral-health follow-up                                                                                |
|--------------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Daily demand | $\lambda_1 = 14$ when $\lambda = 24$ and $p = 7/12$                                                                 | $\lambda_2 = 10$ when $\lambda = 24$ and $p = 7/12$                                                                 |
| Balking      | low until a 21-day access threshold, then high                                                                      | low until a 14-day access threshold, then high                                                                      |
| No-show      | step $\xi_1(\tau)$ : 0.01 before 21 days, 0.31 from 21 days onward; dashed $\tilde{\xi}_1(\tau)$ reserved for later | step $\xi_2(\tau)$ : 0.15 before 14 days, 0.51 from 14 days onward; dashed $\tilde{\xi}_2(\tau)$ reserved for later |
| Cancellation | scalar $\phi_1 = 0.01$ in the baseline; advanced $\tilde{\phi}_1(\tau, r)$ is reserved for later experiments        | scalar $\phi_2 = 0.02$ in the baseline; advanced $\tilde{\phi}_2(\tau, r)$ is reserved for later experiments        |

### 2.3.2 Balking Function

In the current FCFS baseline, balking is represented with a step function of the offered delay. This is intentionally simple: patients are fairly willing to accept appointments below a practical access threshold, and much less willing once the offered delay crosses that threshold.

$$b_1(\tau) = \begin{cases} 0.02, & \tau < 21, \\ 0.55, & \tau \geq 21, \end{cases} \quad b_2(\tau) = \begin{cases} 0.04, & \tau < 14, \\ 0.72, & \tau \geq 14. \end{cases}$$

### Balking as a Step Function of Delay

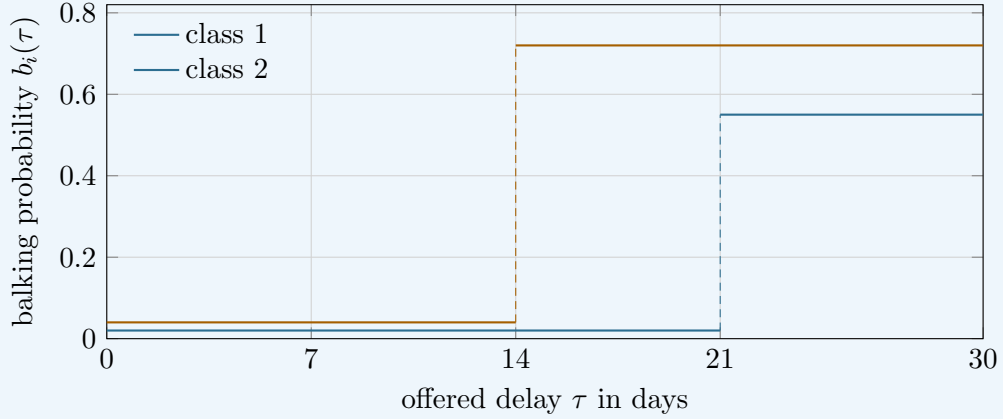

The operational interpretation is direct. Under FCFS, congestion increases the first available future residual day. Once that offered delay crosses a class-specific threshold, many more patients decline the offer. This is the access-side version of the same delay feedback loop that the literature usually models through no-show behavior.

### 2.3.3 No-Show Function

No-show behavior uses the original accepted delay  $\tau$ , not the residual delay  $r$  on a later day. In the current FCFS baseline, no-show is represented with a step function, just like balking:

$$\xi_1(\tau) = \begin{cases} 0.01, & \tau < 21, \\ 0.31, & \tau \geq 21, \end{cases} \quad \xi_2(\tau) = \begin{cases} 0.15, & \tau < 14, \\ 0.51, & \tau \geq 14. \end{cases}$$


The earlier Green-Savin style delay-sensitive curve is still useful as an advanced option for later experiments. In this note it is written as

$$\tilde{\xi}_i(\tau) = \gamma_{i,\max} - (\gamma_{i,\max} - \gamma_{i,0})e^{-\tau/s_i}.$$

For the same illustrative values,

$$(\gamma_{1,0}, \gamma_{1,\max}, s_1) = (0.01, 0.31, 50), \quad (\gamma_{2,0}, \gamma_{2,\max}, s_2) = (0.15, 0.51, 9).$$

### Baseline Step No-Show and Advanced $\tilde{\xi}$

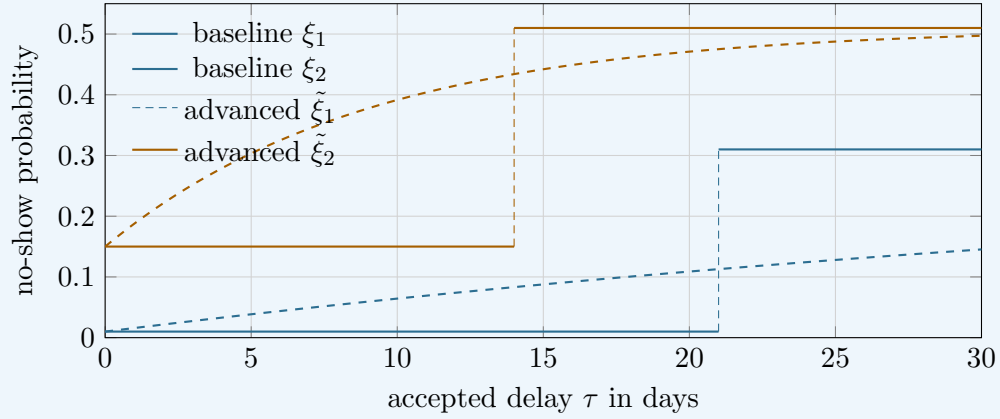

The solid curves are the implemented baseline. They make the daily progression easier to read: patients who accepted a short delay behave one way, and patients who accepted a longer delay behave another way. The dashed curves show the smoother advanced  $\tilde{\xi}_i(\tau)$  option, which is closer to Green-Savin style delay sensitivity and remains available for later experiments.

### Cancellation Probability Figure: Baseline and Advanced Rule

The new baseline uses a constant daily cancellation probability  $\phi_i$ . The older delay/residual-delay function is renamed


$$\tilde{\phi}_i(\tau, r),$$

and is kept only as an advanced option for later experiments. It is not part of the baseline FCFS analysis in this note.

For example, the advanced taper has the form

$$\tilde{\phi}_i(\tau, r) = \min\{a_i + c_i\tau, \bar{\phi}_i\} \frac{r}{\tau}, \quad 1 \leq r \leq \tau,$$

with  $\tilde{\phi}_i(\tau, 0) = 0$ . The figure shows the difference between the scalar baseline and that advanced option.

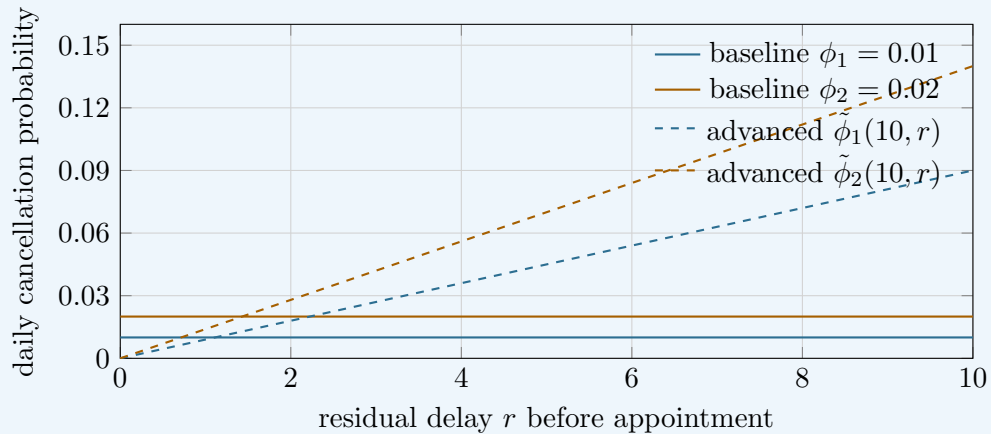

The flat lines are the implemented baseline: each scheduled class- $i$  patient faces the same daily probability  $\phi_i$  on each day they are considered. The dashed curves are only an example of the advanced  $\tilde{\phi}_i(\tau, r)$  rule, where risk can vary with both the original delay and the residual delay.

### 3 Simulation Mechanics

#### 3.1 Daily Simulation Order


The simulator advances one day at a time. For each day  $D$ , it executes the following steps in this exact order.

1. **Compute cancellations for the day.** Each class- $i$  patient scheduled for a future day  $D + r$ ,  $r \in \{1, \dots, H - 1\}$ , independently cancels with daily probability  $\phi_i$ .
2. **Simulate daily arrivals.**

$$M_i^D \sim \text{Poisson}(\lambda_i),$$

where  $M_i^D$  is the number of class- $i$  arrivals on day  $D$ .

3. **Offer future days in FCFS order.** Arrivals are processed sequentially in randomized within-day order. The baseline policy offers the earliest future day  $D + r$ ,  $r \in \{1, \dots, H - 1\}$ , with open capacity.
4. **Simulate balking.** A class- $i$  patient offered delay  $\tau = r$  accepts with probability  $1 - b_i(\tau)$ . If the patient balks, the capacity remains open for later arrivals.
5. **Simulate no-shows and service for day  $D$ .** Each remaining appointment scheduled for  $D$  no-shows with baseline probability  $\xi_i(\tau)$ , using its stored original delay.
6. **Compute metrics for day  $D$ .** The simulator records access, booking, cancellation, service, empty-slot, utilization, and delay metrics.
7. **Advance to day  $D + 1$ .** The current day is removed, residual delays decrease by one, and a new empty future day is appended.

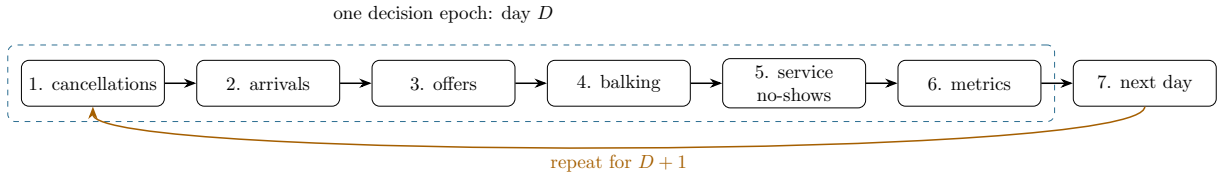

#### Future-Only Cancellations and Offers

New arrivals on day  $D$  cannot book day  $D$ . The cancellation step also applies only to future appointments  $r = 1, \dots, H - 1$ . Same-day occupancy is therefore resolved only through today's no-show/service step, not through same-day cancellations or new offers.



## 3.2 Calendar and Booking Logic

### 3.2.1 Day-Level Calendar Picture

The old note used an  $H \times S$  slot calendar to show exactly where patients sat. The day-level model uses the same rolling calendar concept, but it displays counts by class and residual day.

#### Visualizing the Day-Level State $X^D$

Suppose  $S = 25$ ,  $H = 4$ , and after the cancellation step on day  $D$  the class-count state is:

| Count       | day $D$<br>$r = 0$ | day $D + 1$<br>$r = 1$ | day $D + 2$<br>$r = 2$ | day $D + 3$<br>$r = 3$ |
|-------------|--------------------|------------------------|------------------------|------------------------|
| $X_{1,r}^D$ | 9                  | 12                     | 8                      | 5                      |
| $X_{2,r}^D$ | 11                 | 13                     | 10                     | 7                      |
| $N_r^D$     | 20                 | 25                     | 18                     | 12                     |
| $S - N_r^D$ | 5                  | 0                      | 7                      | 13                     |

The current day  $r = 0$  has five open slots, but they are not bookable by new arrivals. Tomorrow ( $r = 1$ ) is full. The first eligible future day with capacity is  $r = 2$ , so the first offer under FCFS is day  $D + 2$ , with  $\tau = 2$ .

### 3.2.2 FCFS Booking Rule

For a new arrival on day  $D$ , the baseline policy searches

$$r = 1, 2, \dots, H - 1$$

and offers the first residual day satisfying

$$N_r^D < S.$$

If no such day exists, the patient receives no offer. If the patient accepts, the simulator increments  $X_{i,r}^D$  and stores the patient's original delay as  $\tau = r$ . If the patient balks,  $X_{i,r}^D$  is not changed and the capacity remains available to later arrivals.

## 3.3 Worked Day-Level Example

This example is the day-level counterpart of the previous note's FCFS appointment-book example. It shows the state, the patient audit record, the booking decision, the no-show/service step, and the next-day rollover.

### Worked Example: One Full Day $D$

Take  $S = 25$ ,  $H = 4$ , and the post-cancellation state from the previous table:

$$N_0^D = 20, \quad N_1^D = 25, \quad N_2^D = 18, \quad N_3^D = 12.$$

Assume that the cancellation step has already removed one future appointment, so the daily cancellation counter is 1.

Daily arrivals are drawn once per class:

$$M_1^D = 14, \quad M_2^D = 10.$$

The simulator randomizes the within-day order. In this realized day, the resulting offers can be summarized by class mix and outcome.

The booking outcomes are:

| Group         | Class mix            | FCFS offer         | Result                                                   |
|---------------|----------------------|--------------------|----------------------------------------------------------|
| first cohort  | 4 class 1, 3 class 2 | $r = 2, \tau = 2$  | all 7 accept; day $D + 2$ becomes full                   |
| second cohort | 2 class 2            | $r = 2, \tau = 2$  | both balk; the remaining future capacity stays available |
| third cohort  | 9 class 1, 4 class 2 | $r = 3, \tau = 3$  | all 13 accept; day $D + 3$ becomes full                  |
| final cohort  | 1 class 1, 1 class 2 | no future capacity | both receive no offer                                    |

After offers and balking, the aggregate future counts are:

$$N_0^D = 20, \quad N_1^D = 25, \quad N_2^D = 25, \quad N_3^D = 25.$$

The accepted patients are stored in the audit layer with their original delays: 7 bookings with  $\tau = 2$  and 13 bookings with  $\tau = 3$ . The balked and no-offer arrivals create no appointment record.

Now the simulator resolves today's  $r = 0$  appointments. Suppose 17 scheduled patients attend and 3 no-show. Since  $S = 25$  and only 20 patients were scheduled for today, the daily service outcome is:

$$\text{served} = 17, \quad \text{no\_shows} = 3, \quad \text{empty\_slots} = 5.$$

Then the calendar advances. The full day  $D + 1$  becomes the new current day, residual delays decrease by one, and a new empty day  $D + 4$  is appended:

$$(N_0^{D+1}, N_1^{D+1}, N_2^{D+1}, N_3^{D+1}) = (25, 25, 25, 0).$$

### Same Example as a Daily Progression Audit

The implementation exposes the same sequence through `daily_progression`. A stylized row for each step of the example is:

| Step               | Arr | Offer | Book | Balk | Canc | Served | NS | Empty | Interpretation                                                                             |
|--------------------|-----|-------|------|------|------|--------|----|-------|--------------------------------------------------------------------------------------------|
| cancellations      | 0   | 0     | 0    | 0    | 1    | 0      | 0  | 0     | one future appointment removed before arrivals                                             |
| arrivals           | 24  | 0     | 0    | 0    | 1    | 0      | 0  | 0     | daily Poisson counts have been drawn                                                       |
| offers and balking | 24  | 22    | 20   | 2    | 1    | 0      | 0  | 0     | future days $D + 2$ and $D + 3$ absorb 20 bookings; two arrivals balk and two get no offer |
| no-shows/service   | 24  | 22    | 20   | 2    | 1    | 17     | 3  | 5     | today's scheduled patients are resolved                                                    |
| metrics            | 24  | 22    | 20   | 2    | 1    | 17     | 3  | 5     | daily counters are ready for summaries                                                     |
| advance            | 24  | 22    | 20   | 2    | 1    | 17     | 3  | 5     | old $r = 1$ becomes the new $r = 0$                                                        |

This table is not a second model. It is an audit view of the model order. It exists so a reader can verify that the simulator is progressing exactly one day at a time.

## 4 Outputs and Code Mapping

### 4.1 Performance Measures

For patients arriving during the measured window, the simulator reports:

| Metric            | Definition                                                       |
|-------------------|------------------------------------------------------------------|
| Arrivals          | number of appointment requests                                   |
| Booked            | number of requests that accept an offer                          |
| Balked            | number of requests that receive an offer and decline it          |
| No offer          | number of requests for which no future capacity is available     |
| Canceled          | number of booked patients who cancel before service resolution   |
| No-shows          | number of booked patients who remain scheduled but do not attend |
| Served            | number of booked patients who attend                             |
| Mean booked delay | average original offered delay $\tau$ among booked patients      |

The main access and service ratios are:

$$\frac{\text{Booked}}{\text{Arrivals}}, \quad \frac{\text{Served}}{\text{Booked}}, \quad \frac{\text{Booked within target}}{\text{Arrivals}}.$$

For measured service days, daily capacity is still  $S$ . Slot utilization is therefore:

$$\rho^{\text{booked}} = \frac{\text{booked slots}}{S \times \text{measured days}}, \quad \rho^{\text{attended}} = \frac{\text{served slots}}{S \times \text{measured days}}.$$

## 4.2 Implementation Mapping

The code follows this day-level formulation:

- `arrival_rate` is  $\lambda_i$ , the expected class- $i$  arrivals per day.
- `cancel_probability` as a scalar is the direct daily cancellation probability  $\phi_i$  for appointments still scheduled in the future.
- `tau_offered` and `tau_booked` are original offered delays in days.
- `arrival_slot` is retained as a legacy log column and is empty under the day-level process.
- `state_log` records  $X_{i,r}^D$  for every configured class and residual day.
- `daily_progression` records the seven daily model steps for each measured day.
- `slots_per_day` is daily capacity  $S$ , and remains the denominator for slot utilization.

### Review Against the Intended New Model

- The model state is day/class count state  $X_{i,r}^D$ , not slot state  $Y_t(r, m)$ .
- The arrival rate  $\lambda_i$  is daily, so  $M_i^D \sim \text{Poisson}(\lambda_i)$ .
- Same-day offers are disabled; bookable residual days are  $r = 1, \dots, H - 1$ .
- Scalar  $\phi_i$  is a daily cancellation probability applied once per day to future appointments  $r = 1, \dots, H - 1$ .
- A booked patient's original  $\tau$  is retained for balking, no-show, advanced cancellation rules, and delay metrics.
- The event order is cancellations, arrivals, offers, balking, no-shows/service, metrics, and calendar advance.

## 5 Literature and Scope

### 5.1 Relation to the Literature

Green and Savin (2008), Liu and Ziya (2014), and Liu (2015) use stylized queue, backlog, or window states to study delay-sensitive attendance and appointment access. The day-level simulator is a calendar version of the same mechanism. The state  $X_{i,r}^D$  records the future schedule by class and residual day; the offered delay  $\tau$  is the calendar analog of the congestion seen by the patient at booking.

#### 5.1.1 Common Mechanism

The analytical papers usually compress the appointment book into one congestion variable, such as queue length, backlog, or the number of appointments already ahead of a new patient. This note keeps the appointment book explicit but day-level:

$$X^D = (X_{i,r}^D : i \in \mathcal{I}, r = 0, \dots, H - 1).$$

Under FCFS, this state implies the offered delay

$$\tau = \min\{r \in \{1, \dots, H - 1\} : N_r^D < S\},$$

when such an  $r$  exists. Thus  $\tau$  is the bridge between the calendar model and the queueing literature. A larger backlog pushes the first feasible  $r$  farther into the future, and that larger  $\tau$  then enters

$b_i(\tau)$  and the baseline step no-show rule  $\xi_i(\tau)$ . In later experiments, the smoother advanced rule  $\tilde{\xi}_i(\tau)$  can be used instead. In the baseline, cancellation is the scalar daily probability  $\phi_i$ . Later experiments can replace it with the advanced rule  $\tilde{\phi}_i(\tau, r)$ .

### 5.1.2 Green and Savin (2008)

Green and Savin study an appointment queue in which no-show behavior worsens with the backlog seen when the appointment is made. Their no-show curve is an exponential-saturation function of a congestion measure. The v2 baseline deliberately simplifies that behavior to a step function  $\xi_i(\tau)$  so the daily progression stays easy to read, but it keeps the Green-Savin shape as the advanced option

$$\tilde{\xi}_i(\tau) = \gamma_{i,\max} - (\gamma_{i,\max} - \gamma_{i,0})e^{-\tau/s_i}.$$

The mapping is:

- their backlog variable maps to the FCFS delay implied by  $X^D$ ;
- their no-show mechanism maps directly to  $\tilde{\xi}_i(\tau)$ , while the baseline  $\xi_i(\tau)$  is a step approximation used for the first FCFS experiments;
- their homogeneous queue is extended here to multiple classes through  $i$ ;
- v2 also adds explicit balking and pre-appointment cancellation.

The simplification in v2 is that time advances by day rather than by individual service slot. This is acceptable for the first simulator because the central feedback loop depends on appointment delay in days, not on the exact within-day slot where the appointment sits.

### 5.1.3 Liu and Ziya (2014)

Liu and Ziya analyze panel size and overbooking decisions under patient no-shows. Their state is more stylized than a rolling calendar, but the core tradeoff is the same: more demand can increase utilization, while longer waits can reduce realized attendance.

The v2 simulator intentionally does not optimize panel size or overbooking yet. It fixes daily capacity  $S$ , uses FCFS, and observes how access, booking, cancellation, no-show, and service metrics respond to demand and behavior. This makes the simulator a diagnostic baseline before any future optimization layer is added.

The mapping is:

- their panel size / demand pressure maps to total daily arrival rate  $\lambda$ ;
- their show-up probability maps to  $1 - \xi_i(\tau)$  in the baseline and  $1 - \tilde{\xi}_i(\tau)$  in the more detailed variant;
- their capacity decision maps here to fixed daily capacity  $S$ ;
- their overbooking decision is not active in the v2 FCFS baseline.

### 5.1.4 Liu (2015)

Liu studies the optimal appointment scheduling window under delay-dependent no-shows. The model's window size limits how far into the future appointments may be scheduled. In v2, the rolling horizon  $H$  plays the same operational role:

$$r \in \{0, 1, \dots, H - 1\}.$$

Because same-day offers are disabled in the current baseline, the bookable window is

$$r \in \{1, \dots, H - 1\}.$$

If every future residual day is full, the arriving patient receives no offer. This is the explicit calendar equivalent of a finite scheduling window rejecting or deferring demand when the window is full.

The mapping is:

- Liu’s appointment window  $K$  maps to the simulator horizon  $H$ ;
- delay-sensitive attendance maps to  $\xi_i(\tau)$  in the baseline and to  $\tilde{\xi}_i(\tau)$  in the more detailed variant;
- the no-offer event appears when the FCFS search over  $r = 1, \dots, H - 1$  finds no capacity;
- optimizing  $H$  is a later experiment, not part of the current FCFS-only baseline.

### 5.1.5 Why Only FCFS Here

The old codebase already supports alternative slot-selection policies, but this note deliberately keeps the analysis focused on FCFS. That is the cleanest first experiment because it isolates the baseline delay-feedback mechanism:

$$X^D \rightarrow \tau_{\text{FCFS}} \rightarrow b_i(\tau), \phi_i, \xi_i(\tau) \rightarrow \text{daily outcomes.}$$

Future policies can be introduced later as changes to the arrival, admission, or offer step. They should be compared against this FCFS baseline only after the day-level mechanics and metrics are stable.

| Model / paper          | State abstraction                      | Delay variable                         | Difference from this simulator                                      |
|------------------------|----------------------------------------|----------------------------------------|---------------------------------------------------------------------|
| Green and Savin (2008) | queue length / backlog                 | backlog seen when appointment is made  | analytical single-class queue; no explicit calendar                 |
| Liu and Ziya (2014)    | queue length in appointment model      | congestion at booking time             | optimizes panel size and overbooking                                |
| Liu (2015)             | finite appointment window              | delay implied by the scheduling window | optimizes the window size $K$                                       |
| This simulator v2      | rolling day-count calendar $X_{i,r}^D$ | original offered delay $\tau$          | two classes, cancellations, balking, and explicit daily progression |

## 6 References

- Green, L. V., and S. Savin. 2008. Reducing delays for medical appointments: A queueing approach. *Operations Research* 56(6):1526–1538.
- Liu, N. 2015. Optimal choice for appointment scheduling window under patient no-show behavior. *Production and Operations Management* 25(1):128–142.
- Liu, N., and S. Ziya. 2014. Panel size and overbooking decisions for appointment-based services under patient no-shows. *Production and Operations Management* 23(12):2209–2223.