



gajae-code

Cheat sheet

github.com/Yeachan-Heo/gajae-code

shape · act · prove

1 · Getting started

Why gajae-code

Double billing
-> log in with your plan
Edits before understanding
-> approval gate
Stalls when you step away
-> answer by phone
Context bloat
-> summaries, artifacts

Install & first run

```
curl -fsSL <repo>/scripts/\
  install.sh -o gjc-install.sh
sh gjc-install.sh
gjc
```

Prefer the tagged installer; piping main runs mutable content. Bun not required.

```
/login
/skill:deep-interview
/skill:ralplan
gjc ultragoal create-goals
```

pick a plan
requirements
plan + critique

Run modes

```
gjc
gjc --tmux
gjc --tmux --worktree X
gjc -p "...
gjc @shot.png "...
gjc --master --scope repo
gjc --no-tools
gjc --no-lsp / --no-pty
```

Isolate risky work with --worktree.
The parent checkout stays untouched.

current checkout
tmux leader
isolated tree
headless, once
image input
master session
disable tools


Ten simple rules

READ

1. Never mutate before the approval gate
2. Log in with the plan you already pay for
3. Vague request? Start with deep-interview
4. Isolate risky work in a worktree
5. Read structural summaries, not whole files
6. Spill long output to artifact://
7. Split planner and critic across vendors
8. Keep skills in canonical .gjc locations
9. Missing something? customize doctor first
10. Step away — answer from your phone

2 · Plan before mutation

Nothing mutates before the gate

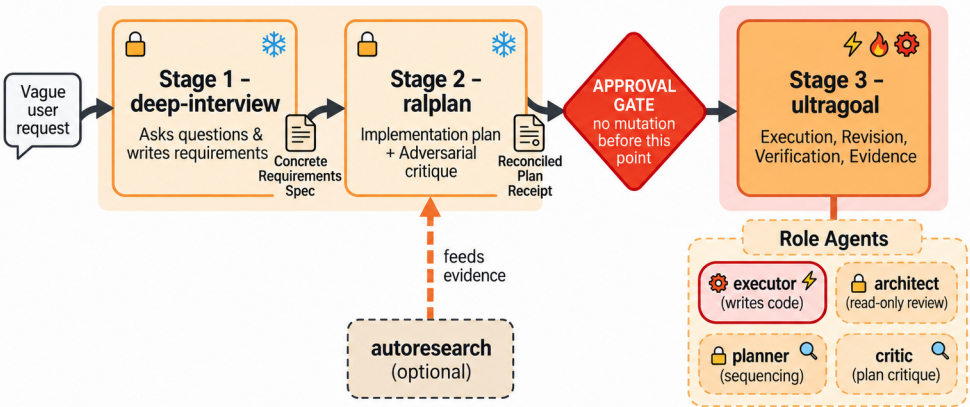

Workflow skills

Clarify requirements
Plan and critique
Execute and verify
Research missions
Exactly four. Disk skills cannot replace them.
No source edits, commits or PRs before approval.

deep-interview
ralplan
ultragoal
autoresearch

Role agents

Implementation (writes)
Architecture review
Sequencing
Plan critique
Only executor mutates; the rest are read-only.

executor
architect
planner
critic

Task routing

```
gjc quick-lane classify \
  "add validation to parser"
```

Decides whether a task goes the bounded quick lane or the deep planning path.

Sessions

```
gjc -c
gjc -r [id|path]
gjc --fork <id>
gjc --no-session
gjc --session-dir=<d>
gjc --export=<f>
```

continue
resume / picker
fork
ephemeral
storage dir
export HTML

3 · Models & cost

Bring your coding plan

Claude Pro / Max
ChatGPT Plus / Pro
Cursor
GitHub Copilot
OpenCode Zen / Go
Kimi / Moonshot
Z.AI GLM
MiniMax
xAI Grok
Qwen Portal

anthropic
openai-codex
cursor
github-copilot
opencode-zen
kimi-code
zai
minimax-code
xai
qwen-portal

Runs on the subscription you already pay for.
No second per-token API bill.

Provider presets

```
gjc setup provider --preset \  
  commandcode-goat  
  cline-pass  
  minimax | glm  
  alibaba-token-plan
```

Writes API type, base URL, env var and a live model catalog together, so new models appear without a GJC update.

Local runtimes (Ollama, LM Studio, vLLM), gateways and 50+ API-key providers also work.

Accounts & auth

gjc accounts list
gjc accounts check <p>
gjc accounts pin <p> id:N
gjc accounts logout <p>
gjc auth-broker login <p>
gjc auth-gateway

stored
health
pin
remove
re-login
team gateway

A dead credential drops the whole provider silently. Missing models? Start here.

An API-key env var overrides stored OAuth. Strip the key to stay on the subscription.

Model selection

```
provider/model:effort  
--model anthropic/claude-opus-5  
--thinking high  
--models a,b,c  
gjc --list-models
```

effort
Alt+N cycle
list all

effort: off · minimal · low · medium · high
· xhigh · max — varies per model.

Per-role models / profiles

```
task:  
agentModel0overrides:  
  executor:  p/m:low  
  architect: p/m:high  
  planner:   p/m  
  critic:    p/m:xhigh
```

A profile shows up on the first /model screen; otherwise you must search for it.

Split planner and critic across vendors — same model self-approves instead of objecting.

Spend fewer tokens

Structural summaries, not whole files
artifact:// — long output is stored, not dumped
compaction — long sessions stay in window
cacheRetention — prefers cheap cache reads

```
read artifact://<id>
```

recover

Usage statistics

gjc stats
gjc stats --summary
gjc stats --json
gjc stats -p <port>

dashboard :3847
console summary

set port

Requests, tokens, cache rate, cost, TTFT and tokens/s per model. A low cache rate means your prompt prefix keeps changing.

4 · Tools & extensions

Built-in tools

files, URLs, archives, DB
regex search
glob lookup
surgical replace
create / overwrite
terminal
parallel subagents

read
search
find
edit
write
bash
task

Use these instead of cat/grep/ls.
Output is not truncated and costs less context.

read selectors

file.ts
file.ts:50-200
file.ts:50+150
file.ts:5-16,60-73
file.ts:raw
file.ts:conflicts
a.zip:in/f.ts:1-20
db.sqlite
db.sqlite:users:42
db.sqlite?q=SELECT..
https://...

structure
line range
start+count
multi range
verbatim
conflicts
in archive
tables
one row
query
reader mode

Re-issue the exact selector the summary footer names. Never guess inside '..'.

Keyboard shortcuts

ctrl+p
ctrl+l
alt+n / alt+shift+n
alt+p
shift+tab
ctrl+t
alt+shift+p
ctrl+r
ctrl+o
ctrl+g
alt+q / alt+enter
alt+shift+c
alt+shift+b
alt+h
escape
ctrl+c / ctrl+d

command palette
select model
cycle model
temp model
cycle effort
toggle thinking
toggle plan
history search
expand tools
external editor
queue message
copy prompt
background fold
speech input
interrupt
clear / exit

Custom skills

```
mkdir -p .gjc/skills  
Project-local, per repository  
mkdir -p ~/.gjc/agent/skills  
User-wide, every project
```

gjc skills list
gjc skills read <name>
gjc skills discover

bundled
read one
discover

.claude/skills and .codex/skills are import sources only — copy before invoking.

MCP & plugins

gjc mcp list
gjc plugin install|list
gjc plugin marketplace
gjc plugin doctor --fix
~/.gjc/agent/mcp.json

servers

marketplace
diagnose

Slash commands

/login
/login <p> --manual
/model
/theme
/settings
/provider add --preset
/extensions

plan login
pair by code
switch model
theme
notify / look
local ext

Opt-in surfaces

desktop control (experimental)
python execution
speech to text

gjc setup <component>
claude · codex · credentials · defaults · hermes
hooks · paseo · provider · python · stt

computer-use
python-repl
stt

5 · Operations & troubleshooting

Config files

```
~/gjc/agent/config.yml
modelRoles · agentModelOverrides · ui
~/gjc/agent/models.yml
providers · profiles — your own
~/gjc/config.yml
retry budgets (request / stream)

gjc config list
gjc config get <k>
gjc config set <k> <v>
```

keys
get
set

One bad entry invalidates the whole models.yml. Verify with --list-models.

Retry budgets

```
retry:
  requestMaxRetries: 4
  streamMaxRetries: 100
  maxRetries: 3
  maxDelayMs: 300000
```

request applies before a stream is established;
stream only to replay-safe transient failures.

Invalid auth, unsupported models, malformed requests, overflow and quota fail fast.

Updating & cleanup

```
gjc update
gjc config set \
  startup.checkUpdate false
```

replace binary

```
gjc gc
gjc gc --prune
gjc gc --disk
```

dry-run report
actually prune
disk retention

Reclaims stale session/PID records, blobs, artifacts and backups. Launch check only notifies.

Answer from anywhere

```
gjc notify setup
gjc notify status|health
gjc notify test
gjc daemon status
gjc daemon restart
```

first setup

send test
daemon status
restart

The agent asks on Telegram, Discord or Slack and your reply resumes the session.

Themes

```
dark default
light default
Claude Code feel
Codex feel
OpenCode feel
```

```
red-claw
blue-crab
claude-code
codex
opencode
```

When something is missing

```
gjc customize doctor
gjc customize doctor --json
```

provenance

One read-only surface explains why a tool, skill, hook, slash, MCP or plugin is absent. Credentials are never printed.

Subcommands

```
accounts auth-broker
auth-gateway config skills
mcp mcp-serve plugin
daemon notify stats gc
update setup customize
migrate web-search(q)
quick-lane interview
ultragoal contribute-pr
```

External controllers

```
gjc-sdk-discover
gjc-sdk-operate
gjc-sdk-author
```

Bots and cron drive real sessions through the broker-bound SDK CLI — never terminal scraping.

Community extensions

```
gjc-remote
oh-my-gajae-code
gjc-agy-skill
multivendor-setup
```

remote via Discord
plugin marketplace
vision / OCR / image
role profiles

github.com/Yeachan-Heo/gajae-code

docs/models.md · docs/skills.md

docs/keybindings.md · docs/install.md

docs/compaction.md · docs/hooks.md