



gajae-code

Cheat sheet

github.com/Yeachan-Heo/gajae-code

shape · act · prove

1 · Getting started

Why gajae-code

Double billing
-> [log in with your plan](#)
Edits before understanding
-> [approval gate](#)
Stalls when you step away
-> [answer by phone](#)
Context bloat
-> [summaries, artifacts](#)

Install & first run

```
curl -fsSL <repo>/scripts/\
  install.sh -o gjc-install.sh
sh gjc-install.sh
gjc
```

Prefer the tagged installer; piping main runs mutable content. Bun not required.

```
/login                                pick a plan
/skill:deep-interview                 requirements
/skill:ralplan                        plan + critique
gjc ultragoal create-goals
```

Run modes

```
gjc                                current checkout
gjc --tmux                         tmux leader
gjc --tmux --worktree X            isolated tree
gjc -p "... "                      headless, once
gjc @shot.png "... "              image input
gjc --master --scope repo          master session
gjc --no-tools                     disable tools
gjc --no-lsp / --no-pty
```

Isolate risky work with --worktree.
The parent checkout stays untouched.


Ten simple rules

READ

1. Never mutate before the approval gate
2. Log in with the plan you already pay for
3. Vague request? Start with deep-interview
4. Isolate risky work in a worktree
5. Read structural summaries, not whole files
6. Spill long output to artifact://
7. Split planner and critic across vendors
8. Keep skills in canonical .gjc locations
9. Missing something? customize doctor first
10. Step away — answer from your phone

2 · Plan before mutation

Nothing mutates before the gate

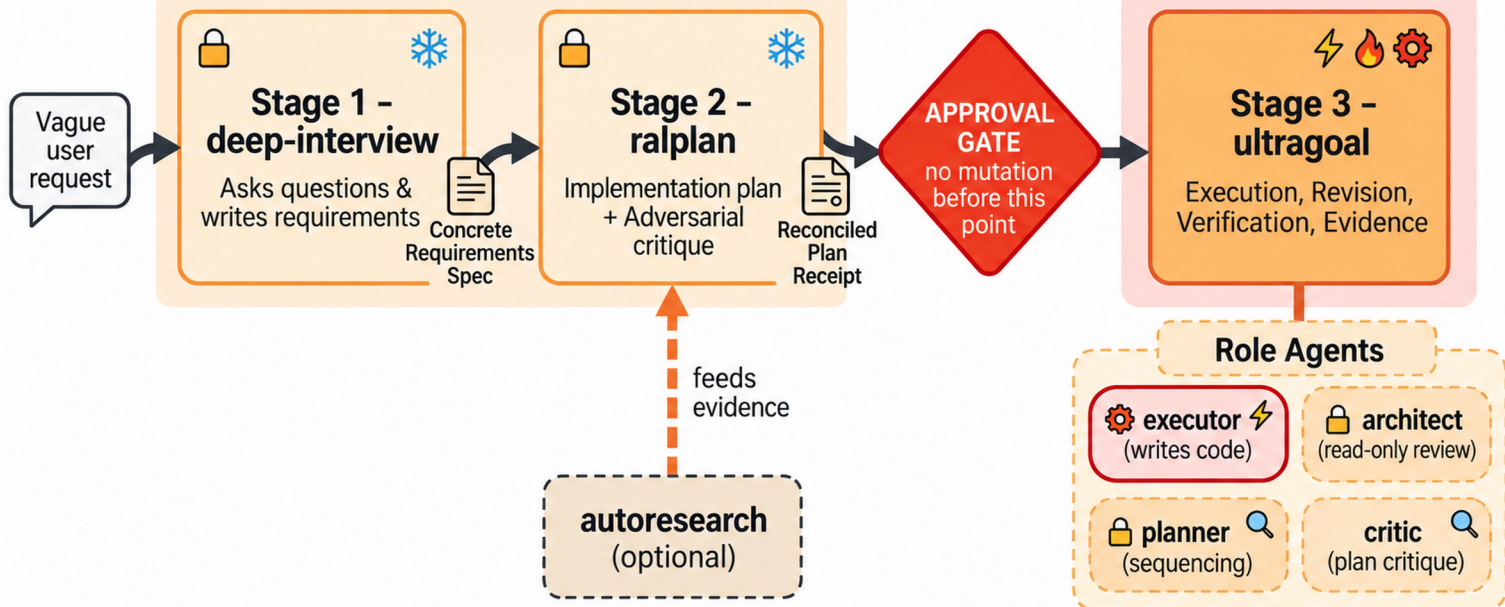

Workflow skills

Clarify requirements [deep-interview](#)
Plan and critique [ralplan](#)
Execute and verify [ultragoal](#)
Research missions [autoresearch](#)

Exactly four. Disk skills cannot replace them.

No source edits, commits or PRs before approval.

Role agents

Implementation (writes) [executor](#)
Architecture review [architect](#)
Sequencing [planner](#)
Plan critique [critic](#)

Only executor mutates; the rest are read-only.

Task routing

```
gjc quick-lane classify \
  "add validation to parser"
```

Decides whether a task goes the bounded quick lane or the deep planning path.

Sessions

```
gjc -c                                continue
gjc -r [id|path]                      resume / picker
gjc --fork <id>                       fork
gjc --no-session                      ephemeral
gjc --session-dir=<d>                  storage dir
gjc --export=<f>                      export HTML
```

3 · Models & cost

Bring your coding plan

Claude Pro / Max	anthropic
ChatGPT Plus / Pro	openai-codex
Cursor	cursor
GitHub Copilot	github-copilot
OpenCode Zen / Go	opencode-zen
Kimi / Moonshot	kimi-code
Z.AI GLM	zai
MiniMax	minimax-code
xAI Grok	xai
Qwen Portal	qwen-portal

Runs on the subscription you already pay for.
No second per-token API bill.

Provider presets

```
gjc setup provider --preset \
  commandcode-goat
  cline-pass
  minimax | glm
  alibaba-token-plan
```

Writes API type, base URL, env var and a live model catalog together, so new models appear without a GJC update.

Local runtimes (Ollama, LM Studio, vLLM), gateways and 50+ API-key providers also work.

Accounts & auth

```
gjc accounts list                    stored
gjc accounts check <p>               health
gjc accounts pin <p> id:N             pin
gjc accounts logout <p>             remove
gjc auth-broker login <p>            re-login
gjc auth-gateway                    team gateway
```

A dead credential drops the whole provider silently. Missing models? [Start here](#).

An API-key env var overrides stored OAuth.
Strip the key to stay on the subscription.

Model selection

```
provider/model:effort
--model anthropic/claude-opus-5
--thinking high                      effort
--models a,b,c                      Alt+N cycle
gjc --list-models                   list all
```

effort: off · minimal · low · medium · high
· xhigh · max — varies per model.

Per-role models / profiles

```
task:
agentModel0overrides:
  executor:  p/m:low
  architect: p/m:high
  planner:   p/m
  critic:    p/m:xhigh
```

A profile shows up on the first /model screen; otherwise you must search for it.

Split planner and critic across vendors — same model self-approves instead of objecting.

Spend fewer tokens

Structural summaries, not whole files
artifact:// — long output is stored, not dumped
compaction — long sessions stay in window
cacheRetention — prefers cheap cache reads
[read artifact://<id>](#) recover

Usage statistics

```
gjc stats                            dashboard :3847
gjc stats --summary                  console summary
gjc stats --json
gjc stats -p <port>                  set port
```

Requests, tokens, cache rate, cost, TTFT and tokens/s per model. A low cache rate means your prompt prefix keeps changing.

4 · Tools & extensions

Built-in tools

files, URLs, archives, DB	read
regex search	search
glob lookup	find
surgical replace	edit
create / overwrite	write
terminal	bash
parallel subagents	task

Use these instead of cat/grep/ls.

Output is not truncated and costs less context.

read selectors

file.ts	structure
file.ts:50-200	line range
file.ts:50+150	start+count
file.ts:5-16,60-73	multi range
file.ts:raw	verbatim
file.ts:conflicts	conflicts
a.zip:in/f.ts:1-20	in archive
db.sqlite	tables
db.sqlite:users:42	one row
db.sqlite?q=SELECT..	query
https://...	reader mode

Re-issue the exact selector the summary footer names. Never guess inside '...'.

Keyboard shortcuts

ctrl+p	command palette
ctrl+l	select model
alt+n / alt+shift+n	cycle model
alt+p	temp model
shift+tab	cycle effort
ctrl+t	toggle thinking
alt+shift+p	toggle plan
ctrl+r	history search
ctrl+o	expand tools
ctrl+g	external editor
alt+q / alt+enter	queue message
alt+shift+c	copy prompt
alt+shift+b	background fold
alt+h	speech input
escape	interrupt
ctrl+c / ctrl+d	clear / exit

Custom skills

```
mkdir -p .gjc/skills
Project-local, per repository
mkdir -p ~/gjc/agent/skills
User-wide, every project
```

```
gjc skills list                      bundled
gjc skills read <name>               read one
gjc skills discover                  discover
```

.claude/skills and .codex/skills are import sources only — copy before invoking.

MCP & plugins

```
gjc mcp list                         servers
gjc plugin install|list
gjc plugin marketplace               marketplace
gjc plugin doctor --fix              diagnose
~/gjc/agent/mcp.json
```

Slash commands

```
/login                                plan login
/login <p> --manual                    pair by code
/model                                switch model
/theme                                 theme
/settings                             notify / look
/provider add --preset
/extensions                            local ext
```

Opt-in surfaces

```
desktop control (experimental)
python execution                  computer-use
speech to text                   python-repl
                                stt
```

```
gjc setup <component>
claude · codex · credentials · defaults · hermes
hooks · paseo · provider · python · stt
```

5 · Operations & troubleshooting

Config files

```
~/gjc/agent/config.yml
modelRoles · agentModelOverrides · ui
~/gjc/agent/models.yml
providers · profiles — your own
~/gjc/config.yml
retry budgets (request / stream)
```

```
gjc config list                      keys
gjc config get <k>                   get
gjc config set <k> <v>               set
```

One bad entry invalidates the whole models.yml. Verify with --list-models.

Retry budgets

```
retry:
  requestMaxRetries: 4
  streamMaxRetries: 100
  maxRetries: 3
  maxDelayMs: 300000
```

request applies before a stream is established; stream only to replay-safe transient failures.

Invalid auth, unsupported models, malformed requests, overflow and quota fail fast.

Updating & cleanup

```
gjc update                            replace binary
gjc config set \
  startup.checkUpdate false

gjc gc                                 dry-run report
gjc gc --prune                        actually prune
gjc gc --disk                          disk retention
```

Reclaims stale session/PID records, blobs, artifacts and backups. Launch check only notifies.

Answer from anywhere

```
gjc notify setup                      first setup
gjc notify status|health
gjc notify test                       send test
gjc daemon status                    daemon status
gjc daemon restart                   restart
```

The agent asks on Telegram, Discord or Slack and your reply resumes the session.

Themes

dark default	red-claw
light default	blue-crab
Claude Code feel	claude-code
Codex feel	codex
OpenCode feel	opencode

When something is missing

```
gjc customize doctor                  provenance
gjc customize doctor --json
```

One read-only surface explains why a tool, skill, hook, slash, MCP or plugin is absent.

Credentials are never printed.

Subcommands

```
accounts auth-broker
auth-gateway config skills
mcp mcp-serve plugin
daemon notify stats gc
update setup customize
migrate web-search(q)
quick-lane interview
ultragoal contribute-pr
```

External controllers

```
gjc-sdk-discover
gjc-sdk-operate
gjc-sdk-author
```

Bots and cron drive real sessions through the broker-bound SDK CLI — never terminal scraping.

Community extensions

```
gjc-remote                           remote via Discord
oh-my-gajae-code                      plugin manager
gjc-agy-skill                         vision / OCR / image
multivendor-setup                     role profiles
```

github.com/Yeachan-Heo/gajae-code

docs/models.md · docs/skills.md
docs/key/bindings.md · docs/install.md
docs/compaction.md · docs/hooks.md