



gajae-code

Cheat sheet

github.com/Yeachan-Heo/gajae-code

shape · act · prove

1 · Getting started

Why gajae-code

Double billing
-> log in with your plan
Edits before understanding
-> approval gate
Stalls when you step away
-> answer by phone
Context bloat
-> summaries, artifacts

Install & first run

```
curl -fsSL <repo>/scripts/\
  install.sh -o gjc-install.sh
sh gjc-install.sh
gjc
```

Prefer the tagged installer; piping main runs mutable content. Bun not required.

```
/login
/skill:deep-interview
/skill:ralplan
gjc ultragoal create-goals
```

pick a plan
requirements
plan + critique

Run modes

```
gjc
gjc --tmux
gjc --tmux --worktree X
gjc -p "...
gjc @shot.png "...
gjc --master --scope repo
gjc --no-tools
gjc --no-lsp / --no-pty
```

Isolate risky work with --worktree.
The parent checkout stays untouched.

current checkout
tmux leader
isolated tree
headless, once
image input
master session
disable tools


Ten simple rules

READ

1. Never mutate before the approval gate
2. Log in with the plan you already pay for
3. Vague request? Start with deep-interview
4. Isolate risky work in a worktree
5. Read structural summaries, not whole files
6. Spill long output to artifact://
7. Split planner and critic across vendors
8. Keep skills in canonical .gjc locations
9. Missing something? customize doctor first
10. Step away — answer from your phone

2 · Plan before mutation

Nothing mutates before the gate

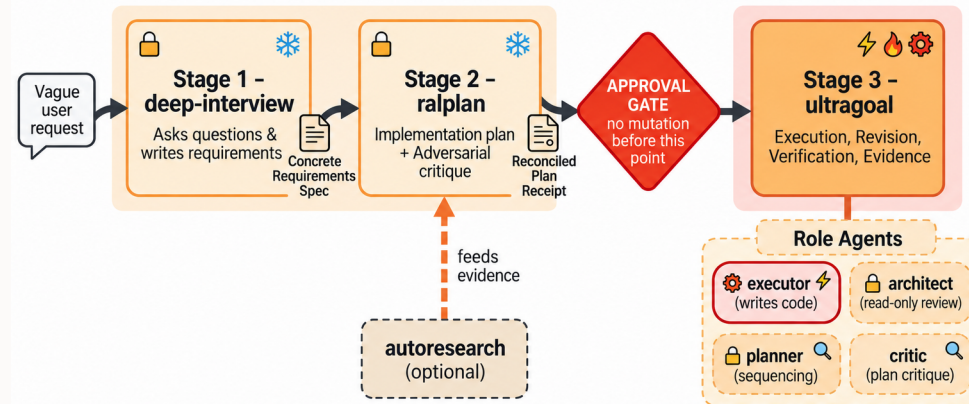

Workflow skills

Clarify requirements
Plan and critique
Execute and verify
Research missions
Exactly four. Disk skills cannot replace them.
No source edits, commits or PRs before approval.

deep-interview
ralplan
ultragoal
autoresearch

Role agents

Implementation (writes)
Architecture review
Sequencing
Plan critique
Only executor mutates; the rest are read-only.

executor
architect
planner
critic

Task routing

```
gjc quick-lane classify \
  "add validation to parser"
```

Decides whether a task goes the bounded quick lane or the deep planning path.

Sessions

```
gjc -c
gjc -r [id|path]
gjc --fork <id>
gjc --no-session
gjc --session-dir=<d>
gjc --export=<f>
```

continue
resume / picker
fork
ephemeral
storage dir
export HTML

3 · Models & cost

Bring your coding plan

Claude Pro / Max	anthropic
ChatGPT Plus / Pro	openai-codex
Cursor	cursor
GitHub Copilot	github-copilot
OpenCode Zen / Go	opencode-zen
Kimi / Moonshot	kimi-code
Z.AI GLM	zai
MiniMax	minimax-code
xAI Grok	xai
Qwen Portal	qwen-portal
Runs on the subscription you already pay for. No second per-token API bill.	

Provider presets

gjc setup provider --preset \ commandcode-goat cline-pass minimax glm alibaba-token-plan	
Writes API type, base URL, env var and a live model catalog together, so new models appear without a GJC update.	
Local runtimes (Ollama, LM Studio, vLLM), gateways and 50+ API-key providers also work.	
Accounts & auth	
gjc accounts list	stored
gjc accounts check <p>	health
gjc accounts pin <p> id:N	pin
gjc accounts logout <p>	remove
gjc auth-broker login <p>	re-login
gjc auth-gateway	team gateway
A dead credential drops the whole provider silently. Missing models? Start here.	
An API-key env var overrides stored OAuth. Strip the key to stay on the subscription.	

Model selection

provider/model:effort	
--model anthropic/claude-opus-5	
--thinking high	effort
--models a,b,c	Alt+N cycle
gjc --list-models	list all
effort: off · minimal · low · medium · high · xhigh · max — varies per model.	

Per-role models / profiles

task: agentModel0overrides: executor: p/m:low architect: p/m:high planner: p/m critic: p/m:xhigh	
A profile shows up on the first /model screen; otherwise you must search for it.	
Split planner and critic across vendors — same model self-approves instead of objecting.	

Spend fewer tokens

Structural summaries, not whole files	
artifact:// — long output is stored, not dumped	
compaction — long sessions stay in window	
cacheRetention — prefers cheap cache reads	
read artifact://<id>	recover

Usage statistics

gjc stats	dashboard :3847
gjc stats --summary	console summary
gjc stats --json	
gjc stats -p <port>	set port
Requests, tokens, cache rate, cost, TTFT and tokens/s per model. A low cache rate means your prompt prefix keeps changing.	

4 · Tools & extensions

Built-in tools

files, URLs, archives, DB	read
regex search	search
glob lookup	find
surgical replace	edit
create / overwrite	write
terminal	bash
parallel subagents	task
Use these instead of cat/grep/ls. Output is not truncated and costs less context.	

read selectors

file.ts	structure
file.ts:50-200	line range
file.ts:50+150	start+count
file.ts:5-16,60-73	multi range
file.ts:raw	verbatim
file.ts:conflicts	conflicts
a.zip:in/f.ts:1-20	in archive
db.sqlite	tables
db.sqlite:users:42	one row
db.sqlite?q=SELECT..	query
https://...	reader mode
Re-issue the exact selector the summary footer names. Never guess inside '..'.	

Keyboard shortcuts

ctrl+p	command palette
ctrl+l	select model
alt+n / alt+shift+n	cycle model
alt+p	temp model
shift+tab	cycle effort
ctrl+t	toggle thinking
alt+shift+p	toggle plan
ctrl+r	history search
ctrl+o	expand tools
ctrl+g	external editor
alt+q / alt+enter	queue message
alt+shift+c	copy prompt
alt+shift+b	background fold
alt+h	speech input
escape	interrupt
ctrl+c / ctrl+d	clear / exit

Custom skills

mkdir -p .gjc/skills	
Project-local, per repository	
mkdir -p ~/.gjc/agent/skills	
User-wide, every project	
gjc skills list	bundled
gjc skills read <name>	read one
gjc skills discover	discover
.claude/skills and .codex/skills are import sources only — copy before invoking.	

MCP & plugins

gjc mcp list	servers
gjc plugin install list	
gjc plugin marketplace	marketplace
gjc plugin doctor --fix	diagnose
~/gjc/agent/mcp.json	

Slash commands

/login	plan login
/login <p> --manual	pair by code
/model	switch model
/theme	theme
/settings	notify / look
/provider add --preset	
/extensions	local ext

Opt-in surfaces

desktop control (experimental)	computer-use
python execution	python-repl
speech to text	stt
gjc setup <component> claude · codex · credentials · defaults · hermes hooks · paseo · provider · python · stt	

5 · Operations & troubleshooting

Config files

```
~/gjc/agent/config.yml
modelRoles · agentModelOverrides · ui
~/gjc/agent/models.yml
providers · profiles — your own
~/gjc/config.yml
retry budgets (request / stream)
```

keys
get
set

`gjc config list`
`gjc config get <k>`
`gjc config set <k> <v>`

One bad entry invalidates the whole models.yml. Verify with `--list-models`.

Retry budgets

```
retry:
  requestMaxRetries: 4
  streamMaxRetries: 100
  maxRetries: 3
  maxDelayMs: 300000
```

request applies before a stream is established;
stream only to replay-safe transient failures.

Invalid auth, unsupported models, malformed requests, overflow and quota fail fast.

Updating & cleanup

```
gjc update
gjc config set \
  startup.checkUpdate false
```

replace binary

```
gjc gc
gjc gc --prune
gjc gc --disk
```

dry-run report
actually prune
disk retention

Reclaims stale session/PID records, blobs, artifacts and backups. Launch check only notifies.

Answer from anywhere

```
gjc notify setup
gjc notify status|health
gjc notify test
gjc daemon status
gjc daemon restart
```

first setup

send test
daemon status
restart

The agent asks on Telegram, Discord or Slack and your reply resumes the session.

Themes

```
dark default
light default
Claude Code feel
Codex feel
OpenCode feel
```

red-claw
blue-crab
claude-code
codex
opencode

When something is missing

```
gjc customize doctor
gjc customize doctor --json
```

provenance

One read-only surface explains why a tool, skill, hook, slash, MCP or plugin is absent. Credentials are never printed.

Subcommands

```
accounts auth-broker
auth-gateway config skills
mcp mcp-serve plugin
daemon notify stats gc
update setup customize
migrate web-search(q)
quick-lane interview
ultragoal contribute-pr
```

External controllers

```
gjc-sdk-discover
gjc-sdk-operate
gjc-sdk-author
```

Bots and cron drive real sessions through the broker-bound SDK CLI — never terminal scraping.

Community extensions

```
gjc-remote
oh-my-gajae-code
gjc-agy-skill
multivendor-setup
```

remote via Discord
plugin marketplace
vision / OCR / image
role profiles

[github.com/Yeachan-Heo/gajae-code](#)
[docs/models.md](#) · [docs/skills.md](#)
[docs/keybindings.md](#) · [docs/install.md](#)
[docs/compaction.md](#) · [docs/hooks.md](#)