



FEATURES SUMMARY -- 2 --

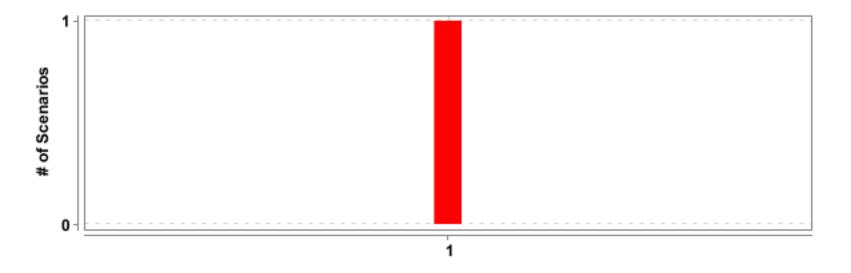

#	Feature Name	T	P	F	S	Duration
1	SeeAppointments	1	0	1	0	11.313 s

SCENARIOS SUMMARY

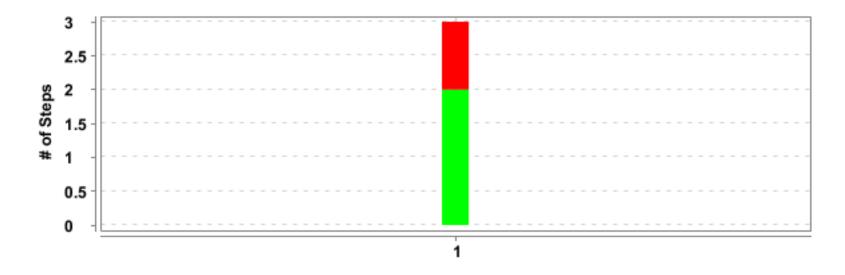


 #	Feature Name	Scenario Name	T	P	F	S	Duration
1	SeeAppointments	User sees his own appointments	3	2	1	0	11.303 s

DETAILED SECTION -- 4 --

(F)- SeeAppointments

FAILED	DURATION - 11.313 s	Scenarios		Steps	
		Total - 1		Total - 3	
/ 10:15:51.706 A	M // 10:16:03.019 AM /	Pass - 0	1	Pass - 2	3
		Fail - 1.		Fail - 1	
		Skip - 0		Skip - 0	

(S)- User sees his own appointments

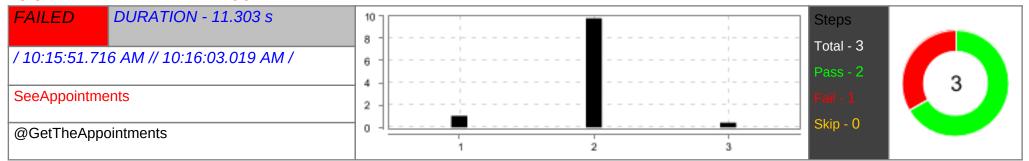

#	Step / Hook Details	Status	Duration
1	Given user goes to Medunna page	PASSED	1.035 s
2	Then user sends a request to get response	PASSED	9.807 s
3	Then user validates api appointments	FAILED	0.425 s
	com.fasterxml.jackson.databind.exc.MismatchedInputException: Cannot deserialize instance of `java.util.HashMap <java.lang.object.java.lang. object=""> out of START_ARRAY token at [Source: (StringReader); line: 1, column: 1] at com.fasterxml.jackson.databind.exc.MismatchedInputException.from(MismatchedInputException.java:59) at com.fasterxml.jackson.databind.DeserializationContext.reportInputMismatch(DeserializationContext.java:1445) at com.fasterxml.jackson.databind.DeserializationContext.handleUnexpectedToken(DeserializationContext.java:1219) at com.fasterxml.jackson.databind.DeserializationContext.handleUnexpectedToken(DeserializationContext.java:1129) at com.fasterxml.jackson.databind.deser.std.StdDeserializerdeserializeFromEmpty(StdDeserializer.java:639) at com.fasterxml.jackson.databind.deser.std.MapDeserializer.deserialize(MapDeserializer.java:360) at com.fasterxml.jackson.databind.deser.std.MapDeserializer.deserialize(MapDeserializer.java:29) at com.fasterxml.jackson.databind.ObjectMapperreadMapAndClose(ObjectMapper.java:4218) at com.fasterxml.jackson.databind.ObjectMapper.readValue(ObjectMapper.java:3214) at com.fasterxml.jackson.databind.ObjectMapperseadValue\$2.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:47) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:148)</java.lang.object.java.lang.>		

#	Step / Hook Details	Status	Duration
	at io.restassured.internal.path.json.mapping.JsonPathJackson2ObjectDeserializer.deserialize(JsonPathJackson2ObjectDeserializer.		
	groovy:46)		
	at io.restassured.path.json.mapping.JsonPathObjectDeserializer\$deserialize.call(Unknown Source)		
	at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:47)		
	at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:125)		
	at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:139)		
	at io.restassured.internal.mapping.Jackson2Mapper.deserialize(Jackson2Mapper.groovy:58)		
	at io.restassured.mapper.ObjectMapper\$deserialize\$0.call(Unknown Source)		
	at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:47)		
	at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:125)		
	at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:139)		
	at io.restassured.internal.mapping.ObjectMapping.parseWithJackson2(ObjectMapping.groovy:238)		
	at io.restassured.internal.mapping.ObjectMapping\$parseWithJackson2\$1.callStatic(Unknown Source)		
	at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallStatic(CallSiteArray.java:55)		
	at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callStatic(AbstractCallSite.java:217)		
	at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callStatic(AbstractCallSite.java:240)		
	at io.restassured.internal.mapping.ObjectMapping.deserialize(ObjectMapping.groovy:59)		
	at io.restassured.internal.mapping.ObjectMapping\$deserialize\$0.call(Unknown Source)		
	at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:47)		
	at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:125)		
	at io.restassured.internal.RestAssuredResponseOptionsGroovyImpl.as(RestAssuredResponseOptionsGroovyImpl.groovy:226)		
	at io.restassured.internal.RestAssuredResponseOptionsImpl.as(RestAssuredResponseOptionsImpl.java:169)		
	at stepdefinitions.apisteps.US10_ApiAppointmentStepDef.userValidatesApiAppointments(US10_ApiAppointmentStepDef.java:67)		
	at ?.user validates api appointments(file:///C:/Users/pc/IdeaProjects/medunnateam87/./src/test/resources/features/APIFeatures/		
	US10_Appointment.feature:7)		
	* Not displayable characters are replaced by '?'.		