



Fortify Audit Workbench

Developer Workbook

Fortifymvp



Table of Contents

- [Executive Summary](#)
- [Project Description](#)
- [Issue Breakdown by Fortify Categories](#)
- [Results Outline](#)




Executive Summary

This workbook is intended to provide all necessary details and information for a developer to understand and remediate the different issues discovered during the Fortifymvp project audit. The information contained in this workbook is targeted at project managers and developers.

This section provides an overview of the issues uncovered during analysis.

Project Name:	Fortifymvp
Project Version:	
SCA:	Results Present
WebInspect:	Results Not Present
WebInspect Agent:	Results Not Present
Other:	Results Not Present

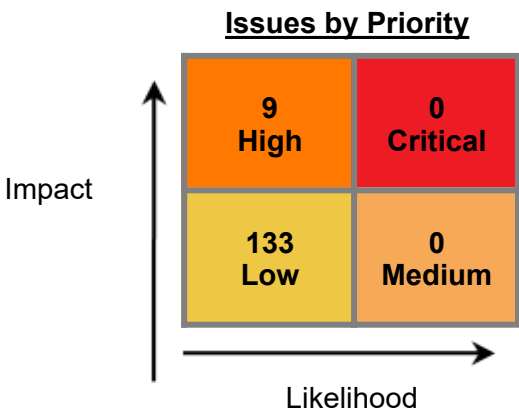

Top Ten Critical Categories

This project does not contain any critical issues



Project Description

This section provides an overview of the Fortify scan engines used for this project, as well as the project meta-information.

SCA

Date of Last Analysis:	2026年7月7日 上午11:00	Engine Version:	26.2.0.0071
Host Name:	TPEBNKSCAAP10TT	Certification:	VALID
Number of Files:	20	Lines of Code:	6,586
Rulepack Name		Rulepack Version	
Fortify 安全編碼規則、社群、Cloud		2026.2.1.0001	
Fortify 安全編碼規則、社群、Universal		2026.2.1.0001	
Fortify 安全編碼規則、核心、Android		2026.2.1.0001	
Fortify 安全編碼規則、核心、Annotations		2026.2.1.0001	
Fortify 安全編碼規則、核心、Cloud		2026.2.1.0001	
Fortify 安全編碼規則、核心、Java		2026.2.1.0001	
Fortify 安全編碼規則、核心、Universal		2026.2.1.0001	
Fortify 安全編碼規則、延伸、配置		2026.2.1.0001	
Fortify 安全編碼規則、延伸、內容		2026.2.1.0001	
Fortify 安全編碼規則、延伸、Java		2026.2.1.0001	
Fortify 安全編碼規則、延伸、JSP		2026.2.1.0001	



Issue Breakdown by Fortify Categories

The following table depicts a summary of all issues grouped vertically by Fortify Category. For each category, the total number of issues is shown by Fortify Priority Order, including information about the number of audited issues.

Category	Fortify Priority (audited/total)				Total Issues
	Critical	High	Medium	Low	
J2EE Bad Practices: Threads	0	0	0	0 / 3	0 / 3
J2EE Bad Practices: getConnection()	0	0	0	0 / 5	0 / 5
Log Forging	0	0	0	0 / 4	0 / 4
Often Misused: Authentication	0	0	0	0 / 6	0 / 6
Password Management	0	0	0	0 / 5	0 / 5
Poor Error Handling: Empty Catch Block	0	0	0	0 / 27	0 / 27
Poor Error Handling: Overly Broad Catch	0	0	0	0 / 37	0 / 37
Poor Error Handling: Overly Broad Throws	0	0	0	0 / 19	0 / 19
Poor Style: Confusing Naming	0	0	0	0 / 11	0 / 11
Poor Style: Value Never Read	0	0	0	0 / 5	0 / 5
Redundant Null Check	0	0	0	0 / 1	0 / 1
System Information Leak	0	0	0	0 / 1	0 / 1
System Information Leak: Internal	0	0	0	0 / 9	0 / 9
Weak Encryption: Inadequate RSA Padding	0	0 / 3	0	0	0 / 3
Weak Encryption: Insecure Mode of Operation	0	0 / 6	0	0	0 / 6



Results Outline

J2EE Bad Practices: Threads (3 issues)

Abstract

在某些情況下，會禁止在 Web 應用程式中進行執行緒管理，且執行緒管理非常容易發生錯誤。


Explanation

在某些情況下，J2EE 標準會禁止在 Web 應用程式中進行執行緒管理，且執行緒管理非常容易發生錯誤。管理執行緒非常困難，並且可能會以無法預測的方式干擾應用程式容器的運作。即使容器沒有受到干擾，執行緒管理通常還是會發生錯誤，例如無法偵測並診斷鎖死 (deadlock)、Race Condition 及其他同步錯誤。

Recommendation

避免直接從 Web 應用程式管理執行緒。改為使用由應用程式容器提供的各種標準，例如訊息驅動 Bean (message driven bean) 和 EJB 計時器服務。

Issue Summary

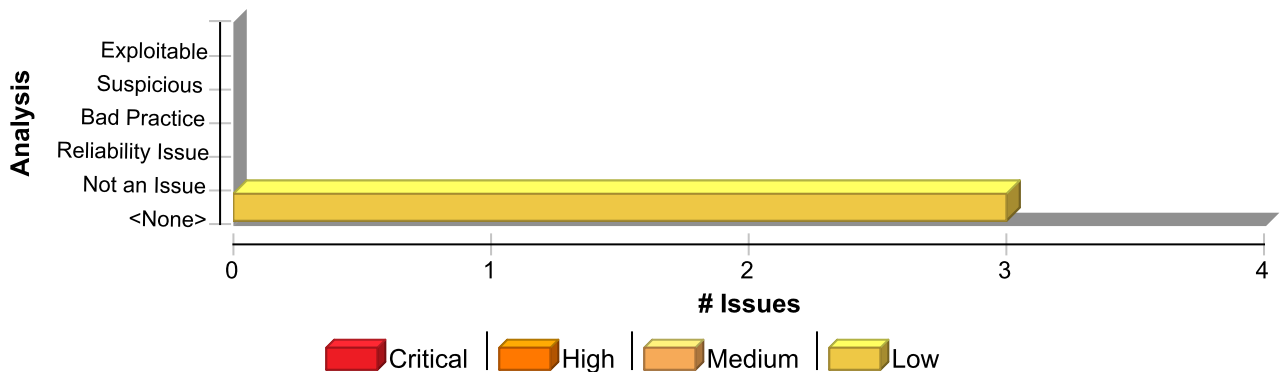

Engine Breakdown

	SCA	WebInspect	SecurityScope	Total
J2EE Bad Practices: Threads	3	0	0	3
Total	3	0	0	3

J2EE Bad Practices: Threads

Low

Package: com.fubon.mvp.serv

serv/ImportAiResultServ.java, line 192 (J2EE Bad Practices: Threads)

Issue Details

Kingdom: Time and State
Scan Engine: SCA (Semantic)

Sink Details

Sink: sleep()
Enclosing Method: runProcess()
File: serv/ImportAiResultServ.java:192



J2EE Bad Practices: Threads

Low

Package: com.fubon.mvp.serv

serv/ImportAiResultServ.java, line 192 (J2EE Bad Practices: Threads)

Taint Flags:

```
189
190 if (master.isEmpty()) {
191 log.info("查詢失敗, 等待 10 秒後重試...");
192 Thread.sleep(10000);
193 master = querySqlServer(ip, port, database, user, password, masterQuery).trim();
194 }
195
```

serv/AiEmailResultRptServ.java, line 193 (J2EE Bad Practices: Threads)

Issue Details

Kingdom: Time and State
Scan Engine: SCA (Semantic)

Sink Details

Sink: sleep()
Enclosing Method: runProcess()
File: serv/AiEmailResultRptServ.java:193
Taint Flags:

```
190 // 若首次查詢返回空值, 等待 10 秒後重試
191 if (master == null || master.isEmpty()) {
192 log.info("Master not found, sleeping 10s...");
193 Thread.sleep(10000);
194 master = queryMasterNode(ip, port, database, user, password, masterQuery);
195 }
196
```

serv/GenAiCallingRptServ.java, line 187 (J2EE Bad Practices: Threads)

Issue Details

Kingdom: Time and State
Scan Engine: SCA (Semantic)

Sink Details

Sink: sleep()
Enclosing Method: runProcess()
File: serv/GenAiCallingRptServ.java:187
Taint Flags:

```
184 // 若首次查詢返回空值, 等待 10 秒後重試
185 if (master == null || master.isEmpty()) {
186 log.info("Master not found, sleeping 10s...");
187 Thread.sleep(10000);
188 master = queryMasterNode(ip, port, database, user, password, masterQuery);
189 }
```



J2EE Bad Practices: Threads

Low

Package: com.fubon.mvp.serv

serv/GenAiCallingRptServ.java, line 187 (J2EE Bad Practices: Threads)

190



J2EE Bad Practices: getConnection() (5 issues)

Abstract

J2EE 標準會禁止直接連線管理。

Explanation

J2EE 標準會要求應用程式使用容器的資源管理工具來取得資源連線。例如，一個 J2EE 應用程式應該以下列方式取得資料庫連線：

```
ctx = new InitialContext();
datasource = (DataSource)ctx.lookup(DB_DATASRC_REF);
conn = datasource.getConnection();
```

並且應避免使用下列方式取得連線：


```
conn = DriverManager.getConnection(CONNECT_STRING);
```

每一個主要的 Web 應用程式容器都會提供集區資料庫連線管理，並將其做為資源管理框架的一部分。在應用程式中複製這個功能是很困難的，且容易出錯，這也是 J2EE 標準禁止這種行為的原因之一。

Recommendation

應使用 JNDI 尋找一個適當的連線因數 (connection factory) 來取代直接呼叫 `DriverManager.getConnection()`，並從連線因數中取得一個連線。

Issue Summary

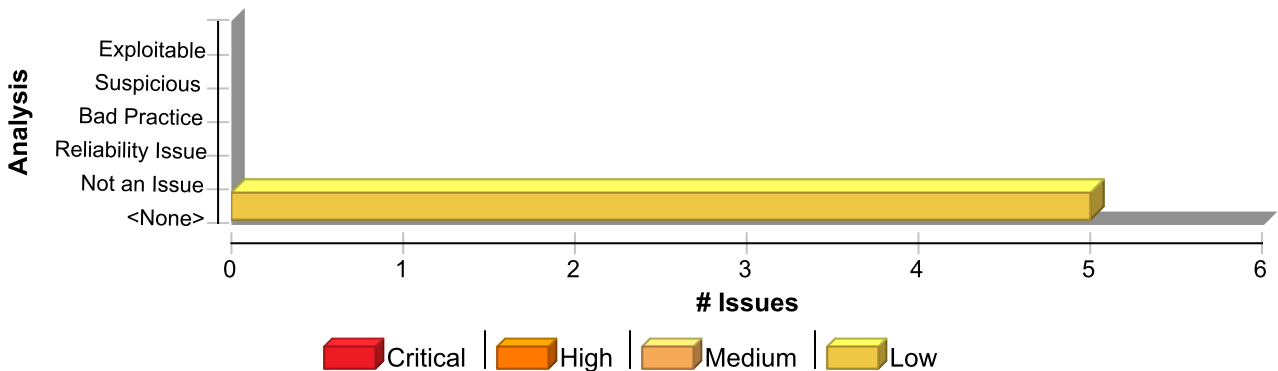

Engine Breakdown

	SCA	WebInspect	SecurityScope	Total
J2EE Bad Practices: getConnection()	5	0	0	5
Total	5	0	0	5

J2EE Bad Practices: getConnection()

Low

Package: com.fubon.mvp.serv

serv/ImportAiResultServ.java, line 403 (J2EE Bad Practices: getConnection())

Issue Details

Kingdom: API Abuse
Scan Engine: SCA (Semantic)

Sink Details



J2EE Bad Practices: getConnection()

Low

Package: com.fubon.mvp.serv

serv/ImportAiResultServ.java, line 403 (J2EE Bad Practices: getConnection())

Sink: getConnection()
Enclosing Method: querySqlServer()
File: serv/ImportAiResultServ.java:403
Taint Flags:

```
400 String user, String pass, String sql) throws Exception {  
401     log.info("JDBC 查詢:{}", sql);  
402     String url = String.format(JDBC_URL_TEMPLATE, ip, port, db);  
403     try (Connection conn = DriverManager.getConnection(url, user, pass);  
404         Statement stmt = conn.createStatement();  
405         ResultSet rs = stmt.executeQuery(sql)) {  
406         return rs.next() ? StringUtils.defaultString(rs.getString(1)) : "";
```

serv/AiEmailResultRptServ.java, line 303 (J2EE Bad Practices: getConnection())

Issue Details

Kingdom: API Abuse
Scan Engine: SCA (Semantic)

Sink Details

Sink: getConnection()
Enclosing Method: queryMasterNode()
File: serv/AiEmailResultRptServ.java:303
Taint Flags:

```
300 "jdbc:sqlserver://%s:%s;databaseName=%s;encrypt=false;trustServerCertificate=true",  
301 dbIp, dbPort, dbName);  
302  
303 try (Connection conn = DriverManager.getConnection(url, dbUser, dbPass);  
304     Statement stmt = conn.createStatement();  
305     ResultSet rs = stmt.executeQuery(query)) {  
306
```

serv/GenAiCallingRptServ.java, line 333 (J2EE Bad Practices: getConnection())

Issue Details

Kingdom: API Abuse
Scan Engine: SCA (Semantic)

Sink Details

Sink: getConnection()
Enclosing Method: queryMasterNode()
File: serv/GenAiCallingRptServ.java:333
Taint Flags:

```
330 "jdbc:sqlserver://%s:%s;databaseName=%s;encrypt=false;trustServerCertificate=true",  
331 dbIp, dbPort, dbName);  
332
```



J2EE Bad Practices: getConnection()

Low

Package: com.fubon.mvp.serv

serv/GenAiCallingRptServ.java, line 333 (J2EE Bad Practices: getConnection())

```
333 try (Connection conn = DriverManager.getConnection(url, dbUser, dbPass);
334 Statement stmt = conn.createStatement();
335 ResultSet rs = stmt.executeQuery(query)) {
336
```

serv/AiEmailResultRptServ.java, line 349 (J2EE Bad Practices: getConnection())

Issue Details

Kingdom: API Abuse

Scan Engine: SCA (Semantic)

Sink Details

Sink: getConnection()

Enclosing Method: exportData()

File: serv/AiEmailResultRptServ.java:349

Taint Flags:

```
346 dbName);
347
348 try (Connection conn =
349 DriverManager.getConnection(
350 url,
351 dbUser,
352 dbPass)) {
```

serv/GenAiCallingRptServ.java, line 368 (J2EE Bad Practices: getConnection())

Issue Details

Kingdom: API Abuse

Scan Engine: SCA (Semantic)

Sink Details

Sink: getConnection()

Enclosing Method: exportCsvData()

File: serv/GenAiCallingRptServ.java:368

Taint Flags:

```
365 "jdbc:sqlserver://%s:%s;databaseName=%s;encrypt=false;trustServerCertificate=true",
366 dbIp, dbPort, dbName);
367
368 try (Connection conn = DriverManager.getConnection(url, dbUser, dbPass);
369 Statement stmt = conn.createStatement();
370 ResultSet rs = stmt.executeQuery(query)) {
371
```



Log Forging (4 issues)

Abstract

將未經驗證的使用者輸入寫入記錄檔會允許攻擊者偽造記錄項目，或將惡意內容插入記錄檔中。

Explanation

Log Forging 弱點會在以下情況中出現：1. 資料從不可信賴的來源進入應用程式。2. 將資料寫入應用程式或系統記錄檔。一般來說，應用程式會使用記錄檔來儲存事件或交易的歷史記錄，以便之後進行檢閱、統計資料蒐集或除錯之用。根據應用程式的本質而定，檢閱日誌檔的工作可在需要時手動執行，或者自動執行，方法為使用工具自動選取重要事件或帶有某種傾向資訊的記錄檔。如果攻擊者可以提供資料給會持續逐字記錄內容的應用程式，則可能會妨礙或是誤導記錄檔的解讀。在大多數理想的情況下，攻擊者可能會藉由提供應用程式包含適當字元的輸入，而將錯誤的項目插入記錄檔。如果記錄檔是自動化處理的，那麼攻擊者就可能能夠藉由破壞檔案格式或插入預期外字元的方式，來使檔案無法使用。更猛烈的惡意攻擊甚至可能導致記錄檔的統計資料產生偏差。藉由偽造或其他方式，毀損的記錄檔可用來掩護攻擊者的追蹤，或甚至授意第三方執行惡意行為 [1]。最糟糕的情況是，攻擊者可能會在記錄檔中插入程式碼或其他指令，並利用記錄檔理公務程式的弱點進行破壞 [2]。範例 1：以下 Web 應用程式程式碼嘗試從一個要求物件中讀取整數值。如果這個值無法解析成一個整數，那麼就會記錄此輸入並附帶一個錯誤訊息，說明發生哪些情況。

```
...
String val = request.getParameter("val");
try {
    int value = Integer.parseInt(val);
}
catch (NumberFormatException nfe) {
    log.info("Failed to parse val = " + val);
}
...
```

如果使用者提交用於 val 的字串「twenty-one」，則會記錄以下項目：

INFO: Failed to parse val=twenty-one

不過，如果攻擊者傳遞了字串「twenty-one%0a%0aINFO:+User+logged+out%3dbadguy」，則會記錄以下的項目：

INFO: Failed to parse val=twenty-one

INFO: User logged out=badguy

您可以清楚發現，攻擊者可能使用相同的機制來插入任何記錄檔項目。有人認為在行動環境中，典型的 Web 應用程式弱點 (例如 Log Forging) 不會產生影響，因為使用者為何會攻擊自己呢？但是請謹記，行動平台的本質是從多種來源下載，並在相同裝置上一起執行的應用程式。在金融應用程式旁執行惡意程式碼的可能性很高，這必然會擴大行動應用程式的受攻擊面，將程序之間的通訊包括在內。範例 2：以下程式碼改寫 Example 1 以適用於 Android 平台。

```
...
String val = this.getIntent().getExtras().getString("val");
try {
    int value = Integer.parseInt();
}
catch (NumberFormatException nfe) {
    Log.e(TAG, "Failed to parse val = " + val);
}
...
```

Recommendation

使用間接方法避免 Log Forging 攻擊：建立一組與不同事件相對應的合法記錄檔項目。這些項目必須記錄在記錄檔中，並且僅記錄隸屬於該組的項目。若要取得動態內容 (例如使用者登出系統)，請務必使用由伺服器所控制的值，而非使用者所提供的資料。這可以確保使用者提供的輸入絕對不會直接用於記錄檔項目。可以重新編寫範例 1 以使用預先定義的記錄項目 (對應於 NumberFormatException)，如下所示：



```
...
public static final String NFE = "Failed to parse val. The input is
required to be an integer value."

```

```
...
String val = request.getParameter("val");
try {
int value = Integer.parseInt(val);
}
catch (NumberFormatException nfe) {
log.info(NFE);
}
}

```


Android 相應程式碼如下：

```
...
public static final String NFE = "Failed to parse val. The input is
required to be an integer value."
...
String val = this.getIntent().getExtras().getString("val");
try {
int value = Integer.parseInt();
}
catch (NumberFormatException nfe) {
Log.e(TAG, NFE);
}
}

```

在某些情況下，這個方法無法執行，因為合法的記錄檔項目組太大或太過複雜。在這些情況下，開發人員通常會實作拒絕清單。在使用輸入資料前，拒絕清單會選擇性的拒絕或避開可能有危險的字元。然而，危險字元清單很快就會不完整或過時。一個更好的方法是建立字元清單。此清單會列出允許出現於記錄檔項目中的字元，並僅接受由核准集中的字元組成的輸入。在大多數 Log Forging 攻擊中，最關鍵的字元是「\n」(新行)字元，這樣的字元絕對不應出現在記錄檔項目的允許清單中。

Issue Summary

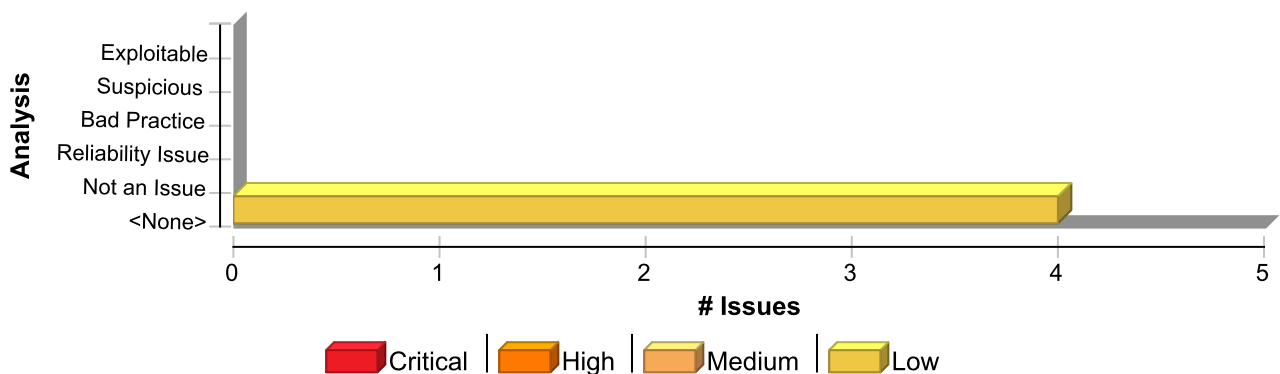

Engine Breakdown

	SCA	WebInspect	SecurityScope	Total
Log Forging	4	0	0	4
Total	4	0	0	4



Log Forging

Low

Package: com.fubon.mvp.serv

serv/GenAiCallingRptServ.java, line 197 (Log Forging)

Issue Details

Kingdom: Input Validation and Representation

Scan Engine: SCA (Data Flow)

Source Details

Source: java.sql.Statement.executeQuery()

From: com.fubon.mvp.serv.GenAiCallingRptServ.queryMasterNode

File: serv/GenAiCallingRptServ.java:335

```
332
333 try (Connection conn = DriverManager.getConnection(url, dbUser, dbPass);
334 Statement stmt = conn.createStatement();
335 ResultSet rs = stmt.executeQuery(query)) {
336
337 if (rs.next()) {
338 return rs.getString(1).trim();
```

Sink Details

Sink: org.slf4j.Logger.info()

Enclosing Method: runProcess()

File: serv/GenAiCallingRptServ.java:197

Taint Flags: DATABASE, XSS

```
194 log.info("=== The Master Is {} ===\n=== Running Machine Is {} ===\nSkipping execution.",
master, runMachine);
195 throw new SkipExecutionException("Not master node");
196 }
197 log.info("=== The Master Is {} ===\n=== Running Machine Is {} ===\nConfirmed Master,
continuing...", master, runMachine);
198
199 // -----
200 // 步驟 4：產出 AI 外撥報表 CSV (取代 sqlcmd + sed)
```

serv/GenAiCallingRptServ.java, line 194 (Log Forging)

Issue Details

Kingdom: Input Validation and Representation

Scan Engine: SCA (Data Flow)

Source Details

Source: java.sql.Statement.executeQuery()

From: com.fubon.mvp.serv.GenAiCallingRptServ.queryMasterNode

File: serv/GenAiCallingRptServ.java:335

```
332
333 try (Connection conn = DriverManager.getConnection(url, dbUser, dbPass);
```



Log Forging

Low

Package: com.fubon.mvp.serv

serv/GenAiCallingRptServ.java, line 194 (Log Forging)

```
334 Statement stmt = conn.createStatement();
335 ResultSet rs = stmt.executeQuery(query)) {
336
337 if (rs.next()) {
338 return rs.getString(1).trim();
```

Sink Details

Sink: org.slf4j.Logger.info()

Enclosing Method: runProcess()

File: serv/GenAiCallingRptServ.java:194

Taint Flags: DATABASE, XSS

```
191 // 取得當前機器的主機名稱並比較 (原始用 getHostName, 非 IP)
192 String runMachine = InetAddress.getLocalHost().getHostName();
193 if (master == null || !master.equals(runMachine)) {
194 log.info("=== The Master Is {} ===\n=== Running Machine Is {} ===\nSkipping execution.",
master, runMachine);
195 throw new SkipExecutionException("Not master node");
196 }
197 log.info("=== The Master Is {} ===\n=== Running Machine Is {} ===\nConfirmed Master,
continuing...", master, runMachine);
```

serv/AiEmailResultRptServ.java, line 200 (Log Forging)

Issue Details

Kingdom: Input Validation and Representation

Scan Engine: SCA (Data Flow)

Source Details

Source: java.sql.Statement.executeQuery()

From: com.fubon.mvp.serv.AiEmailResultRptServ.queryMasterNode

File: serv/AiEmailResultRptServ.java:305

```
302
303 try (Connection conn = DriverManager.getConnection(url, dbUser, dbPass);
304 Statement stmt = conn.createStatement();
305 ResultSet rs = stmt.executeQuery(query)) {
306
307 if (rs.next()) {
308 return rs.getString(1).trim();
```

Sink Details

Sink: org.slf4j.Logger.info()

Enclosing Method: runProcess()

File: serv/AiEmailResultRptServ.java:200



Log Forging

Low

Package: com.fubon.mvp.serv

serv/AiEmailResultRptServ.java, line 200 (Log Forging)

Taint Flags: DATABASE, XSS

```
197 // 取得當前機器的主機名稱並比較 (原始用 getHostName, 非 IP)
198 String runMachine = InetAddress.getLocalHost().getHostName();
199 if (master == null || !master.equals(runMachine)) {
200 log.info("=== The Master Is {} ===\n=== Running Machine Is {} ===\nSkipping execution.",
master, runMachine);
201 throw new SkipExecutionException("Not master node");
202 }
203 log.info("=== The Master Is {} ===\n=== Running Machine Is {} ===\nConfirmed Master,
continuing...", master, runMachine);
```

serv/AiEmailResultRptServ.java, line 203 (Log Forging)

Issue Details

Kingdom: Input Validation and Representation

Scan Engine: SCA (Data Flow)

Source Details

Source: java.sql.Statement.executeQuery()

From: com.fubon.mvp.serv.AiEmailResultRptServ.queryMasterNode

File: serv/AiEmailResultRptServ.java:305

```
302
303 try (Connection conn = DriverManager.getConnection(url, dbUser, dbPass);
304 Statement stmt = conn.createStatement();
305 ResultSet rs = stmt.executeQuery(query)) {
306
307 if (rs.next()) {
308 return rs.getString(1).trim();
```

Sink Details

Sink: org.slf4j.Logger.info()

Enclosing Method: runProcess()

File: serv/AiEmailResultRptServ.java:203

Taint Flags: DATABASE, XSS

```
200 log.info("=== The Master Is {} ===\n=== Running Machine Is {} ===\nSkipping execution.",
master, runMachine);
201 throw new SkipExecutionException("Not master node");
202 }
203 log.info("=== The Master Is {} ===\n=== Running Machine Is {} ===\nConfirmed Master,
continuing...", master, runMachine);
204
205 // -----
206 // 步驟 4：產出 AI 外撥報表 CSV (取代 sqlcmd + sed)
```


Often Misused: Authentication (6 issues)

Abstract

攻擊者可能欺騙 DNS 項目。為了安全起見，請勿依賴 DNS 名稱。

Explanation

許多 DNS 伺服器很容易被攻擊者欺騙，所以您必須設想到您的軟體某一天將會在有問題的 DNS 伺服器環境下執行。如果允許攻擊者進行 DNS 更新 (有時候稱為 DNS 快取下毒)，則他們能夠透過他們的機器制定您網路流量的路徑，或者讓他們的 IP 位址像是在您的領域中。請勿將您系統的安全性依賴於 DNS 名稱上。範例 1：下列程式碼使用 DNS 查詢來判定進入的要求是否來自可信賴的主機。如果攻擊者可以對 DNS 快取下毒，那麼他們就可以取得信賴。


```
String ip = request.getRemoteAddr();
InetAddress addr = InetAddress.getByName(ip);
if (addr.getCanonicalHostName().endsWith("trustme.com")) {
    trusted = true;
}
```

IP 位址比 DNS 名稱可靠，但仍有可能被欺騙。攻擊者可能輕鬆偽造他們所傳送之資料包的來源 IP 位址，但回應資料包將傳回至偽造的 IP 位址。為了查看回應封包，攻擊者需要在受害者的機器和偽造的 IP 位址之間攔截網路資料。為達到所需的攔截，攻擊者一般的做法是嘗試把他們的機器和受害者的機器放在相同的子網路內。攻擊者可藉由使用來源路徑來達到此目的，但現今在大部分的網際網路上已無法使用來源路徑。總而言之，驗證 IP 位址是一種有效的 authentication 方案，但它不是唯一的 authentication 方案。

Recommendation

如果您使用網域名稱搜尋來檢查以確保主機接受和發送的 DNS 項目是一致的，則您可以對它抱持更多的信心。攻擊者若不能控制目標網域的名稱伺服器，便無法同時欺騙接受和發送的 DNS 項目。這不是一個簡單的方法，不過：攻擊者可能可以引誘網域登錄者把網域交給惡意的名稱伺服器。依賴於 DNS 項目的 authentication 是有風險的。雖然沒有較簡單的 authentication 機制，但還有一個比主機式 authentication 更好的方法。密碼系統提供了還不錯的可靠性，但此種可靠性卻容易受到密碼選擇不當、不安全的密碼傳送和不佳的 password management 的影響。一個類似於 SSL 的加密機制是值得考慮的，但此機制通常太過於複雜，以致於使用時會有重大執行錯誤的風險，且關鍵資料可能隨時被竊取。在大多數情況下，包括一個物理標記的多重 authentication 能夠在合理價格內提供最大程度的安全性。

Issue Summary

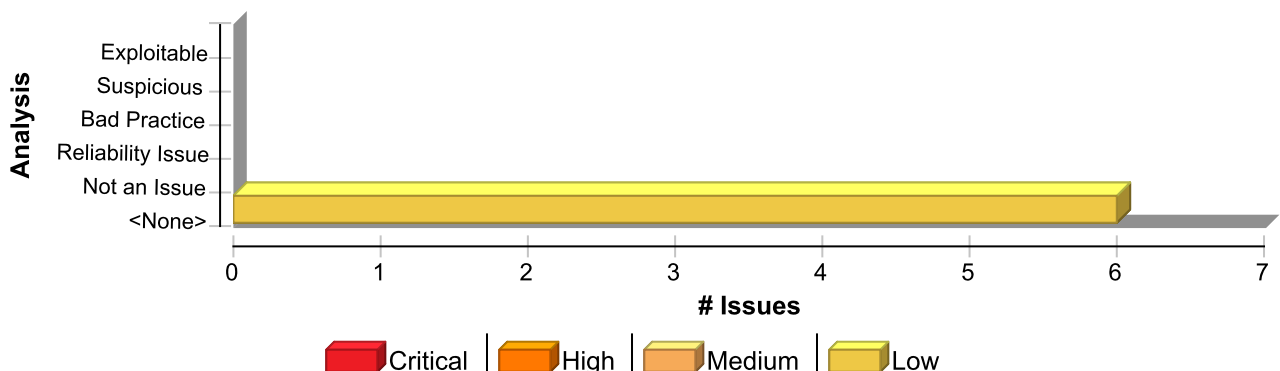

Engine Breakdown

	SCA	WebInspect	SecurityScope	Total
Often Misused: Authentication	6	0	0	6
Total	6	0	0	6



Often Misused: Authentication**Low****Package: com.fubon.mvp.serv****serv/GenAiCallingRptServ.java, line 192 (Often Misused: Authentication)****Issue Details****Kingdom:** API Abuse**Scan Engine:** SCA (Semantic)**Sink Details****Sink:** getHostName()**Enclosing Method:** runProcess()**File:** serv/GenAiCallingRptServ.java:192**Taint Flags:**

```
189  }
190
191  // 取得當前機器的主機名稱並比較（原始用 getHostName, 非 IP）
192  String runMachine = InetAddress.getLocalHost().getHostName();
193  if (master == null || !master.equals(runMachine)) {
194  log.info("=== The Master Is {} ===\n=== Running Machine Is {} ===\nSkipping execution.",
master, runMachine);
195  throw new SkipExecutionException("Not master node");
```

serv/AiEmailResultRptServ.java, line 198 (Often Misused: Authentication)**Issue Details****Kingdom:** API Abuse**Scan Engine:** SCA (Semantic)**Sink Details****Sink:** getLocalHost()**Enclosing Method:** runProcess()**File:** serv/AiEmailResultRptServ.java:198**Taint Flags:**

```
195  }
196
197  // 取得當前機器的主機名稱並比較（原始用 getHostName, 非 IP）
198  String runMachine = InetAddress.getLocalHost().getHostName();
199  if (master == null || !master.equals(runMachine)) {
200  log.info("=== The Master Is {} ===\n=== Running Machine Is {} ===\nSkipping execution.",
master, runMachine);
201  throw new SkipExecutionException("Not master node");
```

serv/ImportAiResultServ.java, line 196 (Often Misused: Authentication)**Issue Details****Kingdom:** API Abuse**Scan Engine:** SCA (Semantic)**Sink Details**

Often Misused: Authentication**Low****Package: com.fubon.mvp.serv****serv/ImportAiResultServ.java, line 196 (Often Misused: Authentication)**

Sink: getHostName()
Enclosing Method: runProcess()
File: serv/ImportAiResultServ.java:196
Taint Flags:

```
193 master = querySqlServer(ip, port, database, user, password, masterQuery).trim();
194 }
195
196 String runMachine = InetAddress.getLocalHost().getHostName();
197 if (!master.equals(runMachine)) {
198     throw new SkipExecutionException("Not master node");
199 }
```

serv/GenAiCallingRptServ.java, line 192 (Often Misused: Authentication)**Issue Details**

Kingdom: API Abuse
Scan Engine: SCA (Semantic)

Sink Details

Sink: getLocalHost()
Enclosing Method: runProcess()
File: serv/GenAiCallingRptServ.java:192
Taint Flags:

```
189 }
190
191 // 取得當前機器的主機名稱並比較 (原始用 getHostName, 非 IP)
192 String runMachine = InetAddress.getLocalHost().getHostName();
193 if (master == null || !master.equals(runMachine)) {
194     log.info("=== The Master Is {} ===\n=== Running Machine Is {} ===\nSkipping execution.",
195         master, runMachine);
196     throw new SkipExecutionException("Not master node");
197 }
```

serv/ImportAiResultServ.java, line 196 (Often Misused: Authentication)**Issue Details**

Kingdom: API Abuse
Scan Engine: SCA (Semantic)

Sink Details

Sink: getLocalHost()
Enclosing Method: runProcess()
File: serv/ImportAiResultServ.java:196
Taint Flags:

```
193 master = querySqlServer(ip, port, database, user, password, masterQuery).trim();
194 }
```



Often Misused: Authentication**Low****Package: com.fubon.mvp.serv****serv/ImportAiResultServ.java, line 196 (Often Misused: Authentication)**

```
195
196 String runMachine = InetAddress.getLocalHost().getHostName();
197 if (!master.equals(runMachine)) {
198     throw new SkipExecutionException("Not master node");
199 }
```

serv/AiEmailResultRptServ.java, line 198 (Often Misused: Authentication)**Issue Details****Kingdom:** API Abuse**Scan Engine:** SCA (Semantic)**Sink Details****Sink:** getHostName()**Enclosing Method:** runProcess()**File:** serv/AiEmailResultRptServ.java:198**Taint Flags:**

```
195 }
196
197 // 取得當前機器的主機名稱並比較（原始用 getHostName, 非 IP）
198 String runMachine = InetAddress.getLocalHost().getHostName();
199 if (master == null || !master.equals(runMachine)) {
200     log.info("=== The Master Is {} ===\n=== Running Machine Is {} ===\nSkipping execution.",
master, runMachine);
201     throw new SkipExecutionException("Not master node");
```



Password Management (5 issues)

Abstract

以純文字形式儲存密碼可能會危及系統安全。

Explanation

當密碼以純文字形式儲存在應用程序的屬性或組態設定檔案時，會發生 Password Management 問題。範例 1：以下程式碼從屬性檔案讀取密碼，並使用該密碼連接到資料庫。

```
...
Properties prop = new Properties();
prop.load(new FileInputStream("config.properties"));
String password = prop.getProperty("password");

DriverManager.getConnection(url, usr, password);
...
```

此程式碼將會順利執行，任何人只要有 config.properties 的存取權，便能夠讀取 password 的值。若心懷不軌的員工擁有此資訊的存取權，則他們可以利用此資訊來進入並破壞系統。在行動環境中，考慮到裝置遺失的可能性較高，因此密碼管理尤為重要。範例 2：以下程式碼會從 Android WebView 儲存區讀取使用者名稱與密碼，並使用這些資訊設定對檢視受保護頁面的驗證。

```
...
webview.setWebViewClient(new WebViewClient() {
public void onReceivedHttpAuthRequest(WebView view,
HttpAuthHandler handler, String host, String realm) {
String[] credentials = view.getHttpAuthUsernamePassword(host, realm);
String username = credentials[0];
String password = credentials[1];
handler.proceed(username, password);
}
});
...
```

預設狀況下，WebView 憑證會以純文字形式 (而非雜湊形式) 儲存。因此，若使用者擁有已取得 Root 權限的裝置 (或使用模擬器)，她即可讀取所儲存的指定網站密碼。

Recommendation

勿以純文字形式儲存密碼。系統啟動時必須由管理員輸入密碼。如果此種方法不可行，還有一個安全性較差但通常較為合適的解決方法，那就是將密碼去模糊化，並將這些資料分散到系統各處，這樣攻擊者就必須取得並正確合併多個系統資源來解譯密碼。至少，在儲存密碼之前應進行雜湊處理。某些第三方產品聲稱能夠以安全的方式來管理密碼。例如，WebSphere Application Server 4.x 使用簡單的 XOR 加密式演算法來模糊化各個值，但也不要完全相信此種方法。WebSphere 和其他應用程式伺服器提供了過期的、相對安全性較弱的加密機制，這在安全性要求較高的環境中是不夠的。安全的做法是，使用者自己建立一個專屬的機制，這是目前最佳的方法。對於 Android 以及使用 SQLite 資料庫的任何其他平台，SQLCipher 是不錯的替代方案。SQLCipher 是 SQLite 資料庫的擴充，可為資料庫檔案提供透明的 256 位元 AES 加密。因此，可將憑證儲存在加密的資料庫中。範例 3：以下程式碼示範下載所需的二進位檔案後，如何將 SQLCipher 整合至 Android 應用程式，以及如何將憑證儲存到資料庫檔案內。


```
import net.sqlcipher.database.SQLiteDatabase;
...
SQLiteDatabase.loadLibs(this);
File dbFile = getDatabasePath("credentials.db");
dbFile.mkdirs();
dbFile.delete();
SQLiteDatabase db = SQLiteDatabase.openOrCreateDatabase(dbFile,
"credentials", null);
db.execSQL("create table credentials(u, p)");
db.execSQL("insert into credentials(u, p) values(?, ?)", new Object[]
```



```
{username, password});
...
```

請注意，對 android.database.sqlite.SQLiteDatabase 的參照已由對 net.sqlcipher.database.SQLiteDatabase 的參照代替。若要在 WebView 儲存區啟用加密，必須使用 sqlcipher.so 程式庫重新編譯 WebKit。

Issue Summary

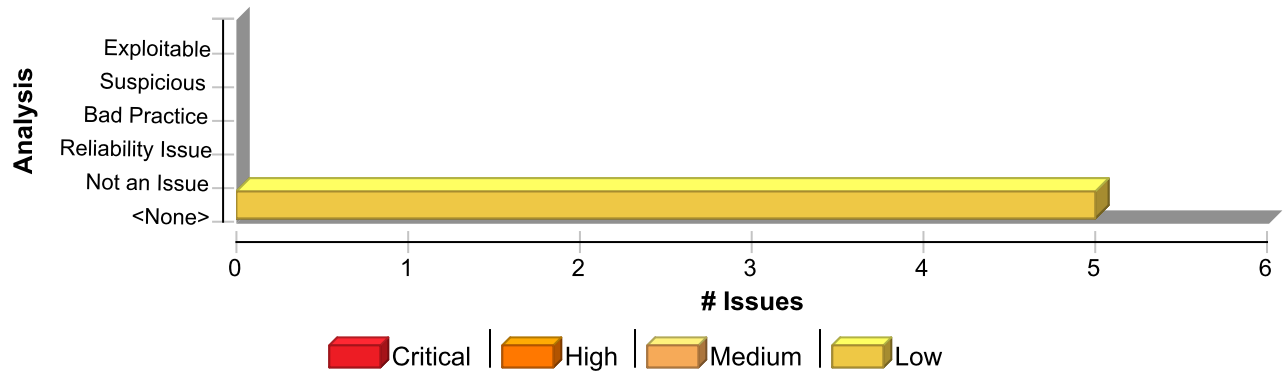

Engine Breakdown

	SCA	WebInspect	SecurityScope	Total
Password Management	5	0	0	5
Total	5	0	0	5

Password ManagementLow

Package: com.fubon.mvp.serv

serv/GenAiCallingRptServ.java, line 368 (Password Management)

Issue Details

Kingdom: Security Features
Scan Engine: SCA (Data Flow)

Source Details

Source: java.nio.file.Files.readAllLines()
From: com.fubon.mvp.serv.GenAiCallingRptServ.readSqlConfig
File: serv/GenAiCallingRptServ.java:553

```
550 // =====
551 private Map<String, String> readSqlConfig(String path) throws
IOException {
552 Map<String, String> conf = new HashMap<>();
553 List<String> lines = Files.readAllLines(Paths.get(path));
554 for (String line : lines) {
555 if (line.contains("=")) {
556 String[] parts = line.split("=", 2);
```

Sink Details

Sink: java.sql.DriverManager.getConnection()



Password Management

Low

Package: com.fubon.mvp.serv

serv/GenAiCallingRptServ.java, line 368 (Password Management)

Enclosing Method: exportCsvData()
File: serv/GenAiCallingRptServ.java:368
Taint Flags: FILE_SYSTEM, NO_NEW_LINE

```
365 "jdbc:sqlserver://%s:%s;databaseName=%s;encrypt=false;trustServerCertificate=true",
366 dbIp, dbPort, dbName);
367
368 try (Connection conn = DriverManager.getConnection(url, dbUser, dbPass);
369 Statement stmt = conn.createStatement();
370 ResultSet rs = stmt.executeQuery(query)) {
371
```

serv/AiEmailResultRptServ.java, line 352 (Password Management)

Issue Details

Kingdom: Security Features
Scan Engine: SCA (Data Flow)

Source Details

Source: java.nio.file.Files.readAllLines()
From: com.fubon.mvp.serv.AiEmailResultRptServ.readSqlConfig
File: serv/AiEmailResultRptServ.java:580

```
577 // =====
578 private Map<String, String> readSqlConfig(String path) throws
IOException {
579 Map<String, String> conf = new HashMap<>();
580 List<String> lines = Files.readAllLines(Paths.get(path));
581 for (String line : lines) {
582 if (line.contains("=")) {
583 String[] parts = line.split("=", 2);
```

Sink Details

Sink: java.sql.DriverManager.getConnection()
Enclosing Method: exportData()
File: serv/AiEmailResultRptServ.java:352
Taint Flags: FILE_SYSTEM, NO_NEW_LINE

```
349 DriverManager.getConnection(
350 url,
351 dbUser,
352 dbPass)) {
353
354 try (Statement stmt =
355 conn.createStatement()) {
```



Password Management

Low

Package: com.fubon.mvp.serv

serv/AiEmailResultRptServ.java, line 303 (Password Management)

Issue Details

Kingdom: Security Features

Scan Engine: SCA (Data Flow)

Source Details

Source: java.nio.file.Files.readAllLines()

From: com.fubon.mvp.serv.AiEmailResultRptServ.readSqlConfig

File: serv/AiEmailResultRptServ.java:580

```
577 // =====
578 private Map<String, String> readSqlConfig(String path) throws
IOException {
579 Map<String, String> conf = new HashMap<>();
580 List<String> lines = Files.readAllLines(Paths.get(path));
581 for (String line : lines) {
582 if (line.contains("=")) {
583 String[] parts = line.split("=", 2);
```

Sink Details

Sink: java.sql.DriverManager.getConnection()

Enclosing Method: queryMasterNode()

File: serv/AiEmailResultRptServ.java:303

Taint Flags: FILE_SYSTEM, NO_NEW_LINE

```
300 "jdbc:sqlserver://%s:%s;databaseName=%s;encrypt=false;trustServerCertificate=true",
301 dbIp, dbPort, dbName);
302
303 try (Connection conn = DriverManager.getConnection(url, dbUser, dbPass);
304 Statement stmt = conn.createStatement();
305 ResultSet rs = stmt.executeQuery(query)) {
306
```

serv/ImportAiResultServ.java, line 403 (Password Management)

Issue Details

Kingdom: Security Features

Scan Engine: SCA (Data Flow)

Source Details

Source: java.nio.file.Files.readAllLines()

From: com.fubon.mvp.serv.ImportAiResultServ.readSqlConfig

File: serv/ImportAiResultServ.java:485

```
482 private Map<String, String> readSqlConfig(String path) throws
IOException {
483 log.info("讀取 SQL 設定檔: {}", path);
```



Password Management

Low

Package: com.fubon.mvp.serv

serv/ImportAiResultServ.java, line 403 (Password Management)

```
484 Map<String, String> conf = new HashMap<>();
485 for (String line : Files.readAllLines(Paths.get(path))) {
486     if (line.contains("=")) {
487         // 以第一個 = 為分界 (允許密碼中包含 =)
488         String[] parts = line.split("=", 2);
```

Sink Details

Sink: java.sql.DriverManager.getConnection()

Enclosing Method: querySqlServer()

File: serv/ImportAiResultServ.java:403

Taint Flags: FILE_SYSTEM, NO_NEW_LINE

```
400 String user, String pass, String sql) throws Exception {
401     log.info("JDBC 查詢:{}", sql);
402     String url = String.format(JDBC_URL_TEMPLATE, ip, port, db);
403     try (Connection conn = DriverManager.getConnection(url, user, pass);
404         Statement stmt = conn.createStatement();
405         ResultSet rs = stmt.executeQuery(sql)) {
406         return rs.next() ? StringUtils.defaultString(rs.getString(1)) : "";
```

serv/GenAiCallingRptServ.java, line 333 (Password Management)

Issue Details

Kingdom: Security Features

Scan Engine: SCA (Data Flow)

Source Details

Source: java.nio.file.Files.readAllLines()

From: com.fubon.mvp.serv.GenAiCallingRptServ.readSqlConfig

File: serv/GenAiCallingRptServ.java:553

```
550 // =====
551 private Map<String, String> readSqlConfig(String path) throws
IOException {
552     Map<String, String> conf = new HashMap<>();
553     List<String> lines = Files.readAllLines(Paths.get(path));
554     for (String line : lines) {
555         if (line.contains("=")) {
556             String[] parts = line.split("=", 2);
```

Sink Details

Sink: java.sql.DriverManager.getConnection()

Enclosing Method: queryMasterNode()

File: serv/GenAiCallingRptServ.java:333

Taint Flags: FILE_SYSTEM, NO_NEW_LINE



Password Management

Low

Package: com.fubon.mvp.serv

serv/GenAiCallingRptServ.java, line 333 (Password Management)

```
330 "jdbc:sqlserver://%s:%s;databaseName=%s;encrypt=false;trustServerCertificate=true",
331 dbIp, dbPort, dbName);
332
333 try (Connection conn = DriverManager.getConnection(url, dbUser, dbPass);
334      Statement stmt = conn.createStatement();
335      ResultSet rs = stmt.executeQuery(query)) {
336
```



Poor Error Handling: Empty Catch Block (27 issues)

Abstract

忽略異常可能會導致程式忽略無法預期的狀態與情況。

Explanation

幾乎每一個對軟體系統嚴重的攻擊都是從破解程式設計師的假設開始的。在攻擊後，程式設計師所建立的假設似乎是脆弱且拙劣的，但在攻擊之前，許多程式設計師會在午休結束之前為他們的假設進行辯護。在程式碼中很容易發現的兩個可疑假設為：「此方法呼叫永遠都不會失敗」以及「即使此呼叫失敗也沒有關係」。因此當程式設計師忽略異常時，已暗示他們是以其中一個假設來執行操作。**範例 1**：以下所引用的程式碼忽略了由 `doExchange()` 拋出的罕見異常。

```
try {
doExchange();
}
catch (RareException e) {
// this can never happen
}
```


如果拋出了 `RareException`，程式會繼續執行，就像什麼都沒有發生過一樣。程式不會記錄有關此特殊情況，這將使得事後嘗試尋找程式此異常的運作方式變得很困難。

Recommendation

至少，應記錄所拋出的異常情況，可幫助事後回來檢查及得知對程式的運作方式造成的影響。然而，最好是中止目前的操作。如果因為呼叫者無法正確地處理而忽略某個異常，而程式環境使得呼叫者難以或者不可能聲明將會拋出異常，那麼可以考慮拋出 `RuntimeException` 異常或 `Error`，這兩者都是未經檢查的異常。在 JDK 1.4 中，`RuntimeException` 有一個建構子，可以輕鬆地封裝另一個異常。**範例 2**：`Example 1` 中的程式碼可以使用以下方式重寫：

```
try {
doExchange();
}
catch (RareException e) {
throw new RuntimeException("This can never happen", e);
}
```

Issue Summary

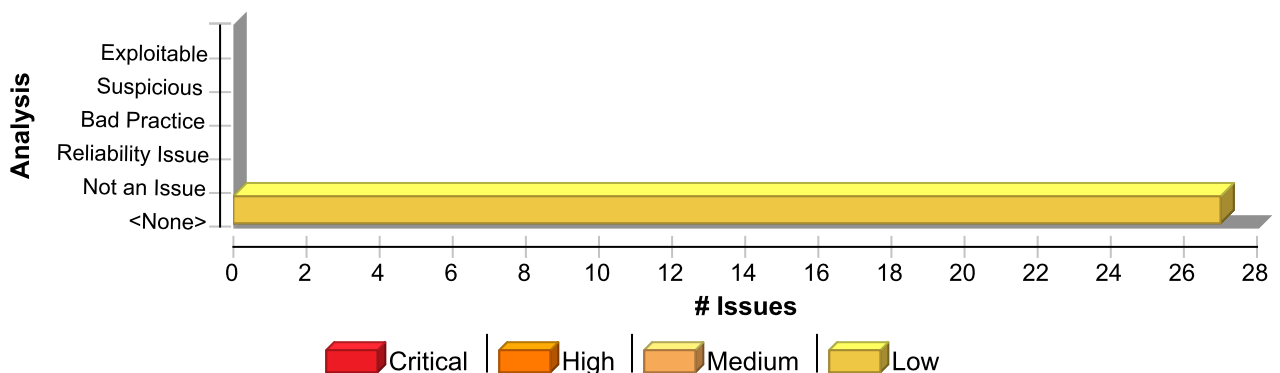

Engine Breakdown

	SCA	WebInspect	SecurityScope	Total
Poor Error Handling: Empty Catch Block	27	0	0	27
Total	27	0	0	27

Poor Error Handling: Empty Catch Block

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 159 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:159

Taint Flags:

```
156
157 // 電文型
158 this.tranCode = txNo;
159 try { this.uuid = doc.selectSingleNode("//UUID").getText().trim(); }catch(Exception ex) {}
160 try { this.branch = doc.selectSingleNode("//BRANCH").getText().trim(); }catch(Exception
ex) {}
161 try { this.teller = doc.selectSingleNode("//TELLER_NO").getText().trim(); }
catch(Exception ex) {}
162 try { this.channel = doc.selectSingleNode("//CHNL").getText().trim(); }catch(Exception
ex) {}
```

data/EmailMaster.java, line 160 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:160

Taint Flags:

```
157 // 電文型
158 this.tranCode = txNo;
159 try { this.uuid = doc.selectSingleNode("//UUID").getText().trim(); }catch(Exception ex) {}
160 try { this.branch = doc.selectSingleNode("//BRANCH").getText().trim(); }catch(Exception
ex) {}
161 try { this.teller = doc.selectSingleNode("//TELLER_NO").getText().trim(); }
catch(Exception ex) {}
162 try { this.channel = doc.selectSingleNode("//CHNL").getText().trim(); }catch(Exception
ex) {}
```



Poor Error Handling: Empty Catch Block

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 160 (Poor Error Handling: Empty Catch Block)

```
163 try { this.subChannel = doc.selectSingleNode("//SUB_CHNL").getText().trim(); }  
catch(Exception ex) {}
```

data/EmailMaster.java, line 161 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:161

Taint Flags:

```
158 this.tranCode = txNo;  
159 try { this.uuid = doc.selectSingleNode("//UUID").getText().trim(); }catch(Exception ex) {}  
160 try { this.branch = doc.selectSingleNode("//BRANCH").getText().trim(); }catch(Exception  
ex) {}  
161 try { this.teller = doc.selectSingleNode("//TELLER_NO").getText().trim(); }  
catch(Exception ex) {}  
162 try { this.channel = doc.selectSingleNode("//CHNL").getText().trim(); }catch(Exception  
ex) {}  
163 try { this.subChannel = doc.selectSingleNode("//SUB_CHNL").getText().trim(); }  
catch(Exception ex) {}  
164 try { this.idNo = doc.selectSingleNode("//CUST_ID").getText().trim(); }catch(Exception  
ex) {}
```

data/EmailMaster.java, line 162 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:162

Taint Flags:

```
159 try { this.uuid = doc.selectSingleNode("//UUID").getText().trim(); }catch(Exception ex) {}  
160 try { this.branch = doc.selectSingleNode("//BRANCH").getText().trim(); }catch(Exception  
ex) {}  
161 try { this.teller = doc.selectSingleNode("//TELLER_NO").getText().trim(); }  
catch(Exception ex) {}  
162 try { this.channel = doc.selectSingleNode("//CHNL").getText().trim(); }catch(Exception  
ex) {}  
163 try { this.subChannel = doc.selectSingleNode("//SUB_CHNL").getText().trim(); }  
catch(Exception ex) {}
```



Poor Error Handling: Empty Catch Block

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 162 (Poor Error Handling: Empty Catch Block)

```
164 try { this.idNo = doc.selectSingleNode("//CUST_ID").getText().trim(); }catch(Exception ex) {}  
165 try { this.idType = doc.selectSingleNode("//ID_TYPE").getText().trim(); }catch(Exception ex) {}
```

data/EmailMaster.java, line 163 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:163

Taint Flags:

```
160 try { this.branch = doc.selectSingleNode("//BRANCH").getText().trim(); }catch(Exception ex) {}  
161 try { this.teller = doc.selectSingleNode("//TELLER_NO").getText().trim(); }  
catch(Exception ex) {}  
162 try { this.channel = doc.selectSingleNode("//CHNL").getText().trim(); }catch(Exception ex) {}  
163 try { this.subChannel = doc.selectSingleNode("//SUB_CHNL").getText().trim(); }  
catch(Exception ex) {}  
164 try { this.idNo = doc.selectSingleNode("//CUST_ID").getText().trim(); }catch(Exception ex) {}  
165 try { this.idType = doc.selectSingleNode("//ID_TYPE").getText().trim(); }catch(Exception ex) {}  
166 try { this.chName = doc.selectSingleNode("//CUST_NAME").getText().trim(); }  
catch(Exception ex) {}
```

data/EmailMaster.java, line 164 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:164

Taint Flags:

```
161 try { this.teller = doc.selectSingleNode("//TELLER_NO").getText().trim(); }  
catch(Exception ex) {}  
162 try { this.channel = doc.selectSingleNode("//CHNL").getText().trim(); }catch(Exception ex) {}  
163 try { this.subChannel = doc.selectSingleNode("//SUB_CHNL").getText().trim(); }  
catch(Exception ex) {}
```



Poor Error Handling: Empty Catch Block

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 164 (Poor Error Handling: Empty Catch Block)

```
164 try { this.idNo = doc.selectSingleNode("//CUST_ID").getText().trim(); }catch(Exception  
ex) {}  
165 try { this.idType = doc.selectSingleNode("//ID_TYPE").getText().trim(); }catch(Exception  
ex) {}  
166 try { this.chName = doc.selectSingleNode("//CUST_NAME").getText().trim(); }  
catch(Exception ex) {}  
167 try { this.enName = doc.selectSingleNode("//ENG_NAME").getText().trim(); }catch(Exception  
ex) {}
```

data/EmailMaster.java, line 165 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:165

Taint Flags:

```
162 try { this.channel = doc.selectSingleNode("//CHNL").getText().trim(); }catch(Exception  
ex) {}  
163 try { this.subChannel = doc.selectSingleNode("//SUB_CHNL").getText().trim(); }  
catch(Exception ex) {}  
164 try { this.idNo = doc.selectSingleNode("//CUST_ID").getText().trim(); }catch(Exception  
ex) {}  
165 try { this.idType = doc.selectSingleNode("//ID_TYPE").getText().trim(); }catch(Exception  
ex) {}  
166 try { this.chName = doc.selectSingleNode("//CUST_NAME").getText().trim(); }  
catch(Exception ex) {}  
167 try { this.enName = doc.selectSingleNode("//ENG_NAME").getText().trim(); }catch(Exception  
ex) {}  
168 try { this.prevEmail = doc.selectSingleNode("//PREV_EMAIL_ADDR").getText().trim(); }  
catch(Exception ex) {}
```

data/EmailMaster.java, line 166 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:166

Taint Flags:

```
163 try { this.subChannel = doc.selectSingleNode("//SUB_CHNL").getText().trim(); }  
catch(Exception ex) {}
```



Poor Error Handling: Empty Catch Block

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 166 (Poor Error Handling: Empty Catch Block)

```
164 try { this.idNo = doc.selectSingleNode("//CUST_ID").getText().trim(); }catch(Exception  
ex) {}  
165 try { this.idType = doc.selectSingleNode("//ID_TYPE").getText().trim(); }catch(Exception  
ex) {}  
166 try { this.chName = doc.selectSingleNode("//CUST_NAME").getText().trim(); }  
catch(Exception ex) {}  
167 try { this.enName = doc.selectSingleNode("//ENG_NAME").getText().trim(); }catch(Exception  
ex) {}  
168 try { this.prevEmail = doc.selectSingleNode("//PREV_EMAIL_ADDR").getText().trim(); }  
catch(Exception ex) {}  
169 try { this.afterEmail = doc.selectSingleNode("//AFTER_EMAIL_ADDR").getText().trim(); }  
catch(Exception ex) {}
```

data/EmailMaster.java, line 167 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:167

Taint Flags:

```
164 try { this.idNo = doc.selectSingleNode("//CUST_ID").getText().trim(); }catch(Exception  
ex) {}  
165 try { this.idType = doc.selectSingleNode("//ID_TYPE").getText().trim(); }catch(Exception  
ex) {}  
166 try { this.chName = doc.selectSingleNode("//CUST_NAME").getText().trim(); }  
catch(Exception ex) {}  
167 try { this.enName = doc.selectSingleNode("//ENG_NAME").getText().trim(); }catch(Exception  
ex) {}  
168 try { this.prevEmail = doc.selectSingleNode("//PREV_EMAIL_ADDR").getText().trim(); }  
catch(Exception ex) {}  
169 try { this.afterEmail = doc.selectSingleNode("//AFTER_EMAIL_ADDR").getText().trim(); }  
catch(Exception ex) {}  
170 try { this.changeDate = TimeUtil.dateE(new Date()); }catch(Exception ex) {}
```

data/EmailMaster.java, line 168 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:168



Poor Error Handling: Empty Catch Block

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 168 (Poor Error Handling: Empty Catch Block)

Taint Flags:

```
165 try { this.idType = doc.selectSingleNode("//ID_TYPE").getText().trim(); }catch(Exception ex) {}
166 try { this.chName = doc.selectSingleNode("//CUST_NAME").getText().trim(); }
    catch(Exception ex) {}
167 try { this.enName = doc.selectSingleNode("//ENG_NAME").getText().trim(); }catch(Exception ex) {}
168 try { this.prevEmail = doc.selectSingleNode("//PREV_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
169 try { this.afterEmail = doc.selectSingleNode("//AFTER_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
170 try { this.changeDate = TimeUtil.dateE(new Date()); }catch(Exception ex) {}
171 try { this.changeTime = TimeUtil.timeE(new Date()); }catch(Exception ex) {}
```

data/EmailMaster.java, line 169 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:169

Taint Flags:

```
166 try { this.chName = doc.selectSingleNode("//CUST_NAME").getText().trim(); }
    catch(Exception ex) {}
167 try { this.enName = doc.selectSingleNode("//ENG_NAME").getText().trim(); }catch(Exception ex) {}
168 try { this.prevEmail = doc.selectSingleNode("//PREV_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
169 try { this.afterEmail = doc.selectSingleNode("//AFTER_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
170 try { this.changeDate = TimeUtil.dateE(new Date()); }catch(Exception ex) {}
171 try { this.changeTime = TimeUtil.timeE(new Date()); }catch(Exception ex) {}
172 try { this.online = doc.selectSingleNode("//ON_OFF_LINE").getText().trim(); }
    catch(Exception ex) {}
```

data/EmailMaster.java, line 170 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()



Poor Error Handling: Empty Catch Block

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 170 (Poor Error Handling: Empty Catch Block)

File: data/EmailMaster.java:170

Taint Flags:

```
167 try { this.enName = doc.selectSingleNode("//ENG_NAME").getText().trim(); }catch(Exception ex) {}
168 try { this.prevEmail = doc.selectSingleNode("//PREV_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
169 try { this.afterEmail = doc.selectSingleNode("//AFTER_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
170 try { this.changeDate = TimeUtil.dateE(new Date()); }catch(Exception ex) {}
171 try { this.changeTime = TimeUtil.timeE(new Date()); }catch(Exception ex) {}
172 try { this.online = doc.selectSingleNode("//ON_OFF_LINE").getText().trim(); }
    catch(Exception ex) {}
173 try { this.reason = doc.selectSingleNode("//REASON").getText().trim(); }catch(Exception ex) {}
```

data/EmailMaster.java, line 171 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:171

Taint Flags:

```
168 try { this.prevEmail = doc.selectSingleNode("//PREV_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
169 try { this.afterEmail = doc.selectSingleNode("//AFTER_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
170 try { this.changeDate = TimeUtil.dateE(new Date()); }catch(Exception ex) {}
171 try { this.changeTime = TimeUtil.timeE(new Date()); }catch(Exception ex) {}
172 try { this.online = doc.selectSingleNode("//ON_OFF_LINE").getText().trim(); }
    catch(Exception ex) {}
173 try { this.reason = doc.selectSingleNode("//REASON").getText().trim(); }catch(Exception ex) {}
174 try { this.remark = doc.selectSingleNode("//REMARK").getText(); }catch(Exception ex) {}
```

data/EmailMaster.java, line 172 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()



Poor Error Handling: Empty Catch Block

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 172 (Poor Error Handling: Empty Catch Block)

File: data/EmailMaster.java:172

Taint Flags:

```
169 try { this.afterEmail = doc.selectSingleNode("//AFTER_EMAIL_ADDR").getText().trim(); }  
catch(Exception ex) {}  
170 try { this.changeDate = TimeUtil.dateE(new Date()); }catch(Exception ex) {}  
171 try { this.changeTime = TimeUtil.timeE(new Date()); }catch(Exception ex) {}  
172 try { this.online = doc.selectSingleNode("//ON_OFF_LINE").getText().trim(); }  
catch(Exception ex) {}  
173 try { this.reason = doc.selectSingleNode("//REASON").getText().trim(); }catch(Exception  
ex) {}  
174 try { this.remark = doc.selectSingleNode("//REMARK").getText(); }catch(Exception ex) {}  
175
```

data/EmailMaster.java, line 173 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:173

Taint Flags:

```
170 try { this.changeDate = TimeUtil.dateE(new Date()); }catch(Exception ex) {}  
171 try { this.changeTime = TimeUtil.timeE(new Date()); }catch(Exception ex) {}  
172 try { this.online = doc.selectSingleNode("//ON_OFF_LINE").getText().trim(); }  
catch(Exception ex) {}  
173 try { this.reason = doc.selectSingleNode("//REASON").getText().trim(); }catch(Exception  
ex) {}  
174 try { this.remark = doc.selectSingleNode("//REMARK").getText(); }catch(Exception ex) {}  
175  
176 // 臨時型
```

data/EmailMaster.java, line 174 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:174

Taint Flags:

```
171 try { this.changeTime = TimeUtil.timeE(new Date()); }catch(Exception ex) {}
```



Poor Error Handling: Empty Catch Block

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 174 (Poor Error Handling: Empty Catch Block)

```
172 try { this.online = doc.selectSingleNode("//ON_OFF_LINE").getText().trim(); }  
catch(Exception ex) {}  
173 try { this.reason = doc.selectSingleNode("//REASON").getText().trim(); }catch(Exception  
ex) {}  
174 try { this.remark = doc.selectSingleNode("//REMARK").getText(); }catch(Exception ex) {}  
175  
176 // 臨時型  
177 try { this.queryUuid = doc.selectSingleNode("//QUERY_UUID").getText().trim(); }  
catch(Exception ex) {}
```

data/EmailMaster.java, line 177 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:177

Taint Flags:

```
174 try { this.remark = doc.selectSingleNode("//REMARK").getText(); }catch(Exception ex) {}  
175  
176 // 臨時型  
177 try { this.queryUuid = doc.selectSingleNode("//QUERY_UUID").getText().trim(); }  
catch(Exception ex) {}  
178 try { this.beginDate = doc.selectSingleNode("//FROM_DATE").getText().trim(); }  
catch(Exception ex) {}  
179 try { this.endDate = doc.selectSingleNode("//TO_DATE").getText().trim(); }catch(Exception  
ex) {}  
180 try { this.nextKey = doc.selectSingleNode("//NEXT_KEY").getText().trim(); }  
catch(Exception ex) {}
```

data/EmailMaster.java, line 178 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:178

Taint Flags:

```
175  
176 // 臨時型  
177 try { this.queryUuid = doc.selectSingleNode("//QUERY_UUID").getText().trim(); }
```



Poor Error Handling: Empty Catch Block

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 178 (Poor Error Handling: Empty Catch Block)

```
catch(Exception ex) {}  
178 try { this.beginDate = doc.selectSingleNode("//FROM_DATE").getText().trim(); }  
catch(Exception ex) {}  
179 try { this.endDate = doc.selectSingleNode("//TO_DATE").getText().trim(); }catch(Exception  
ex) {}  
180 try { this.nextKey = doc.selectSingleNode("//NEXT_KEY").getText().trim(); }  
catch(Exception ex) {}  
181 }
```

data/EmailMaster.java, line 179 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors
Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock
Enclosing Method: EmailMaster()
File: data/EmailMaster.java:179
Taint Flags:

```
176 // 臨時型  
177 try { this.queryUuid = doc.selectSingleNode("//QUERY_UUID").getText().trim(); }  
catch(Exception ex) {}  
178 try { this.beginDate = doc.selectSingleNode("//FROM_DATE").getText().trim(); }  
catch(Exception ex) {}  
179 try { this.endDate = doc.selectSingleNode("//TO_DATE").getText().trim(); }catch(Exception  
ex) {}  
180 try { this.nextKey = doc.selectSingleNode("//NEXT_KEY").getText().trim(); }  
catch(Exception ex) {}  
181 }  
182
```

data/EmailMaster.java, line 180 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors
Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock
Enclosing Method: EmailMaster()
File: data/EmailMaster.java:180
Taint Flags:

```
177 try { this.queryUuid = doc.selectSingleNode("//QUERY_UUID").getText().trim(); }  
catch(Exception ex) {}  
178 try { this.beginDate = doc.selectSingleNode("//FROM_DATE").getText().trim(); }  
catch(Exception ex) {}
```



Poor Error Handling: Empty Catch Block

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 180 (Poor Error Handling: Empty Catch Block)

```
179 try { this.endDate = doc.selectSingleNode("//TO_DATE").getText().trim(); }catch(Exception  
ex) {}  
180 try { this.nextKey = doc.selectSingleNode("//NEXT_KEY").getText().trim(); }  
catch(Exception ex) {}  
181 }  
182  
183 //-----
```

Package: com.fubon.mvp.serv

serv/GenAiCallingRptServ.java, line 543 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: uploadFileViaFtp()

File: serv/GenAiCallingRptServ.java:543

Taint Flags:

```
540 ftp.logout();  
541 } finally {  
542 if (ftp != null && ftp.isConnected()) {  
543 try { ftp.disconnect(); } catch (IOException e) { }  
544 }  
545 }  
546 }
```

serv/AiEmailResultRptServ.java, line 510 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: decodeFtpCredential()

File: serv/AiEmailResultRptServ.java:510

Taint Flags:

```
507 //System.out.println("[decodeFtpCredential] 成功使用 digest=" + digest);  
508 return result;  
509  
510 } catch (BadPaddingException | IllegalBlockSizeException e) {
```



Poor Error Handling: Empty Catch Block

Low

Package: com.fubon.mvp.serv

serv/AiEmailResultRptServ.java, line 510 (Poor Error Handling: Empty Catch Block)

```
511 //這個 digest 不對, 換下一個試
512 //System.out.println("[decodeFtpCredential] digest=" + digest + " 失敗, 嘗試下一個");
513 }
```

serv/ImportAiResultServ.java, line 541 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: decodeFtpCredential()

File: serv/ImportAiResultServ.java:541

Taint Flags:

```
538 //System.out.println("[decodeFtpCredential] 成功使用 digest=" + digest);
539 return result;
540
541 } catch (BadPaddingException | IllegalBlockSizeException e) {
542 //這個 digest 不對, 換下一個試
543 //System.out.println("[decodeFtpCredential] digest=" + digest + " 失敗, 嘗試下一個");
544 }
```

serv/ImportAiResultServ.java, line 468 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: downloadFromFtp()

File: serv/ImportAiResultServ.java:468

Taint Flags:

```
465
466 } finally {
467 if (ftp.isConnected()) {
468 try { ftp.logout(); } catch (IOException ignored) {}
469 try { ftp.disconnect(); } catch (IOException ignored) {}
470 }
471 }
```

serv/ImportAiResultServ.java, line 469 (Poor Error Handling: Empty Catch Block)

Issue Details



Poor Error Handling: Empty Catch Block

Low

Package: com.fubon.mvp.serv

serv/ImportAiResultServ.java, line 469 (Poor Error Handling: Empty Catch Block)

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: downloadFromFtp()

File: serv/ImportAiResultServ.java:469

Taint Flags:

```
466 } finally {  
467     if (ftp.isConnected()) {  
468         try { ftp.logout(); } catch (IOException ignored) {}  
469         try { ftp.disconnect(); } catch (IOException ignored) {}  
470     }  
471 }  
472 }
```

serv/GenAiCallingRptServ.java, line 483 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: decodeFtpCredential()

File: serv/GenAiCallingRptServ.java:483

Taint Flags:

```
480 //System.out.println("[decodeFtpCredential] 成功使用 digest=" + digest);  
481 return result;  
482  
483 } catch (BadPaddingException | IllegalBlockSizeException e) {  
484     //這個 digest 不對，換下一個試  
485     //System.out.println("[decodeFtpCredential] digest=" + digest + " 失敗，嘗試下一個");  
486 }
```

serv/AiEmailResultRptServ.java, line 570 (Poor Error Handling: Empty Catch Block)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock



Poor Error Handling: Empty Catch Block**Low****Package:** com.fubon.mvp.serv**serv/AiEmailResultRptServ.java, line 570 (Poor Error Handling: Empty Catch Block)****Enclosing Method:** uploadFileViaFtp()**File:** serv/AiEmailResultRptServ.java:570**Taint Flags:**

```
567 ftp.logout();  
568 } finally {  
569 if (ftp != null && ftp.isConnected()) {  
570 try { ftp.disconnect(); } catch (IOException e) { }  
571 }  
572 }  
573 }
```



Poor Error Handling: Overly Broad Catch (37 issues)

Abstract

catch 區塊可處理種類眾多的異常，但可能會深陷於各種不應在此位置中考慮的各種問題。

Explanation

多重 catch 區塊看上去可能比較繁瑣，但藉由捕捉高層級的類別 (比如 Exception) 「濃縮」 catch 區塊，可能會混淆那些需要特殊處理的異常，或是捕捉了不應該在程式中某階段捕捉的異常。捕捉範圍過大的異常，實質上是與「Java 分類定義異常」目的相違背的，並且隨著程式的增長且開始拋出新類型的異常時，此做法將導致嚴重的危險。因為，新的異常類型將不會被注意到。範例 1：以下引用的程式碼使用相同的方式處理三種不同的異常類型。

```
try {
doExchange();
}
catch (IOException e) {
logger.error("doExchange failed", e);
}
catch (InvocationTargetException e) {
logger.error("doExchange failed", e);
}
catch (SQLException e) {
logger.error("doExchange failed", e);
}
```

其實，似乎使用單一 catch 區塊來處理這些異常會比較好一點，如下所示：


```
try {
doExchange();
}
catch (Exception e) {
logger.error("doExchange failed", e);
}
```

但是，如果修改 doExchange() 後而拋出新的異常類型，而此異常需以不同方式來處理，那麼過大範圍的 catch 區塊將會阻止編譯器指出這個情況 (有新的異常拋出)。此外，新的 catch 區塊也可處理從 RuntimeException 衍生的異常，例如 ClassCastException 和 NullPointerException，而處理這些異常並不在程式設計師的意圖之內。

Recommendation

請勿捕捉範圍過大的異常類別，例如 Exception、Throwable、Error 或 RuntimeException，除非是非常高層級的程式或執行緒。

Issue Summary

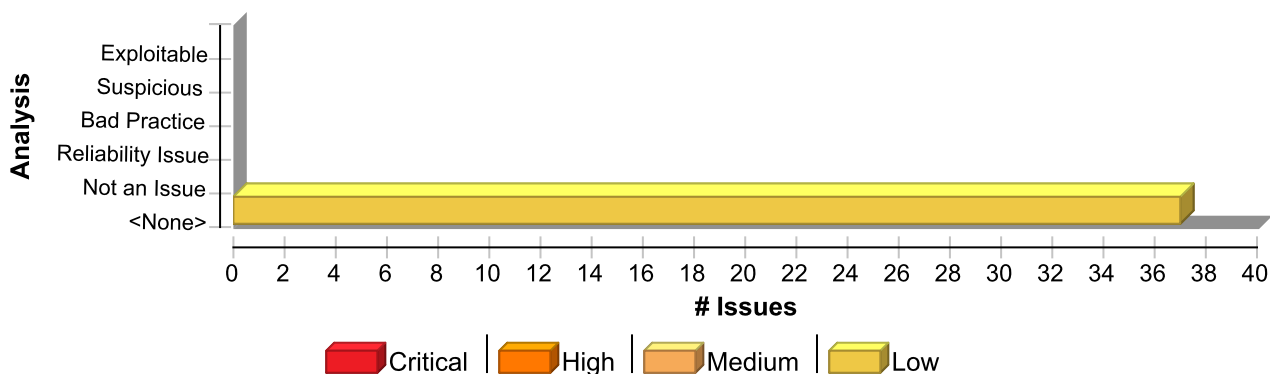

Engine Breakdown

	SCA	WebInspect	SecurityScope	Total
Poor Error Handling: Overly Broad Catch	37	0	0	37
Total	37	0	0	37

Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.ctrl

ctrl/MvpApiCtrl.java, line 243 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: aiResultImport()

File: ctrl/MvpApiCtrl.java:243

Taint Flags:

```
240 this.importAiResultProcess.processAiResultReport(excelFilePath);
241 result.append("<status>success</status>");
242 result.append("<message>AI結果報表處理完成</message>");
243 } catch (Exception ex) {
244 result.append("<status>error</status>");
245 result.append("<message>").append(ex.getMessage()).append("</message>");
246 }
```

ctrl/MvpApiCtrl.java, line 368 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: importAiResultTrigger()

File: ctrl/MvpApiCtrl.java:368

Taint Flags:

```
365 importAiResultServ.execute();
366 result.append("<status>success</status>");
367 result.append("<message>ImportAiResult 排程觸發成功, 已開始執行 AI 外撥結果報表導入</message>");
368 } catch (Exception ex) {
369 log.error("ImportAiResult 排程觸發失敗", ex);
370 result.append("<status>error</status>");
371 result.append("<message>").append(ex.getMessage()).append("</message>");
```

ctrl/MvpApiCtrl.java, line 340 (Poor Error Handling: Overly Broad Catch)

Issue Details



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.ctrl

ctrl/MvpApiCtrl.java, line 340 (Poor Error Handling: Overly Broad Catch)

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: genAiCallingRptTrigger()

File: ctrl/MvpApiCtrl.java:340

Taint Flags:

```
337 genAiCallingRptServ.execute();
338 result.append("<status>success</status>");
339 result.append("<message>GenAiCallingRpt 排程觸發成功, 已開始執行 AI 外撥名單導出</message>");
340 } catch (Exception ex) {
341 log.error("GenAiCallingRpt 排程觸發失敗", ex);
342 result.append("<status>error</status>");
343 result.append("<message>").append(ex.getMessage()).append("</message>");
```

ctrl/MvpApiCtrl.java, line 396 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: AiEmailResultRptTrigger()

File: ctrl/MvpApiCtrl.java:396

Taint Flags:

```
393 AiEmailResultRptServ.execute();
394 result.append("<status>success</status>");
395 result.append("<message>AiEmailResultRptServ 排程觸發成功, 已開始執行 AI 外撥結果報表</message>");
396 } catch (Exception ex) {
397 log.error("AiEmailResultRptServ 排程觸發失敗", ex);
398 result.append("<status>error</status>");
399 result.append("<message>").append(ex.getMessage()).append("</message>");
```

Package: com.fubon.mvp.dao

dao/EmailDao.java, line 210 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.dao

dao/EmailDao.java, line 210 (Poor Error Handling: Overly Broad Catch)

Sink: CatchBlock
Enclosing Method: save()
File: dao/EmailDao.java:210
Taint Flags:

```
207  
208 try {  
209     this.detailRepo.save(detail);  
210 } catch (Exception ex) {  
211     log.error(ex.toString());  
212     return ex;  
213 }
```

dao/EmailHostDao.java, line 108 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors
Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock
Enclosing Method: save()
File: dao/EmailHostDao.java:108
Taint Flags:

```
105 try {  
106     this.repo.save(entity);  
107     success = true;  
108 } catch (Exception ex) {  
109     log.error(ex.toString());  
110 }  
111 return success;
```

dao/EmailDao.java, line 194 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors
Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock
Enclosing Method: save()
File: dao/EmailDao.java:194
Taint Flags:

```
191  
192 try {  
193     this.masterRepo.save(master);
```



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.dao

dao/EmailDao.java, line 194 (Poor Error Handling: Overly Broad Catch)

```
194 } catch (Exception ex) {  
195     log.error(ex.toString());  
196     return ex;  
197 }
```

Package: com.fubon.mvp.data

data/EmailMaster.java, line 159 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:159

Taint Flags:

```
156  
157 // 電文型  
158 this.tranCode = txNo;  
159 try { this.uuid = doc.selectSingleNode("//UUID").getText().trim(); }catch(Exception ex) {}  
160 try { this.branch = doc.selectSingleNode("//BRANCH").getText().trim(); }catch(Exception  
ex) {}  
161 try { this.teller = doc.selectSingleNode("//TELLER_NO").getText().trim(); }  
catch(Exception ex) {}  
162 try { this.channel = doc.selectSingleNode("//CHNL").getText().trim(); }catch(Exception  
ex) {}
```

data/EmailMaster.java, line 160 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:160

Taint Flags:

```
157 // 電文型  
158 this.tranCode = txNo;  
159 try { this.uuid = doc.selectSingleNode("//UUID").getText().trim(); }catch(Exception ex) {}  
160 try { this.branch = doc.selectSingleNode("//BRANCH").getText().trim(); }catch(Exception  
ex) {}  
161 try { this.teller = doc.selectSingleNode("//TELLER_NO").getText().trim(); }  
catch(Exception ex) {}
```



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 160 (Poor Error Handling: Overly Broad Catch)

```
162 try { this.channel = doc.selectSingleNode("//CHNL").getText().trim(); }catch(Exception ex) {}  
163 try { this.subChannel = doc.selectSingleNode("//SUB_CHNL").getText().trim(); }  
catch(Exception ex) {}
```

data/EmailMaster.java, line 161 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:161

Taint Flags:

```
158 this.tranCode = txNo;  
159 try { this.uuid = doc.selectSingleNode("//UUID").getText().trim(); }catch(Exception ex) {}  
160 try { this.branch = doc.selectSingleNode("//BRANCH").getText().trim(); }catch(Exception ex) {}  
161 try { this.teller = doc.selectSingleNode("//TELLER_NO").getText().trim(); }  
catch(Exception ex) {}  
162 try { this.channel = doc.selectSingleNode("//CHNL").getText().trim(); }catch(Exception ex) {}  
163 try { this.subChannel = doc.selectSingleNode("//SUB_CHNL").getText().trim(); }  
catch(Exception ex) {}  
164 try { this.idNo = doc.selectSingleNode("//CUST_ID").getText().trim(); }catch(Exception ex) {}
```

data/EmailMaster.java, line 162 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:162

Taint Flags:

```
159 try { this.uuid = doc.selectSingleNode("//UUID").getText().trim(); }catch(Exception ex) {}  
160 try { this.branch = doc.selectSingleNode("//BRANCH").getText().trim(); }catch(Exception ex) {}  
161 try { this.teller = doc.selectSingleNode("//TELLER_NO").getText().trim(); }  
catch(Exception ex) {}  
162 try { this.channel = doc.selectSingleNode("//CHNL").getText().trim(); }catch(Exception ex) {}
```



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 162 (Poor Error Handling: Overly Broad Catch)

```
163 try { this.subChannel = doc.selectSingleNode("//SUB_CHNL").getText().trim(); }  
catch(Exception ex) {}  
  
164 try { this.idNo = doc.selectSingleNode("//CUST_ID").getText().trim(); }catch(Exception  
ex) {}  
  
165 try { this.idType = doc.selectSingleNode("//ID_TYPE").getText().trim(); }catch(Exception  
ex) {}
```

data/EmailMaster.java, line 163 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:163

Taint Flags:

```
160 try { this.branch = doc.selectSingleNode("//BRANCH").getText().trim(); }catch(Exception  
ex) {}  
  
161 try { this.teller = doc.selectSingleNode("//TELLER_NO").getText().trim(); }  
catch(Exception ex) {}  
  
162 try { this.channel = doc.selectSingleNode("//CHNL").getText().trim(); }catch(Exception  
ex) {}  
  
163 try { this.subChannel = doc.selectSingleNode("//SUB_CHNL").getText().trim(); }  
catch(Exception ex) {}  
  
164 try { this.idNo = doc.selectSingleNode("//CUST_ID").getText().trim(); }catch(Exception  
ex) {}  
  
165 try { this.idType = doc.selectSingleNode("//ID_TYPE").getText().trim(); }catch(Exception  
ex) {}  
  
166 try { this.chName = doc.selectSingleNode("//CUST_NAME").getText().trim(); }  
catch(Exception ex) {}
```

data/EmailMaster.java, line 164 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:164

Taint Flags:

```
161 try { this.teller = doc.selectSingleNode("//TELLER_NO").getText().trim(); }  
catch(Exception ex) {}  
  
162 try { this.channel = doc.selectSingleNode("//CHNL").getText().trim(); }catch(Exception  
ex) {}
```



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 164 (Poor Error Handling: Overly Broad Catch)

```
163 try { this.subChannel = doc.selectSingleNode("//SUB_CHNL").getText().trim(); }  
catch(Exception ex) {}  
164 try { this.idNo = doc.selectSingleNode("//CUST_ID").getText().trim(); }catch(Exception  
ex) {}  
165 try { this.idType = doc.selectSingleNode("//ID_TYPE").getText().trim(); }catch(Exception  
ex) {}  
166 try { this.chName = doc.selectSingleNode("//CUST_NAME").getText().trim(); }  
catch(Exception ex) {}  
167 try { this.enName = doc.selectSingleNode("//ENG_NAME").getText().trim(); }catch(Exception  
ex) {}
```

data/EmailMaster.java, line 165 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:165

Taint Flags:

```
162 try { this.channel = doc.selectSingleNode("//CHNL").getText().trim(); }catch(Exception  
ex) {}  
163 try { this.subChannel = doc.selectSingleNode("//SUB_CHNL").getText().trim(); }  
catch(Exception ex) {}  
164 try { this.idNo = doc.selectSingleNode("//CUST_ID").getText().trim(); }catch(Exception  
ex) {}  
165 try { this.idType = doc.selectSingleNode("//ID_TYPE").getText().trim(); }catch(Exception  
ex) {}  
166 try { this.chName = doc.selectSingleNode("//CUST_NAME").getText().trim(); }  
catch(Exception ex) {}  
167 try { this.enName = doc.selectSingleNode("//ENG_NAME").getText().trim(); }catch(Exception  
ex) {}  
168 try { this.prevEmail = doc.selectSingleNode("//PREV_EMAIL_ADDR").getText().trim(); }  
catch(Exception ex) {}
```

data/EmailMaster.java, line 166 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:166

Taint Flags:



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 166 (Poor Error Handling: Overly Broad Catch)

```
163 try { this.subChannel = doc.selectSingleNode("//SUB_CHNL").getText().trim(); }  
catch(Exception ex) {}  
164 try { this.idNo = doc.selectSingleNode("//CUST_ID").getText().trim(); }catch(Exception  
ex) {}  
165 try { this.idType = doc.selectSingleNode("//ID_TYPE").getText().trim(); }catch(Exception  
ex) {}  
166 try { this.chName = doc.selectSingleNode("//CUST_NAME").getText().trim(); }  
catch(Exception ex) {}  
167 try { this.enName = doc.selectSingleNode("//ENG_NAME").getText().trim(); }catch(Exception  
ex) {}  
168 try { this.prevEmail = doc.selectSingleNode("//PREV_EMAIL_ADDR").getText().trim(); }  
catch(Exception ex) {}  
169 try { this.afterEmail = doc.selectSingleNode("//AFTER_EMAIL_ADDR").getText().trim(); }  
catch(Exception ex) {}
```

data/EmailMaster.java, line 167 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:167

Taint Flags:

```
164 try { this.idNo = doc.selectSingleNode("//CUST_ID").getText().trim(); }catch(Exception  
ex) {}  
165 try { this.idType = doc.selectSingleNode("//ID_TYPE").getText().trim(); }catch(Exception  
ex) {}  
166 try { this.chName = doc.selectSingleNode("//CUST_NAME").getText().trim(); }  
catch(Exception ex) {}  
167 try { this.enName = doc.selectSingleNode("//ENG_NAME").getText().trim(); }catch(Exception  
ex) {}  
168 try { this.prevEmail = doc.selectSingleNode("//PREV_EMAIL_ADDR").getText().trim(); }  
catch(Exception ex) {}  
169 try { this.afterEmail = doc.selectSingleNode("//AFTER_EMAIL_ADDR").getText().trim(); }  
catch(Exception ex) {}  
170 try { this.changeDate = TimeUtil.dateE(new Date()); }catch(Exception ex) {}
```

data/EmailMaster.java, line 168 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 168 (Poor Error Handling: Overly Broad Catch)

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:168

Taint Flags:

```
165 try { this.idType = doc.selectSingleNode("//ID_TYPE").getText().trim(); }catch(Exception ex) {}
166 try { this.chName = doc.selectSingleNode("//CUST_NAME").getText().trim(); }
    catch(Exception ex) {}
167 try { this.enName = doc.selectSingleNode("//ENG_NAME").getText().trim(); }catch(Exception ex) {}
168 try { this.prevEmail = doc.selectSingleNode("//PREV_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
169 try { this.afterEmail = doc.selectSingleNode("//AFTER_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
170 try { this.changeDate = TimeUtil.dateE(new Date()); }catch(Exception ex) {}
171 try { this.changeTime = TimeUtil.timeE(new Date()); }catch(Exception ex) {}
```

data/EmailMaster.java, line 169 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:169

Taint Flags:

```
166 try { this.chName = doc.selectSingleNode("//CUST_NAME").getText().trim(); }
    catch(Exception ex) {}
167 try { this.enName = doc.selectSingleNode("//ENG_NAME").getText().trim(); }catch(Exception ex) {}
168 try { this.prevEmail = doc.selectSingleNode("//PREV_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
169 try { this.afterEmail = doc.selectSingleNode("//AFTER_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
170 try { this.changeDate = TimeUtil.dateE(new Date()); }catch(Exception ex) {}
171 try { this.changeTime = TimeUtil.timeE(new Date()); }catch(Exception ex) {}
172 try { this.online = doc.selectSingleNode("//ON_OFF_LINE").getText().trim(); }
    catch(Exception ex) {}
```

data/EmailMaster.java, line 170 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 170 (Poor Error Handling: Overly Broad Catch)

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:170

Taint Flags:

```
167 try { this.enName = doc.selectSingleNode("//ENG_NAME").getText().trim(); }catch(Exception ex) {}
168 try { this.prevEmail = doc.selectSingleNode("//PREV_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
169 try { this.afterEmail = doc.selectSingleNode("//AFTER_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
170 try { this.changeDate = TimeUtil.dateE(new Date()); }catch(Exception ex) {}
171 try { this.changeTime = TimeUtil.timeE(new Date()); }catch(Exception ex) {}
172 try { this.online = doc.selectSingleNode("//ON_OFF_LINE").getText().trim(); }
    catch(Exception ex) {}
173 try { this.reason = doc.selectSingleNode("//REASON").getText().trim(); }catch(Exception
ex) {}
```

data/EmailMaster.java, line 171 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:171

Taint Flags:

```
168 try { this.prevEmail = doc.selectSingleNode("//PREV_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
169 try { this.afterEmail = doc.selectSingleNode("//AFTER_EMAIL_ADDR").getText().trim(); }
    catch(Exception ex) {}
170 try { this.changeDate = TimeUtil.dateE(new Date()); }catch(Exception ex) {}
171 try { this.changeTime = TimeUtil.timeE(new Date()); }catch(Exception ex) {}
172 try { this.online = doc.selectSingleNode("//ON_OFF_LINE").getText().trim(); }
    catch(Exception ex) {}
173 try { this.reason = doc.selectSingleNode("//REASON").getText().trim(); }catch(Exception
ex) {}
174 try { this.remark = doc.selectSingleNode("//REMARK").getText(); }catch(Exception ex) {}
```

data/EmailMaster.java, line 172 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 172 (Poor Error Handling: Overly Broad Catch)

Sink: CatchBlock
Enclosing Method: EmailMaster()
File: data/EmailMaster.java:172
Taint Flags:

```
169 try { this.afterEmail = doc.selectSingleNode("//AFTER_EMAIL_ADDR").getText().trim(); }  
    catch(Exception ex) {}  
170 try { this.changeDate = TimeUtil.dateE(new Date()); }catch(Exception ex) {}  
171 try { this.changeTime = TimeUtil.timeE(new Date()); }catch(Exception ex) {}  
172 try { this.online = doc.selectSingleNode("//ON_OFF_LINE").getText().trim(); }  
    catch(Exception ex) {}  
173 try { this.reason = doc.selectSingleNode("//REASON").getText().trim(); }catch(Exception  
ex) {}  
174 try { this.remark = doc.selectSingleNode("//REMARK").getText(); }catch(Exception ex) {}  
175
```

data/EmailMaster.java, line 173 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors
Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock
Enclosing Method: EmailMaster()
File: data/EmailMaster.java:173
Taint Flags:

```
170 try { this.changeDate = TimeUtil.dateE(new Date()); }catch(Exception ex) {}  
171 try { this.changeTime = TimeUtil.timeE(new Date()); }catch(Exception ex) {}  
172 try { this.online = doc.selectSingleNode("//ON_OFF_LINE").getText().trim(); }  
    catch(Exception ex) {}  
173 try { this.reason = doc.selectSingleNode("//REASON").getText().trim(); }catch(Exception  
ex) {}  
174 try { this.remark = doc.selectSingleNode("//REMARK").getText(); }catch(Exception ex) {}  
175  
176 // 臨時型
```

data/EmailMaster.java, line 174 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors
Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock
Enclosing Method: EmailMaster()
File: data/EmailMaster.java:174
Taint Flags:



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 174 (Poor Error Handling: Overly Broad Catch)

```
171 try { this.changeTime = TimeUtil.timeE(new Date()); }catch(Exception ex) {}
172 try { this.online = doc.selectSingleNode("//ON_OFF_LINE").getText().trim(); }
catch(Exception ex) {}
173 try { this.reason = doc.selectSingleNode("//REASON").getText().trim(); }catch(Exception
ex) {}
174 try { this.remark = doc.selectSingleNode("//REMARK").getText(); }catch(Exception ex) {}
175
176 // 臨時型
177 try { this.queryUuid = doc.selectSingleNode("//QUERY_UUID").getText().trim(); }
catch(Exception ex) {}
```

data/EmailMaster.java, line 177 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:177

Taint Flags:

```
174 try { this.remark = doc.selectSingleNode("//REMARK").getText(); }catch(Exception ex) {}
175
176 // 臨時型
177 try { this.queryUuid = doc.selectSingleNode("//QUERY_UUID").getText().trim(); }
catch(Exception ex) {}
178 try { this.beginDate = doc.selectSingleNode("//FROM_DATE").getText().trim(); }
catch(Exception ex) {}
179 try { this.endDate = doc.selectSingleNode("//TO_DATE").getText().trim(); }catch(Exception
ex) {}
180 try { this.nextKey = doc.selectSingleNode("//NEXT_KEY").getText().trim(); }
catch(Exception ex) {}
```

data/EmailMaster.java, line 178 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:178

Taint Flags:

```
175
176 // 臨時型
```



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 178 (Poor Error Handling: Overly Broad Catch)

```
177 try { this.queryUuid = doc.selectSingleNode("//QUERY_UUID").getText().trim(); }  
catch(Exception ex) {}  
178 try { this.beginDate = doc.selectSingleNode("//FROM_DATE").getText().trim(); }  
catch(Exception ex) {}  
179 try { this.endDate = doc.selectSingleNode("//TO_DATE").getText().trim(); }catch(Exception  
ex) {}  
180 try { this.nextKey = doc.selectSingleNode("//NEXT_KEY").getText().trim(); }  
catch(Exception ex) {}  
181 }
```

data/EmailMaster.java, line 179 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:179

Taint Flags:

```
176 // 臨時型  
177 try { this.queryUuid = doc.selectSingleNode("//QUERY_UUID").getText().trim(); }  
catch(Exception ex) {}  
178 try { this.beginDate = doc.selectSingleNode("//FROM_DATE").getText().trim(); }  
catch(Exception ex) {}  
179 try { this.endDate = doc.selectSingleNode("//TO_DATE").getText().trim(); }catch(Exception  
ex) {}  
180 try { this.nextKey = doc.selectSingleNode("//NEXT_KEY").getText().trim(); }  
catch(Exception ex) {}  
181 }  
182
```

data/EmailMaster.java, line 180 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: EmailMaster()

File: data/EmailMaster.java:180

Taint Flags:

```
177 try { this.queryUuid = doc.selectSingleNode("//QUERY_UUID").getText().trim(); }  
catch(Exception ex) {}  
178 try { this.beginDate = doc.selectSingleNode("//FROM_DATE").getText().trim(); }
```



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.data

data/EmailMaster.java, line 180 (Poor Error Handling: Overly Broad Catch)

```
catch(Exception ex) {}  
179 try { this.endDate = doc.selectSingleNode("//TO_DATE").getText().trim(); }catch(Exception  
ex) {}  
180 try { this.nextKey = doc.selectSingleNode("//NEXT_KEY").getText().trim(); }  
catch(Exception ex) {}  
181 }  
182  
183 //-----
```

Package: com.fubon.mvp.serv

serv/EmailWsClient.java, line 69 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: sendMail()

File: serv/EmailWsClient.java:69

Taint Flags:

```
66 try {  
67 response = (SendToOneUIDResponse) super.getWebServiceTemplate()  
68 .marshalSendAndReceive(request, this.soapAction);  
69 } catch (Exception ex) {  
70 ex.printStackTrace();  
71 log.error(ex.toString());  
72 return -1;
```

serv/ImportAiResultServ.java, line 142 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: execute()

File: serv/ImportAiResultServ.java:142

Taint Flags:

```
139 log.info("AI Result Import process completed successfully.");  
140 } catch (SkipExecutionException e) {  
141 log.info("AI Result Import process skipped: {}", e.getMessage());  
142 } catch (Exception e) {  
143 log.error("Critical error during AI Result Import process: ", e);
```



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.serv

serv/ImportAiResultServ.java, line 142 (Poor Error Handling: Overly Broad Catch)

```
144 }  
145 }
```

serv/Mvp110007Serv.java, line 209 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: schedule()

File: serv/Mvp110007Serv.java:209

Taint Flags:

```
206 try {  
207     xml = this.proxy.api("esb").body(Mono.just(doc.asXML()),  
String.class).retrieve().bodyToMono(String.class).block();  
208     log.info("6日未回覆 處理階段3 (呼叫電文中) : " + master.toString()+"電文回應內容="+xml);  
209 } catch (Exception ex) {  
210     // ESB無法連線,保留失敗狀態供下次重試  
211     if (!("02".equals(oldStatus) && this.notEsbCode.equals(oldError))) {  
212         master.setStatus("02");
```

serv/MvpAiResultServ.java, line 235 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: callCoreApi()

File: serv/MvpAiResultServ.java:235

Taint Flags:

```
232 .bodyToMono(String.class).block();  
233 log.info("MvpAiResultServ: ESB response - " + xml);  
234 return xml;  
235 } catch (Exception ex) {  
236     log.error("MvpAiResultServ: ESB disconnected - " + ex.toString());  
237     return null;  
238 }
```

serv/MvpAiResultServ.java, line 186 (Poor Error Handling: Overly Broad Catch)

Issue Details



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.serv

serv/MvpAiResultServ.java, line 186 (Poor Error Handling: Overly Broad Catch)

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: processOverdueAiCalling()

File: serv/MvpAiResultServ.java:186

Taint Flags:

```
183 log.error("MvpAiResultServ: ESB disconnected, uuid=" + master.getUuid());
184 }
185
186 } catch (Exception ex) {
187 log.error("MvpAiResultServ: 處理逾時記錄異常 UUID=" + master.getUuid() + " : " +
ex.toString());
188 }
189 }
```

serv/Mvc310004Serv.java, line 71 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: service()

File: serv/Mvc310004Serv.java:71

Taint Flags:

```
68 if (qn != null) {
69 queryUuid = qn.getText().trim();
70 }
71 } catch (Exception ex) {
72 log.error("parse QUERY_UUID error", ex);
73 return this.response(doc, valid, business, database).asXML();
74 }
```

serv/GenAiCallingRptServ.java, line 146 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.serv

serv/GenAiCallingRptServ.java, line 146 (Poor Error Handling: Overly Broad Catch)

Enclosing Method: execute()

File: serv/GenAiCallingRptServ.java:146

Taint Flags:

```
143 log.info("AI Calling Report process completed successfully.");
144 } catch (SkipExecutionException e) {
145 log.info("Skipping execution: {}", e.getMessage());
146 } catch (Exception e) {
147 log.error("Critical error during AI Calling Report process: ", e);
148 }
149 }
```

serv/Mvc310005Serv.java, line 92 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: service()

File: serv/Mvc310005Serv.java:92

Taint Flags:

```
89
90 Node nk = doc.selectSingleNode("//NEXT_KEY");
91 if (nk != null) nextKey = nk.getText().trim();
92 } catch (Exception ex) {
93 log.error("parse error", ex);
94 return this.response(doc, valid, business).asXML();
95 }
```

serv/Mvp110008Serv.java, line 269 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: schedule()

File: serv/Mvp110008Serv.java:269

Taint Flags:

```
266 try {
267 // 呼叫處理單筆的方法
268 processOverdueRecord(master);
```



Poor Error Handling: Overly Broad Catch

Low

Package: com.fubon.mvp.serv

serv/Mvp110008Serv.java, line 269 (Poor Error Handling: Overly Broad Catch)

```
269 } catch (Exception e) {  
270     log.error("處理逾時記錄時發生錯誤: uuid=" + master.getUuid(), e);  
271 }  
272 }
```

serv/AiEmailResultRptServ.java, line 152 (Poor Error Handling: Overly Broad Catch)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: CatchBlock

Enclosing Method: execute()

File: serv/AiEmailResultRptServ.java:152

Taint Flags:

```
149 log.info("AI Report process completed successfully.");  
150 } catch (SkipExecutionException e) {  
151     log.info("Skipping execution: {}", e.getMessage());  
152 } catch (Exception e) {  
153     log.error("Critical error during AI Report process: ", e);  
154 }  
155 }
```

Poor Error Handling: Overly Broad Throws (19 issues)

Abstract

方法拋出一個籠統的異常，使呼叫者很難處理和修復所發生的錯誤。

Explanation

聲明一個可拋出 `Exception` 或是 `Throwable` 異常的方法，會使呼叫者很難處理和修復發生的錯誤。Java 的異常機制被設定為：呼叫者可以很容易的預計到方法有可能會發生什麼錯誤，並且編寫程式碼以處理各個特定的異常情況。同時聲明：一個方法拋出一個過於籠統的異常違反該系統。**範例 1**：下列方法拋出三種類型的異常。

```
public void doExchange()  
throws IOException, InvocationTargetException,  
SQLException {  
    ...  
}
```

這樣看起來比較整齊


```
public void doExchange()  
throws Exception {  
    ...  
}
```

這樣做會防礙呼叫者理解和處理所發生異常。此外，如果 `doExchange()` 方法因為變更了程式碼，而引入一個需要不同處理方式的異常，則不能用簡單的方式來處理該要求。

Recommendation

請不要聲明會拋出 `Exception` 或 `Throwable` 異常的方法。如果方法拋出的異常無法恢復，或者通常不能被呼叫者捕捉，那麼可以考慮拋出未經檢查的異常，而不是已檢查的異常。這可以透過執行延伸的 `RuntimeException` 或 `Error` 的異常類別來代替 `Exception`，或者還可以在您的方法中加入 `try/catch` 封裝將已檢查的異常轉換為未檢查的異常。

Issue Summary

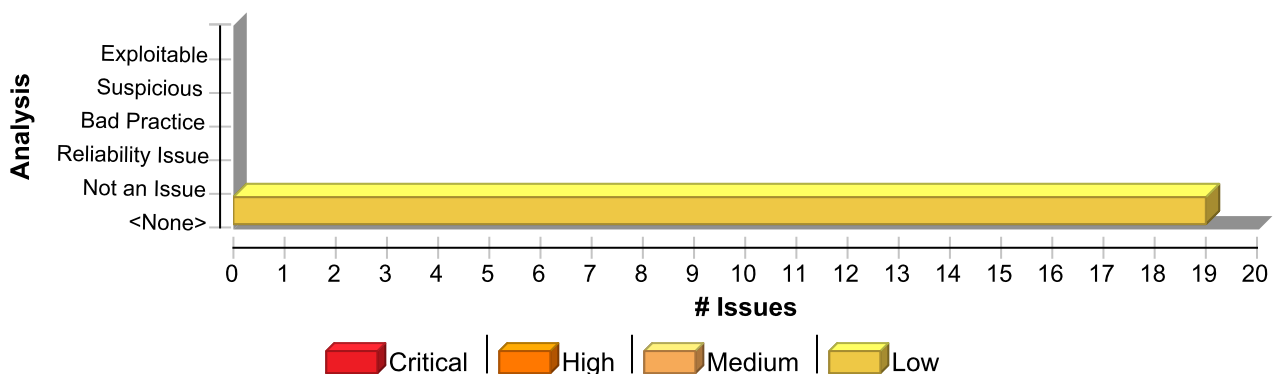

Engine Breakdown

	SCA	WebInspect	SecurityScope	Total
Poor Error Handling: Overly Broad Throws	19	0	0	19
Total	19	0	0	19



Poor Error Handling: Overly Broad Throws

Low

Package: com.fubon.mvp.serv

serv/AiEmailResultRptServ.java, line 545 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: Function: uploadFileViaFtp

Enclosing Method: uploadFileViaFtp()

File: serv/AiEmailResultRptServ.java:545

Taint Flags:

```
542  /**
543  * 透過 Apache Commons Net FTPClient 上傳檔案 (取代 ftp shell)
544  */
545  private void uploadFileViaFtp(String ftpIp, String ftpUser, String ftpPass, String
localDir, String remoteDir, String fileName) throws Exception {
546
547  org.apache.commons.net.ftp.FTPClient ftp = null;
548  try {
```

serv/AiEmailResultRptServ.java, line 436 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: Function: processFtpUpload

Enclosing Method: processFtpUpload()

File: serv/AiEmailResultRptServ.java:436

Taint Flags:

```
433  // =====
434  // 【步驟 5】透過 FTP 上傳報表 (Apache Commons Net 取代 ftp shell)
435  // =====
436  private void processFtpUpload(String reportFile) throws Exception {
437  log.info("透過 FTP 上傳報表");
438
439  File ftpIni = new File(SH_DIR, "ftp2.ini");
```

serv/ImportAiResultServ.java, line 436 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)



Poor Error Handling: Overly Broad Throws

Low

Package: com.fubon.mvp.serv

serv/ImportAiResultServ.java, line 436 (Poor Error Handling: Overly Broad Throws)

Sink Details

Sink: Function: downloadFromFtp
Enclosing Method: downloadFromFtp()
File: serv/ImportAiResultServ.java:436
Taint Flags:

```
433 * @param filename 要下載的檔案名稱
434 * @param localFilePath 本地儲存完整路徑
435 */
436 private void downloadFromFtp(String ftpIp, String ftpUser, String ftpPass,
437 String remoteDir, String filename,
438 String localFilePath) throws Exception {
439 log.info("FTP 連線:{}", ftpIp);
```

serv/AiEmailResultRptServ.java, line 257 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors
Scan Engine: SCA (Structural)

Sink Details

Sink: Function: decryptWithRsaPrivateKey
Enclosing Method: decryptWithRsaPrivateKey()
File: serv/AiEmailResultRptServ.java:257
Taint Flags:

```
254 // =====
255 // 【步驟2】RSA 私鑰解密（取代 openssl rsautl -decrypt）
256 // =====
257 private void decryptWithRsaPrivateKey(Path outputConfPath) throws Exception {
258 if (Security.getProvider(BC_PROVIDER) == null) {
259 Security.addProvider(new BouncyCastleProvider());
260 }
```

serv/GenAiCallingRptServ.java, line 154 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors
Scan Engine: SCA (Structural)

Sink Details

Sink: Function: runProcess
Enclosing Method: runProcess()
File: serv/GenAiCallingRptServ.java:154



Poor Error Handling: Overly Broad Throws

Low

Package: com.fubon.mvp.serv

serv/GenAiCallingRptServ.java, line 154 (Poor Error Handling: Overly Broad Throws)

Taint Flags:

```
151 // =====
152 // 【核心流程】模擬 shell 腳本 gen_ai_calling_rpt.sh 的完整步驟
153 // =====
154 private void runProcess() throws Exception {
155     Path decryptedConfPath = Paths.get(HOME, "mvpsqlserver.conf");
156     try {
157         // -----
```

serv/ImportAiResultServ.java, line 556 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: Function: evpBytesToKey

Enclosing Method: evpBytesToKey()

File: serv/ImportAiResultServ.java:556

Taint Flags:

```
553 }
554
555 //新增 digest 參數
556 private static byte[] evpBytesToKey(byte[] password, byte[] salt,
557     int keyLen, int ivLen, String digest) throws Exception {
558     java.security.MessageDigest md = java.security.MessageDigest.getInstance(digest);
559     byte[] keyAndIv = new byte[keyLen + ivLen];
```

serv/ImportAiResultServ.java, line 298 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: Function: decryptRsaFile

Enclosing Method: decryptRsaFile()

File: serv/ImportAiResultServ.java:298

Taint Flags:

```
295 * @param encryptedPath 加密輸入檔路徑
296 * @param outputPath 解密輸出檔路徑
297 */
```



Poor Error Handling: Overly Broad Throws

Low

Package: com.fubon.mvp.serv

serv/ImportAiResultServ.java, line 298 (Poor Error Handling: Overly Broad Throws)

```
298 private void decryptRsaFile(String keyPath, String encryptedPath, String outputPath)
    throws Exception {
299     log.info("RSA 解密: {} → {}", encryptedPath, outputPath);
300     PrivateKey privateKey = loadRsaPrivateKey(keyPath);
301     byte[] encryptedData = Files.readAllBytes(Paths.get(encryptedPath));
```

serv/AiEmailResultRptServ.java, line 370 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: Function: exportExcel

Enclosing Method: exportExcel()

File: serv/AiEmailResultRptServ.java:370

Taint Flags:

```
367
368
369
370 private void exportExcel(
371     ResultSet rs,
372     Path reportPath) throws Exception {
373
```

serv/AiEmailResultRptServ.java, line 160 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: Function: runProcess

Enclosing Method: runProcess()

File: serv/AiEmailResultRptServ.java:160

Taint Flags:

```
157 // =====
158 // 【核心流程】模拟 shell 脚本 gen_ai_calling_rpt.sh 的完整步骤
159 // =====
160 private void runProcess() throws Exception {
161     Path decryptedConfPath = Paths.get(HOME, "mvpsqlserver.conf");
162     try {
163     // -----
```



Poor Error Handling: Overly Broad Throws

Low

Package: com.fubon.mvp.serv

serv/AiEmailResultRptServ.java, line 160 (Poor Error Handling: Overly Broad Throws)

serv/AiEmailResultRptServ.java, line 525 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: Function: evpBytesToKey

Enclosing Method: evpBytesToKey()

File: serv/AiEmailResultRptServ.java:525

Taint Flags:

```
522  }
523
524  //新增 digest 參數
525  private static byte[] evpBytesToKey(byte[] password, byte[] salt, int keyLen, int ivLen,
String digest) throws Exception {
526  java.security.MessageDigest md = java.security.MessageDigest.getInstance(digest);
527  byte[] keyAndIv = new byte[keyLen + ivLen];
528  byte[] prev = new byte[0];
```

serv/GenAiCallingRptServ.java, line 262 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: Function: decryptWithRsaPrivateKey

Enclosing Method: decryptWithRsaPrivateKey()

File: serv/GenAiCallingRptServ.java:262

Taint Flags:

```
259  // =====
260  // 【步驟 2】RSA 私鑰解密（取代 openssl rsautl -decrypt）
261  // =====
262  private void decryptWithRsaPrivateKey(Path outputConfPath) throws Exception {
263  if (Security.getProvider(BC_PROVIDER) == null) {
264  Security.addProvider(new BouncyCastleProvider());
265  }
```



Poor Error Handling: Overly Broad Throws

Low

Package: com.fubon.mvp.serv
serv/AiEmailResultRptServ.java, line 333 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors
Scan Engine: SCA (Structural)

Sink Details

Sink: Function: exportData
Enclosing Method: exportData()
File: serv/AiEmailResultRptServ.java:333
Taint Flags:

```
330 // 【步驟 4b】查詢資料並寫入 EXCEL (JDBC 取代 sqlcmd)
331 // =====
332
333 private void exportData(
334     String dbIp,
335     String dbPort,
336     String dbName,
```

serv/ImportAiResultServ.java, line 150 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors
Scan Engine: SCA (Structural)

Sink Details

Sink: Function: runProcess
Enclosing Method: runProcess()
File: serv/ImportAiResultServ.java:150
Taint Flags:

```
147 // =====
148 // 【核心流程】
149 // =====
150 private void runProcess() throws Exception {
151     try {
152
153     // -----
```

serv/ImportAiResultServ.java, line 399 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors
Scan Engine: SCA (Structural)



Poor Error Handling: Overly Broad Throws

Low

Package: com.fubon.mvp.serv

serv/ImportAiResultServ.java, line 399 (Poor Error Handling: Overly Broad Throws)

Sink Details

Sink: Function: querySqlServer

Enclosing Method: querySqlServer()

File: serv/ImportAiResultServ.java:399

Taint Flags:

```
396 * @param sql 查詢 SQL (T-SQL, SELECT 回傳單一欄位即可)
397 * @return 第一列第一欄的值；若無結果則回傳空字串
398 */
399 private String querySqlServer(String ip, String port, String db,
400 String user, String pass, String sql) throws Exception {
401 log.info("JDBC 查詢:{}", sql);
402 String url = String.format(JDBC_URL_TEMPLATE, ip, port, db);
```

serv/GenAiCallingRptServ.java, line 518 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: Function: uploadFileViaFtp

Enclosing Method: uploadFileViaFtp()

File: serv/GenAiCallingRptServ.java:518

Taint Flags:

```
515 /**
516 * 透過 Apache Commons Net FTPClient 上傳檔案 (取代 ftp shell)
517 */
518 private void uploadFileViaFtp(String ftpIp, String ftpUser, String ftpPass, String
localDir, String remoteDir, String fileName) throws Exception {
519
520 org.apache.commons.net.ftp.FTPClient ftp = null;
521 try {
```

serv/ImportAiResultServ.java, line 318 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: Function: loadRsaPrivateKey

Enclosing Method: loadRsaPrivateKey()

File: serv/ImportAiResultServ.java:318



Poor Error Handling: Overly Broad Throws

Low

Package: com.fubon.mvp.serv

serv/ImportAiResultServ.java, line 318 (Poor Error Handling: Overly Broad Throws)

Taint Flags:

```
315 * PKCS#8 (-----BEGIN PRIVATE-----)
316 * PKCS#1 (-----BEGIN RSA PRIVATE-----) → 自動包裝為 PKCS#8
317 */
318 private PrivateKey loadRsaPrivateKey(String keyPath) throws Exception {
319     String pem = new String(Files.readAllBytes(Paths.get(keyPath)), StandardCharsets.UTF_8);
320
321     // 去除 PEM 標頭/標尾與空白字元
```

serv/GenAiCallingRptServ.java, line 362 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: Function: exportCsvData

Enclosing Method: exportCsvData()

File: serv/GenAiCallingRptServ.java:362

Taint Flags:

```
359 // =====
360 // 【步驟 4b】查詢資料並寫入 CSV (JDBC 取代 sqlcmd)
361 // =====
362 private void exportCsvData(String dbIp, String dbPort, String dbName, String dbUser,
363     String dbPass, String query, Path csvPath) throws Exception {
364     String url = String.format(
365         "jdbc:sqlserver://%s:%s;databaseName=%s;encrypt=false;trustServerCertificate=true",
```

serv/GenAiCallingRptServ.java, line 409 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: Function: processFtpUpload

Enclosing Method: processFtpUpload()

File: serv/GenAiCallingRptServ.java:409

Taint Flags:

```
406 // =====
407 // 【步驟 5】透過 FTP 上傳報表 (Apache Commons Net 取代 ftp shell)
```



Poor Error Handling: Overly Broad Throws

Low

Package: com.fubon.mvp.serv

serv/GenAiCallingRptServ.java, line 409 (Poor Error Handling: Overly Broad Throws)

```
408 // =====
409 private void processFtpUpload(String reportFile) throws Exception {
410     log.info("透過 FTP 上傳報表");
411
412     File ftpIni = new File(SH_DIR, "ftp2.ini");
```

serv/GenAiCallingRptServ.java, line 498 (Poor Error Handling: Overly Broad Throws)

Issue Details

Kingdom: Errors

Scan Engine: SCA (Structural)

Sink Details

Sink: Function: evpBytesToKey

Enclosing Method: evpBytesToKey()

File: serv/GenAiCallingRptServ.java:498

Taint Flags:

```
495 }
496
497 //新增 digest 參數
498 private static byte[] evpBytesToKey(byte[] password, byte[] salt, int keyLen, int ivLen,
String digest) throws Exception {
499     java.security.MessageDigest md = java.security.MessageDigest.getInstance(digest);
500     byte[] keyAndIv = new byte[keyLen + ivLen];
501     byte[] prev = new byte[0];
```

Poor Style: Confusing Naming (11 issues)

Abstract

類別包含名稱相同的欄位和方法。

Explanation

在同一個類別中，成員的欄位與方法擁有相同的名稱，很讓人困擾。這很容易讓程式設計師想存取某欄位時卻不小心呼叫與之同名的方法，而當他想要呼叫某方法時卻存取了與之同名的欄位。範例 1：

```
public class Totaller {  
    private int total;  
    public int total() {  
        ...  
    }  
}
```


Recommendation

重新命名方法或欄位。如果該方法回傳此欄位，請考慮遵循以下標準的 getter/setter 命名慣例：範例 2：

Example 1 中的程式碼可以使用以下方式重寫：

```
public class Totaller {  
    private int total;  
    public int getTotal() {  
        ...  
    }  
}
```

Issue Summary

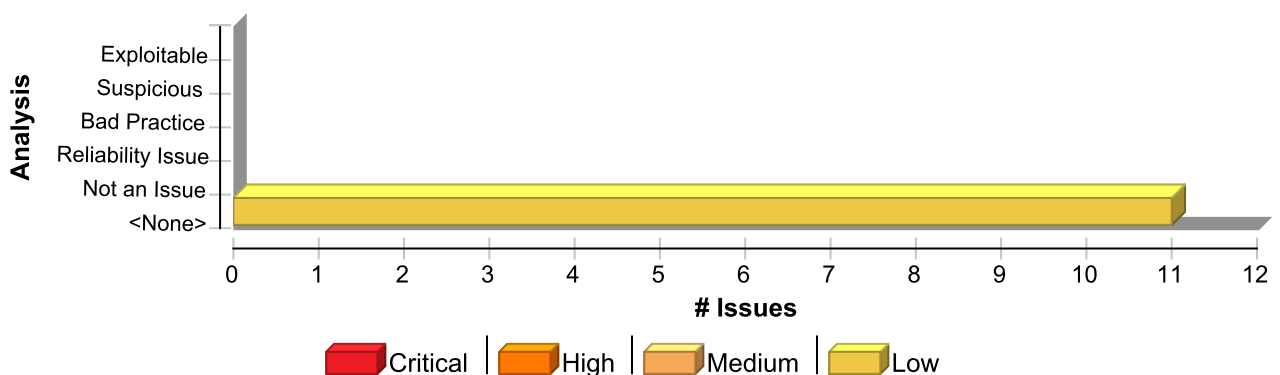

Engine Breakdown

	SCA	WebInspect	SecurityScope	Total
Poor Style: Confusing Naming	11	0	0	11
Total	11	0	0	11



Poor Style: Confusing Naming

Low

Package: com.fubon.mvp.ctrl

ctrl/MvpApiCtrl.java, line 71 (Poor Style: Confusing Naming)

Issue Details

Kingdom: Code Quality

Scan Engine: SCA (Structural)

Sink Details

Sink: Field: mvc084000

File: ctrl/MvpApiCtrl.java:71

Taint Flags:

```
68 private Mvc310005Serv mvc310005;  
69  
70 @Autowired  
71 private Mvc084000Serv mvc084000;  
72  
73 @Autowired  
74 private ImportAiResultToProcessServ importAiResultProcess;
```

ctrl/MvpApiCtrl.java, line 62 (Poor Style: Confusing Naming)

Issue Details

Kingdom: Code Quality

Scan Engine: SCA (Structural)

Sink Details

Sink: Field: mvc310002

File: ctrl/MvpApiCtrl.java:62

Taint Flags:

```
59 @Autowired  
60 private Mvc310001Serv mvc310001;  
61 @Autowired  
62 private Mvc310002Serv mvc310002;  
63 @Autowired  
64 private Mvc310003Serv mvc310003;  
65 @Autowired
```

ctrl/MvpApiCtrl.java, line 51 (Poor Style: Confusing Naming)

Issue Details

Kingdom: Code Quality

Scan Engine: SCA (Structural)

Sink Details

Sink: Field: mvc110002

File: ctrl/MvpApiCtrl.java:51

Taint Flags:



Poor Style: Confusing Naming

Low

Package: com.fubon.mvp.ctrl

ctrl/MvpApiCtrl.java, line 51 (Poor Style: Confusing Naming)

```
48 @Autowired
49 private Mvc110001Serv mvc110001;
50 @Autowired
51 private Mvc110002Serv mvc110002;
52 @Autowired
53 private Mvc110003Serv mvc110003;
54 @Autowired
```

ctrl/MvpApiCtrl.java, line 57 (Poor Style: Confusing Naming)

Issue Details

Kingdom: Code Quality

Scan Engine: SCA (Structural)

Sink Details

Sink: Field: mvc110007

File: ctrl/MvpApiCtrl.java:57

Taint Flags:

```
54 @Autowired
55 private Mvc110006Serv mvc110006;
56 @Autowired
57 private Mvc110007Serv mvc110007;
58
59 @Autowired
60 private Mvc310001Serv mvc310001;
```

ctrl/MvpApiCtrl.java, line 66 (Poor Style: Confusing Naming)

Issue Details

Kingdom: Code Quality

Scan Engine: SCA (Structural)

Sink Details

Sink: Field: mvc310004

File: ctrl/MvpApiCtrl.java:66

Taint Flags:

```
63 @Autowired
64 private Mvc310003Serv mvc310003;
65 @Autowired
66 private Mvc310004Serv mvc310004;
67 @Autowired
68 private Mvc310005Serv mvc310005;
69
```



Poor Style: Confusing Naming

Low

Package: com.fubon.mvp.ctrl

ctrl/MvpApiCtrl.java, line 64 (Poor Style: Confusing Naming)

Issue Details

Kingdom: Code Quality

Scan Engine: SCA (Structural)

Sink Details

Sink: Field: mvc310003

File: ctrl/MvpApiCtrl.java:64

Taint Flags:

```
61 @Autowired
62 private Mvc310002Serv mvc310002;
63 @Autowired
64 private Mvc310003Serv mvc310003;
65 @Autowired
66 private Mvc310004Serv mvc310004;
67 @Autowired
```

ctrl/MvpApiCtrl.java, line 53 (Poor Style: Confusing Naming)

Issue Details

Kingdom: Code Quality

Scan Engine: SCA (Structural)

Sink Details

Sink: Field: mvc110003

File: ctrl/MvpApiCtrl.java:53

Taint Flags:

```
50 @Autowired
51 private Mvc110002Serv mvc110002;
52 @Autowired
53 private Mvc110003Serv mvc110003;
54 @Autowired
55 private Mvc110006Serv mvc110006;
56 @Autowired
```

ctrl/MvpApiCtrl.java, line 49 (Poor Style: Confusing Naming)

Issue Details

Kingdom: Code Quality

Scan Engine: SCA (Structural)

Sink Details

Sink: Field: mvc110001

File: ctrl/MvpApiCtrl.java:49

Taint Flags:



Poor Style: Confusing Naming

Low

Package: com.fubon.mvp.ctrl

ctrl/MvpApiCtrl.java, line 49 (Poor Style: Confusing Naming)

```
46 @Autowired
47 private WebProxy proxy;
48 @Autowired
49 private Mvc110001Serv mvc110001;
50 @Autowired
51 private Mvc110002Serv mvc110002;
52 @Autowired
```

ctrl/MvpApiCtrl.java, line 55 (Poor Style: Confusing Naming)

Issue Details

Kingdom: Code Quality

Scan Engine: SCA (Structural)

Sink Details

Sink: Field: mvc110006

File: ctrl/MvpApiCtrl.java:55

Taint Flags:

```
52 @Autowired
53 private Mvc110003Serv mvc110003;
54 @Autowired
55 private Mvc110006Serv mvc110006;
56 @Autowired
57 private Mvc110007Serv mvc110007;
58
```

ctrl/MvpApiCtrl.java, line 60 (Poor Style: Confusing Naming)

Issue Details

Kingdom: Code Quality

Scan Engine: SCA (Structural)

Sink Details

Sink: Field: mvc310001

File: ctrl/MvpApiCtrl.java:60

Taint Flags:

```
57 private Mvc110007Serv mvc110007;
58
59 @Autowired
60 private Mvc310001Serv mvc310001;
61 @Autowired
62 private Mvc310002Serv mvc310002;
63 @Autowired
```



Poor Style: Confusing Naming

Low

Package: com.fubon.mvp.ctrl

ctrl/MvpApiCtrl.java, line 68 (Poor Style: Confusing Naming)

Issue Details

Kingdom: Code Quality

Scan Engine: SCA (Structural)

Sink Details

Sink: Field: mvc310005

File: ctrl/MvpApiCtrl.java:68

Taint Flags:

```
65 @Autowired
66 private Mvc310004Serv mvc310004;
67 @Autowired
68 private Mvc310005Serv mvc310005;
69
70 @Autowired
71 private Mvc084000Serv mvc084000;
```



Poor Style: Value Never Read (5 issues)

Abstract

雖指定變數值，但從不使用，而使它成為無用儲存。

Explanation


未使用此變數值。在指定值後，會為變數指定另一個值，或者超出範圍之外。範例 1：以下摘錄的程式碼會為變數 `r` 指定值，然後在沒有使用的情況下將其覆寫。

```
r = getName();  
r = getNewBuffer(buf);
```

Recommendation

移除沒有必要的指定值，讓程式碼較容易了解與維護。

Issue Summary

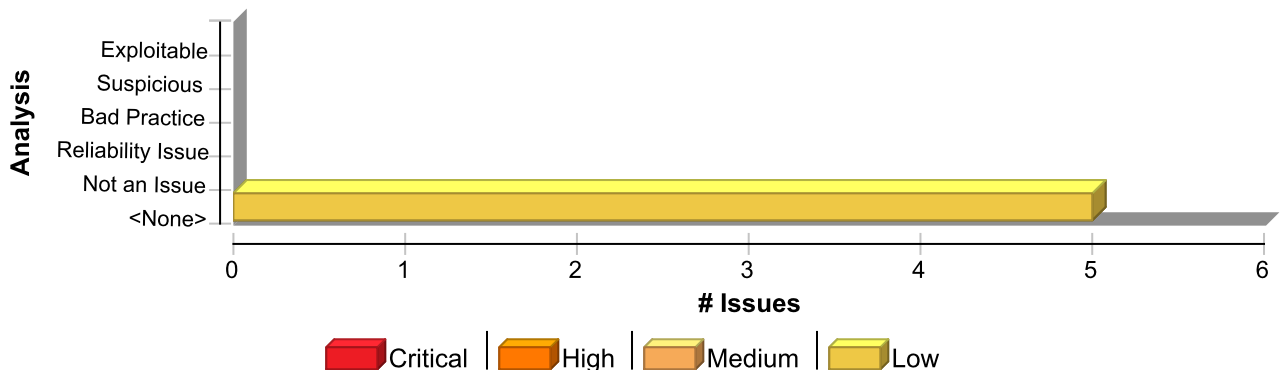

Engine Breakdown

	SCA	WebInspect	SecurityScope	Total
Poor Style: Value Never Read	5	0	0	5
Total	5	0	0	5

Poor Style: Value Never Read

Low

Package: com.fubon.mvp.serv

serv/Mvp110007Serv.java, line 183 (Poor Style: Value Never Read)

Issue Details

Kingdom: Code Quality
Scan Engine: SCA (Structural)

Sink Details

Sink: VariableAccess: oldError
Enclosing Method: schedule()
File: serv/Mvp110007Serv.java:183
Taint Flags:



Poor Style: Value Never Read

Low

Package: com.fubon.mvp.serv

serv/Mvp110007Serv.java, line 183 (Poor Style: Value Never Read)

```
180
181 // (3.3) 保存狀態資料 (請求核心前)
182 String oldStatus = master.getStatus();
183 String oldError = master.getErrorCode();
184 master.setTranCode("067050");
185 master.setStatus("00"); // "00": 處理中
186 master.setTxStatus("80"); // "80": 請求核心資料中 (呼叫電文取 姓名 與 電話)
```

serv/MvpAiResultServ.java, line 123 (Poor Style: Value Never Read)

Issue Details

Kingdom: Code Quality
Scan Engine: SCA (Structural)

Sink Details

Sink: VariableAccess: oldTxStatus
Enclosing Method: processOverdueAiCalling()
File: serv/MvpAiResultServ.java:123
Taint Flags:

```
120 try {
121 // 1. 記錄舊狀態
122 String oldStatus = master.getStatus();
123 String oldTxStatus = master.getTxStatus();
124 String oldError = master.getErrorCode();
125
126 // 2. 狀態流轉: STATUS=00 + TX_STATUS=60 (請求核心資料中)
```

serv/Mvc310005Serv.java, line 117 (Poor Style: Value Never Read)

Issue Details

Kingdom: Code Quality
Scan Engine: SCA (Structural)

Sink Details

Sink: VariableAccess: list01
Enclosing Method: service()
File: serv/Mvc310005Serv.java:117
Taint Flags:

```
114 } else {
115 // 查詢所有狀態為處理中 (00) 或已完成 (01) 且 FLAG 不為空之紀錄。
116 List<EmailMaster> list00 = this.dao.overdueResend(); // STATUS=00, TX_STATUS IN (11,13)
117 List<EmailMaster> list01 = new java.util.ArrayList<EmailMaster>();
118
119 // 過濾 FLAG != NULL 的紀錄。
120 entities = new java.util.ArrayList<EmailMaster>();
```



Poor Style: Value Never Read**Low****Package:** com.fubon.mvp.serv**serv/Mvc310005Serv.java, line 117 (Poor Style: Value Never Read)****serv/Mvp110007Serv.java, line 182 (Poor Style: Value Never Read)****Issue Details****Kingdom:** Code Quality**Scan Engine:** SCA (Structural)**Sink Details****Sink:** VariableAccess: oldStatus**Enclosing Method:** schedule()**File:** serv/Mvp110007Serv.java:182**Taint Flags:**

```
179  }  
180  
181  // (3.3) 保存狀態資料 (請求核心前)  
182  String oldStatus = master.getStatus();  
183  String oldError = master.getErrorCode();  
184  master.setTranCode("067050");  
185  master.setStatus("00"); // "00": 處理中
```

serv/Mvc310003Serv.java, line 71 (Poor Style: Value Never Read)**Issue Details****Kingdom:** Code Quality**Scan Engine:** SCA (Structural)**Sink Details****Sink:** VariableAccess: valid**Enclosing Method:** service()**File:** serv/Mvc310003Serv.java:71**Taint Flags:**

```
68  log.warn("check : (310003) argument errors 輸入參數沒通過驗證");  
69  return this.response(doc, false, 0).asXML();  
70  }  
71  valid = true;  
72  
73  EmailMaster entity=null;  
74  // 4. 讀取資料庫 - 取得主檔資料 (CUST_ID, ID_TYPE)。
```

Redundant Null Check (1 issue)

Abstract

程式可能會解除參照 Null 指標，因此造成 Null 指標異常。

Explanation


Null 指標異常通常是由於一個或者多個程式設計師的假設遭到破解而造成的。當程式在檢查物件是否為 null 之前先解除參照可能為 null 的物件，將會造成「解除參照之後檢查」的錯誤。大部分的 Null 指標問題都會導致一般的軟體可靠性問題，但如果攻擊者蓄意觸發 Null 指標解除參照的話，他們就可能使用引發的異常繞過安全邏輯，或是使應用程式揭露出除錯資訊，這些資訊對於計畫後續攻擊很有利用價值。**範例 1：**在以下程式碼中，程式設計師會假設 foo 變數不是 null，並解除參照物件來確認這項假設。不過，程式設計師之後將對照 null 檢查 foo，來反駁這項假設。在 if 陳述式中檢查 foo 時，若其為 null，則在解除參照時也可為 null，並有可能會造成 Null 指標異常。解除參照不安全，後續檢查也不必要。

```
foo.setBar(val);  
...  
if (foo != null) {  
    ...  
}
```

Recommendation

在解除參照可能為 null 的物件前，請執行仔細的檢查。可能的話，請將 null 檢查納入操縱資源的程式碼封裝中，以確保所有狀況中都會執行此檢查，將發生錯誤的可能性降到最低。

Issue Summary

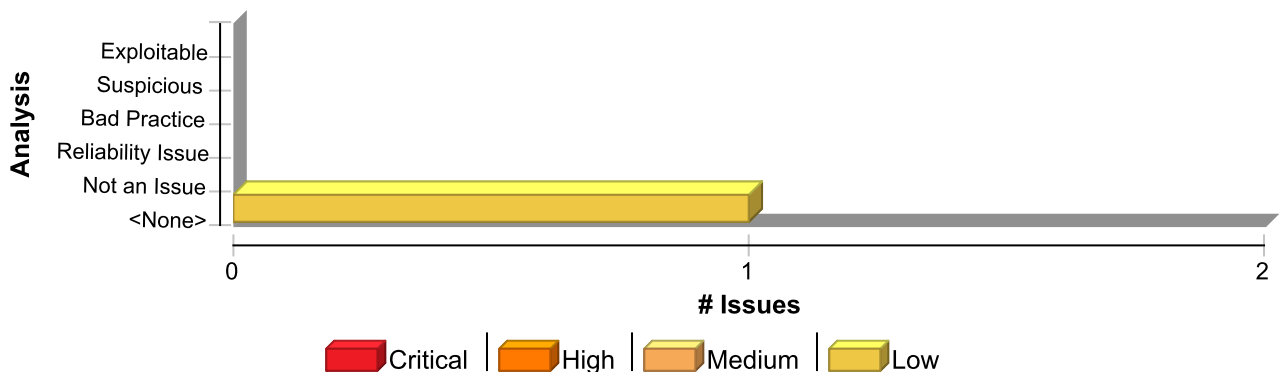

Engine Breakdown

	SCA	WebInspect	SecurityScope	Total
Redundant Null Check	1	0	0	1
Total	1	0	0	1

Redundant Null Check

Low

Package: com.fubon.mvp.dao

dao/EmailHostDao.java, line 52 (Redundant Null Check)

Issue Details



Redundant Null Check

Low

Package: com.fubon.mvp.dao

dao/EmailHostDao.java, line 52 (Redundant Null Check)

Kingdom: Code Quality

Scan Engine: SCA (Control Flow)

Sink Details

Sink: Dereferenced : this.entity

Enclosing Method: initial()

File: dao/EmailHostDao.java:52

Taint Flags:

```
49 String hostname = AddrUtil.hostname();
50 this.entity = this.repo.findOneByAddressAndHostname(address, hostname);
51
52 log.info("■ 目前執行的主機="+address+" "+hostname+" "+entity+" 若要啟用請於資料庫設定啟用判定");
53
54 if (this.entity == null) {
55
```

System Information Leak (1 issue)

Abstract

顯示系統資料或除錯資訊有助於攻擊者瞭解系統並制訂攻擊計畫。

Explanation

當系統資料或除錯資訊透過輸出串流或記錄功能離開程式時，會發生資訊洩漏。**範例 1：**以下程式碼會將異常寫入標準錯誤串流：

```
try {  
    ...  
} catch (Exception e) {  
    e.printStackTrace();  
}
```

視系統配置而定，此資訊可以傾印到主控台、寫入到記錄檔，或是顯示給遠端使用者。例如，使用指令碼機制時，將輸出資訊從「標準錯誤」或「標準輸出」重新導向至檔案或其他程式的過程是不太有意義的。此外，程式執行所在的系統可能會有遠端記錄機制，例如會將記錄傳送至遠端裝置的「syslog」伺服器。在開發期間，您沒有方法可得知從何處會結束顯示此資訊。在某些情況下，錯誤訊息會為攻擊者提供系統容易受到哪些確切的攻擊類型影響。例如，資料庫錯誤訊息即可揭露應用程式容易受到 SQL injection 攻擊。其他錯誤訊息還可揭露更多關於系統的間接線索。在 Example 1 中，洩漏的資訊可能會暗示有關作業系統類型、系統上安裝的應用程式，以及管理員在配置程式時所花費的努力等資訊。以下是行動環境中特有的另一種狀況。現在，多數行動裝置執行近距離無線通訊 (NFC) 通訊協定，以使用無線電通訊在裝置之間快速共用資訊。裝置距離極為接近或彼此接觸時，才會實現此通訊。即使將 NFC 的通訊範圍限制在幾公分距離，也可能發生竊聽、資料修改及其他多種類型的攻擊，因為 NFC 本身並不能確保安全通訊。**範例 2：**Android 平台提供對 NFC 的支援。以下程式碼建立進入範圍內其他裝置的訊息。

```
...  
public static final String TAG = "NfcActivity";  
private static final String DATA_SPLITTER = "___:DATA:___";  
private static final String MIME_TYPE = "application/my.applications.mimetype";  
...  
public NdefMessage createNdefMessage(NfcEvent event) {  
    TelephonyManager tm =  
        (TelephonyManager) Context.getSystemService(Context.TELEPHONY_SERVICE);  
    String VERSION = tm.getDeviceSoftwareVersion();  
    String text = TAG + DATA_SPLITTER + VERSION;  
    NdefRecord record = new NdefRecord(NdefRecord.TNF_MIME_MEDIA,  
        MIME_TYPE.getBytes(), new byte[0], text.getBytes());  
    NdefRecord[] records = { record };  
    NdefMessage msg = new NdefMessage(records);  
    return msg;  
}
```


NFC 資料交換格式 (NDEF) 訊息包含輸入的資料、URI 或自訂應用程式裝載。若訊息包含應用程式的相關資訊 (例如其名稱、MIME 類型或裝置軟體版本)，則可能會向竊聽者洩漏此資訊。在 Example 2 中，Fortify Static Code Analyzer 會在傳回陳述式中報告「系統資訊洩漏」弱點。

Recommendation

編寫錯誤訊息時，請將安全性問題考慮進去。在生產環境中，請儘量使用簡短的錯誤訊息，而不要使用詳細的錯誤資訊。限制產生與儲存詳細的輸出內容，將有助於管理員和程式設計師診斷問題。除錯追蹤有時可能會出現在不明顯的地方 (例如，內嵌在錯誤頁面的 HTML 註解中)。即使是不會揭露堆疊追蹤或資料庫傾印的簡短錯誤訊息，都可能會助攻擊者一臂之力。例如，「拒絕存取」訊息可能表示系統中存在著檔案或使用者。若您擔心在 Android 裝置上透過 NFC 洩漏系統資料，可以執行以下三項作業之一。在進入範圍內其他裝置的訊息中不包括系統資料，加密訊息的裝載，或在更高層建立安全通訊通道。



Issue Summary

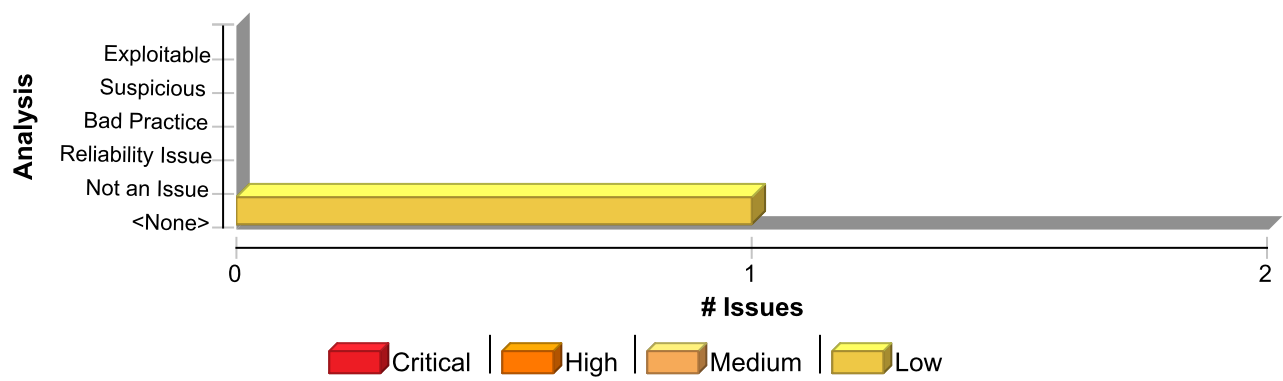

Engine Breakdown

	SCA	WebInspect	SecurityScope	Total
System Information Leak	1	0	0	1
Total	1	0	0	1

System Information LeakLow

Package: com.fubon.mvp.serv

serv/EmailWsClient.java, line 70 (System Information Leak)

Issue Details

Kingdom: Encapsulation
Scan Engine: SCA (Semantic)

Sink Details

Sink: printStackTrace()
Enclosing Method: sendMail()
File: serv/EmailWsClient.java:70
Taint Flags:

```
67 response = (SendToOneUIDResponse) super.getWebServiceTemplate()  
68 .marshalSendAndReceive(request, this.soapAction);  
69 } catch (Exception ex) {  
70 ex.printStackTrace();  
71 log.error(ex.toString());  
72 return -1;  
73 }
```



System Information Leak: Internal (9 issues)

Abstract

顯示系統資料或除錯資訊有助於攻擊者瞭解系統並制訂攻擊計畫。

Explanation

在透過列印或記錄將系統資料或除錯資訊傳送至本機檔案、主控台或螢幕時，會發生內部資訊洩漏。**範例 1**：以下程式碼會將異常寫入標準錯誤串流：

```
try {  
    ...  
} catch (Exception e) {  
    e.printStackTrace();  
}
```


根據系統配置，可以將資訊傾印到主控台、寫入記錄檔，或者顯示給使用者。在某些情況下，錯誤訊息會為攻擊者提供系統容易受到哪些確切的攻擊類型影響。例如，資料庫錯誤訊息即可揭露應用程式容易受到 SQL injection 攻擊。其他錯誤訊息還可揭露更多關於系統的間接線索。在 Example 1 中，洩漏的資訊可能會暗示有關作業系統類型、系統上安裝的應用程式，以及管理員在配置程式時所花費的努力等資訊。在行動運算環境中，資訊洩漏也是令人擔心的事情。**範例 2**：以下程式碼記錄了 Android 平台上所捕捉異常的堆疊追蹤。

```
try {  
    ...  
} catch (Exception e) {  
    Log.e(TAG, Log.getStackTraceString(e));  
}
```

Recommendation

編寫錯誤訊息時，請將安全性問題考慮進去。在生產環境中，請盡量使用簡短的錯誤訊息，而不要使用詳細的錯誤資訊。限制產生與儲存詳細的輸出內容，將有助於管理員和程式設計師診斷問題。除錯追蹤有時可能會出現在不明顯的地方 (例如，內嵌在錯誤頁面的 HTML 註解中)。即使是不會揭露堆疊追蹤或資料庫傾印的簡短錯誤訊息，都可能會助攻擊者一臂之力。例如，「拒絕存取」訊息可能表示系統中存在著檔案或使用者。

Issue Summary

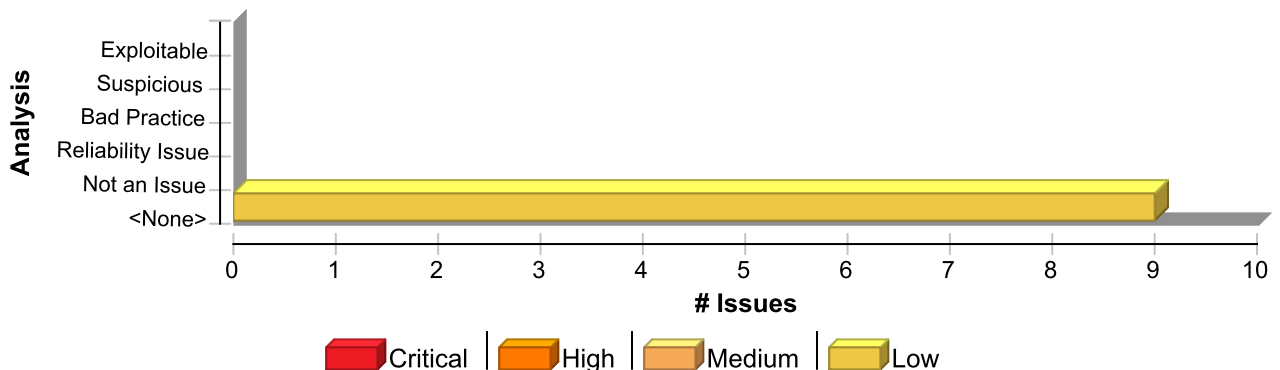

Engine Breakdown

	SCA	WebInspect	SecurityScope	Total
System Information Leak: Internal	9	0	0	9
Total	9	0	0	9

System Information Leak: InternalLow

Package: com.fubon.mvp.serv

serv/GenAiCallingRptServ.java, line 255 (System Information Leak: Internal)

Issue Details

Kingdom: Encapsulation
Scan Engine: SCA (Data Flow)

Source Details

Source: Read e
From: com.fubon.mvp.serv.GenAiCallingRptServ.runProcess
File: serv/GenAiCallingRptServ.java:255

```
252 } finally {  
253 // 無論成功或失敗，一律清理解密設定檔（避免明碼密碼殘留）  
254 try { Files.deleteIfExists(decryptedConfPath); }  
255 catch (IOException e) { log.warn("Failed to delete mvpsqlserver.conf",  
e); }  
256 }  
257 }  
258
```

Sink Details

Sink: org.slf4j.Logger.warn()
Enclosing Method: runProcess()
File: serv/GenAiCallingRptServ.java:255
Taint Flags: EXCEPTIONINFO, SYSTEMINFO

```
252 } finally {  
253 // 無論成功或失敗，一律清理解密設定檔（避免明碼密碼殘留）  
254 try { Files.deleteIfExists(decryptedConfPath); }  
255 catch (IOException e) { log.warn("Failed to delete mvpsqlserver.conf", e); }  
256 }  
257 }  
258
```

serv/ImportAiResultServ.java, line 143 (System Information Leak: Internal)

Issue Details

Kingdom: Encapsulation
Scan Engine: SCA (Data Flow)

Source Details



System Information Leak: Internal**Low****Package:** com.fubon.mvp.serv**serv/ImportAiResultServ.java, line 143 (System Information Leak: Internal)****Source:** Read e**From:** com.fubon.mvp.serv.ImportAiResultServ.execute**File:** serv/ImportAiResultServ.java:143

```
140 } catch (SkipExecutionException e) {  
141 log.info("AI Result Import process skipped: {}", e.getMessage());  
142 } catch (Exception e) {  
143 log.error("Critical error during AI Result Import process: ", e);  
144 }  
145 }  
146
```

Sink Details**Sink:** org.slf4j.Logger.error()**Enclosing Method:** execute()**File:** serv/ImportAiResultServ.java:143**Taint Flags:** EXCEPTIONINFO, SYSTEMINFO

```
140 } catch (SkipExecutionException e) {  
141 log.info("AI Result Import process skipped: {}", e.getMessage());  
142 } catch (Exception e) {  
143 log.error("Critical error during AI Result Import process: ", e);  
144 }  
145 }  
146
```

serv/ImportAiResultServ.java, line 282 (System Information Leak: Internal)**Issue Details****Kingdom:** Encapsulation**Scan Engine:** SCA (Data Flow)**Source Details****Source:** Read e**From:** com.fubon.mvp.serv.ImportAiResultServ.runProcess**File:** serv/ImportAiResultServ.java:282

```
279 } finally {  
280 // 無論成功或失敗，一律清理解密設定檔（避免明碼密碼殘留）  
281 try { Files.deleteIfExists(Paths.get(HOME + "/mvpsqlserver.conf")); }  
282 catch (IOException e) { log.warn("刪除 mvpsqlserver.conf 異常", e); }  
283 }  
284 }  
285
```



System Information Leak: Internal**Low****Package:** com.fubon.mvp.serv**serv/ImportAiResultServ.java, line 282 (System Information Leak: Internal)****Sink Details**

Sink: org.slf4j.Logger.warn()
Enclosing Method: runProcess()
File: serv/ImportAiResultServ.java:282
Taint Flags: EXCEPTIONINFO, SYSTEMINFO

```
279 } finally {  
280 // 無論成功或失敗, 一律清理解密設定檔 (避免明碼密碼殘留)  
281 try { Files.deleteIfExists(Paths.get(HOME + "/mvpsqlserver.conf")); }  
282 catch (IOException e) { log.warn("刪除 mvpsqlserver.conf 異常", e); }  
283 }  
284 }  
285 }
```

serv/GenAiCallingRptServ.java, line 147 (System Information Leak: Internal)**Issue Details**

Kingdom: Encapsulation
Scan Engine: SCA (Data Flow)

Source Details

Source: Read e
From: com.fubon.mvp.serv.GenAiCallingRptServ.execute
File: serv/GenAiCallingRptServ.java:147

```
144 } catch (SkipExecutionException e) {  
145 log.info("Skipping execution: {}", e.getMessage());  
146 } catch (Exception e) {  
147 log.error("Critical error during AI Calling Report process: ", e);  
148 }  
149 }  
150 }
```

Sink Details

Sink: org.slf4j.Logger.error()
Enclosing Method: execute()
File: serv/GenAiCallingRptServ.java:147
Taint Flags: EXCEPTIONINFO, SYSTEMINFO

```
144 } catch (SkipExecutionException e) {  
145 log.info("Skipping execution: {}", e.getMessage());  
146 } catch (Exception e) {  
147 log.error("Critical error during AI Calling Report process: ", e);  
148 }  
149 }  
150 }
```



System Information Leak: Internal**Low****Package:** com.fubon.mvp.serv**serv/AiEmailResultRptServ.java, line 250 (System Information Leak: Internal)****Issue Details****Kingdom:** Encapsulation**Scan Engine:** SCA (Data Flow)**Source Details****Source:** Read e**From:** com.fubon.mvp.serv.AiEmailResultRptServ.runProcess**File:** serv/AiEmailResultRptServ.java:250

```
247 } finally {  
248 // 無論成功或失敗, 一律清理解密設定檔 (避免明碼密碼殘留)  
249 try { Files.deleteIfExists(decryptedConfPath); }  
250 catch (IOException e) { log.warn("Failed to delete mvpsqlserver.conf",  
e); }  
251 }  
252 }  
253
```

Sink Details**Sink:** org.slf4j.Logger.warn()**Enclosing Method:** runProcess()**File:** serv/AiEmailResultRptServ.java:250**Taint Flags:** EXCEPTIONINFO, SYSTEMINFO

```
247 } finally {  
248 // 無論成功或失敗, 一律清理解密設定檔 (避免明碼密碼殘留)  
249 try { Files.deleteIfExists(decryptedConfPath); }  
250 catch (IOException e) { log.warn("Failed to delete mvpsqlserver.conf", e); }  
251 }  
252 }  
253
```

serv/AiEmailResultRptServ.java, line 153 (System Information Leak: Internal)**Issue Details****Kingdom:** Encapsulation**Scan Engine:** SCA (Data Flow)**Source Details****Source:** Read e**From:** com.fubon.mvp.serv.AiEmailResultRptServ.execute**File:** serv/AiEmailResultRptServ.java:153

```
150 } catch (SkipExecutionException e) {  
151 log.info("Skipping execution: {}", e.getMessage());
```



System Information Leak: Internal**Low****Package:** com.fubon.mvp.serv**serv/AiEmailResultRptServ.java, line 153 (System Information Leak: Internal)**

```
152 } catch (Exception e) {  
153 log.error("Critical error during AI Report process: ", e);  
154 }  
155 }  
156
```

Sink Details

Sink: org.slf4j.Logger.error()
Enclosing Method: execute()
File: serv/AiEmailResultRptServ.java:153
Taint Flags: EXCEPTIONINFO, SYSTEMINFO

```
150 } catch (SkipExecutionException e) {  
151 log.info("Skipping execution: {}", e.getMessage());  
152 } catch (Exception e) {  
153 log.error("Critical error during AI Report process: ", e);  
154 }  
155 }  
156
```

serv/MvpAiResultServ.java, line 382 (System Information Leak: Internal)**Issue Details**

Kingdom: Encapsulation
Scan Engine: SCA (Data Flow)

Source Details

Source: Read ex
From: com.fubon.mvp.serv.MvpAiResultServ.readExcel
File: serv/MvpAiResultServ.java:382

```
379 workbook.close();  
380  
381 } catch (IOException ex) {  
382 log.error("MvpAiResultServ: Excel 讀取失敗 - " + ex.toString());  
383 return null;  
384 }  
385
```

Sink Details

Sink: org.slf4j.Logger.error()
Enclosing Method: readExcel()
File: serv/MvpAiResultServ.java:382
Taint Flags: EXCEPTIONINFO, SYSTEMINFO



System Information Leak: Internal**Low****Package: com.fubon.mvp.serv****serv/MvpAiResultServ.java, line 382 (System Information Leak: Internal)**

```
379 workbook.close();
380
381 } catch (IOException ex) {
382 log.error("MvpAiResultServ: Excel 讀取失敗 - " + ex.toString());
383 return null;
384 }
385
```

serv/ImportAiResultToProcessServ.java, line 298 (System Information Leak: Internal)**Issue Details**

Kingdom: Encapsulation
Scan Engine: SCA (Data Flow)

Source Details

Source: Read ex
From: com.fubon.mvp.serv.ImportAiResultToProcessServ.readExcel
File: serv/ImportAiResultToProcessServ.java:298

```
295 // try-with-resources 會自動關閉 fis 與 workbook
296
297 } catch (IOException ex) {
298 log.error("ImportAiResultProcessServ: Excel 讀取失敗 - " + ex.toString());
299 return null;
300 }
301
```

Sink Details

Sink: org.slf4j.Logger.error()
Enclosing Method: readExcel()
File: serv/ImportAiResultToProcessServ.java:298
Taint Flags: EXCEPTIONINFO, SYSTEMINFO

```
295 // try-with-resources 會自動關閉 fis 與 workbook
296
297 } catch (IOException ex) {
298 log.error("ImportAiResultProcessServ: Excel 讀取失敗 - " + ex.toString());
299 return null;
300 }
301
```

serv/GenAiCallingRptServ.java, line 147 (System Information Leak: Internal)**Issue Details**

Kingdom: Encapsulation



System Information Leak: Internal	Low
Package: com.fubon.mvp.serv	
serv/GenAiCallingRptServ.java, line 147 (System Information Leak: Internal)	

Scan Engine: SCA (Data Flow)

Source Details

Source: Read e
From: com.fubon.mvp.serv.GenAiCallingRptServ.runProcess
File: serv/GenAiCallingRptServ.java:244

```
241 Files.move(cleanPath, reportPath, StandardCopyOption.REPLACE_EXISTING);
242 } catch (Exception e) {
243 Files.deleteIfExists(cleanPath);
244 throw e;
245 }
246
247 // -----
```

Sink Details

Sink: org.slf4j.Logger.error()
Enclosing Method: execute()
File: serv/GenAiCallingRptServ.java:147
Taint Flags: EXCEPTIONINFO, SYSTEMINFO

```
144 } catch (SkipExecutionException e) {
145 log.info("Skipping execution: {}", e.getMessage());
146 } catch (Exception e) {
147 log.error("Critical error during AI Calling Report process: ", e);
148 }
149 }
150
```



Weak Encryption: Inadequate RSA Padding (3 issues)

Abstract

在不使用 OAEP 填補的情況下執行公開金鑰 RSA 加密，會使加密的安全性變弱。

Explanation

進行實務操作時，使用 RSA 公開金鑰進行加密通常會結合填補架構。填補架構可以防止針對執行加密時未使用填補才有效的 RSA 所進行的攻擊。**範例 1**：以下程式碼使用 RSA 公開金鑰進行加密，但不使用填補架構：

```
public Cipher getRSACipher() {
    Cipher rsa = null;
    try {
        rsa = javax.crypto.Cipher.getInstance("RSA/NONE/NoPadding");
    }
    catch (java.security.NoSuchAlgorithmException e) {
        log("this should never happen", e);
    }
    catch (javax.crypto.NoSuchPaddingException e) {
        log("this should never happen", e);
    }
    return rsa;
}
```

此類別衍生自 Cigital Java Rulepack。


Recommendation

若要安全地使用 RSA，您必須在執行加密時使用 OAEP (Optimal Asymmetric Encryption Padding) 搭配 SHA-2 雜湊。**範例 2**：以下程式碼使用 OAEP 填補執行 RSA 公開金鑰加密：

```
public Cipher getRSACipher() {
    Cipher rsa = null;
    try {
        rsa = javax.crypto.Cipher.getInstance("RSA/ECB/OAEPWithSHA-256AndMGF1Padding");
    }
    catch (java.security.NoSuchAlgorithmException e) {
        log("this should never happen", e);
    }
    catch (javax.crypto.NoSuchPaddingException e) {
        log("this should never happen", e);
    }
    return rsa;
}
```

Issue Summary



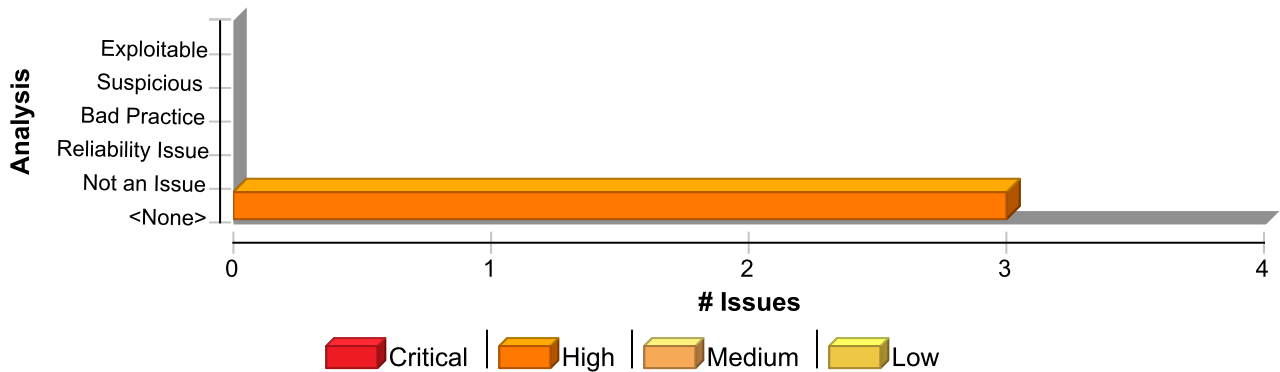

Engine Breakdown

	SCA	WebInspect	SecurityScope	Total
Weak Encryption: Inadequate RSA Padding	3	0	0	3
Total	3	0	0	3

Weak Encryption: Inadequate RSA Padding

High

Package: com.fubon.mvp.serv

serv/GenAiCallingRptServ.java, line 286 (Weak Encryption: Inadequate RSA Padding)

Issue Details

Kingdom: Security Features

Scan Engine: SCA (Semantic)

Sink Details

Sink: getInstance()

Enclosing Method: decryptWithRsaPrivateKey()

File: serv/GenAiCallingRptServ.java:286

Taint Flags:

```

283  RSAPrivateKey privateKey = (RSAPrivateKey) kf.generatePrivate(keySpec);
284
285  // RSA 私鑰解密 (對應 openssl rsautl -decrypt)
286  Cipher cipher = Cipher.getInstance("RSA/ECB/PKCS1Padding", BC_PROVIDER);
287  cipher.init(Cipher.DECRYPT_MODE, privateKey);
288
289  // 讀取加密檔並解密
  
```

serv/AiEmailResultRptServ.java, line 281 (Weak Encryption: Inadequate RSA Padding)

Issue Details

Kingdom: Security Features

Scan Engine: SCA (Semantic)

Sink Details

Sink: getInstance()

Enclosing Method: decryptWithRsaPrivateKey()

Weak Encryption: Inadequate RSA Padding

High

Package: com.fubon.mvp.serv

serv/AiEmailResultRptServ.java, line 281 (Weak Encryption: Inadequate RSA Padding)

File: serv/AiEmailResultRptServ.java:281

Taint Flags:

```
278 RSAPrivateKey privateKey = (RSAPrivateKey) kf.generatePrivate(keySpec);
279
280 // RSA 私鑰解密 (對應 openssl rsautl -decrypt)
281 Cipher cipher = Cipher.getInstance("RSA/ECB/PKCS1Padding", BC_PROVIDER);
282 cipher.init(Cipher.DECRYPT_MODE, privateKey);
283
284 // 讀取加密檔並解密
```

serv/ImportAiResultServ.java, line 304 (Weak Encryption: Inadequate RSA Padding)

Issue Details

Kingdom: Security Features

Scan Engine: SCA (Semantic)

Sink Details

Sink: getInstance()

Enclosing Method: decryptRsaFile()

File: serv/ImportAiResultServ.java:304

Taint Flags:

```
301 byte[] encryptedData = Files.readAllBytes(Paths.get(encryptedPath));
302
303 // openssl rsautl 預設使用 PKCS1 v1.5 padding
304 Cipher cipher = Cipher.getInstance("RSA/ECB/PKCS1Padding");
305 cipher.init(Cipher.DECRYPT_MODE, privateKey);
306 byte[] decrypted = cipher.doFinal(encryptedData);
307
```



Weak Encryption: Insecure Mode of Operation (6 issues)

Abstract

請勿將密碼編譯加密演算法與不安全的作業模式搭配使用。

Explanation

區塊編碼器的作業模式是一種演算法，它描述如何一再套用密碼的單一區塊作業來安全地轉換超過一個區塊的資料量。有些作業模式包含了電子程式碼籍 (ECB)、加密區塊鏈結 (CBC)、加密回饋 (CFB) 和計數器 (CTR)。在本質上，ECB 模式的安全性較低，因為它會為完全相同的純文字區塊產生一樣的加密文字。CBC 模式容易遭受 Padding oracle 攻擊。CTR 模式則無這些弱點，因此為優先選用的模式。範例 1：以下程式碼使用 AES 加密搭配 ECB 模式：

```
...
SecretKeySpec key = new SecretKeySpec(keyBytes, "AES");
Cipher cipher = Cipher.getInstance("AES/ECB/PKCS7Padding", "BC");
cipher.init(Cipher.ENCRYPT_MODE, key);
...
```

Recommendation

當加密的資料超過一個區塊時，請避免使用 ECB 和 CBC 作業模式。在與 SSL 搭配使用時，CBC 模式的效能會有些降低而導致嚴重風險 [1]。因此，請改用 CCM (Counter with CBC-MAC) 模式，或者，如果效能需優先考量，則使用 GCM (Galois/Counter Mode) 模式 (如果可用)。範例 2：以下程式碼使用 AES 加密搭配 GCM 模式：


```
...
SecretKeySpec key = new SecretKeySpec(keyBytes, "AES");
Cipher cipher = Cipher.getInstance("AES/GCM/PKCS5Padding", "BC");
cipher.init(Cipher.ENCRYPT_MODE, key);
...
```

一般來說，操作模式對 RSA 安全性的影響很小。然而，當您使用 ECB 或任何其他操作模式時，對於安全加密來說，安全填補 (例如搭配 SHA-2 雜湊的 OAEP 填補) 至關重要。範例 3：以下程式碼採用使用了 ECB 並搭配 OAEP 填補的 RSA 公開金鑰來執行加密：

```
public Cipher getRSACipher() {
    Cipher rsa = null;
    try {
        rsa = javax.crypto.Cipher.getInstance("RSA/ECB/
        OAEPWithSHA-256AndMGF1Padding");
    }
    catch (java.security.NoSuchAlgorithmException e) {
        handleMissingAlgorithm();
    }
    catch (javax.crypto.NoSuchPaddingException e) {
        handleMissingAlgorithm();
    }
    return rsa;
}
```

Issue Summary



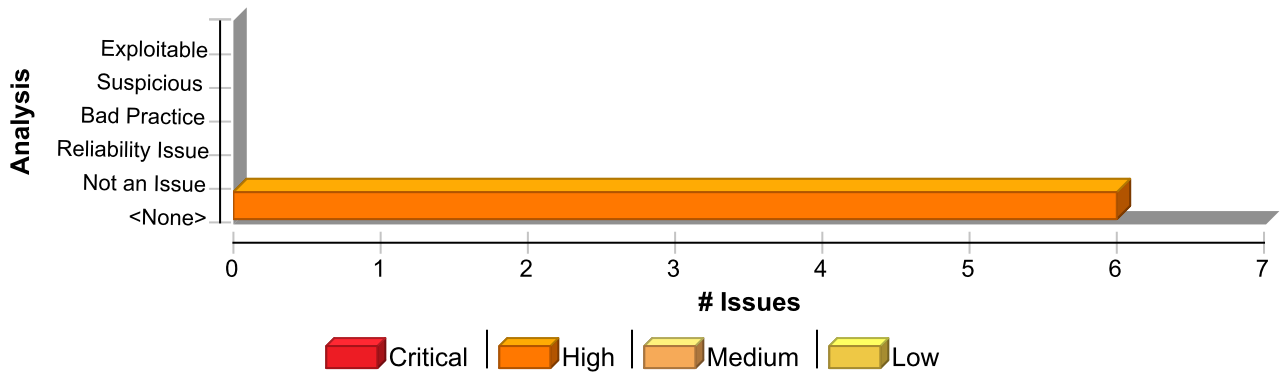

Engine Breakdown

	SCA	WebInspect	SecurityScope	Total
Weak Encryption: Insecure Mode of Operation	6	0	0	6
Total	6	0	0	6

Weak Encryption: Insecure Mode of Operation

High

Package: com.fubon.mvp.serv

serv/ImportAiResultServ.java, line 531 (Weak Encryption: Insecure Mode of Operation)

Issue Details

Kingdom: Security Features
 Scan Engine: SCA (Semantic)

Sink Details

Sink: getInstance()
 Enclosing Method: decodeFtpCredential()
 File: serv/ImportAiResultServ.java:531
 Taint Flags:

```

528 byte[] key = Arrays.copyOfRange(keyAndIv, 0, 32);
529 byte[] iv = Arrays.copyOfRange(keyAndIv, 32, 48);
530
531 Cipher cipher = Cipher.getInstance("AES/CBC/PKCS5Padding");
532 cipher.init(Cipher.DECRYPT_MODE,
533 new SecretKeySpec(key, "AES"),
534 new IvParameterSpec(iv));
  
```

serv/AiEmailResultRptServ.java, line 281 (Weak Encryption: Insecure Mode of Operation)

Issue Details

Kingdom: Security Features
 Scan Engine: SCA (Semantic)

Sink Details

Sink: getInstance()
 Enclosing Method: decryptWithRsaPrivateKey()



Weak Encryption: Insecure Mode of Operation

High

Package: com.fubon.mvp.serv

serv/AiEmailResultRptServ.java, line 281 (Weak Encryption: Insecure Mode of Operation)

File: serv/AiEmailResultRptServ.java:281

Taint Flags:

```
278 RSAPrivateKey privateKey = (RSAPrivateKey) kf.generatePrivate(keySpec);
279
280 // RSA 私鑰解密 (對應 openssl rsautl -decrypt)
281 Cipher cipher = Cipher.getInstance("RSA/ECB/PKCS1Padding", BC_PROVIDER);
282 cipher.init(Cipher.DECRYPT_MODE, privateKey);
283
284 // 讀取加密檔並解密
```

serv/AiEmailResultRptServ.java, line 500 (Weak Encryption: Insecure Mode of Operation)

Issue Details

Kingdom: Security Features

Scan Engine: SCA (Semantic)

Sink Details

Sink: getInstance()

Enclosing Method: decodeFtpCredential()

File: serv/AiEmailResultRptServ.java:500

Taint Flags:

```
497 byte[] key = Arrays.copyOfRange(keyAndIv, 0, 32);
498 byte[] iv = Arrays.copyOfRange(keyAndIv, 32, 48);
499
500 Cipher cipher = Cipher.getInstance("AES/CBC/PKCS5Padding");
501 cipher.init(Cipher.DECRYPT_MODE,
502 new SecretKeySpec(key, "AES"),
503 new IvParameterSpec(iv));
```

serv/GenAiCallingRptServ.java, line 286 (Weak Encryption: Insecure Mode of Operation)

Issue Details

Kingdom: Security Features

Scan Engine: SCA (Semantic)

Sink Details

Sink: getInstance()

Enclosing Method: decryptWithRsaPrivateKey()

File: serv/GenAiCallingRptServ.java:286

Taint Flags:

```
283 RSAPrivateKey privateKey = (RSAPrivateKey) kf.generatePrivate(keySpec);
284
```



Weak Encryption: Insecure Mode of Operation

High

Package: com.fubon.mvp.serv

serv/GenAiCallingRptServ.java, line 286 (Weak Encryption: Insecure Mode of Operation)

```
285 // RSA 私鑰解密 (對應 openssl rsautl -decrypt)
286 Cipher cipher = Cipher.getInstance("RSA/ECB/PKCS1Padding", BC_PROVIDER);
287 cipher.init(Cipher.DECRYPT_MODE, privateKey);
288
289 // 讀取加密檔並解密
```

serv/GenAiCallingRptServ.java, line 473 (Weak Encryption: Insecure Mode of Operation)

Issue Details

Kingdom: Security Features
Scan Engine: SCA (Semantic)

Sink Details

Sink: getInstance()
Enclosing Method: decodeFtpCredential()
File: serv/GenAiCallingRptServ.java:473
Taint Flags:

```
470 byte[] key = Arrays.copyOfRange(keyAndIv, 0, 32);
471 byte[] iv = Arrays.copyOfRange(keyAndIv, 32, 48);
472
473 Cipher cipher = Cipher.getInstance("AES/CBC/PKCS5Padding");
474 cipher.init(Cipher.DECRYPT_MODE,
475 new SecretKeySpec(key, "AES"),
476 new IvParameterSpec(iv));
```

serv/ImportAiResultServ.java, line 304 (Weak Encryption: Insecure Mode of Operation)

Issue Details

Kingdom: Security Features
Scan Engine: SCA (Semantic)

Sink Details

Sink: getInstance()
Enclosing Method: decryptRsaFile()
File: serv/ImportAiResultServ.java:304
Taint Flags:

```
301 byte[] encryptedData = Files.readAllBytes(Paths.get(encryptedPath));
302
303 // openssl rsautl 預設使用 PKCS1 v1.5 padding
304 Cipher cipher = Cipher.getInstance("RSA/ECB/PKCS1Padding");
305 cipher.init(Cipher.DECRYPT_MODE, privateKey);
306 byte[] decrypted = cipher.doFinal(encryptedData);
```



Weak Encryption: Insecure Mode of Operation

High

Package: com.fubon.mvp.serv

serv/ImportAiResultServ.java, line 304 (Weak Encryption: Insecure Mode of Operation)

307



