



568



# Box Model

## Normal Flow

### Display & Float

lesson 2



1

2

3


4

5


6




# Box Model

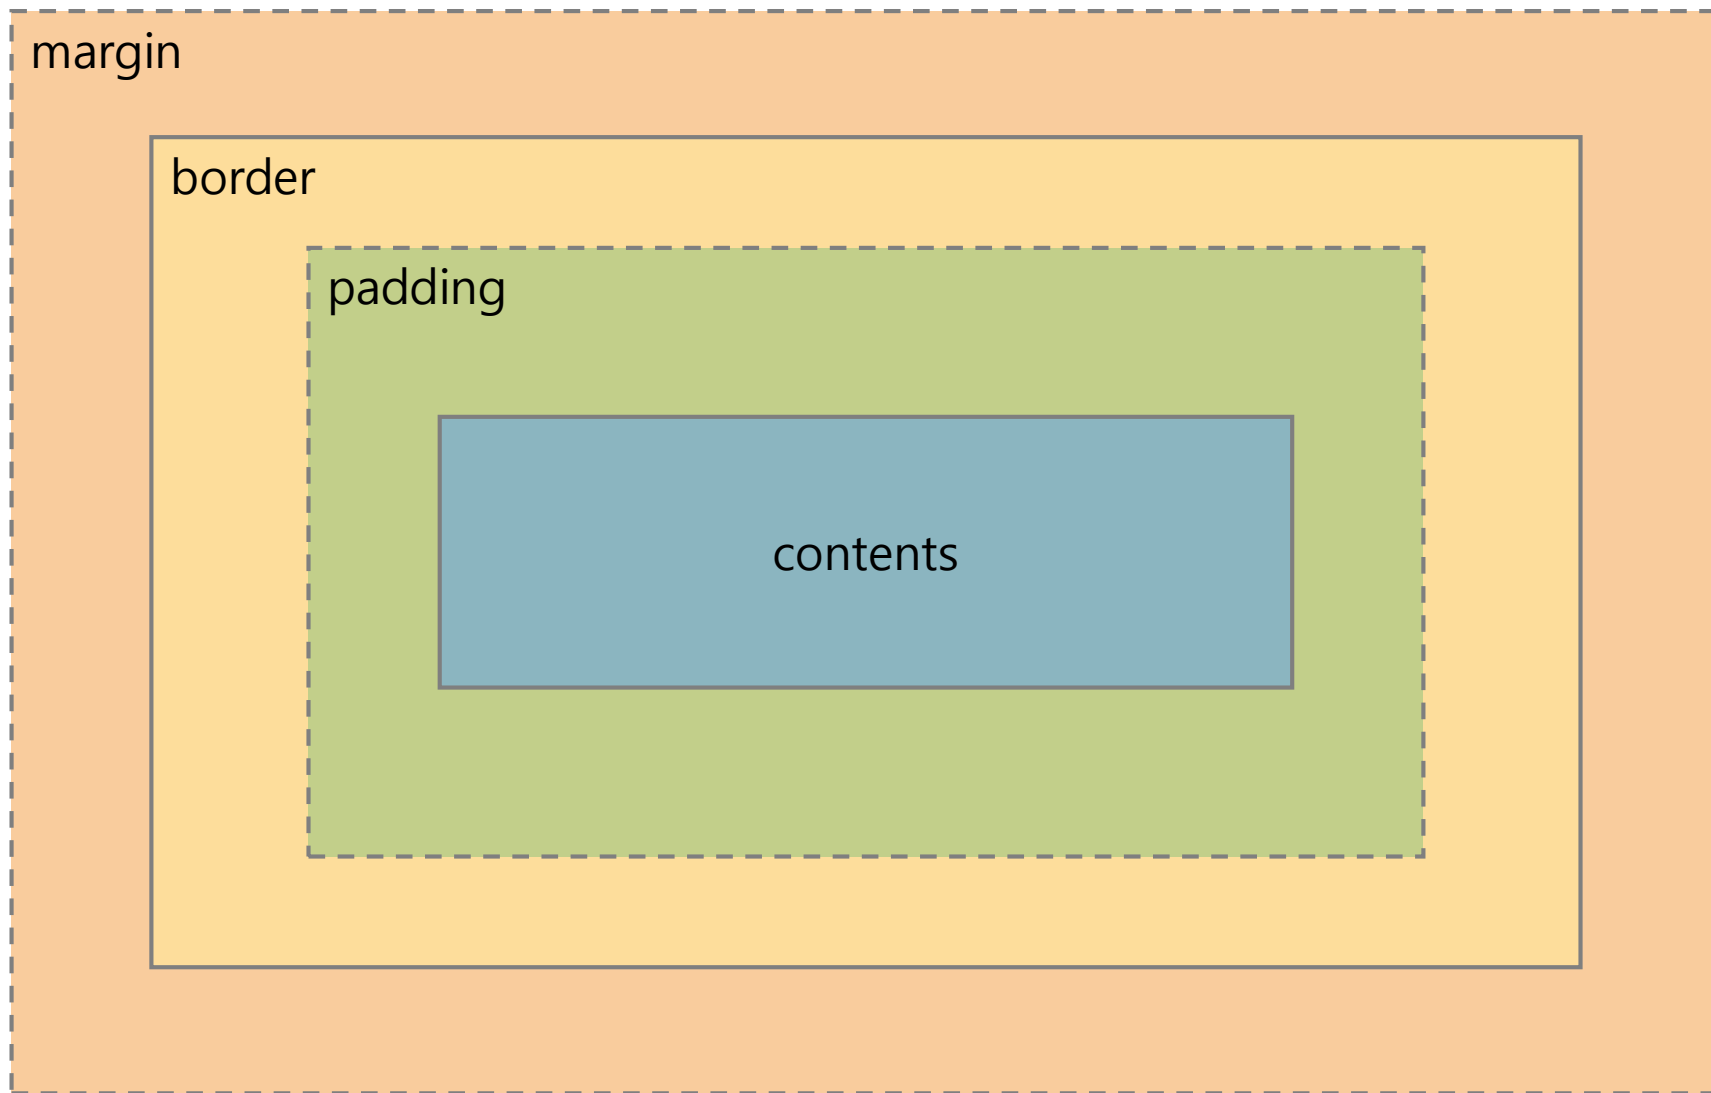


# Box Model

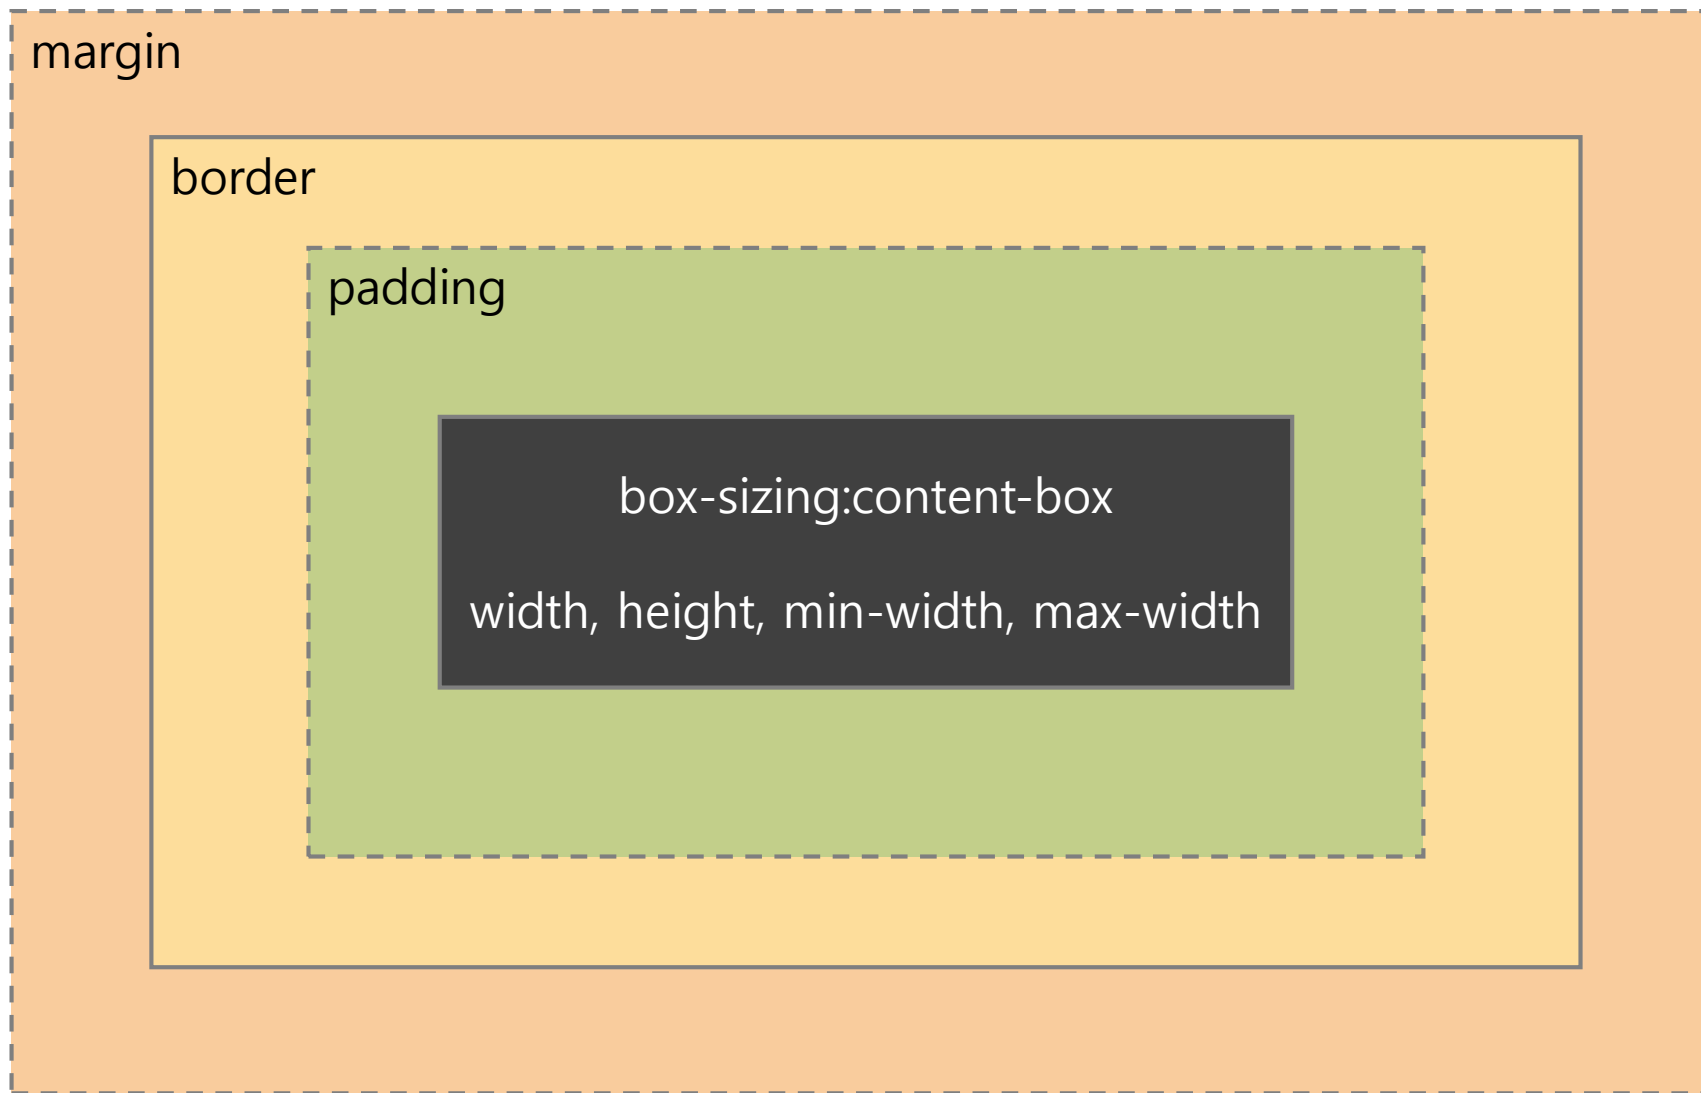


# Box Model

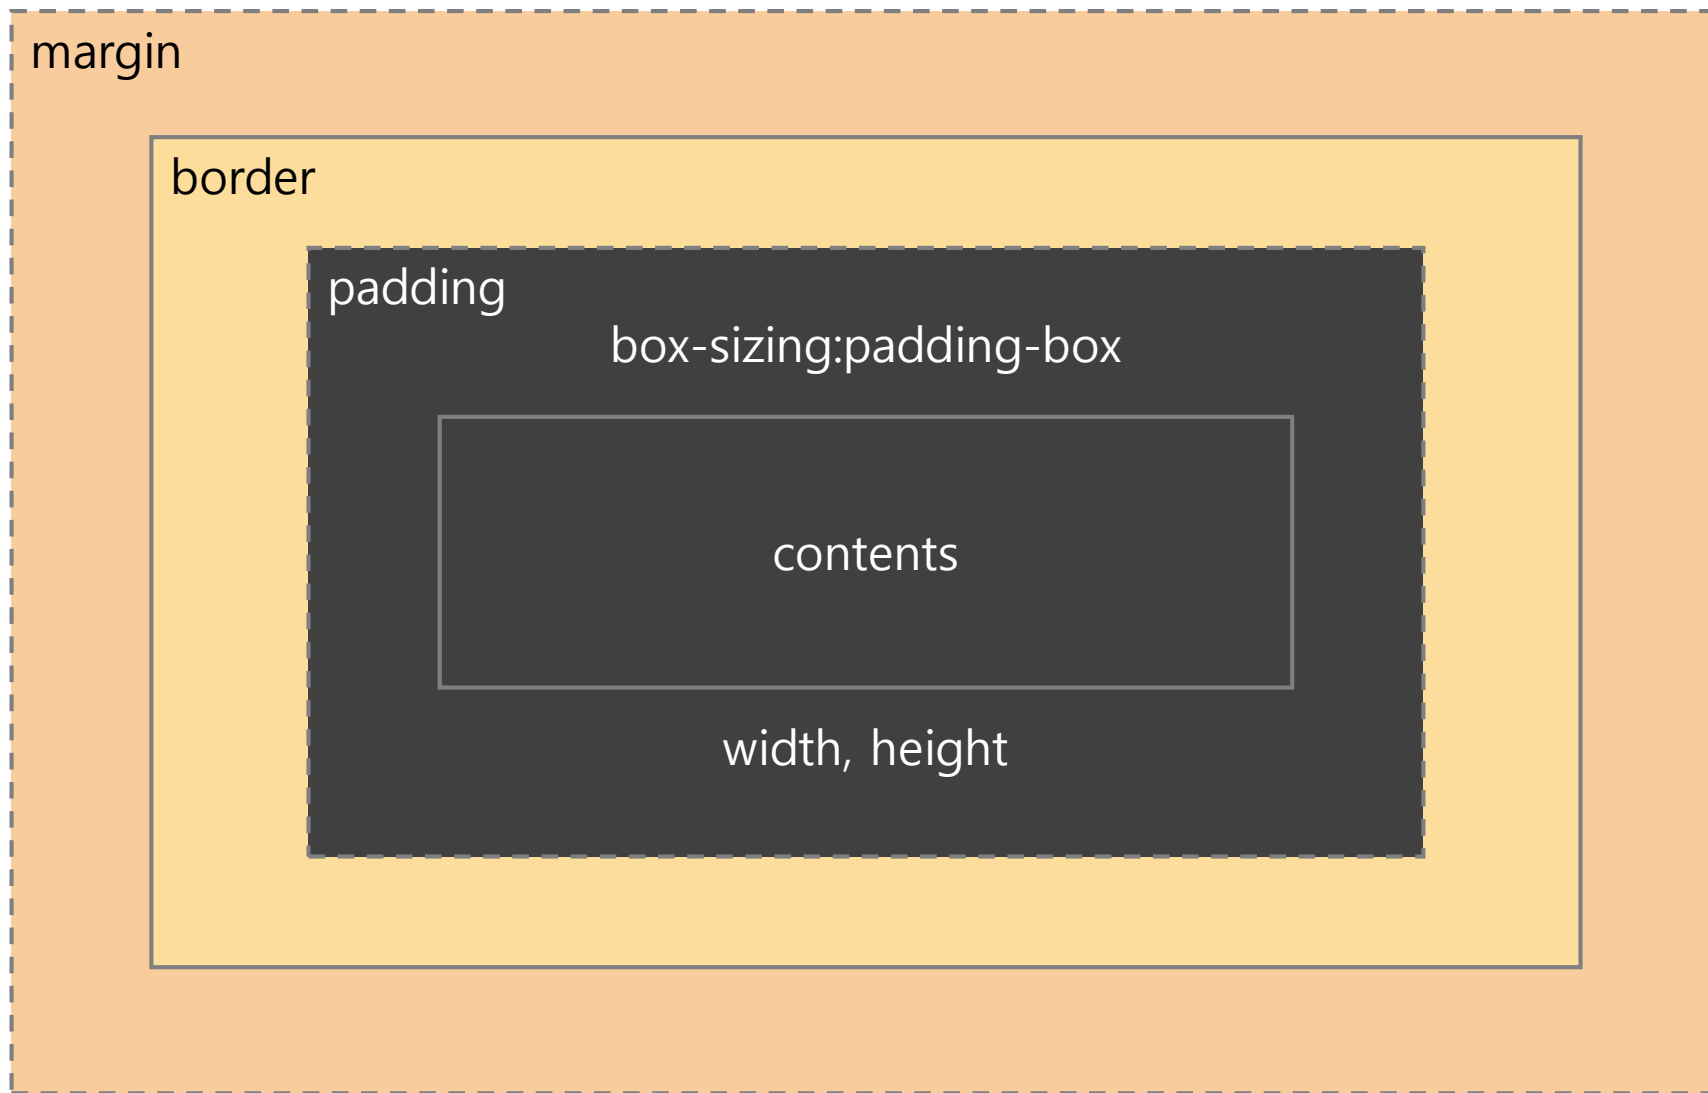

# Box Model

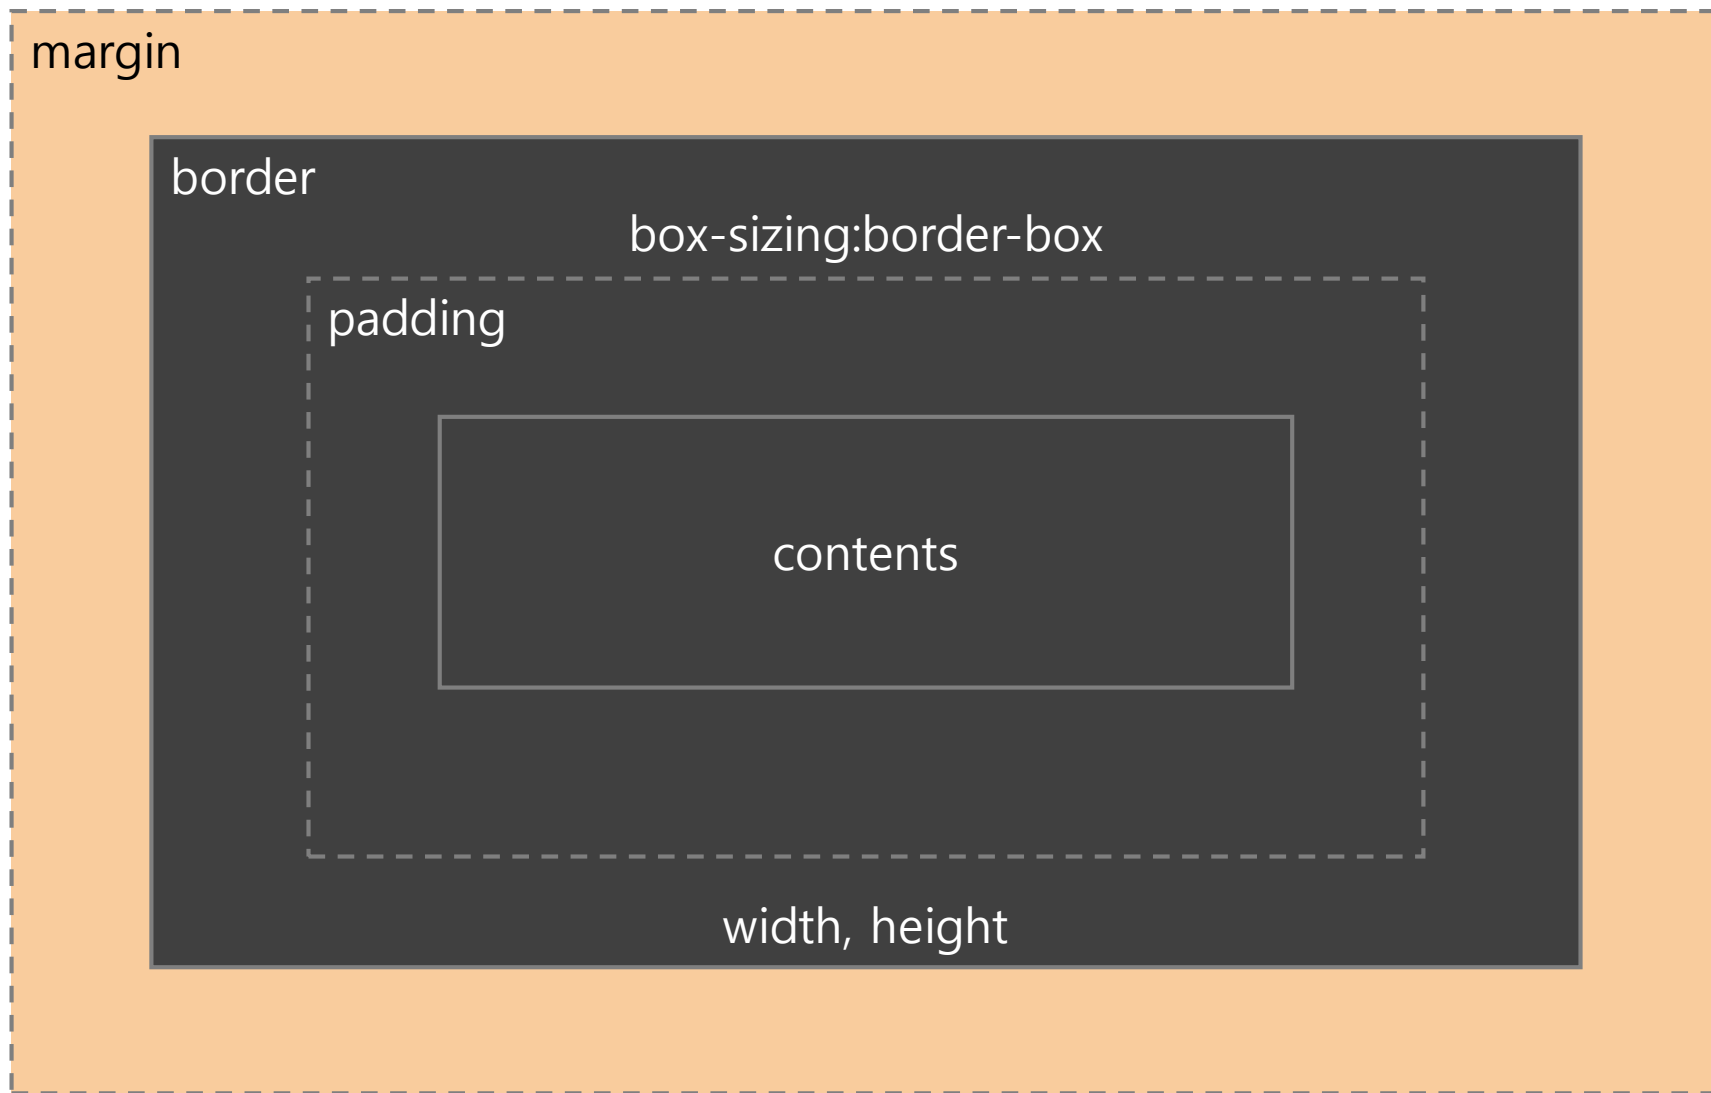


# Normal Flow

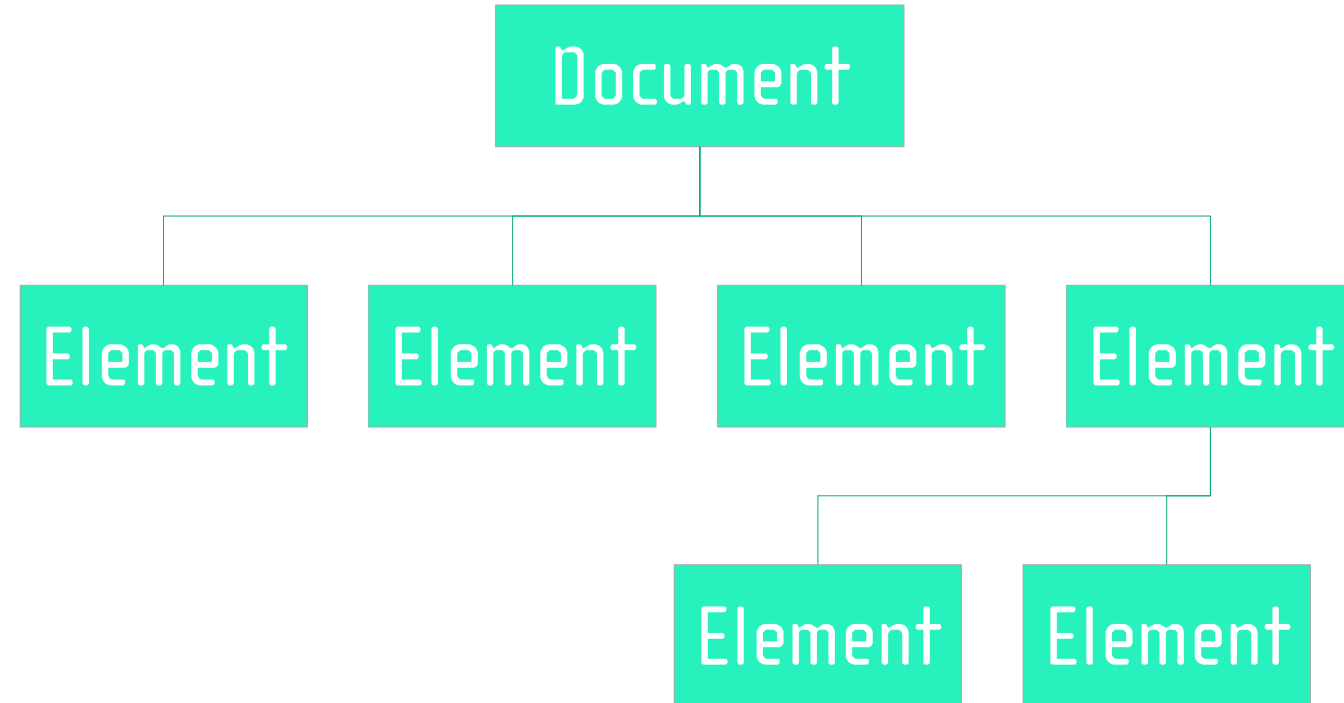


```
<html>
<head></head>
<body>
  <div></div>
  <div></div>
  <div></div>
  <div>
    <div></div>
    <div>abc</div>
  </div>
</body>
</html>
```



# Normal Flow

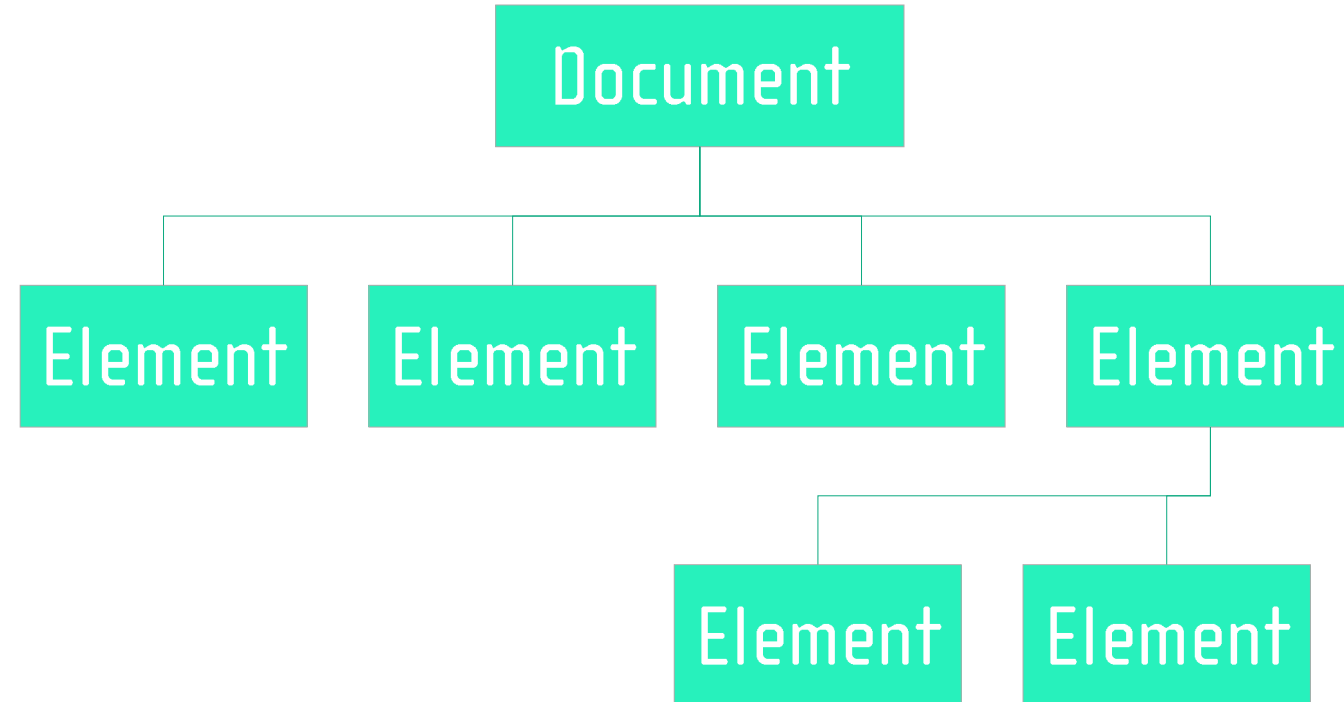


```
<html>  
<head></head>  
<body>
```

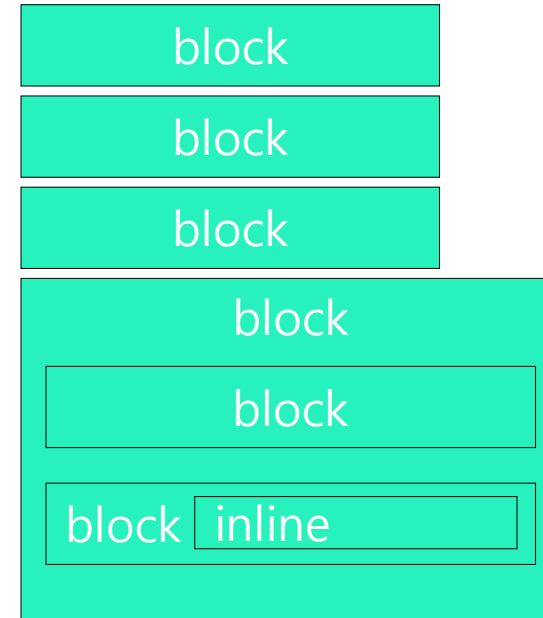


```
</body>  
</html>
```

# Normal Flow

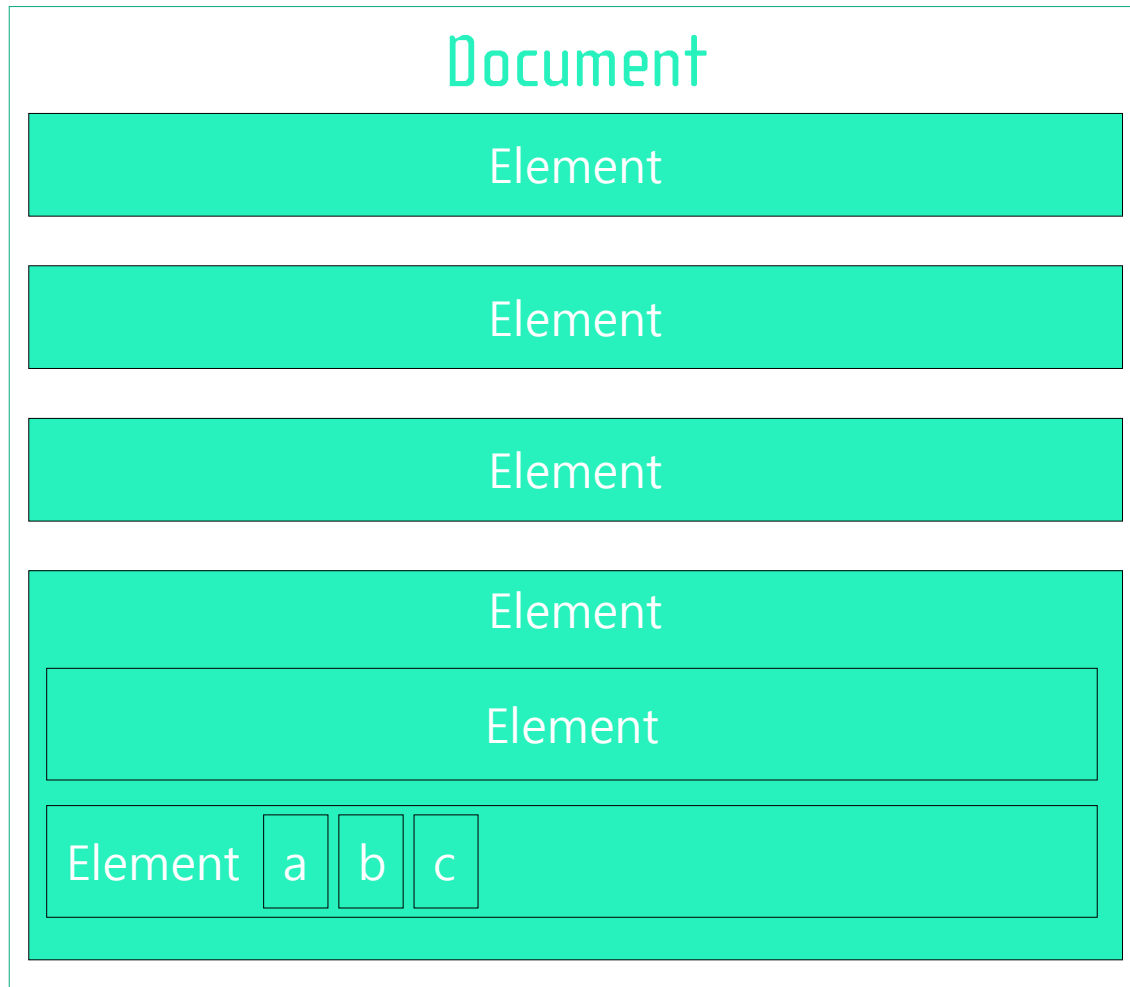

```
<html>  
<head></head>  
<body>
```

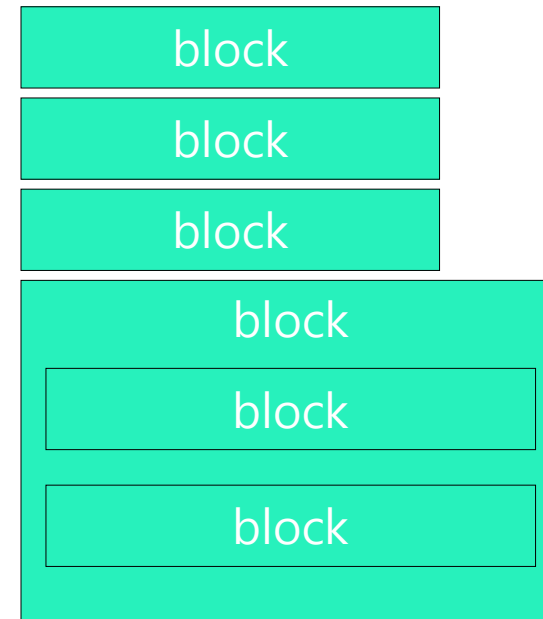


```
</body>  
</html>
```

# Normal Flow



BFC BlockFormattingContext

---





# Normal Flow




BFC BlockFormattingContext

InlineFormattingContext IFC

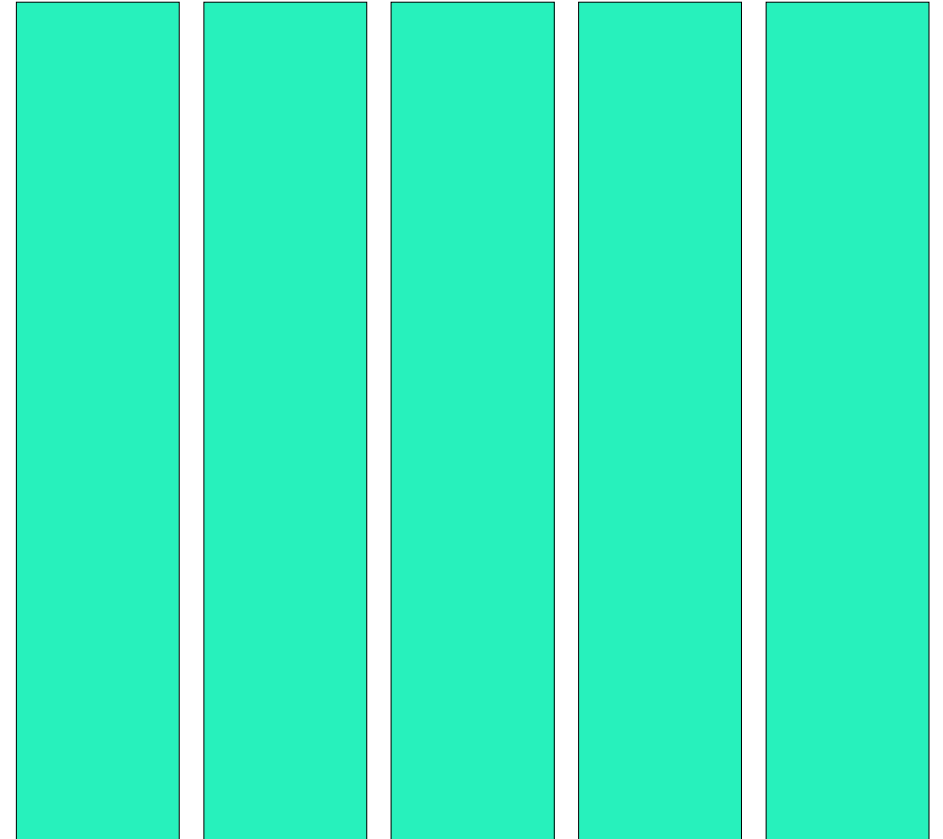

<https://goo.gl/b2wDPu>

# Normal Flow



# Normal Flow



BFC BlockFormattingContext

Create

root

float != none

display == inline-block, table-cell, table-caption

overflow != visible

flex box

Containing

A block formatting context contains everything inside of the element creating it that is not also inside a descendant element that creates a new block formatting context.

<https://goo.gl/O0XGOG>

# Display & Float



display



float

display-outside

block, inline, inline-block

display-inside

table, flex, grid

display-internal

table-cell,...