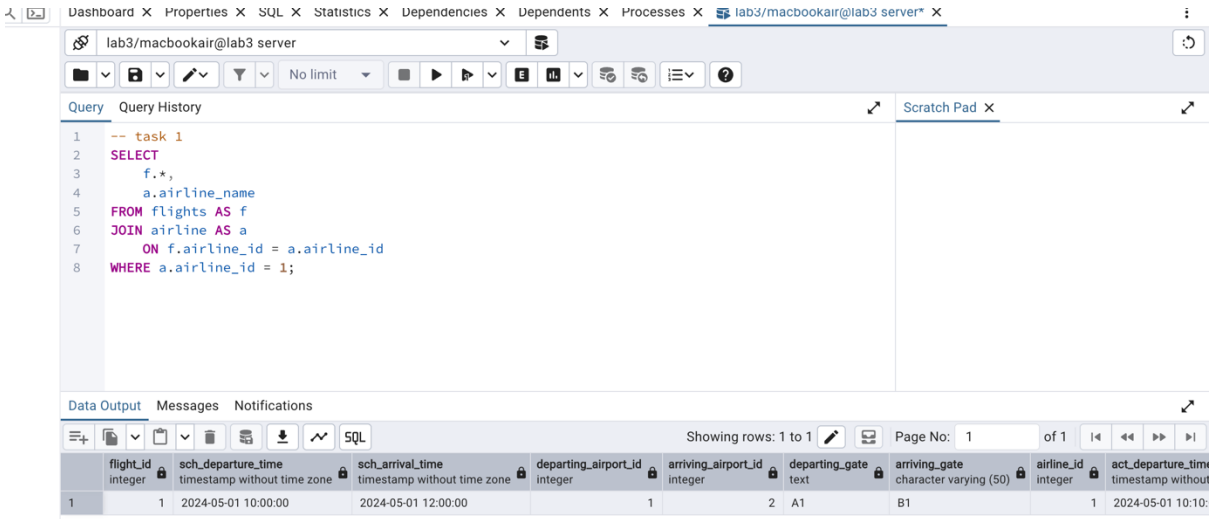
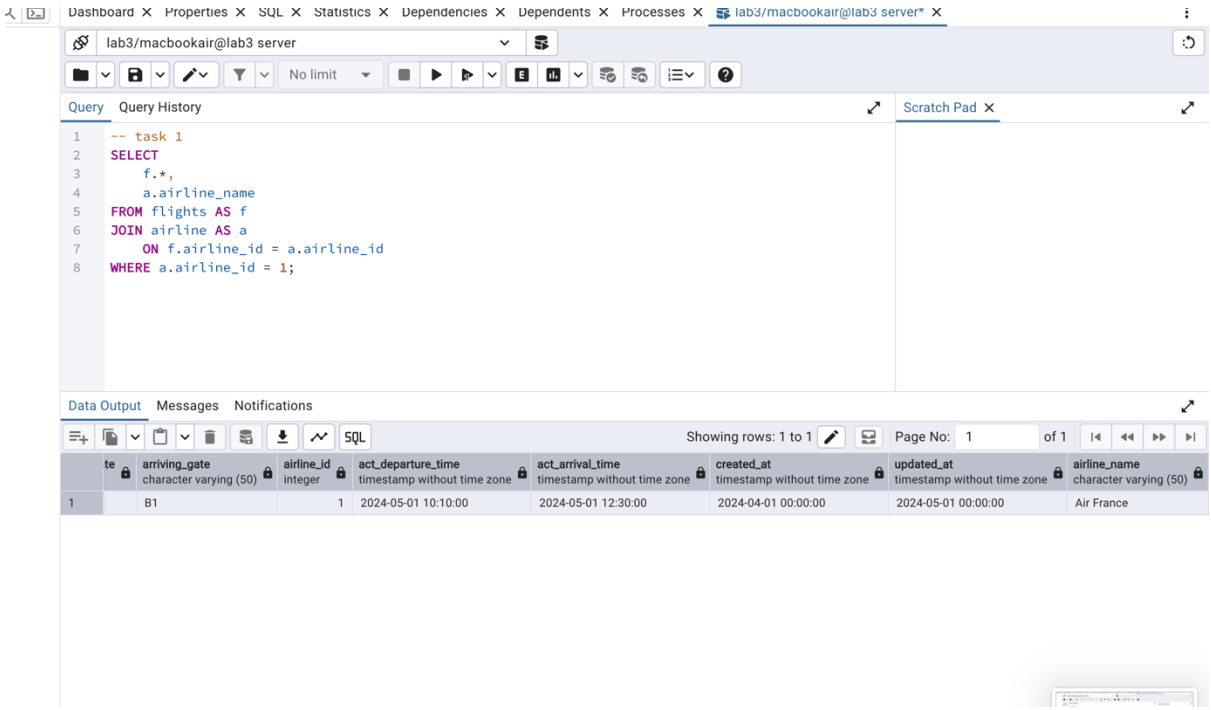
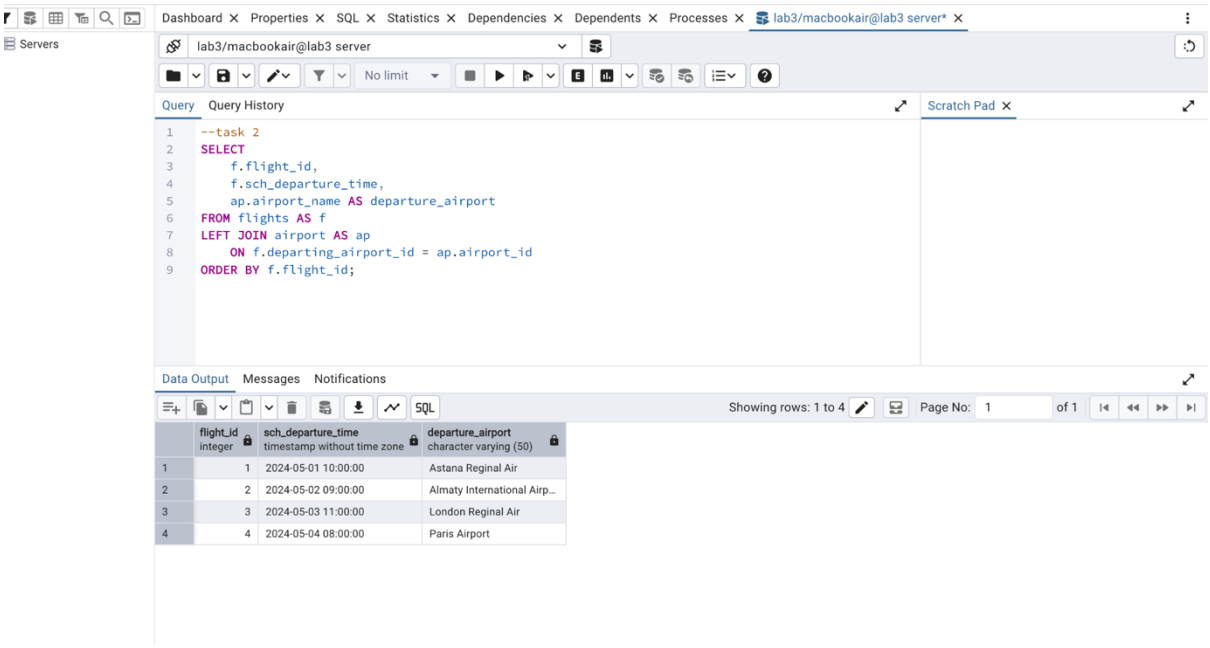
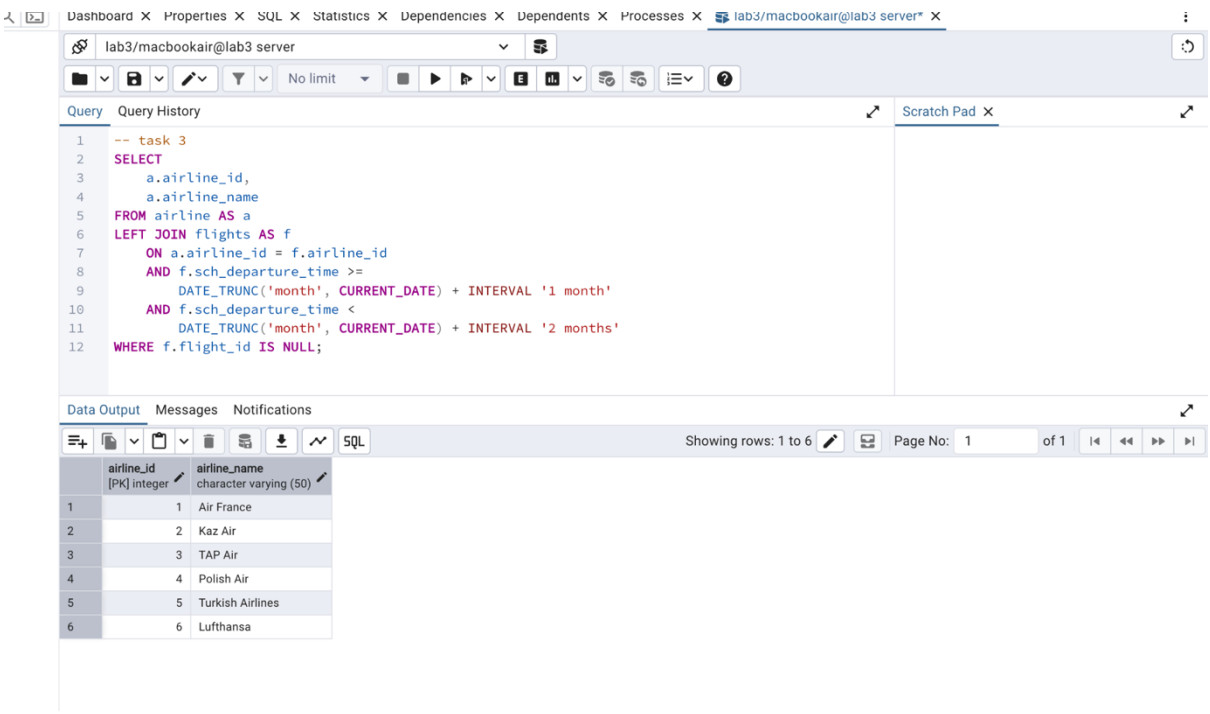
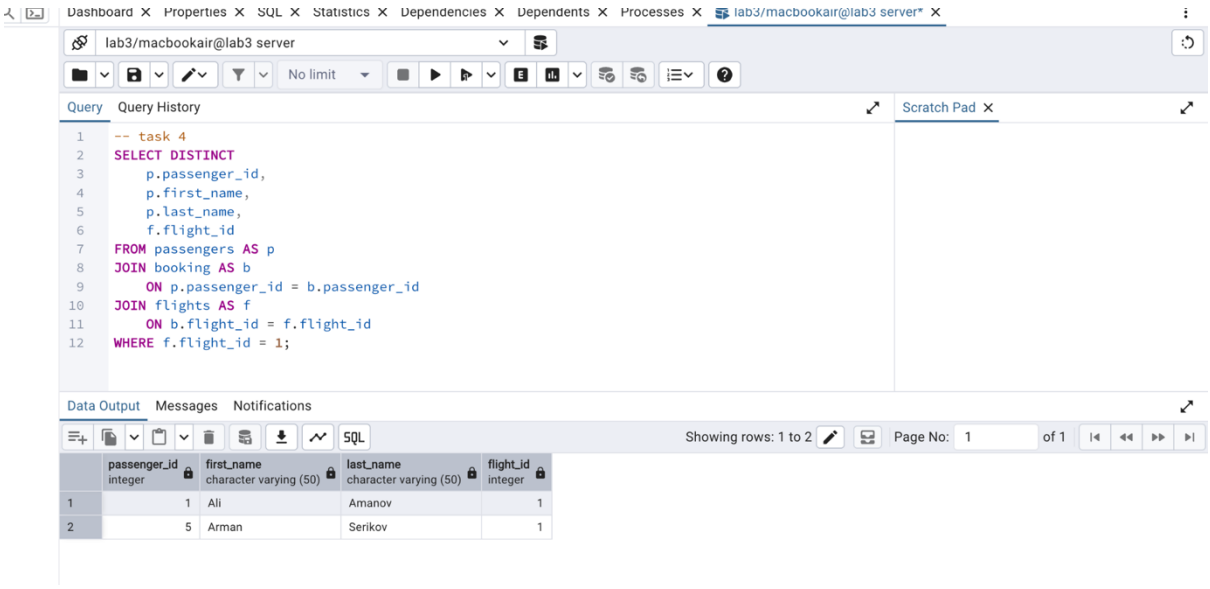

Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
lab3/macbookair@lab3 server*
lab3/macbookair@lab3 server
No limit
Query
Query History
Scratch Pad
-- task 1
SELECT
f.*,
a.airline_name
FROM flights AS f
JOIN airline AS a
ON f.airline_id = a.airline_id
WHERE a.airline_id = 1;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 1
Page No: 1
of 1
flight_id integer
sch_departure_time timestamp without time zone
sch_arrival_time timestamp without time zone
departing_airport_id integer
arriving_airport_id integer
departing_gate text
arriving_gate character varying (50)
airline_id integer
act_departure_time timestamp without
1
1
2024-05-01 10:00:00
2024-05-01 12:00:00
1
2
A1
B1
1
2024-05-01 10:10:


Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
lab3/macbookair@lab3 server*
lab3/macbookair@lab3 server
No limit
Query
Query History
Scratch Pad
-- task 1
SELECT
f.*,
a.airline_name
FROM flights AS f
JOIN airline AS a
ON f.airline_id = a.airline_id
WHERE a.airline_id = 1;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 1
Page No: 1
of 1
te
arriving_gate character varying (50)
airline_id integer
act_departure_time timestamp without time zone
act_arrival_time timestamp without time zone
created_at timestamp without time zone
updated_at timestamp without time zone
airline_name character varying (50)
1
B1
1
2024-05-01 10:10:00
2024-05-01 12:30:00
2024-04-01 00:00:00
2024-05-01 00:00:00
Air France

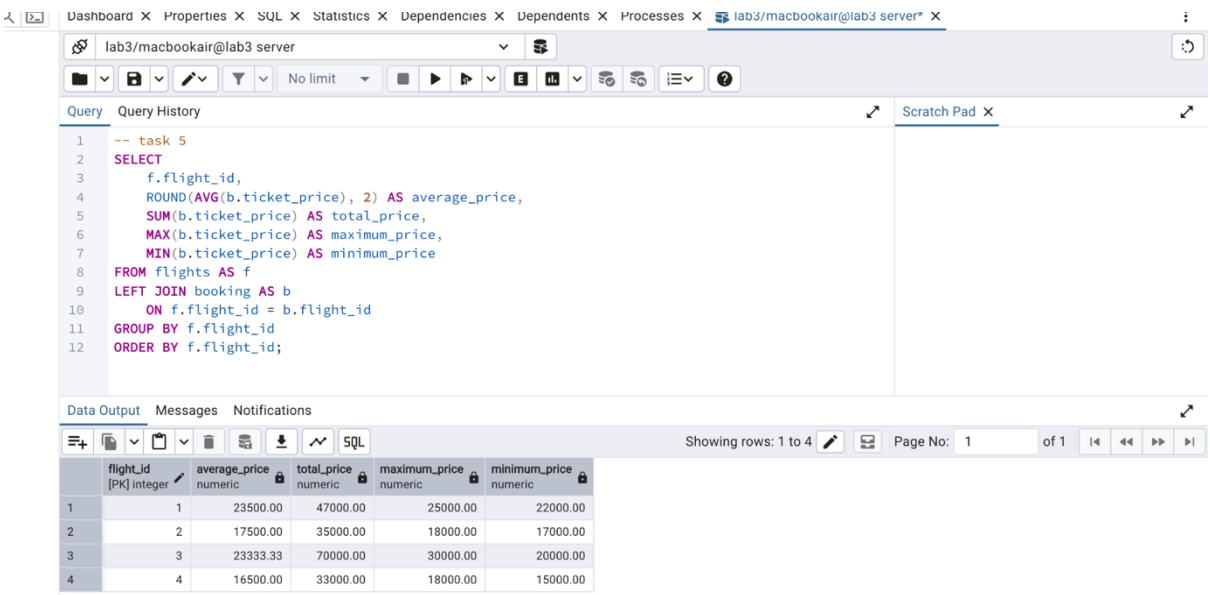

Servers
Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
lab3/macbookair@lab3 server*
lab3/macbookair@lab3 server
No limit
Query
Query History
Scratch Pad
--task 2
SELECT
f.flight_id,
f.sch_departure_time,
ap.airport_name AS departure_airport
FROM flights AS f
LEFT JOIN airport AS ap
ON f.departing_airport_id = ap.airport_id
ORDER BY f.flight_id;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 4
Page No: 1
of 1
flight_id integer
sch_departure_time timestamp without time zone
departure_airport character varying (50)
1 1 2024-05-01 10:00:00 Astana Reginal Air
2 2 2024-05-02 09:00:00 Almaty International Airp...
3 3 2024-05-03 11:00:00 London Reginal Air
4 4 2024-05-04 08:00:00 Paris Airport


Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
lab3/macbookair@lab3 server*
lab3/macbookair@lab3 server
No limit
Query
Query History
Scratch Pad
-- task 3
SELECT
a.airline_id,
a.airline_name
FROM airline AS a
LEFT JOIN flights AS f
ON a.airline_id = f.airline_id
AND f.sch_departure_time >=
DATE_TRUNC('month', CURRENT_DATE) + INTERVAL '1 month'
AND f.sch_departure_time <
DATE_TRUNC('month', CURRENT_DATE) + INTERVAL '2 months'
WHERE f.flight_id IS NULL;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 6
Page No: 1
of 1
airline_id [PK] integer
airline_name character varying (50)
1 1 Air France
2 2 Kaz Air
3 3 TAP Air
4 4 Polish Air
5 5 Turkish Airlines
6 6 Lufthansa



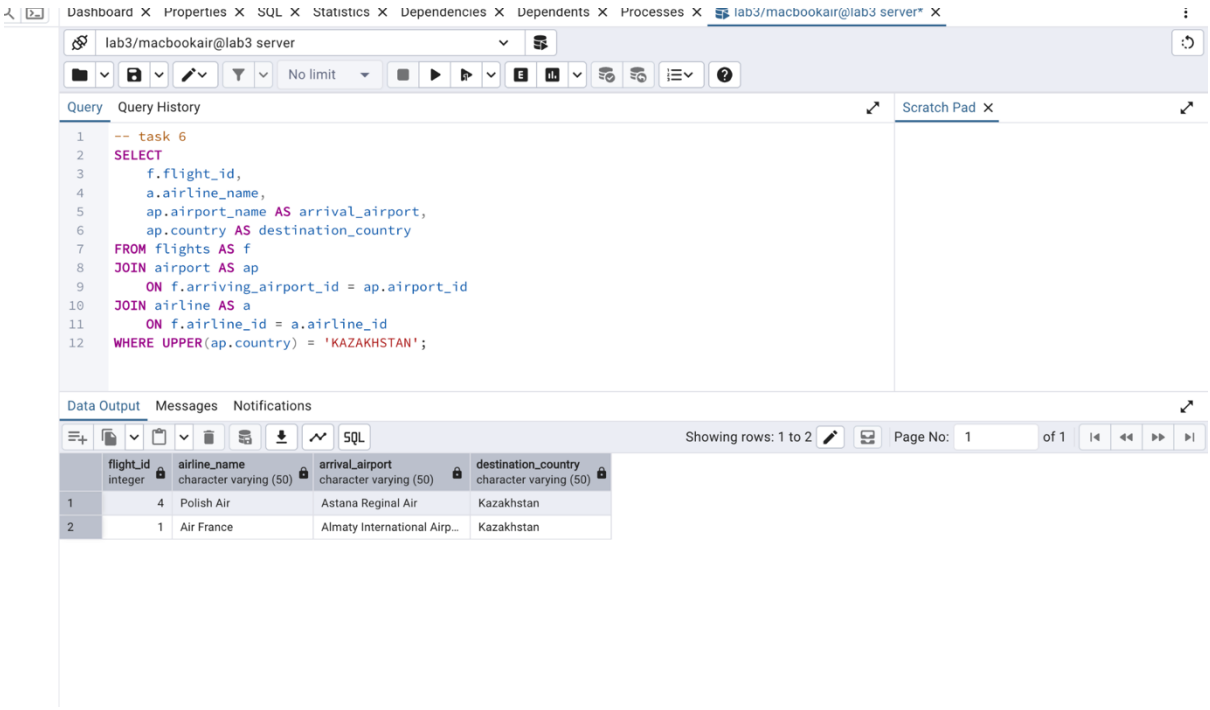
```
-- task 4
SELECT DISTINCT
    p.passenger_id,
    p.first_name,
    p.last_name,
    f.flight_id
FROM passengers AS p
JOIN booking AS b
    ON p.passenger_id = b.passenger_id
JOIN flights AS f
    ON b.flight_id = f.flight_id
WHERE f.flight_id = 1;
```

	passenger_id integer	first_name character varying (50)	last_name character varying (50)	flight_id integer
1	1	Ali	Amanov	1
2	5	Arman	Serikov	1



```
-- task 5
SELECT
    f.flight_id,
    ROUND(AVG(b.ticket_price), 2) AS average_price,
    SUM(b.ticket_price) AS total_price,
    MAX(b.ticket_price) AS maximum_price,
    MIN(b.ticket_price) AS minimum_price
FROM flights AS f
LEFT JOIN booking AS b
    ON f.flight_id = b.flight_id
GROUP BY f.flight_id
ORDER BY f.flight_id;
```

	flight_id [PK] integer	average_price numeric	total_price numeric	maximum_price numeric	minimum_price numeric
1	1	23500.00	47000.00	25000.00	22000.00
2	2	17500.00	35000.00	18000.00	17000.00
3	3	23333.33	70000.00	30000.00	20000.00
4	4	16500.00	33000.00	18000.00	15000.00


Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
lab3/macbookair@lab3 server*
lab3/macbookair@lab3 server
No limit
Query
Query History
Scratch Pad
-- task 6
SELECT
f.flight_id,
a.airline_name,
ap.airport_name AS arrival_airport,
ap.country AS destination_country
FROM flights AS f
JOIN airport AS ap
ON f.arriving_airport_id = ap.airport_id
JOIN airline AS a
ON f.airline_id = a.airline_id
WHERE UPPER(ap.country) = 'KAZAKHSTAN';
Data Output
Messages
Notifications
Showing rows: 1 to 2
Page No: 1
of 1
flight_id integer
airline_name character varying (50)
arrival_airport character varying (50)
destination_country character varying (50)
1 4 Polish Air Astana Reginal Air Kazakhstan
2 1 Air France Almaty International Airp... Kazakhstan

Dashboard × Properties × SQL × Statistics × Dependencies × Dependents × Processes × lab3/macbookair@lab3 server* ×

lab3/macbookair@lab3 server

No limit

Query | Query History

Scratch Pad ×

```sql
-- task 8
SELECT
    CONCAT_WS(' ', p.first_name, p.last_name) AS full_name,
    p.passport_number,
    f.flight_id,
    f.act_arrival_time
FROM passengers AS p
JOIN booking AS b
    ON p.passenger_id = b.passenger_id
JOIN flights AS f
    ON b.flight_id = f.flight_id
ORDER BY f.flight_id, p.passenger_id;
```

Data Output | Messages | Notifications

Showing rows: 1 to 9 | Page No: 1 of 1

	full_name text	passport_number character varying (20)	flight_id integer	act_arrival_time timestamp without time zone
1	Ali Amanov	P001	1	2024-05-01 12:30:00
2	Arman Serikov	P005	1	2024-05-01 12:30:00
3	Ali Amanov	P001	2	2024-05-02 12:50:00
4	Aruzhan Samato...	P002	2	2024-05-02 12:50:00
5	Ali Amanov	P001	3	2024-05-03 15:45:00
6	Aruzhan Samato...	P002	3	2024-05-03 15:45:00
7	Dias Bekov	P003	3	2024-05-03 15:45:00
8	Aruzhan Samato...	P002	4	2024-05-04 10:00:00
9	Dana Aliyeva	P004	4	2024-05-04 10:00:00

Dashboard × Properties × SQL × Statistics × Dependencies × Dependents × Processes × lab3/macbookair@lab3 server* ×

lab3/macbookair@lab3 server

No limit

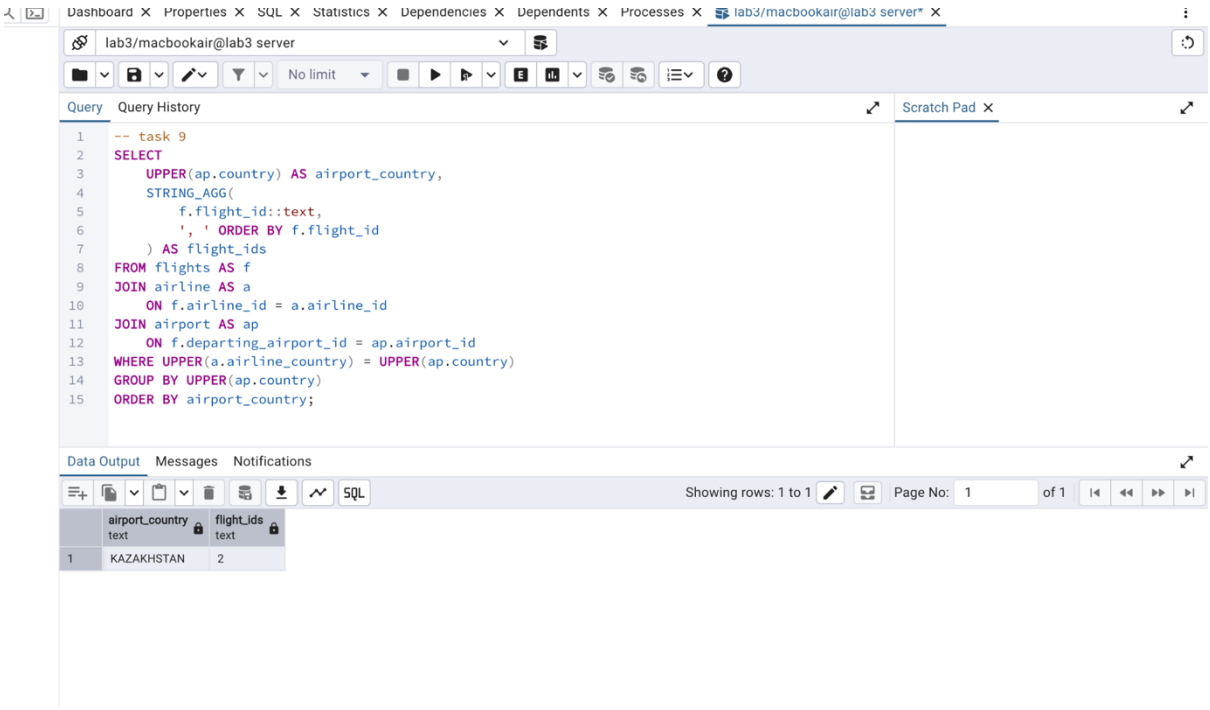
Query | Query History

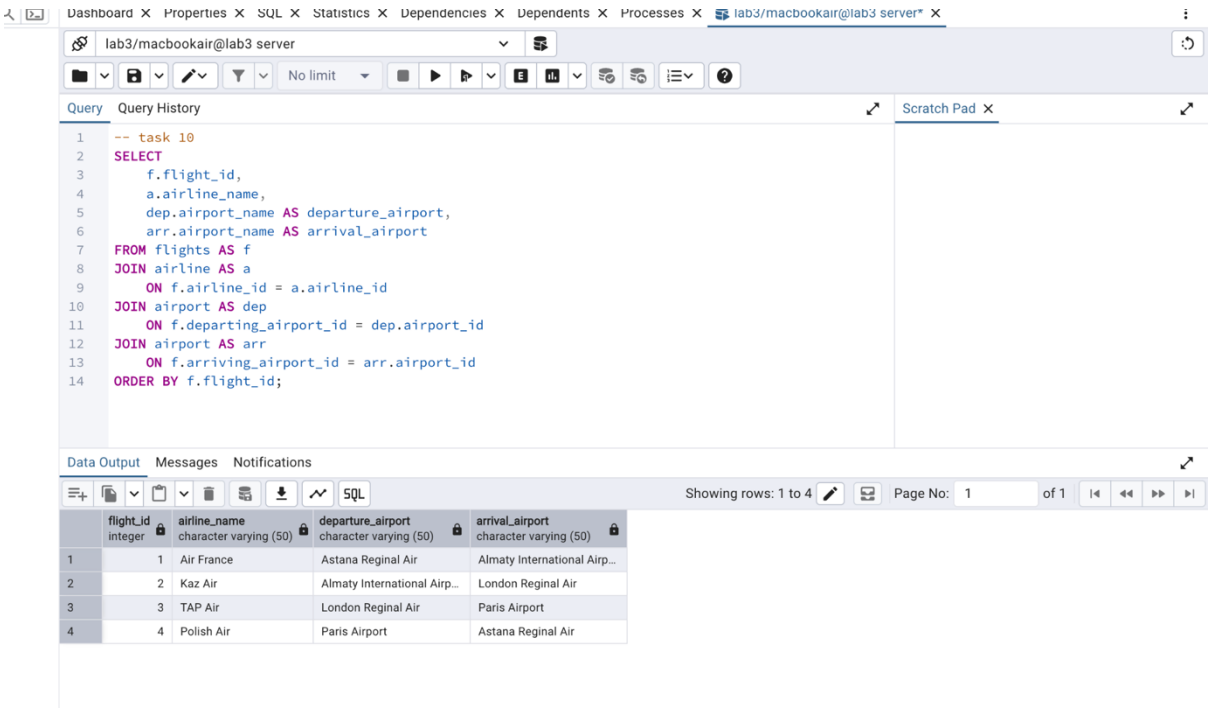
Scratch Pad ×

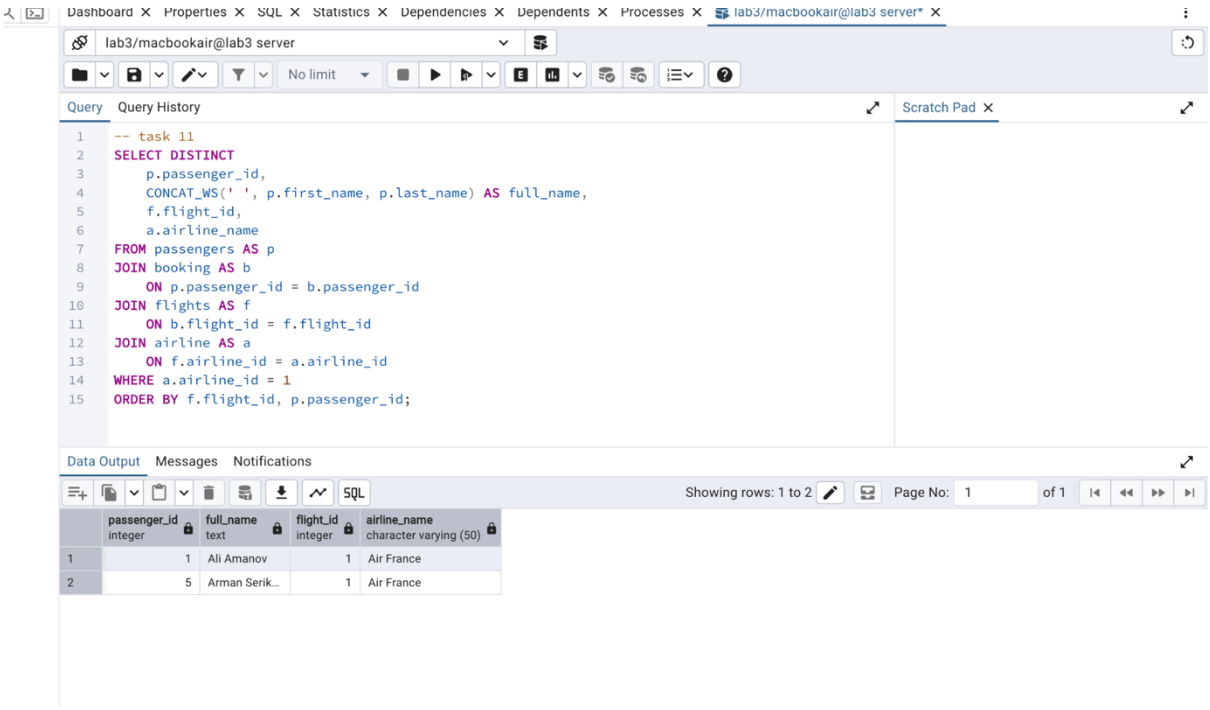
```sql
-- task 7
SELECT DISTINCT
    p.passenger_id,
    CONCAT_WS(' ', p.first_name, p.last_name) AS full_name,
    p.date_of_birth,
    ap.airport_name AS arrival_airport,
    ap.city AS destination_city,
    ap.country AS destination_country
FROM passengers AS p
JOIN booking AS b
    ON p.passenger_id = b.passenger_id
JOIN flights AS f
    ON b.flight_id = f.flight_id
JOIN airport AS ap
    ON f.arriving_airport_id = ap.airport_id
WHERE p.date_of_birth >
      (CURRENT_DATE - INTERVAL '18 years')::date
  AND p.date_of_birth <= CURRENT_DATE;
```

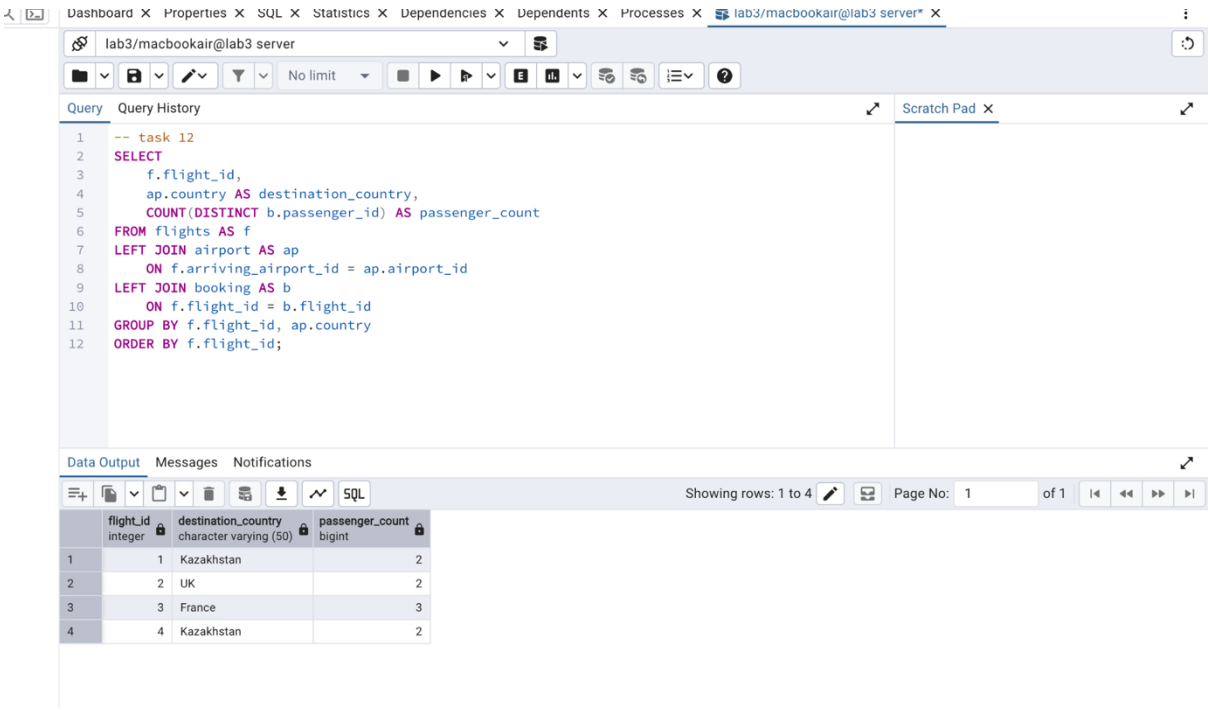
Data Output | Messages | Notifications

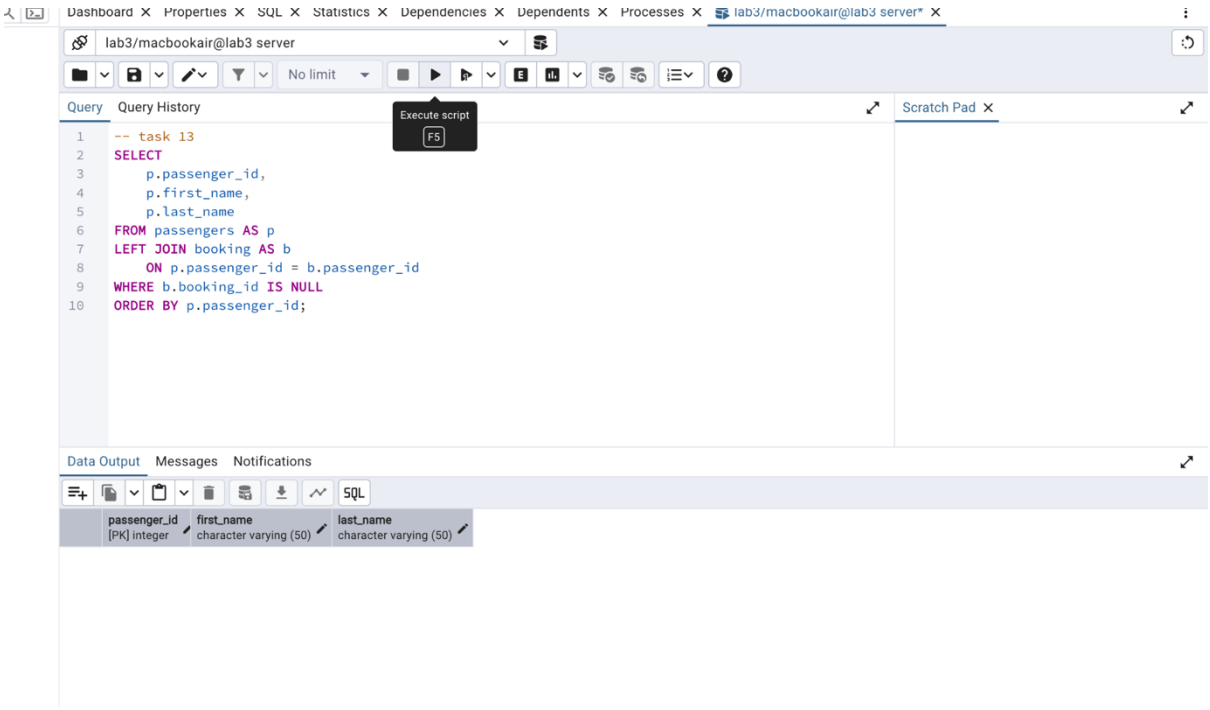
	passenger_id integer	full_name text	date_of_birth date	arrival_airport character varying (50)	destination_city character varying (50)	destination_country character varying (50)

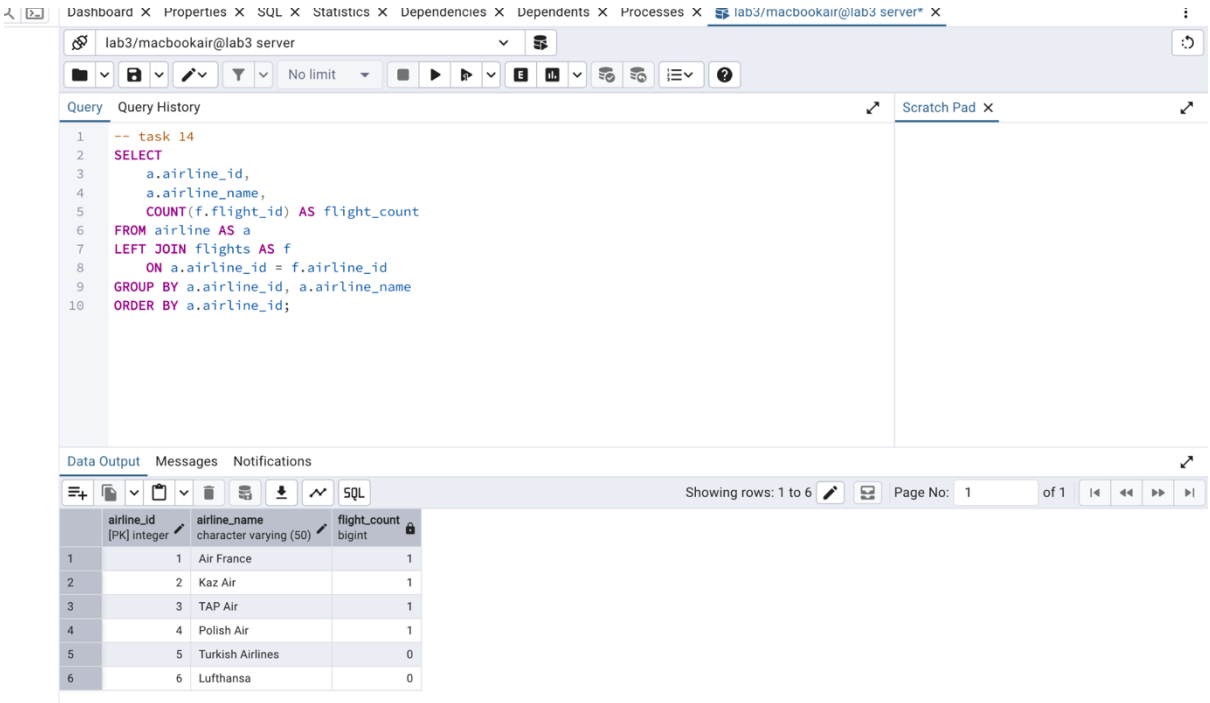

Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
lab3/macbookair@lab3 server*
lab3/macbookair@lab3 server
No limit
Query
Query History
Scratch Pad
-- task 9
SELECT
UPPER(ap.country) AS airport_country,
STRING_AGG(
f.flight_id::text,
', ' ORDER BY f.flight_id
) AS flight_ids
FROM flights AS f
JOIN airline AS a
ON f.airline_id = a.airline_id
JOIN airport AS ap
ON f.departing_airport_id = ap.airport_id
WHERE UPPER(a.airline_country) = UPPER(ap.country)
GROUP BY UPPER(ap.country)
ORDER BY airport_country;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 1
Page No:
1
of 1
airport_country
text
flight_ids
text
1
KAZAKHSTAN
2

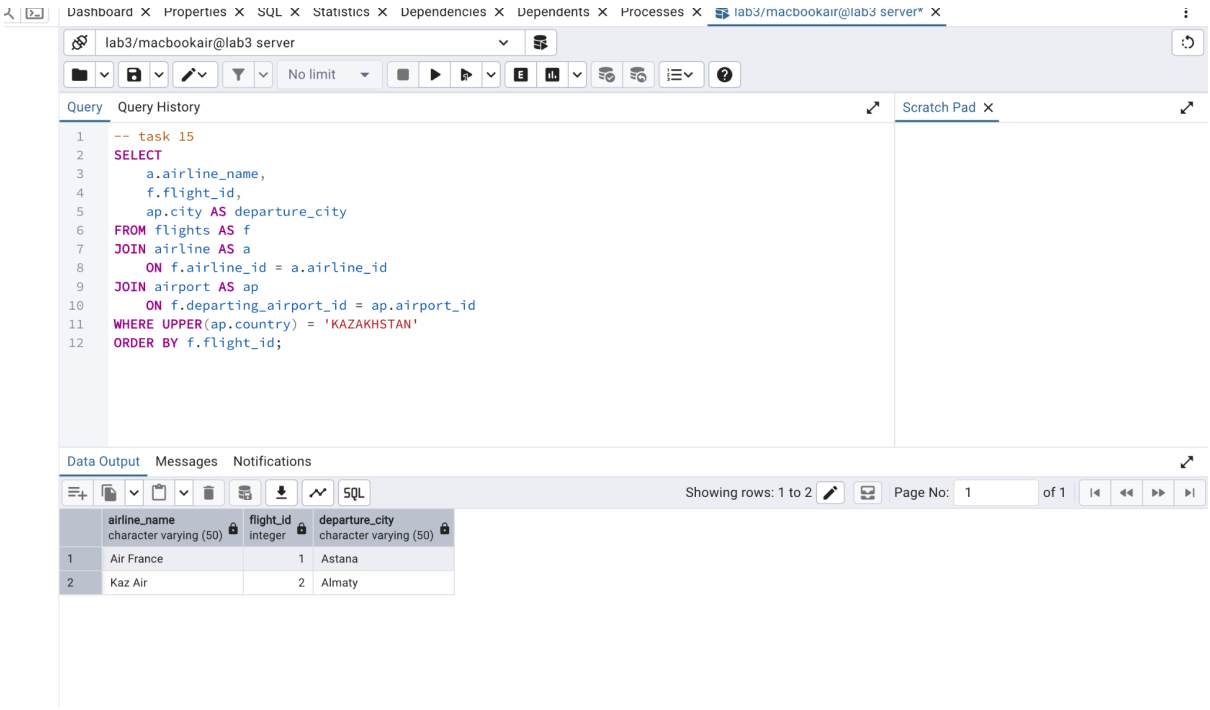

Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
lab3/macbookair@lab3 server*
lab3/macbookair@lab3 server
No limit
Query
Query History
Scratch Pad
-- task 10
SELECT
f.flight_id,
a.airline_name,
dep.airport_name AS departure_airport,
arr.airport_name AS arrival_airport
FROM flights AS f
JOIN airline AS a
ON f.airline_id = a.airline_id
JOIN airport AS dep
ON f.departing_airport_id = dep.airport_id
JOIN airport AS arr
ON f.arriving_airport_id = arr.airport_id
ORDER BY f.flight_id;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 4
Page No:
1
of 1
flight_id
integer
airline_name
character varying (50)
departure_airport
character varying (50)
arrival_airport
character varying (50)
1
1
Air France
Astana Reginal Air
Almaty International Airp...
2
2
Kaz Air
Almaty International Airp...
London Reginal Air
3
3
TAP Air
London Reginal Air
Paris Airport
4
4
Polish Air
Paris Airport
Astana Reginal Air


Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
lab3/macbookair@lab3 server*
lab3/macbookair@lab3 server
No limit
Query
Query History
Scratch Pad
-- task 11
SELECT DISTINCT
p.passenger_id,
CONCAT_WS(' ', p.first_name, p.last_name) AS full_name,
f.flight_id,
a.airline_name
FROM passengers AS p
JOIN booking AS b
ON p.passenger_id = b.passenger_id
JOIN flights AS f
ON b.flight_id = f.flight_id
JOIN airline AS a
ON f.airline_id = a.airline_id
WHERE a.airline_id = 1
ORDER BY f.flight_id, p.passenger_id;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 2
Page No: 1
of 1
passenger_id integer
full_name text
flight_id integer
airline_name character varying (50)
1 1 Ali Amanov 1 Air France
2 5 Arman Serik... 1 Air France


Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
lab3/macbookair@lab3 server*
lab3/macbookair@lab3 server
No limit
Query
Query History
Scratch Pad
-- task 12
SELECT
f.flight_id,
ap.country AS destination_country,
COUNT(DISTINCT b.passenger_id) AS passenger_count
FROM flights AS f
LEFT JOIN airport AS ap
ON f.arriving_airport_id = ap.airport_id
LEFT JOIN booking AS b
ON f.flight_id = b.flight_id
GROUP BY f.flight_id, ap.country
ORDER BY f.flight_id;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 4
Page No: 1
of 1
flight_id integer
destination_country character varying (50)
passenger_count bigint
1 1 Kazakhstan 2
2 2 UK 2
3 3 France 3
4 4 Kazakhstan 2


Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
lab3/macbookair@lab3 server*
lab3/macbookair@lab3 server
No limit
Query
Query History
Execute script
F5
Scratch Pad
-- task 13
SELECT
p.passenger_id,
p.first_name,
p.last_name
FROM passengers AS p
LEFT JOIN booking AS b
ON p.passenger_id = b.passenger_id
WHERE b.booking_id IS NULL
ORDER BY p.passenger_id;
Data Output
Messages
Notifications
SQL
passenger_id
[PK] integer
first_name
character varying (50)
last_name
character varying (50)


Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
lab3/macbookair@lab3 server*
lab3/macbookair@lab3 server
No limit
Query
Query History
Scratch Pad
-- task 14
SELECT
a.airline_id,
a.airline_name,
COUNT(f.flight_id) AS flight_count
FROM airline AS a
LEFT JOIN flights AS f
ON a.airline_id = f.airline_id
GROUP BY a.airline_id, a.airline_name
ORDER BY a.airline_id;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 6
Page No: 1
of 1
airline_id
[PK] integer
airline_name
character varying (50)
flight_count
bigint
1 1 Air France 1
2 2 Kaz Air 1
3 3 TAP Air 1
4 4 Polish Air 1
5 5 Turkish Airlines 0
6 6 Lufthansa 0


Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
lab3/macbookair@lab3 server*
lab3/macbookair@lab3 server
No limit
Query
Query History
Scratch Pad
-- task 15
SELECT
a.airline_name,
f.flight_id,
ap.city AS departure_city
FROM flights AS f
JOIN airline AS a
ON f.airline_id = a.airline_id
JOIN airport AS ap
ON f.departing_airport_id = ap.airport_id
WHERE UPPER(ap.country) = 'KAZAKHSTAN'
ORDER BY f.flight_id;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 2
Page No: 1
of 1
airline_name character varying (50)
flight_id integer
departure_city character varying (50)
1 Air France 1 Astana
2 Kaz Air 2 Almaty