





DESPLIEGUE DEL BACKEND

- 1- Inicialmente inicio sesión en render para desplegar el proyecto backend y cliqueo en Deploy Web Service

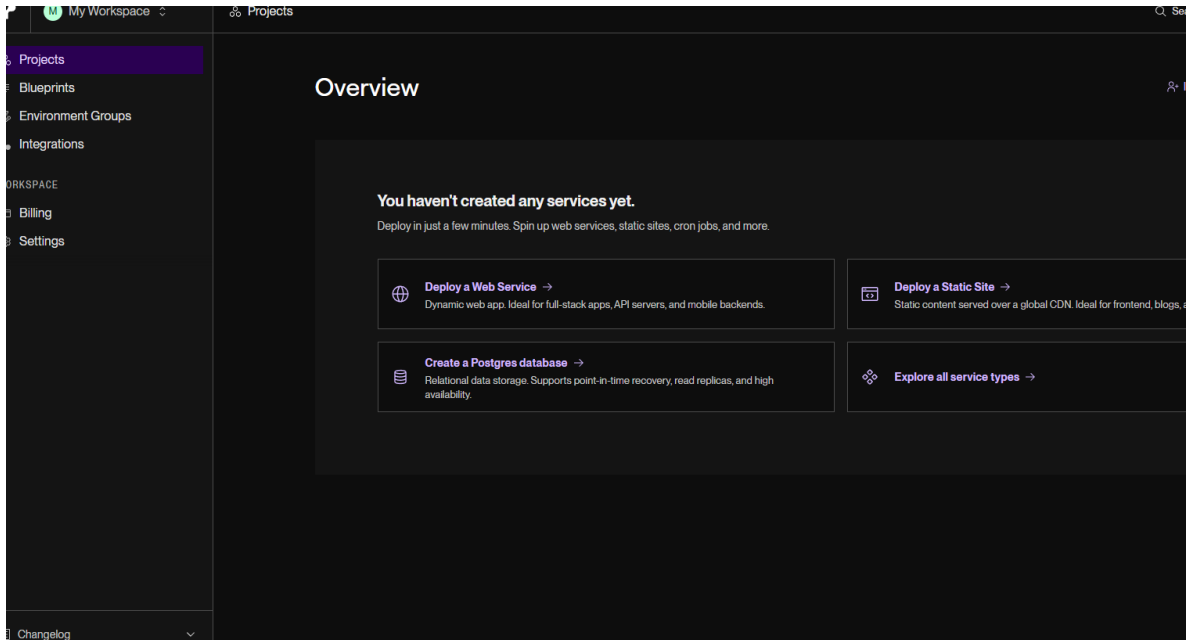

- 2- Seguidamente elijo donde tengo el repositorio del backend el cual esta agregado en github y escojo el proyecto que deseo desplegar

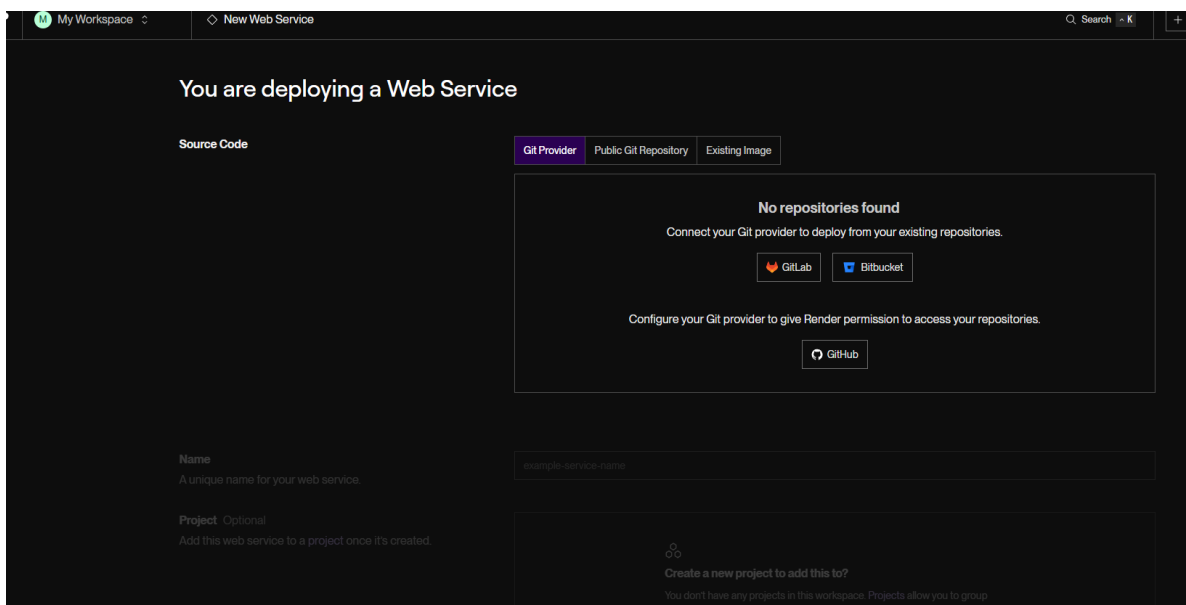

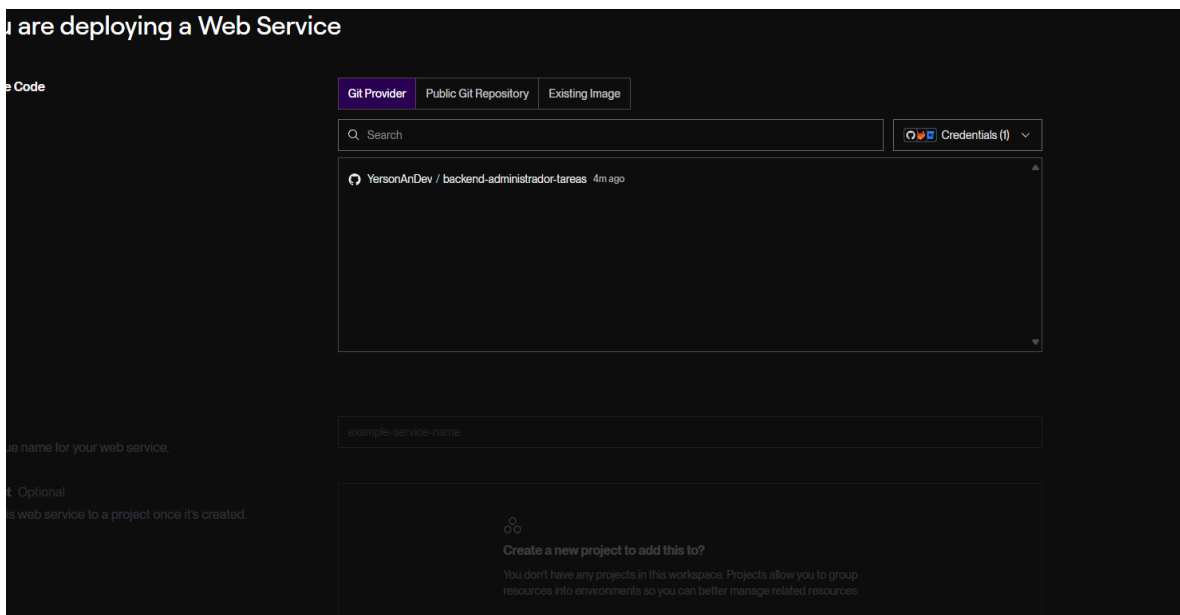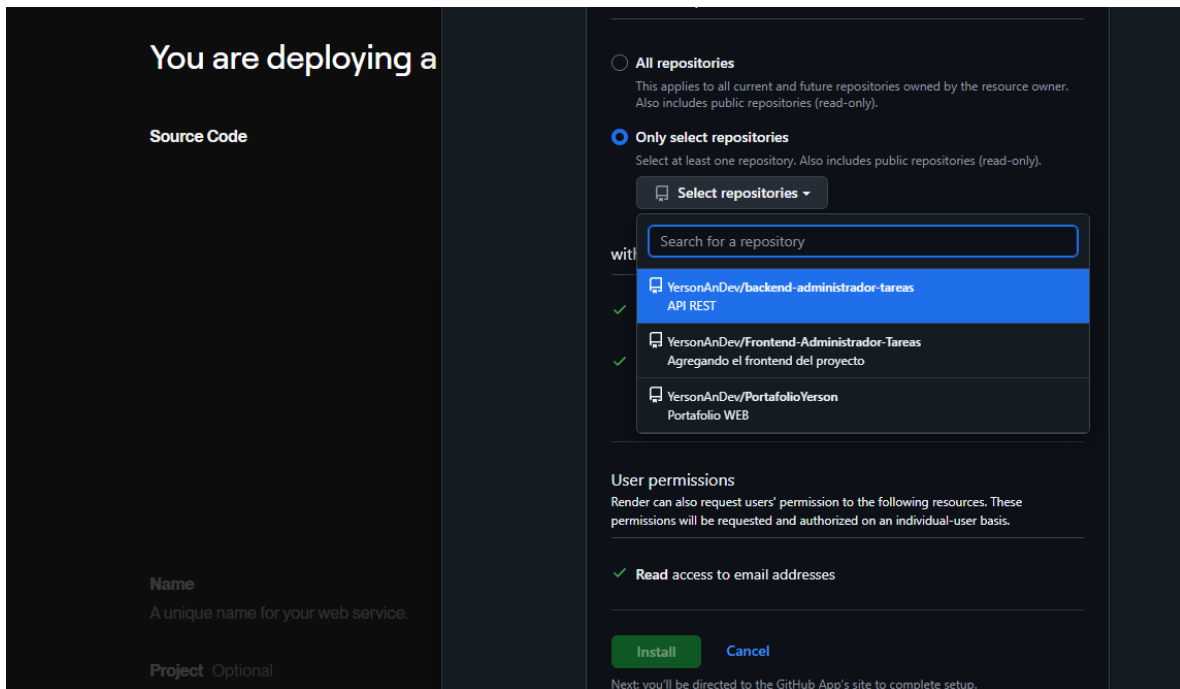

- 3- Modifico el apartado de build command escribiendo el comando de npm install && npm run build el cual instala los paquetes node y corre el comando de desarrollo del proyecto; también escribo la ubicación que ejecuta todo el proyecto.

Your services in the same region can communicate over a private network.

Root Directory Optional
If set, Render runs commands from this directory instead of the repository root. Additionally, code changes outside of this directory do not trigger an auto-deploy. Most commonly used with a monorepo.

Build Command
Render runs this command to build your app before each deploy.

Start Command
Render runs this command to start your app with each

e.g. src

\$ npm install && npm run build

\$ node dist/index.js

4- Elijo el plan gratuito y cliqueo el desplegar el servicio web

For professional use For more power and to get the most out of Render, we recommend using one of our paid instance types. All paid instances support: <ul style="list-style-type: none">Zero DowntimeSSH AccessScalingOne-off jobsSupport for persistent disks	Free \$0 / month 512 MB (RAM) 0.1 CPU	Free instances spin down after periods of inactivity. They do not support SSH access, scaling, one-off jobs, or persistent disks. Select any paid instance type to enable these features.
	Starter \$7 / month 512 MB (RAM) 0.5 CPU	Standard \$25 / month 2 GB (RAM) 1 CPU
	Pro \$85 / month 4 GB (RAM) 2 CPU	Pro Plus \$175 / month 8 GB (RAM) 4 CPU
	Pro Max \$225 / month 16 GB (RAM) 4 CPU	Pro Ultra \$450 / month 32 GB (RAM) 8 CPU
	Need a custom instance type? We support up to 512 GB RAM and 64 CPUs.	

Environment Variables
Set environment-specific config and secrets (such as API keys), then read those values from your code. [Learn more.](#)

+ Add Environment Variable Add from env

> **Advanced**

Deploy Web Service

5- Espero hasta finalizar el despliegue del proyecto

Dashboard

backend-administrador-tareas

Events

Settings

MONITOR

Logs

Metrics

MANAGE

Environment

Shell

Scaling

Previews

Disks

Jobs

Changelog

Invide a friend

Contact support

WEB SERVICE

backend-administrador-tareas

NodeFreeUpgrade your instance →

YersonArDev / backend-administrador-tareas main

https://backend-administrador-tareas.onrender.com

ConnectManual Deploy

Your free instance will spin down with inactivity, which can delay requests by 50 seconds or more.Upgrade now

May 15, 2025 at 10:54 PMBuilding

Subiendo el proyecto Backend

Cancel deploy

All logsSearchLive tailGMT-5

May 15 19:54:17 PM Cloning from https://github.com/YersonArDev/backend-administrador-tareas

May 15 19:54:17 PM Checking out commit b6d38e47986e46d660d2b12742e4ef306e295cf in branch main

May 15 19:54:19 PM Using Node.js version 22.14.0 (default)

May 15 19:54:19 PM Done on specifying a Node.js version: https://render.com/docs/node-version