

Weeklendar

A weekly displayed calendar.

Version 0.1.0



2026-09-15

<https://github.com/Yesteeer/typst-weeklendar>

General syntax

Let us look at an example that uses all of weeklendar's features.

```
#let events = (  
  (  
    start: "2026-09-18T09",  
    end: "2026-09-18T12",  
    summary: "Learning Typst",  
    description: "Create a calendar package."  
  ),  
  (  
    start: "2026-09-14T08:15",  
    end: "2026-09-14T09:45",  
    summary: "Yoga class",  
    repeat-until: "2026-12-31",  
    repeat-frequency: duration(days: 7)  
  ),  
  (  
    start: "2026-09-26T10",  
    end: "2026-09-27T17",  
    summary: "Family trip",  
    description: "Hiking with the whole family in the swiss mountains",  
    fill: orange.lighten(60%)  
  )  
)  
  
#weeklendar(  
  starting-date: "2026-09-14",  
  ending-date: "2026-09-27",  
  events  
)
```

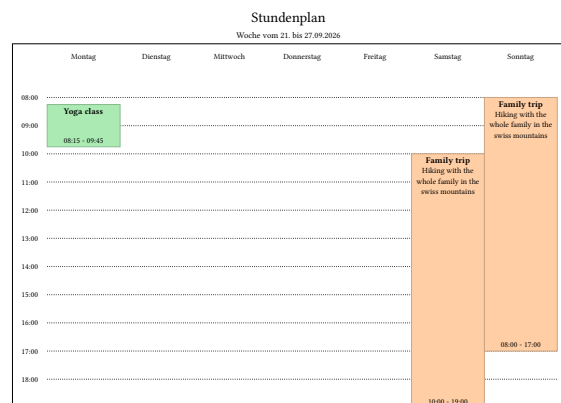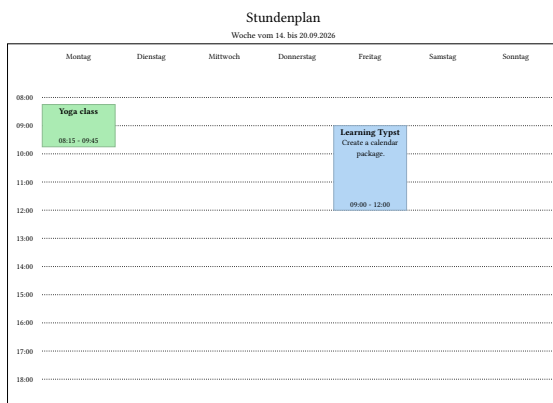

Spacing and margin

WIP

Customize event styling

WIP

Weeklendar's API

- weeklendar()

weeklendar

This function generates a weekly calendar from a starting date to a end date. It displays events, which are parametrized by a dictionary.

Parameters

```
weeklendar(  
    starting-date: str,  
    ending-date: str,  
    height: length,  
    width: length,  
    margin: dictionary,  
    days: array,  
    days-pad: dictionary,  
    time-start: datetime,  
    time-step: duration,  
    time-number: int,  
    time-width: length,  
    time-pad: length,  
    weekly-title: auto function,  
    event-fct: auto function,  
    debug: boolean,  
    events: array  
) -> content
```

starting-date str

The starting-date defines the first week to be displayed in the calendar.

The date must be given with the following format (based on the ISO 8601 extended format):

- “dd-mm-yyyy”
- “dd-mm-yyyyThh”
- “dd-mm-yyyyThh:mm”
- “dd-mm-yyyyThh:mm:ss”

Or directly as a datetime element.

Default: `datetime.today()`

ending-date str

The ending date defines the last week to be displayed in the calendar.

The accepted date format are the same as for the starting-date.

Default: `datetime.today() + duration(days: 7)`

height length

The paper's height (not the same as the timetable's height !).

Default: 21cm

width length

The paper's width (not the same as the timetable's width !).

Default: 29.70cm

margin dictionary

The paper's margins, which define the timetable's height and width, together with the title's dimensions.

The top margin is applied above and below the title, so that the total distance between the top of the timetable and the top of the page is equal to the title's height + 2 * margin.top.

Default: (:)

days array

The days names to be displayed on the timetable.

Default: (
 "Montag",
 "Dienstag",
 "Mittwoch",
 "Donnerstag",
 "Freitag",
 "Samstag",
 "Sonntag"
)

days-pad dictionary

The padding below and above the displayed days.

Default: (above: 0.5cm, below: 0.5cm)

time-start datetime

The first timeline to appear on the timetable.

Default: datetime(hour: 8, minute: 0, second: 0)

time-step `duration`

The step between two successive displayed timelines.

Default: `duration(hours: 1)`

time-number `int`

The number of timelines.

The spacing between consecutive timelines depends on this number.

Default: `11`

time-width `length`

The width of the box containing the timeline's times.

Default: `1cm`

time-pad `length`

The padding on the left/right around the timeline's time (added to the time's width) and at the end of the timeline's line.

Default: `10pt`

weekly-title `auto` or `function`

A custom function for generating weekly titles. It takes the first week's day "monday" as an argument and build a custom title depending on monday's date.

Default: `auto`

event-fct `auto` or `function`

A custom function for the generic content of an event. It takes an event as an argument. It is recommended to build a content that expands vertically (for example by using `#v(1fr)`), so that the events are displayed on the entire associated timeline.

Default: `auto`

debug `boolean`

A debugging option to show some of the displayed element's boundaries.

Default: `false`

events `array`

Events to be displayed on the calendar, passed as a positional argument.

Each event is described by a dictionary with two mandatory arguments: `start` and `end`, which are to be given in the ISO 8601 extended format (see `starting-date` above) or directly as a `datetime` element.

If you want to make a periodic event, then you can use `repeat-until` and `repeat-frequency`. You can add extra named arguments, to be accessed by your custom `event-fct`.