Block LSD: auxiliary heap and overall speed distribution

Candidate: c = 4, minimum 1 KiB per block; equal measured calls are reused

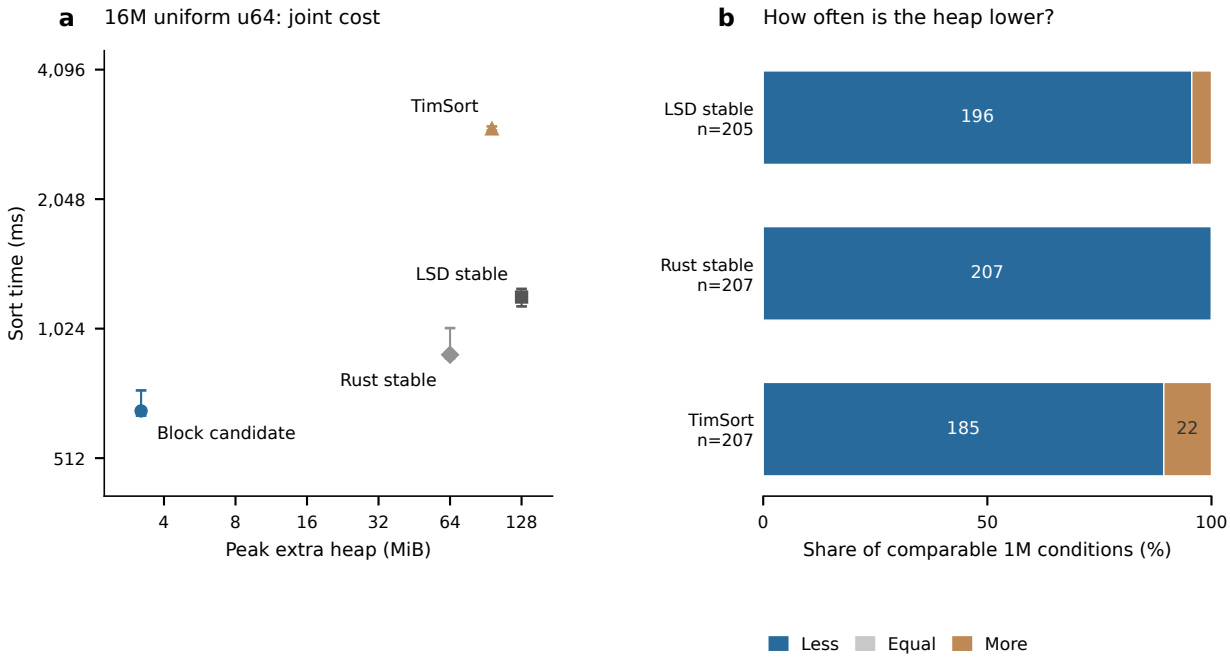

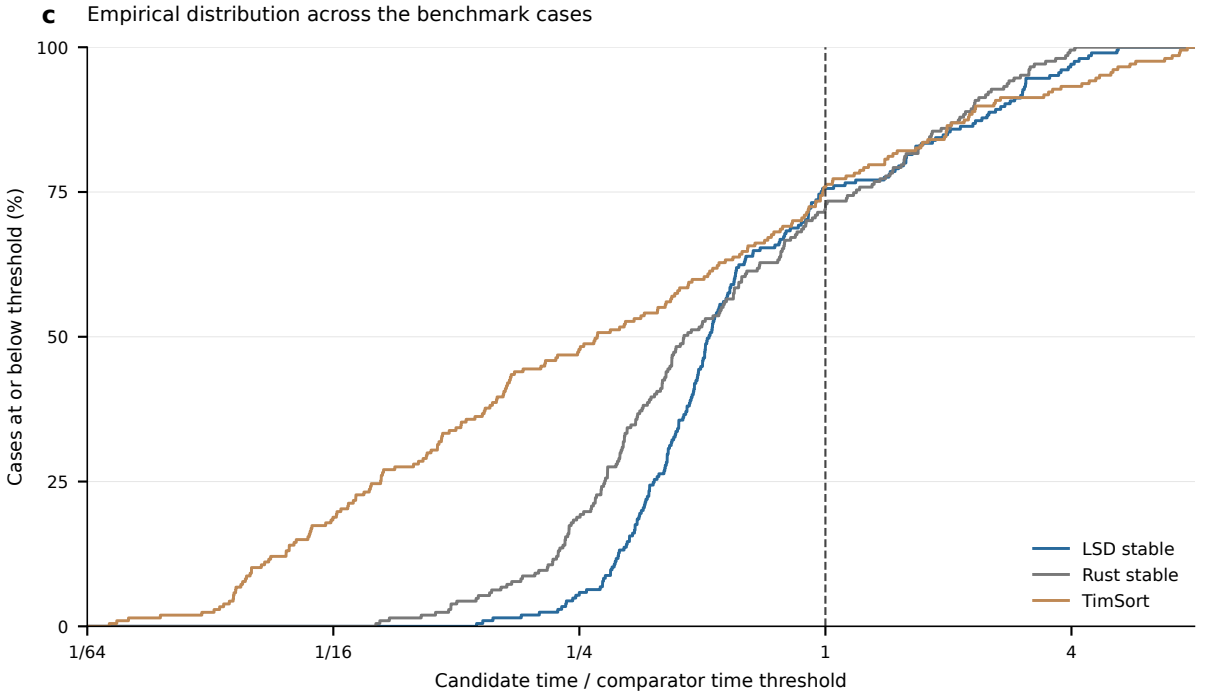

c: every case has equal weight; these curves describe case differences, not timing uncertainty.

1M: LSD has 205 valid cases; Rust stable and TimSort have 207. Two reversed-record LSD oracle failures are excluded.

a: same-campaign medians and full timing ranges. Individual types and distributions are shown in Figure 1.