

Qwen replay of GCG suffixes from independent optimization runs

TV gain = distance(empty optional, no-channel) − distance(variant, no-channel); positive means closer to no-channel.

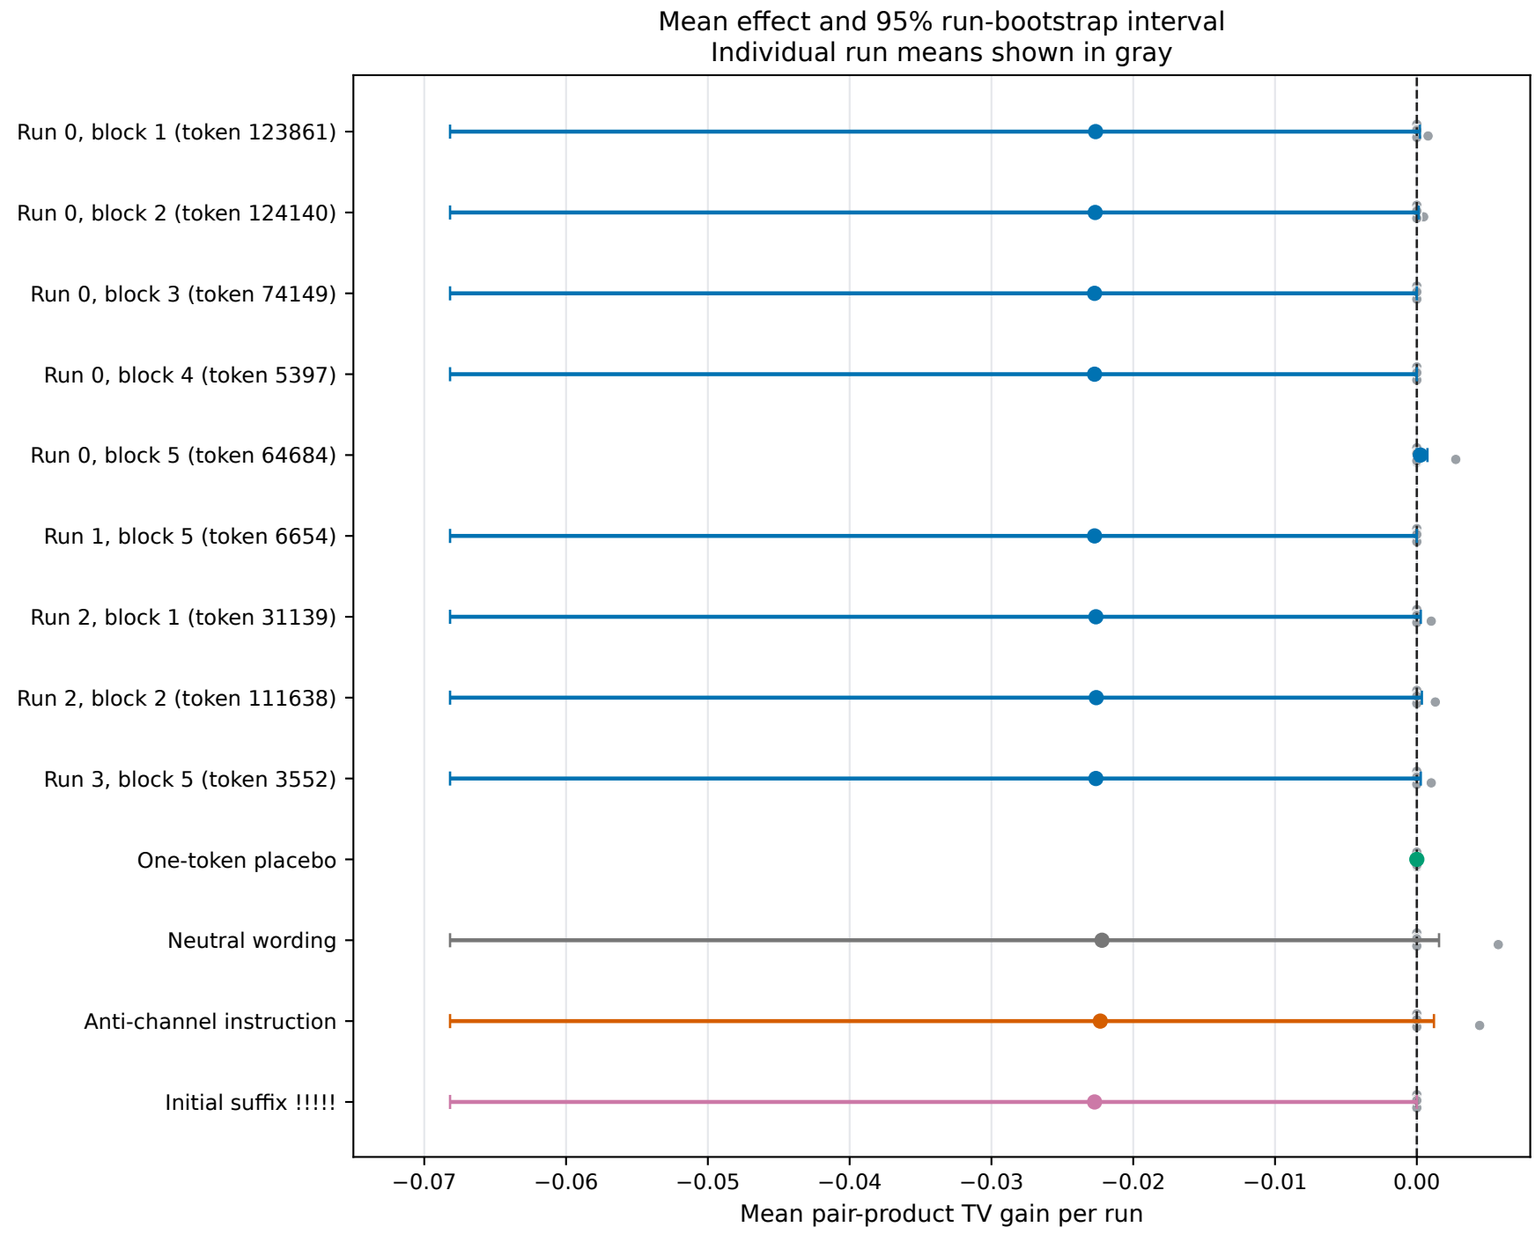

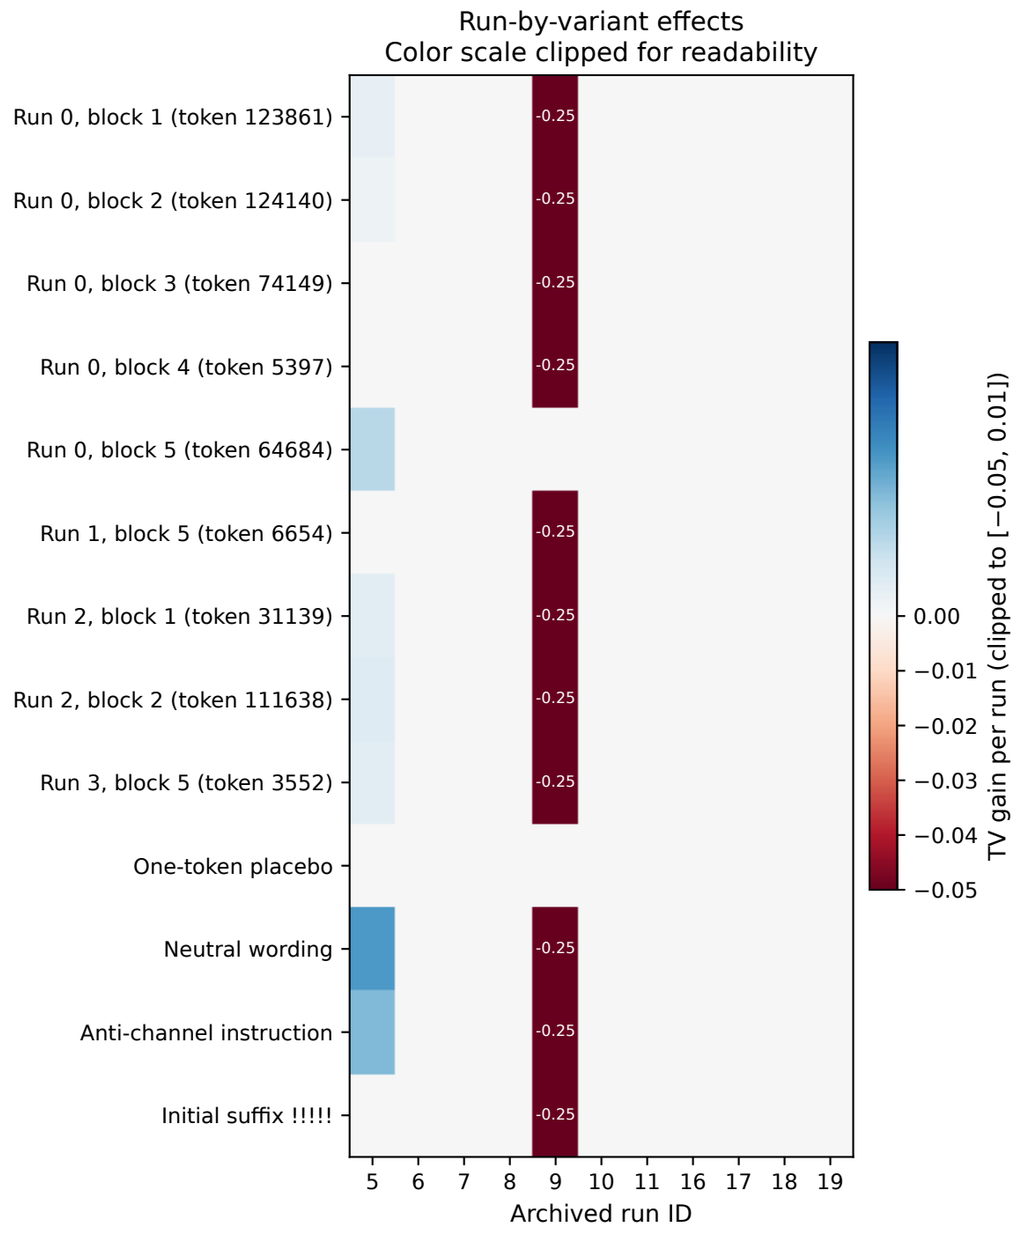

11 archived Qwen runs × 4 rounds. Run 9, round 20 drives the large negative cells. Candidates use source block and Qwen token ID; decoded text is in candidates.json. p(A)×p(B) is not observed action CMI.