

mlEDA: an interactive tool for guided standardized exploratory analysis workflow of multivariate longitudinal data

Ying Jin Mandy Goldberg David Umbach Shanshan Zhao

2026-03-26

Contents

1	Introduction	1
1.1	Motivation	1
1.2	Previous work	2
2	Motivational dataset	3
3	The mlEDA App	4
3.1	Functionalities	4
4	Dynamic netowrk plot of variable association	10
4.1	Multidimensional Scaling	10
4.2	Temporal stability	11
5	Case Study	13
6	Discussion (to be expanded)	15
	References	15

1 Introduction

1.1 Motivation

In many biomedical studies, researchers routinely collect health-related measurements over time. In experimental settings, panels of biomarkers are followed longitudinally to understand the underlying biological processes. In observational studies, procedures are often done repeatedly to monitor progress over time. Our motivational dataset, the Infant Feeding and Early Development (IFED) study, is an example of this type of data structure. In the IFED study, infants are followed up from birth to up to three years old. Physical examples, blood sample collection and ultrasound are scheduled every few weeks to collected measure of growth. Such data structure, characterized by repeated measures of multiple variables, are commonly referred to as multivariate longitudinal data .

Comprehensive exploratory data analysis (EDA) of such data is essential to provide insights into the temporal dynamics of biological processes and their interactions. As the first step in the data analysis pipeline, EDA supports problem identification, hypothesis generation, and design of downstream analysis. In particular, the correlation structure between variables, especially its temporal evolution, can reveal vital information. Therefore, a comprehensive and effective exploration of the time-varying relationship between multivariate longitudinal variables is fundamental. Nevertheless, existing EDA methods and tools for multivariate longitudinal data remain limited, due to its complex and dynamic nature. In particular, exploration of such data largely depends on graphic visualization, which demands substantial technical expertise (e.g. programming with statistical software). As a result, biomedical and clinical experts may be discouraged from conducting thorough exploratory data analyses, which can greatly hinder interdisciplinary collaboration and communication. Furthermore, existing exploratory analysis often consists of isolated summary tables and graphs that are rarely connected. There also lacks a standardize EDA workflow, leaving the choice of methods largely up to discretion. As a result, EDA may be inconsistent or incomplete, making it difficult to form an objective understanding of the data.

These challenges above have inspired the development of mlEDA, an accessible toolkit that provides an interactive and standardized workflow for exploratory analysis of multivariate longitudinal data. This toolkit facilitates comprehensive summarization and visualization of the data structure, with a particular emphasis on time-varying correlations, and is designed for easy use by researchers without extensive statistical or programming background.

1.2 Previous work

Multivariate longitudinal data are characterized by both multi-dimensionality and temporal evolution, which pose challenges for EDA. Traditional EDA methods are largely for univariate or pairwise examinations. Summary statistics (e.g., mean, standard deviation) and plots (e.g. boxplots, histograms) can summarize the distribution of individual variables at each time point, while associations between variables are often presented pairwise in matrix form, such as correlation matrix, scatterplot matrix or heatmaps. Although effective for low- to moderate-dimensional datasets, these approaches become infeasible as dimensionality increases, due to the rapid growth of information to be processed. In addition, these summaries are static and do not directly reflect temporal changes. To accommodate the time-varying feature, they have to be reproduced at every time point, requiring constant examination and comparison across time slices. Such operation is inefficient and result in high chance of errors and negligence.

Some methods have been proposed for the visualization of high-dimensional or large-scale data, through dimension reduction techniques. One such example is Multidimensional Scaling (MDS) (also known as Principal Coordinates Analysis (Gower 1966)). It is specifically designed to preserve the high-dimensional structure representing pairwise relationships (i.e. similarity). As a result, MDS has been used to visualize correlation. In the R package *corr* (Kuhn, Jackson, and Cimentada 2022), the MDS process is embedded into the *network_plot* function. It represents the correlation matrix on a 2D surface in a network plot format, where each variable is represented by a node and their coordinates is the output of MDS algorithms. This function offers a clean, comprehensive visualization where variable correlation can be intuitively perceived. However, it is a static plot and thus is subject to the same repetition procedure mentioned above when visualizing temporal evolution. *igraph* (Csardi and Nepusz 2005) offers a similar function with the same temporal restriction. Other R packages have been developed to either implement MDS reduction ((R Core Team 2025; Venables and Ripley 2002; Mair, Groenen, and de Leeuw 2022)) or produce network-based visualizations ((Wickham 2016; Bender-deMoll 2024; Butts et al. 2024)), but rarely combining the two procedure.

All the packages mentioned up require careful data management and substantial R programming expertise, such that domain experts without easy access to these techniques are often discouraged from using them, even though they could significantly improve analysis efficiency. Another shortcoming of existing EDA tools is their in coherence and interactivity. Graphical summaries reflecting different aspects of data are often implemented in isolation. Cross-referencing is frequently needed but not sufficiently supported by the existing exploratory analysis scheme. Existing literature has demonstrated the preference toward interactive tools

(Lakkaraju et al. 2022). Unfortunately, development in this areas has been sparse and lacks standardize EDA workflows.

2 Motivational dataset

This section introduces the motivational dataset that will be used through out this manuscript for demonstration purposes, in both Section 3 to explain the mLEDA workflow and functionalities, and Section 5 for a data application example to illustrate its practical utility. This data was collected by the Infant Feeding and Early Development (IFED) study (Adgent et al. 2018), an NIH-funded longitudinal observational study of postnatal development of reproductive system on healthy term infants born in Philadelphia. From August 2010 to November 2013, eligible infants completed the baseline visit within 72 hours after birth. Subsequent visits were scheduled every 2-4 weeks. Boys were followed for 28 weeks and girls 36 weeks after birth. At each visit, anthropometry was performed on present participants for a set of group measures, such as length, weight, head circumference, etc. Blood sample collection began at week 2 and was analyzed for hormones (e.g. estradiol, FSH). In later weeks, ultrasound was performed immediately before or after regular visits to measure the dimension of organs, such as breast bud bead, thyroid, uterus and ovary.

The original study intended to explore the effect of feeding regime (Adgent et al. 2018). Since then, the data set has been explored for a variety of questions regarding early development of the reproductive system (Goldberg et al. 2024). Special interest has been shown in the postnatal activation of Hypothalamic-pituitary-gonadal (HPG) axis activation, often referred to as “minipuberty” in existing literature. During this time, hormones concentration could increase rapidly and stimulates development of target tissues, which can affect growth, body composition and behavioral development. Therefore, minipuberty is considered a critical window for early detection and treatment of disorders of sexual development Renault Christoffer Højrup (2020). Despite the importance, the biological pathways behind these phenomenon remain unclear. This is largely due to the complexity of multidimensional, dynamic interactions between factors, as well as the large variability in timing and duration of development across individuals. Existing research often uses univariate or pairwise examination (Chin et al. 2023), which provides facets of information instead of the full picture. The study design of IFED data also poses specific challenges. The schedule of procedures are different between blood sample collection and ultrasound, causing discontinuity in the study of their correlation. Blood samples are consistently collected at each visits starting the second visit, but the hormone concentration is often too low to be detected, causing missing values in large proportion of the sample and leading to unreliable correlation measures.

In the following section we will use this dataset as an example to illustrate the workflow and functionalists that mLEDA offers. More detailed regarding the analysis and intepretation of results will be presented in Section 5. Considering the different biological mechanism of child development between boys and girls, the two sexes are often analyzed separately. In this paper, we will focus on the data from infant girls, as “minipuberty” is less understood or explored in girls compared to boys.

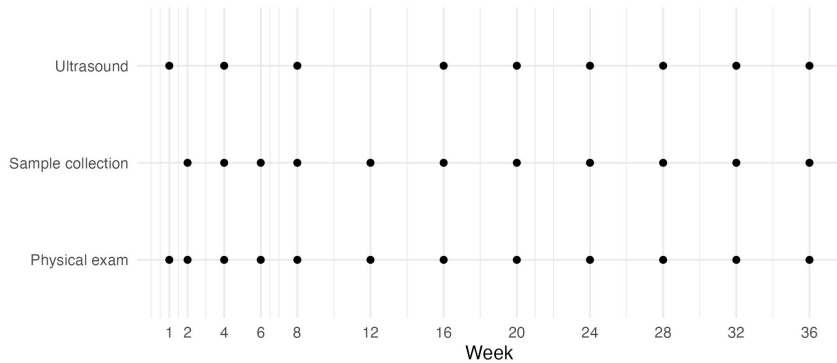


Figure 1: IFED study timeline. Scheduled procedure are indicated by black dots.

3 The mlEDA App

To address the challenges in Section 1, we have created mlEDA, a web-based application designed for interactive, standardized exploratory data analysis workflow of multivariate longitudinal dataset. This application is an integration of classical EDA components and novel multidimensional visualization scheme with the ability to visualize temporal evolution dynamically and intuitively to human vision. It guides users through an comprehensive analytical workflow with interactive operations. Its usage requires minimal technical background or coding experience, thus desirable for the interdisciplinary collaboration settings. This section will demonstrate the functionalities of mlEDA in details, using the the Infant Feeding and Early Development (IFED) study introduced in 2 as a motivational example. The same data will also serve as a case study example in Section 5.

3.1 Functionalities

The mlEDA Shiny App guides user through a series of operations to explore various facets of a full dataset. The entire workflow is briefly summarized in Figure 2. Each step corresponds to component of analysis wrapped in a single tab, such as data upload and preview, descriptive statistics and graphs, dynamic visualization and integrated, time-independent visualization. All tabs in mlEDA consists of a input panel on the left side and an output panel on the right side. Users can give commands and specify options in the input panel, and analysis results will be interactively generated and displayed on the output panel.

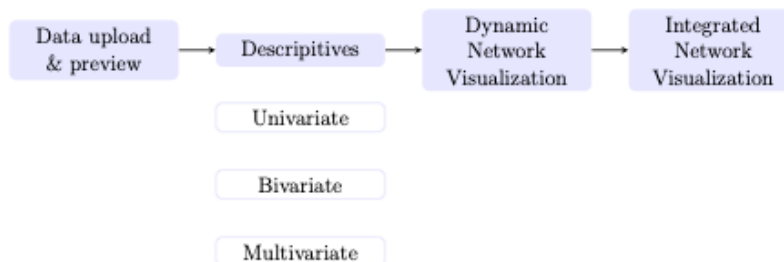


Figure 2: mlEDA workflow summary

3.1.1 Data upload and preview

The first tab of mlEDA allows user to upload a dataset from their own local device. Currently, the dataset is required to be a csv file with long-format, meaning each row is an observation from one subject at a single time point, and repeated measures at different times should be vertically stacked. The uploaded data will then be displayed on the output panel in a table format, followed by a brief summary of sample size and follow-up times.

It is also important that user should specify the time and subject identifier in this tab, as those are the defining factors of repeated measures over time and will affect future analysis. In some cases a dataset can contain multiple variables for time or subject ID. The IFED dataset, as an example, recorded time both by the week a procedure is scheduled, or the number of days after birth. These variables are often highly correlated as they contains the same piece of information in different forms. Therefore, we recommend user to keep only one of them in the following analysis to avoid redundancy, unless they must be included for specific purposes.

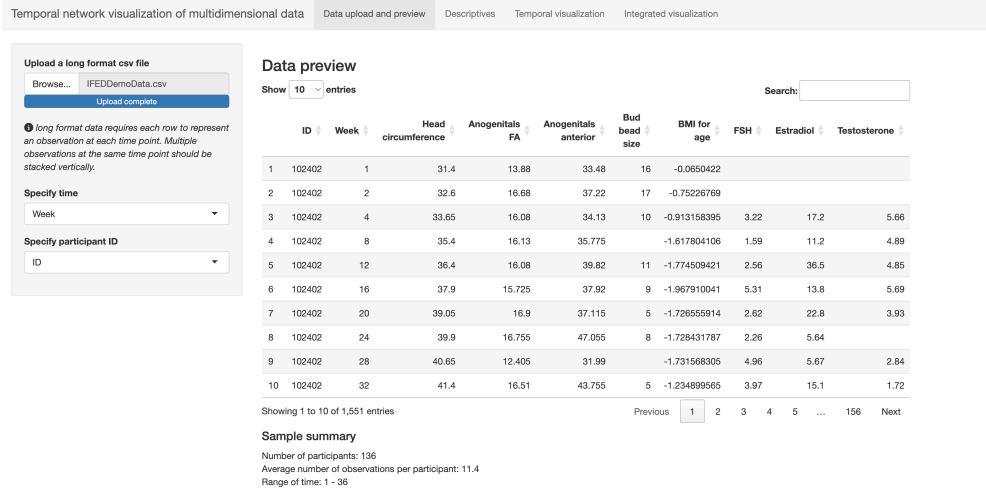


Figure 3: Temporal correlation structure


3.1.2 Descriptives

The second tab of mLEDA provides graphs and statistics for detailed exploration of subsets of the data. It offers three aspects of examination respectively under three subtabs: univariate distribution, bivariate correlation and multivariate correlation.


3.1.2.1 Univariate On the first “Univariate” subtab, users can choose any single variable from the dataset and examine its distribution at each time point and the change in distribution over time. The choice of summary graphs depends on how the “time” variable is perceived. If time grid is relatively sparse and irregular (e.g. a handful of time points), users are more likely to think of time as discrete points and focus on the average summary at each time point. On the other hand, a dense, regular grid is more likely to be interpreted as a continuous variable, where the individual trajectories over time become more important than distribution at each time point. The choice of perceiving time as categorical or continuous depends on the data structure as well as analysis context, and thus is often up to user discretion. Taking the IFED data as example, time can be treated as discrete since there are only 12 unique scheduled visits over the follow up period. It can also be perceived as continuous, as the visits are timed by number of weeks after birth. In some studies, infant age coded as days after birth is used as the time variable, making a denser grid with 191 unique values present in between 0 and 278. This should be considered continuous due to this high-density.

The mLEDA app accommodates the potential different in time by giving user the option to specify time as discrete or continuous and adjusts the visualization method and following analysis accordingly. A variable over discrete time will be visualized as a series of boxplots, highlighting sample distribution at each measurement point. Temporal trend is then represented by the change in time-specific sample median, while the discrepancy across sample is still highlighted at each time point (Figure 4a). For continuous time, the app generates a spaghetti plot of individual trajectories, accompanied by a summary trajectory smoothed over time (Figure 4b). Additionally, it provides time-dependent summary of missing pattern across both sample and time. This is often of interest because high-proportion of missing values can severely affect the reliability of summary statistics. User could choose to display a summary table of proportion of missing at each time point, where high-missing will be highlighted. User may wish to remove high-missing variables or time points from downstream analysis to improve robustness.

3.1.2.2 Bivariate The second subtab examines the time-dependent correlation between any pair of variables. User can choose any two variable from the data and their preferred correlation measure (pearson or

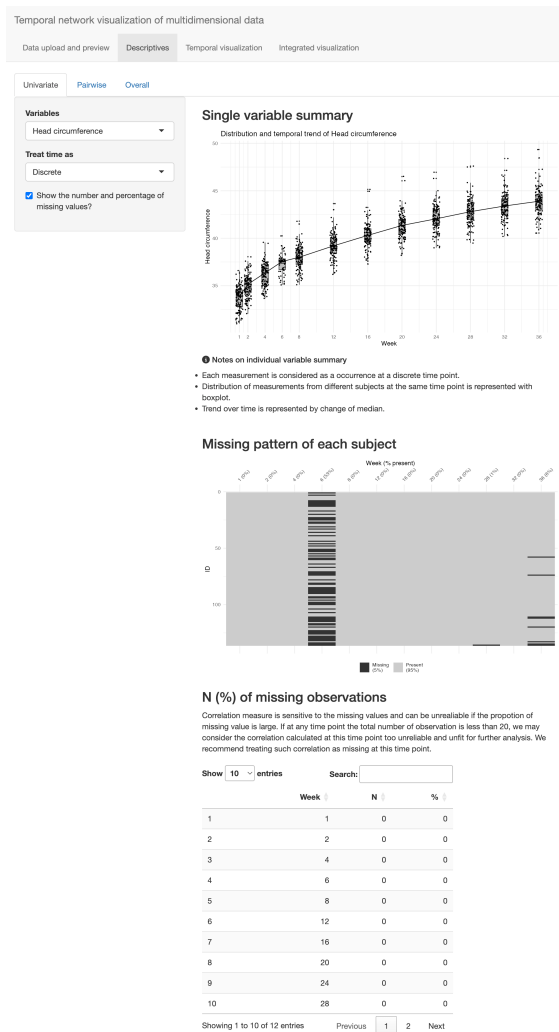

(a) Discrete time

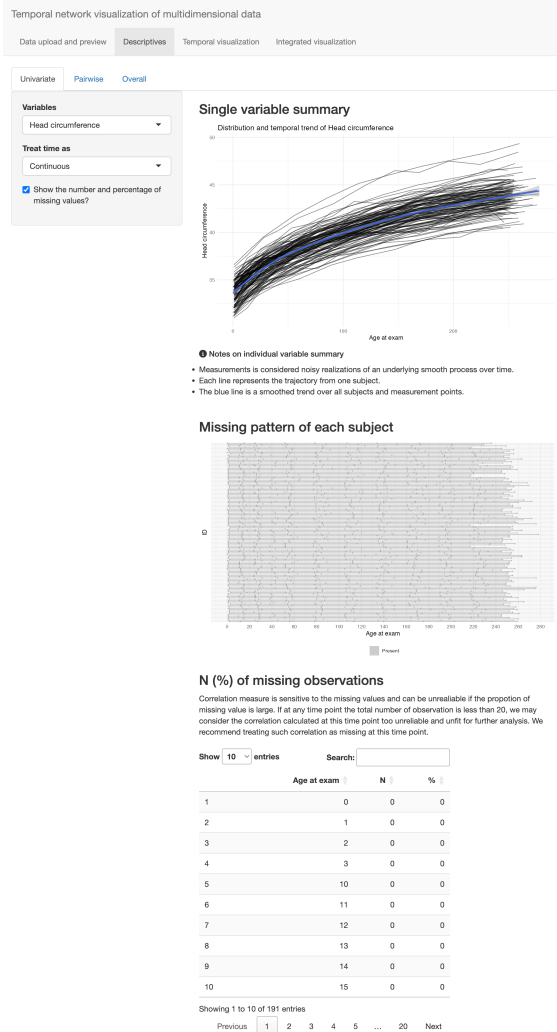

(b) Continuous time

Figure 4: Descriptives of individual variable distribution and change over time. Figure (a) uses week of scheduled procedure as time. Figure (b) uses infant age as time, coded as days after birth.

spearman). A plot of correlation trend is then generated in the output panel showing the empirical correlation value at each measurement point. Please note here the scale of missing is also visualized on the same plot. The points not only represents the value of correlation coefficient. Their size also indicates how many observations are used for calculating the correlation at each time. This information is very important because it is relevant to the reliability of correlation. Large point size indicates a large sample, and thus more reliable correlation, and vice versa. Missing data is a practical and frequent issue in real-world data analysis. For example, for some variables in the IFED dataset, there may have only 2 complete pairs at a single time point, and the correlation measure will always be 1 or -1, which clearly is not informative. This can happen especially when the measurement grid is sparse. If age is considered as time in IFED data, the 136 participants would be spread over 278 days, making sample size at each time point very small. The empirical correlation therefore, frequently hits extreme values, as illustrated in Figure 5b.

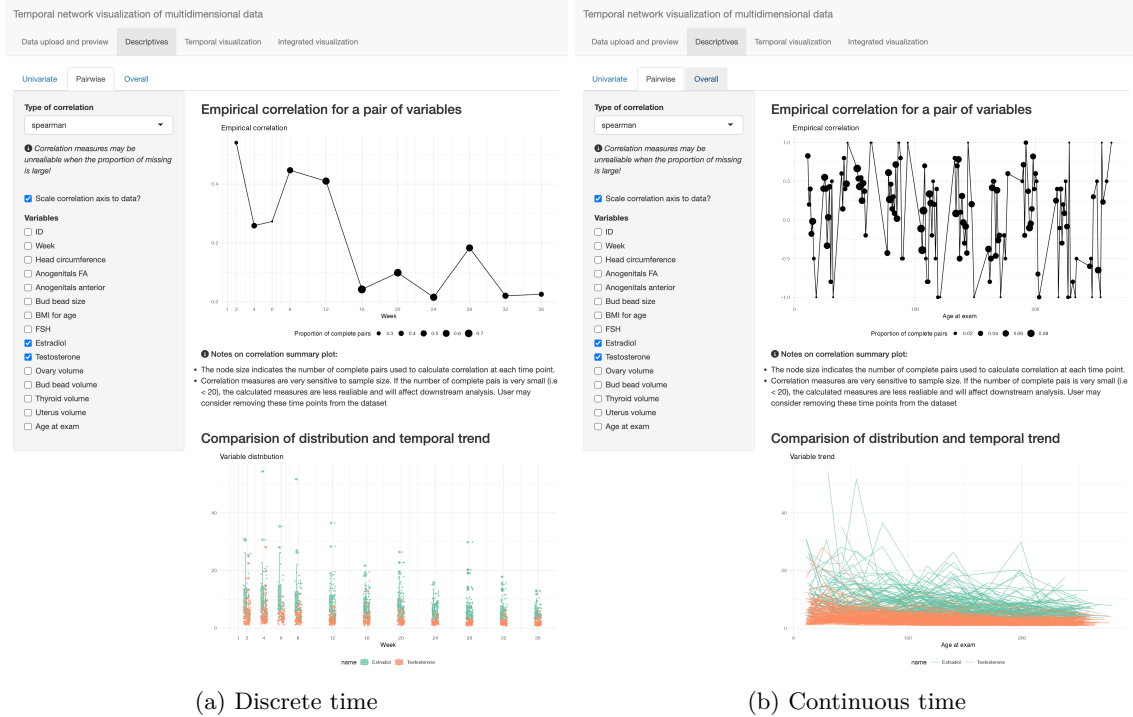


Figure 5: Descriptives of pairwise correlation and its change over time. Figure (a) uses week of scheduled procedure as discrete time. Figure (b) uses infant age as continuous time, coded as days after birth.

The correlation graph allows users to adjust the vertical axis range correlation plot to data. A fixed axis range between -1, 1 give users a better idea of the magnitude of correlation, while a scaled one highlights relative change. In addition, distribution and/or trajectories of the two variables are displayed together below the correlation graph for comparison and reference. The visualization scheme is similar to the previous tab, except now two variables are displayed in one graph for comparison purpose.

3.1.2.3 Multivariate Tab 3 display the empirical correlation matrix in a heatmap, using different colors for direction and hue for magnitude (Figure 6). User can scroll over the time axis on the input panel to examine its change over time. If a correlation cannot be computed, the corresponding square will be marked gray.

3.1.3 Temporal visualization

This tab hosts the core functionality of the mlEDA app - a dynamic network graph of multivariate correlation and/or association. We proposed this novel visualization scheme to offer a comprehensive, concise and

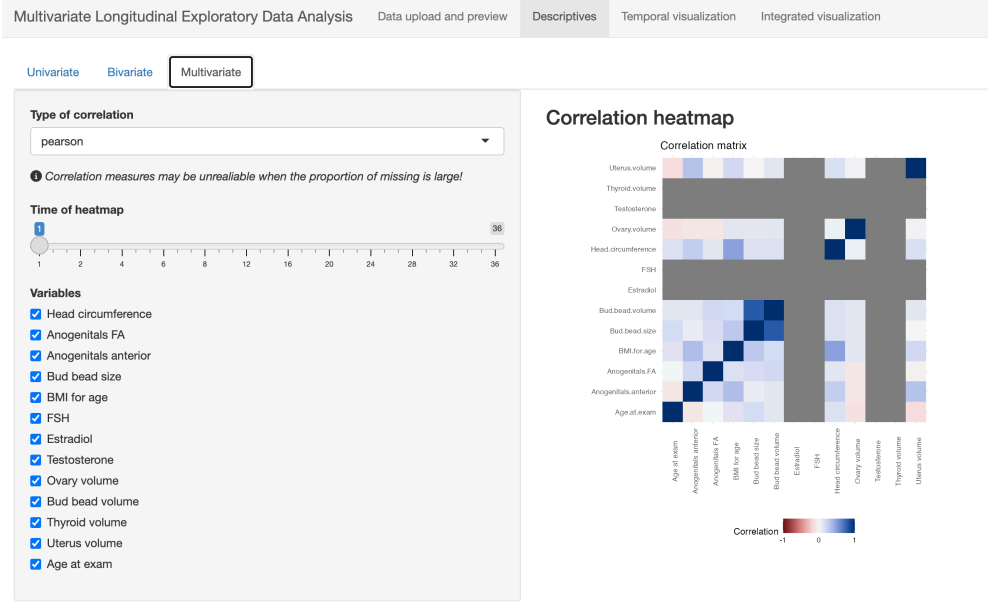


Figure 6: Descriptives of the correlation structure of the entire dataset

interpretable representation of the complicated and evolving relationship between multiple measures. The layout reflects the relationship between multiple variables on one 2D surface, with nodes indicates variables, and their relative position indicating the strength of relationship. Strongly associated variables are positioned closer to each other while weakly associated variables are positioned further away. For example, in Figure 7, the two anogenital measures are very close to each other, indicating very strong correlation between them, which is consistent with intuition considering they measure the same subject from different aspects.

By scrolling over the time axis on the input panel, user will see the graph layout adjust in a visually stable way, using minimal movement to adapt to the change of data structure over time. The following Section 4 will explain in detail the how the layout is generated and visual stability is preserved. Here we focus on the visualization scheme. As is shown, the plot essentially maps the strength of correlation onto the distance between nodes on a 2D surface, thus lead to an intuitive visualization that can be efficiently interpreted.

More interactive features are incorporated in this tab to accommodate users' needs and preferences. Users can choose their preferred method to quantify variable relationship, such as correlation or distance. Users can also choose to highlight strong relationships by specifying a threshold on the input panel. Depending on the choice of measure, strong associations are visualized as an edge connecting the corresponding two variables, and the thickness and color hue of the edges reflects the magnitude of the relationship measure. In Figure 7, spearman correlation is visualized with its threshold is set to 0.5. It follows that edges appeared between FSH and ovary volume, and bud bead size and bud bead volume, meaning these two correlation coefficients are greater than 0.5. In practice, user may also wish to identity groups of variables with stronger association (i.e., "clusters" of variables). mlEDA has a corresponding complementary function on this tab to group variables by performing a time-dependent hierarchical clustering on the association measures. The clustering is implemented on the lower-dimensional coordinates instead of the empirical higher dimensional association matrix, since the lower dimensional structure is more stable over time (see section 4 for details). Users can choose the number of groups, and the variable vertices will be colored differently by group assignment. A few summary of group labels over time can be displayed below the network graph, where user can examine the change of grouping results over time from different perspectives. If a group of interest in identified, user can also regenerated the plot only for these subset of variables for more detailed analysis.

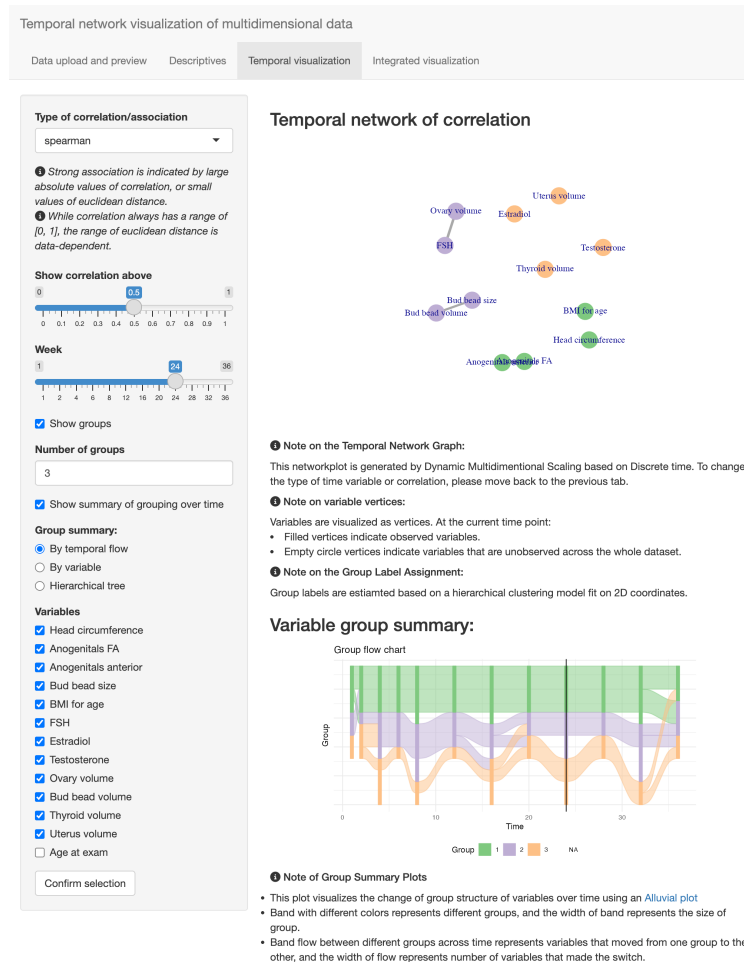


Figure 7: Dynamic network plot of variable association.

3.1.4 Integrated visualization

The fourth tab offers an time-independent summary of variable association integrating the entire follow up period. It averages the association matrix from all time points during the follow up time, and then visualize this “average” matrix using the same network mechanism as tab 3. User can either treat all time points equally, or weigh them by the time interval in between. The “weighted” option takes a “last observation carried over” approach, assuming correlation structure does not change until the next time point. It therefore weighs each time point by the length of following interval. This time-independent summary could be good complementary information to user inspection. As Figure 8 shows, the structure of this tab is very similar to tab 3, except for the time-dependent components. They also share similar interactive functionalities, such as specifying association threshold, grouping, and choosing subsets of data.

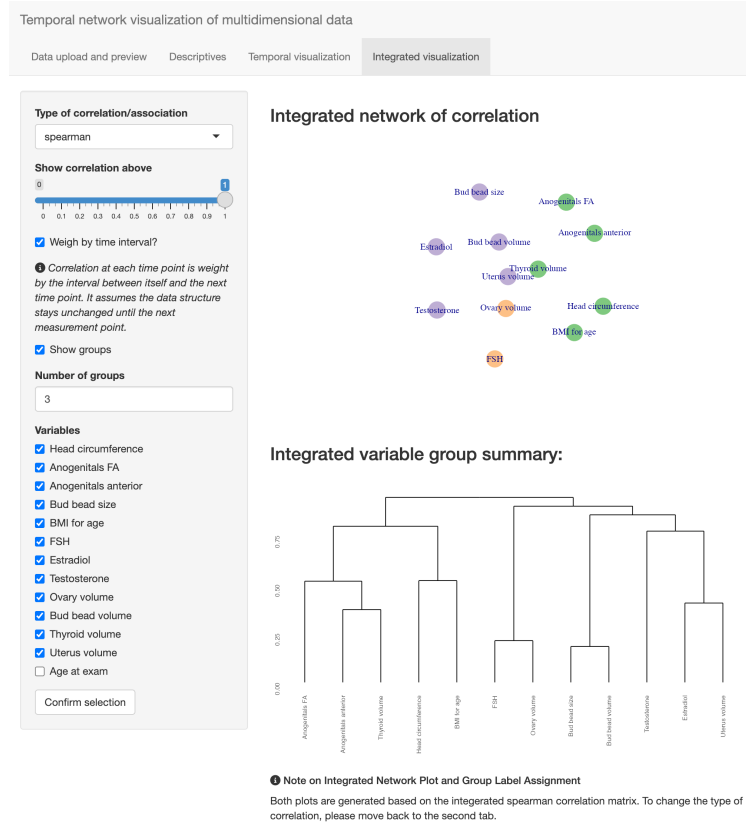


Figure 8: Integrated network visualization of correlation or association matrix

4 Dynamic network plot of variable association

In this section, we explain in more details about the core functionality of mlEDA: the dynamic network plot of variable association. We explain the method used for plot layout generation, how the high-dimensional association structure is preserved and how visual stability across time is enhanced.

4.1 Multidimensional Scaling

As in Section 1, exploratory data analysis (EDA) methods for multivariate longitudinal datasets are not yet well-developed. In the aspect of data reduction, existing literature largely focuses on studying the relationship between subjects but not variables. Principal component analysis (PCA) or clustering, which

are arguably the two most widely used EDA methods for complicated data, both set up the data with rows as subjects and columns as variables (Hastie, Tibshirani, and Friedman 2009). However, exploration of feature association is the study of relationship between *variables*, or in other words, the matrix of bivariate quantitative association measure, such as correlation, association, or distance. This distinction makes many existing methods inapplicable, because association matrices do not satisfy many common assumptions these methods make, such as i.i.d observations. However, multidimensional scaling (MDS) is appropriate in this case, because it is highly flexible with few assumptions on the high-dimensional data structures. It assumes that the high-dimensional matrix is square and symmetric matrix with zero diagonal elements. The values in the matrix should correspond to a “dissimilarity” between variables. Most association measures satisfy, or can be easily converted to meet these assumptions.

Essentially, MDS generates variable layout by estimating a set of low-dimensional coordinates that resembles the high-dimensional association matrix as much as possible. Specifically, for a dataset $\mathbf{X}$ with P variables $X_1, \dots, X_P$, at a specific time point, the relationship between variables will be represented by a P -dimensional matrix: $\Sigma(\mathbf{X}) = \{\rho_{lp}\}$, where ρ_{lp} is the relationship between $\mathbf{X}_l$ and $\mathbf{X}_p$. MDS will first transform this higher-dimensional matrix into a “dissimilarity” matrix: $\Delta = \{\delta_{lp}\}$, with the method of transformation dependent on the chosen measure. In mlEDA, correlation is transformed as $\delta_{lp} = 1 - |\rho_{lp}|$. Euclidean distance on the other hand can be a dissimilarity measure itself and needs no more transformation.

The next step is to reduce the higher-dimensional dissimilarity Δ onto a 2D surface. In the Cartesian coordinate system, a variable X_p is represented by two coordinates (c_{p1}, c_{p2}) indicating horizontal and vertical positions respectively. The distance between any pair of variables, given their coordinates, can be easily calculated: $d_{lp} = \sqrt{(c_{l1} - c_{p1})^2 + (c_{l2} - c_{p2})^2}$. The matrix of pairwise Euclidean distance is a P by P matrix: $\mathbf{D} = \{d_{lp}\}$. Since we would like the geometrical distance to reflect higher-dimensional measures, this problem comes down to minimizing the difference between Δ and $\mathbf{D}$. This leads to the stress loss function (B.Kruskal 1964):

$$Stress(\mathbf{C}) = \frac{\|\Delta - \mathbf{D}\|^2}{\|\Delta\|^2}. \quad (1)$$

By minimizing the stress loss 1, we will be able to get the 2D coordinates that is most reflective of the correlation structure.

4.2 Temporal stability

Note that the MDS algorithm alone does not consider time changes. The classic algorithm proposed by (Gower 1966), as well as many its extensions, are able to visualize one matrix at a single time. For a series of matrices at different time point, there needs to be one separate MDS procedure at each time point. We can consider the evolution process of data structure as a “movie”, then each representation generated by MDS at a specific time point would be a “frame”. However, simple repeated implementation cause visual instability problems. Regeneration will induce random initialization of vertices positions. Although the higher-dimensional structure can be preserved at each time point, variable nodes will rotate around the surface with no connection to the previous time points, causing high visual instability and disorientation. This goes against the purpose of mlEDA, which is to introduce intuitive visualization that is easy for human comprehension. A temporally stable extension of classic MDS is needed to solve this issue. In this section, we will introduce two different approaches for this purpose: Dynamic MDS and Splines MDS. The major difference between these two methods is how they perceive the time variable. While Dynamic MDS treats time as discrete points, Splines MDS treats time as the observations of a continuous variable.

4.2.1 Dynamic MDS

One way to achieve visual stability over time is to minimize the change of layout between adjacent time points. This leads us to the Dynamic MDS methods by (Xu, Kliger, and Hero 2012), which impose penalization on the coordinate change between all adjacent slices. The loss function in this case is penalized stress below:

$$Loss(\mathbf{C}) = \sum_t \frac{\|\Delta_t - \mathbf{D}_t\|^2}{\|\Delta_t\|^2} + \lambda \|\mathbf{C}_t - \mathbf{C}_{t-1}\|^2. \quad (2)$$

This method is very straightforward and works well on datasets that are regularly measured with low measurement density. However, the computation time increases exponentially with measurement grid density and quickly becomes unfeasible. In addition, this method also works poorly with the presence of irregular measurement grid, when variables in the data are measured at different time points. Unfortunately, both issues are very common in practice. As in Section 2, in the IFED study, the three procedures are not scheduled in conjunction. Office visits and sample collection are scheduled twice as frequent as ultrasounds. From Equation 2 we can see that only vertices that are present in both adjacent time points can be counted into the penalization. At time points when growth measures and hormones are present but ultrasounds are complete missing, the relationship between ultrasounds and other measures cannot be calculated, and these variables cannot be visualized. The corresponding vertices, as a consequence, will appear and disappear from the graph repeatedly, causing more visual disorientation.

4.2.2 Splines MDS

While the relationship between variables changes with time, we can also assume this evolution to be a smooth process. It follows that its lower-dimensional representation will also be a smooth process, represented by smooth coordinates functions over time: $\mathbf{C}_t = (c_{p1}(t), c_{p2}(t))$, where $p = 1 \dots P$. A natural choice is to model the coordinates using spline basis functions:

$$\begin{aligned} c_{p1}(t) &= \sum_{k=1}^K \xi_{pk} \phi_k(t) = \xi_p(t) \\ c_{p2}(t) &= \sum_{k=1}^K \zeta_{pk} \phi_k(t) = \zeta_p(t) \end{aligned} \quad (3)$$

The position of the vertex indicating variable X_p will then change smoothly with t , determined by parameters ξ_p and ζ_p . The lower dimensional representation $\mathbf{D}$ will be a collection of the smooth coordinates: $\mathbf{D}(t, \xi, \zeta) = \{c_p(t), p = 1 \dots P\}$. And the stress function can be written as $Stress(\mathbf{C}(t, \xi, \zeta)) = \frac{\|\Delta_t - \mathbf{D}(t)\|^2}{\|\Delta_t\|^2}$. As time changes, the stability of layout can be controlled by penalizing the “smoothness” of coordinate functions, such as their second derivatives:

$$Loss(\xi, \zeta) = \int_t Stress(\mathbf{C}(t, \xi, \zeta)) + \sum_{p=1}^P \lambda (\xi_p + \zeta_p) \Phi'' \quad (4)$$

Splines MDS layout estimated by minimizing Equation 4 has a few advantages over the Dynamic MDS approach. First of all, the Splines basis functions are shared across variables. Therefore, the vertex coordinates computed here is determined by spline basis coefficients ξ_p, ζ_p , which are time-independent. With irregular measurement grid, although some variables can be completely missing at some time points, their layout could still be computed in a consistent manner. The mlEDA app supports this function and annotates the completely missing variables with unfilled circles instead of solid nodes. This keeps all variables in the plot and thus makes it more visually stable, revealing smooth, gradual structural evolution over time without the burden of constantly adjusting to disappearing/reappearing nodes.

In addition, with the measurement grid is dense, the loss function 4 is a lot more efficient to minimize, because it estimates a lot less parameters and also can be paralleled over time. For example, the different of computation time between Dynamic and Splines MDS, when used on IFED data with age as time, is a few hours versus a few minutes, making Splines MDS the only feasible choice for visualization.

5 Case Study

In this section, we demonstrate the practical utility of mlEDA using the discoveries it revealed on the IFED data. Because the essential difference in the reproductive system between sexes, boys and girls are usually analyzed separately. In this paper, we focus on the 136 full-term infant girls from the IFED study, exploring the interaction and evolution of physical growth, organ growth and hormone concentrations. Although existing literature on girls' early reproductive development is extensive, the discoveries showed controversies and complications. We hope this tools can offer novel insight using its concise, interpretable visualization and facilitate the generation of new hypothesis. Please note that though mlEDA provides different options for visualization, this paper will focus on evolution over week as a continuous time measure and spearman correlation as the association measure.

Most physical growth measures, including head circumference and anogenital measures, showed steady growing trend over the entire follow-up period. Head circumference increased quickly during the first 3-4 months, and then gradually reaching a plateau at the end. Anogenital measures had a lot more fluctuation over time. Age-adjusted BMI stayed stable as expected. Hormone concentrations, on the other hand, showed high variability across individual and more fluctuation over time. Considering sample average, FSH, estradiol and testosterone all showed very slow and steady decrease over the 36 weeks. On the other hand, most individual tracks showed similarity, with at least one peak at different timing and with different magnitude. Most estradiol tracks started with a decrease in concentration at the first 5-10 weeks followed by small fluctuations. Some subjects had brief increase at week 12, 20 or 28. Testosterone showed a similar trend, with high initial concentration right after birth, a rapid decrease from 4-12 weeks and then fluctuations. The initial decreasing is likely due to subsiding placental hormones. Organ volume measured from ultrasound also showed notable heterogeneity. The average bud bead volume showed an initial increase from week 1-4, then flatten out across the following weeks. However, the individual tracks showed sharp increases of partial sample at week 4, 12 and 24. Similarly, the average ovary volume slowly increased from week 1-4 and plateaued, while individual tracks showed waves of peaks at week 4, 8, 12 and 24. Uterus volume had a more uniform trend, as most infants showed a sharp decline in volume from week 2 to 4. While most infants stayed steady after, there are infants whose uterus volume showed a later peak, but also across different timings including week 8, 12 and 24. Overall, the individual development track of reproductive organs and hormones revealed the existence of rapid development periods, but the timing and magnitude can be very different across individual. An average trend over sample might not be a good summary measure in this case. A more appropriate target of analysis would be the pattern of change over time.

The correlation between most growth measures are stable over time. Head circumference and BMI showed stable moderate correlation (0.5), and the two anogenital measures (FA and anterior) showed slowly increasing correlation from roughly 0.2 to 0.5 over the first few weeks. The correlation between hormone concentrations are weaker, fluctuating across zero throughout follow-up. The correlation between estradiol showed a brief increase from 0.25 to 0.5 during week 4-8, but the soon decreased back to zero at week 16. In terms of reproduce organ volumes, some showed slight increase of correlation over the first few weeks. The correlation between ovary and uterus increased from 0.1 to 0.25 during the first few weeks. Similar for bud bead and uterus, their correlation increased to 0.3 during the first 8 weeks. Both correlation then decreased slowly until about week 24. Ovary and bud bead volume, on the other hand, did not show the initial correlation increase. Their correlation stayed at around 0.25 until week 16, followed by a slight decrease. The pairwise correlation between growth measures and hormones are generally close to zero with small fluctuations. The correlation between hormone concentrations and reproductive organ volumes are more uncertain, which is partly due to the inconsistency in procedure schedule and missing observations. Their correlation is generally weak, with the exception of FSH and ovary value, which showed moderate negative correlation (-0.5-0.6) consistently throughout the study period. FSH and uterus has been weakly correlated (~ -0.25) until week 24 when correlation reduced to zero. Estradiol and uterus showed a quick increase from 0 to 0.5 during the first 8 weeks, followed by decrease in the next 8 weeks.

The dynamic network graph on tab 3 offers a comprehensive view of the evolution of the multidimensional correlation structure over time. This graph reflects the strength and change of relative correlation by the change in node positions. We start from week 4, which is the first time point when all measures are

collected. As Figure 9a shows, measures of growth, hormones and organs are roughly evenly distributed across the surface, indicating correlation across board is roughly equal and weak, which may corresponding to a “balanced” state right after birth before the rapid development began. Two growth measures, head circumference and age-adjusted BMI, are positioned close to each other at the top-left conner, indicating strong correlation at this time point. Similar with Ovary volume and FSH on the top-right corner. Both positions are consistent with their time-specific bivariate correlation (~ 0.5). The two anogenital measures are placed more apart, corresponding to the initial weak correlation (0.2-0.25) from weeks 1-4. Testosterone are slightly further from FSH and ovary volume, indicating weaker correlation. In fact, moving on from week 4, we can observe testosterone moving further away from FSH and ovary volume (9 b). The two anogenital measures moved much closer from week 4 to 8, consistent with the increasing bivariate correlation from 0.2 to 0.5 during this period. They also clustered with other growth measures (head circumference and age-adjusted BMI). On the other side of the plot, FSH, estradiol, uterus volume, ovary volume and bud bead volumes also showed clustering effect. The physical growth measures were separating from the hormone concentrations and reproductive organ volumes. Testosterone and thyroid volume lays in between, showing association with neither group.

Approaching week 16, the cluster structure separating growth meaasures from hormones and organ volumes stayed stable, but some previously close variables slowly disperse apart. Comparing 9b and d, it is clear FSH and ovary volume moved further away. The growth measures showed more clustering to the center of the plot and closer to thyroid volume at week 16. Week 12 in the Figure below reflects an “in-between” status between week 8 and 16. Note that ultrasound was not scheduled at this week, therefore there are no organ volume measures in the data at this point. However, Splines MDS was able to impute their positioning given the layouts at other time points. This provides more visual stability compared to traditional dynamic MDS, in which the missing measures will simply disappear.

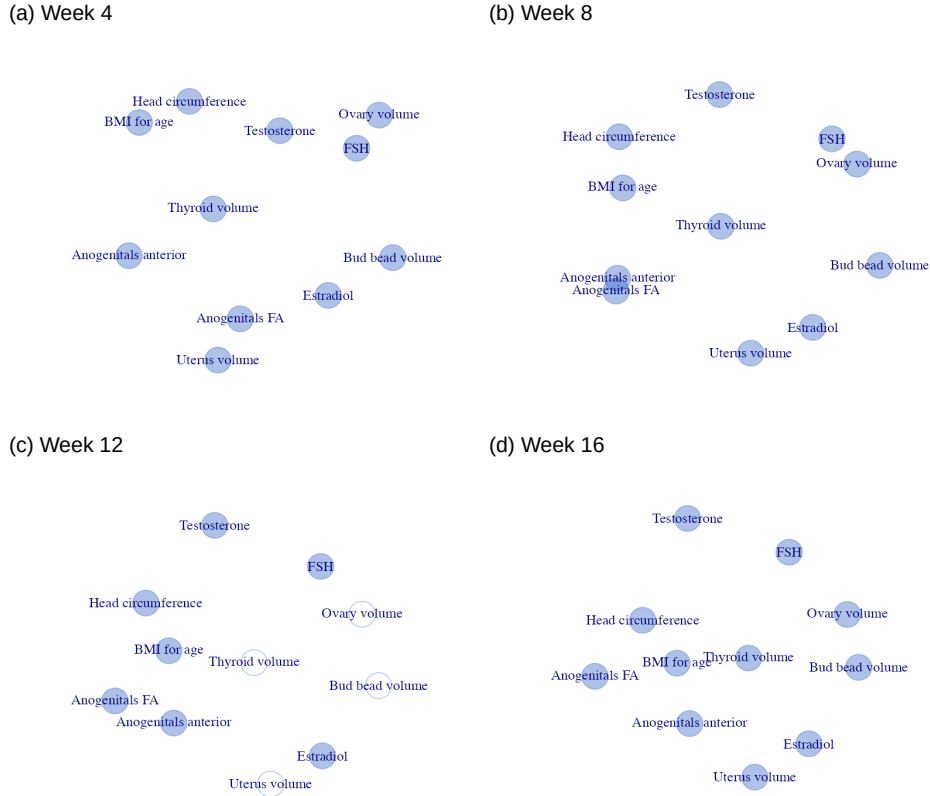


Figure 9: Selected dynamic network graph of spearman correlation the IFED data.

6 Discussion (to be expanded)

In summary, mLEDA provides an standardized workflow for exploratory data analysis of multivariate longitudinal data with complicated, time-dependent structure. It guides users through a series of analytically operations, and at each step intuitive visualization and summaries are generated interactively. Through intentional choice of comprehensive, concise visualization, the analysis results are easier to interpret, even for users without statistical background. Users can easily examine the distribution of each variable and the relationship between a set of variables at each time point, as well as their evolution across time. The interactive user interface also minimize the need for computer programming, making the web base app friendly to users without technical background. Our case study has revealed it's high efficiency in facilitating interdisciplinary communication in a collaborative setting. Domain experts are actively engaged and highly encouraged to provide feedback by the straightforward visualization. Its application on IFED data has led to observations consistent with previous literature on infant early development and "minipuberty". Moreover, it also revealed new discoveries that have been previously unidentified or underexplored, including the joint, dynamic correlation between FSH, ovary, uterus and estradio from week 4 to 16, as well as the similarity trajectory shape of hormon concentration with various timing and magnitude. This new discoveries has confirmed the limitation of traditional statistical methods based on population time-specific mean. They pointed out promising directions for future investigation and analytical strategies. In reality, these effective initial explorations can improve efficiency and resource allocation.

The statistics and graphics mLEDA uses for univariate and bivariate summary (tab 2) are classical methods that have been well-established and widely used in exisiting literature. However, as the introduction pointed out, methods for full-picture summary of multivariate dataset are still restricted and difficult to implement, especially when temporal evolution is involved. mLEDA provides an intuitive dynamic network graph that fills in this gap. However, the graphical scheme still has limitations. The visualization of a high-dimensional correlation matrix is essentially a dimension reduction problem, and thus information loss in inevitable. The positions of variable nodes may not exactly reflect the original correlation structure. When visual stability over time is introduced, the layout at a specific time is also affected by other time points. In reality, datasets often have missing value, or inconsistent measurement grid as IFED study, both affecting the quality and stability of visualization. Last but not least, both methods are not efficient enough to handle large-scale datasets, like EHR. Improvement of visualization efficiency is a key point of future investigation.

References

- Adgent, Margaret A, David M Umbach, Babette S Zemel, Andrea Kelly, Joan I Schall, Eileen G Ford, Kerry James, et al. 2018. "A Longitudinal Study of Estrogen-Responsive Tissues and Hormone Concentrations in Infants Fed Soy Formula." *The Journal of Clinical Endocrinology & Metabolism* 103 (5): 1899–909. <https://doi.org/10.1210/jc.2017-02249>.
- Bender-deMoll, Skye. 2024. *Ndtv: Network Dynamic Temporal Visualizations*. <https://doi.org/10.32614/CRAN.package.ndtv>.
- B.Kruskal, J. 1964. "Nonmetric Multidimensional Scaling: A Numerical Method." *Psychometrika* 29 (June): 115–29. <https://doi.org/https://doi.org/10.1007/BF02289694>.
- Butts, Carter T., Ayn Leslie-Cook, Pavel N. Krivitsky, and Skye Bender-deMoll. 2024. *networkDynamic: Dynamic Extensions for Network Objects*. <https://doi.org/10.32614/CRAN.package.networkDynamic>.
- Chin, Helen B, Jenna R Krall, Mandy Goldberg, Frank Z Stanczyk, Kassa Darge, Virginia A Stallings, Walter J Rogen, David M Umbach, and Donna D Baird. 2023. "Early Life Anti-Müllerian Hormone Trajectories in Infant Girls." *Epidemiology* 34 (4). <https://doi.org/10.1097/EDE.0000000000001610>.
- Csardi, Gabor, and Tamas Nepusz. 2005. "The Igraph Software Package for Complex Network Research." *InterJournal Complex Systems* (November): 1695.
- Goldberg, Mandy, Margaret A. Adgent, Danielle R. Stevens, Helen B. Chin, Kelly K. Ferguson, Antonia M. Calafat, Gregory Travlos, et al. 2024. "Environmental Phenol Exposures in 6- to 12-Week-Old Infants: The Infant Feeding and Early Development (IFED) Study." *Environmental Research* 252: 119075. <https://doi.org/https://doi.org/10.1016/j.envres.2024.119075>.

- Gower, J. C. 1966. “Some Distance Properties of Latent Root and Vector Methods Used in Multivariate Analysis.” *Biometrika* 53 (3/4): 325–38. <http://www.jstor.org/stable/2333639>.
- Hastie, Trevor, Robert Tibshirani, and Jerome Friedman. 2009. *The Elements of Statistical Learning*. Springer New York, NY. <https://doi.org/https://doi.org/10.1007/978-0-387-84858-7>.
- Kuhn, Max, Simon Jackson, and Jorge Cimentada. 2022. *Corrr: Correlations in r*. <https://doi.org/10.32614/CRAN.package.corrr>.
- Lakkaraju, Himabindu, Dylan Slack, Yuxin Chen, Chenhao Tan, and Sameer Singh. 2022. “Rethinking Explainability as a Dialogue: A Practitioner’s Perspective.” *NeurIPS Workshop on Human Centered AI*. <https://par.nsf.gov/biblio/10462932>.
- Lucaccioni, Laura, Viola Trevisani, Alessandra Boncompagni, Lucia Marrozzini, Alberto Berardi, and Lorenzo Iughetti. 2021. “Minipuberty: Looking Back to Understand Moving Forward.” *Frontiers in Pediatrics* Volume 8 - 2020. <https://doi.org/10.3389/fped.2020.612235>.
- Mair, Patrick, Patrick Groenen, and Jan de Leeuw. 2022. “Multidimensional Scaling Using Majorization: SMACOF in r.” *Journal of Statistical Software* 102. <https://doi.org/10.18637/jss.v102.i10>.
- R Core Team. 2025. *R: A Language and Environment for Statistical Computing*. Vienna, Austria: R Foundation for Statistical Computing. <https://www.R-project.org/>.
- Renault Christoffer Højrup, Wøjdemann Ditte, Aksglaede Lise. 2020. “Minipuberty of Human Infancy – a Window of Opportunity to Evaluate Hypogonadism and Differences of Sex Development?” *Ann Pediatr Endocrinol Metab* 25 (2): 84–91. <https://doi.org/10.6065/apem.2040094.047>.
- Venables, W. N., and B. D. Ripley. 2002. *Modern Applied Statistics with s*. Fourth. New York: Springer. <https://www.stats.ox.ac.uk/pub/MASS4/>.
- Wickham, Hadley. 2016. *Ggplot2: Elegant Graphics for Data Analysis*. Springer-Verlag New York. <https://ggplot2.tidyverse.org>.
- Xu, Kevin S., Mark Kliger, and Alfred O. Hero. 2012. “A Regularized Graph Layout Framework for Dynamic Network Visualization.” *Data Mining and Knowledge Discovery* 27 (1): 84–116. <https://doi.org/10.1007/s10618-012-0286-6>.