



(a) Input curve order



valid sequence: (2, 3, 1, 7, 6, 4, 5)

(b) Initialization


partial order S_2



upper family
 $P_2 = \{z_1, z_2\}$


lower family
 $P_3 = \{z_2, z_3\}$

(c) Representative iteration $i = 4$

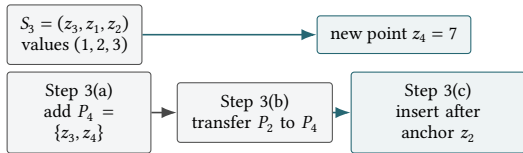

$S_4 = (z_3, z_1, z_2, z_4)$ with values (1, 2, 3, 7)

(d) Recovered axis order



output from maintained partial order: (1, 2, 3, 4, 5, 6, 7)