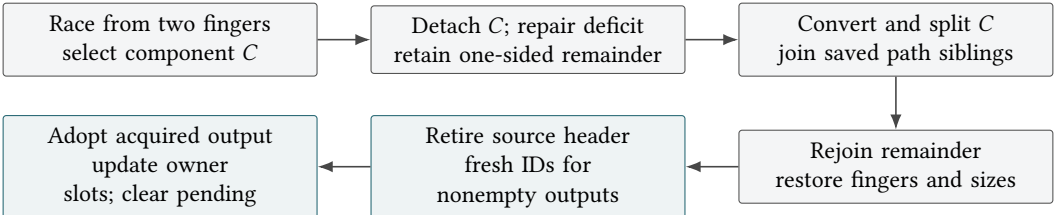
Race from two fingers
select component C
Detach C; repair deficit
retain one-sided remainder
Convert and split C
join saved path siblings
Rejoin remainder
restore fingers and sizes
Retire source header
fresh IDs for
nonempty outputs
Adopt acquired output
update owner
slots; clear pending