



(a) Input curve order




valid sequence: (2, 3, 1, 7, 6, 4, 5)

(b) Initialization

partial order S_2

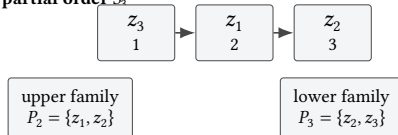

(c) Representative iteration $i = 4$

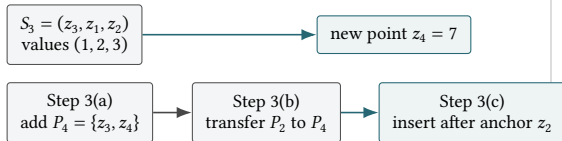

$S_4 = (z_3, z_1, z_2, z_4)$ with values (1, 2, 3, 7)

(d) Recovered axis order



output from maintained partial order: (1, 2, 3, 4, 5, 6, 7)