
Actividad 2

Busqueda de documentación


1.

Lo primero que vamos a hacer es hablar con la Inteligencia Artificial para que nos guie mas o menos que tenemos que hacer, que nos recomienda él y demas.

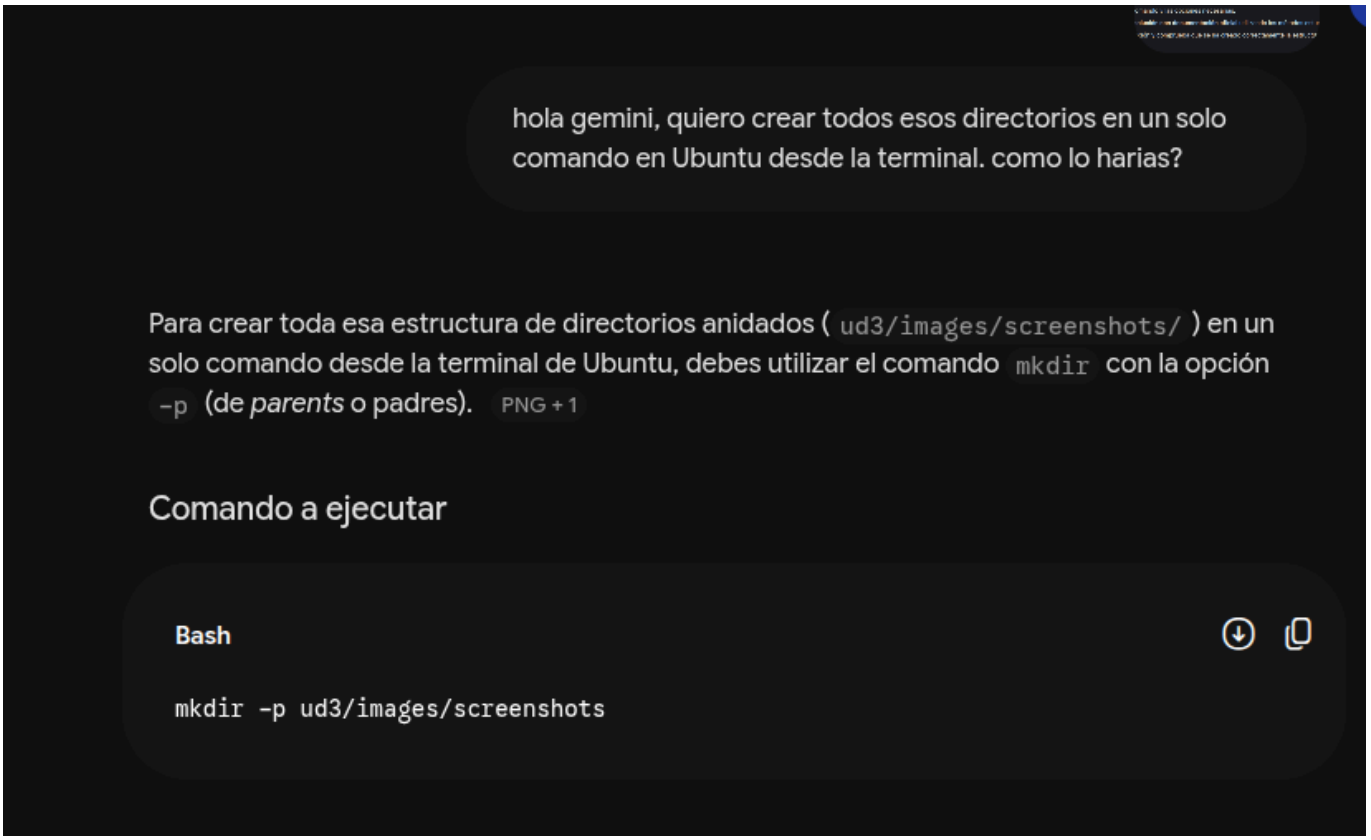


Hecho esto y visto que la Inteligencia Artificial nos da ya la solucion lo que hay que hacer es asegurarnos de que es real y que no se lo esta inventando. Asi que iremos directamente ha las paginas oficiales para corroborarlo.

2.

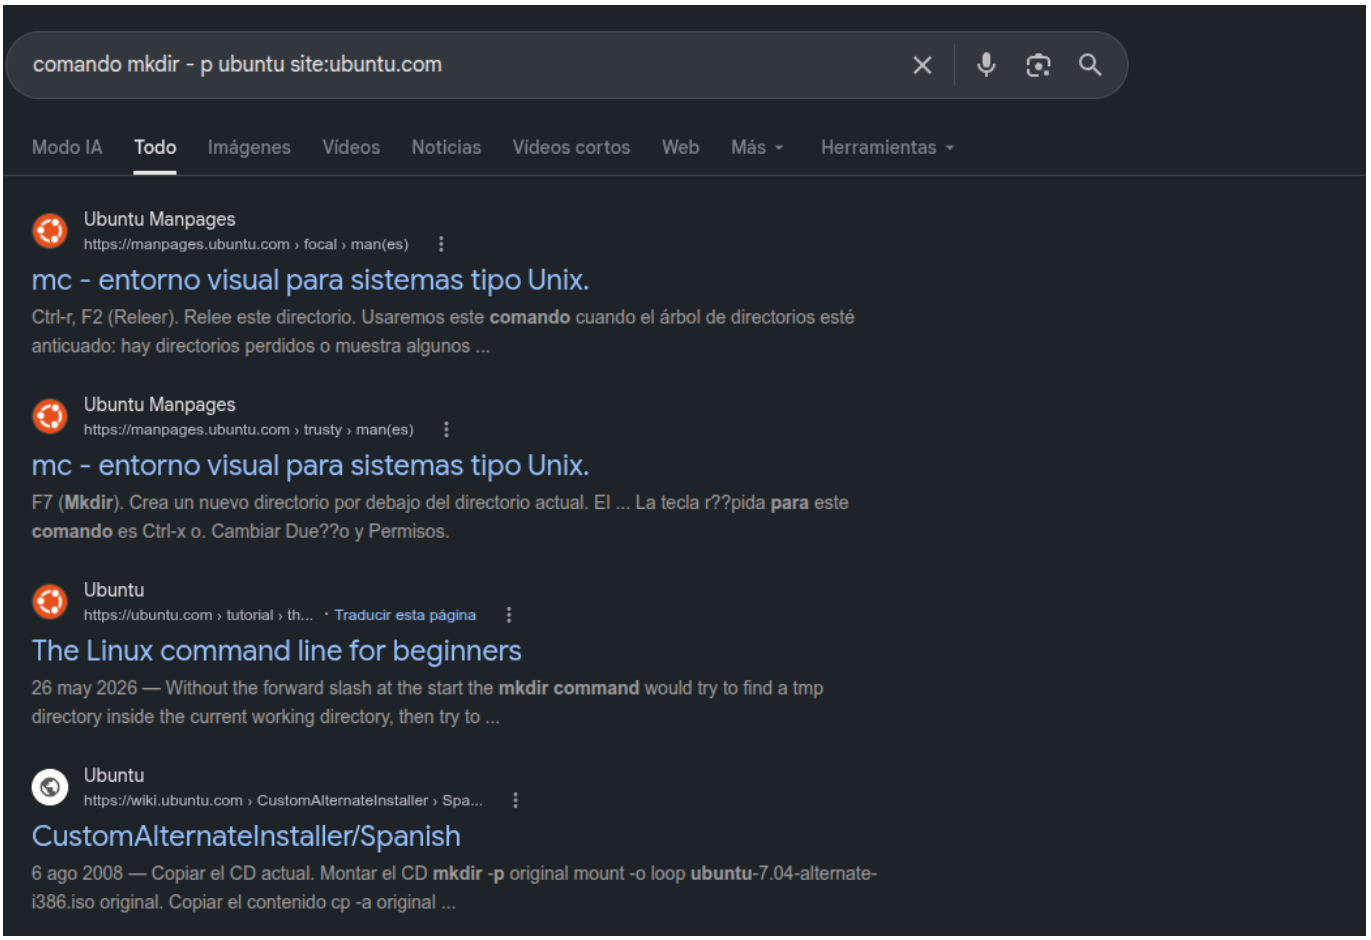

Con esta busqueda nos aseguramos que todas las webs que nos van a salir son de Ubuntu (oficiales) con el comando "site:". Y luego especificarle que el comando que necesito investigar es "mkdir -p", que es el que me indica Gemini.

3.

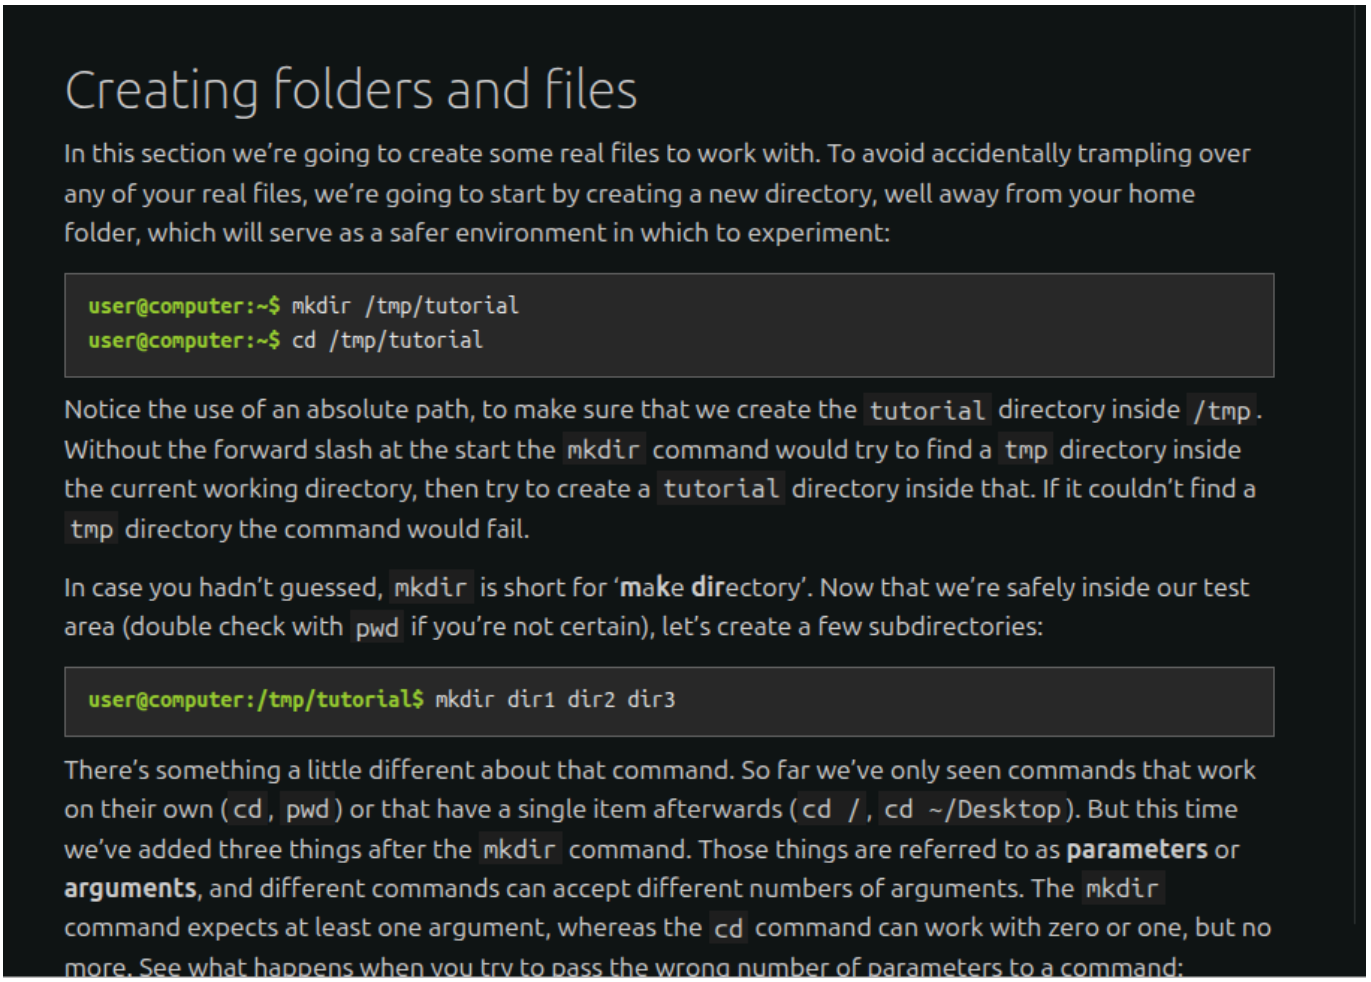

Creating folders and files

In this section we're going to create some real files to work with. To avoid accidentally trampling over any of your real files, we're going to start by creating a new directory, well away from your home folder, which will serve as a safer environment in which to experiment:

```
user@computer:~$ mkdir /tmp/tutorial
user@computer:~$ cd /tmp/tutorial
```

Notice the use of an absolute path, to make sure that we create the `tutorial` directory inside `/tmp`. Without the forward slash at the start the `mkdir` command would try to find a `tmp` directory inside the current working directory, then try to create a `tutorial` directory inside that. If it couldn't find a `tmp` directory the command would fail.


In case you hadn't guessed, `mkdir` is short for '**mk**e **dir**ectory'. Now that we're safely inside our test area (double check with `pwd` if you're not certain), let's create a few subdirectories:

```
user@computer:/tmp/tutorial$ mkdir dir1 dir2 dir3
```

There's something a little different about that command. So far we've only seen commands that work on their own (`cd`, `pwd`) or that have a single item afterwards (`cd /`, `cd ~/Desktop`). But this time we've added three things after the `mkdir` command. Those things are referred to as **parameters** or **arguments**, and different commands can accept different numbers of arguments. The `mkdir` command expects at least one argument, whereas the `cd` command can work with zero or one, but no more. See what happens when you try to pass the wrong number of parameters to a command:

Tenemos que ir buscando hasta que encontremos esta zona donde dice "Creating folders and files" que en español es "Creando carpetas y archivos". Nosotros estamos intentando crear varias carpetas a la vez asi que seguro que aqui encontramos algo.

4.

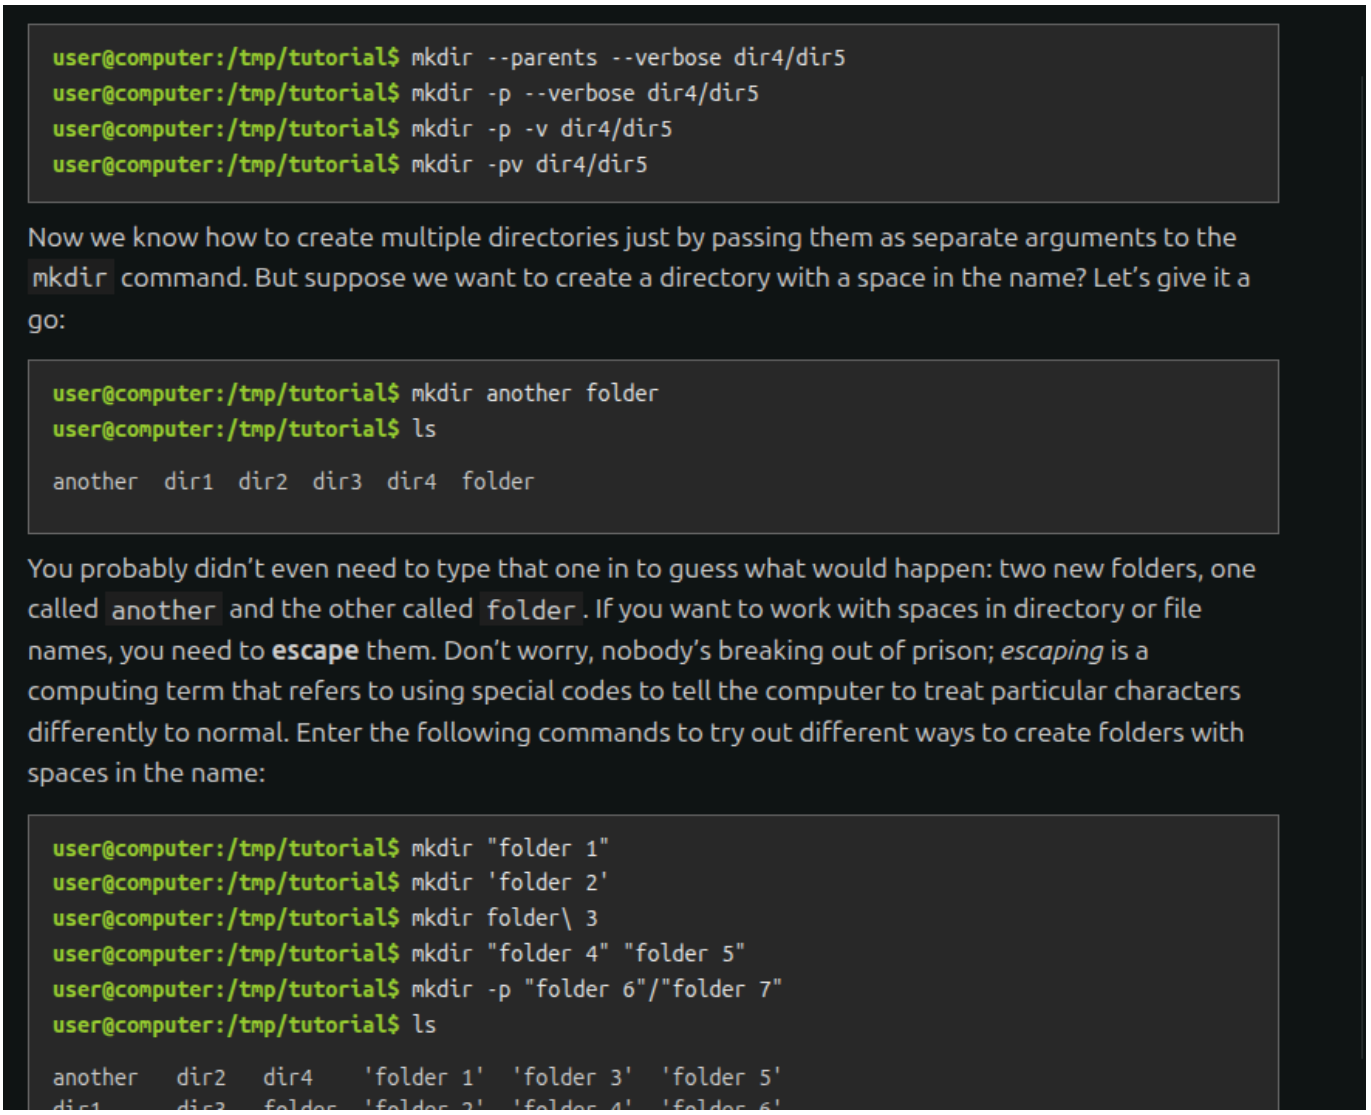

```
user@computer:/tmp/tutorial$ mkdir --parents --verbose dir4/dir5
user@computer:/tmp/tutorial$ mkdir -p --verbose dir4/dir5
user@computer:/tmp/tutorial$ mkdir -p -v dir4/dir5
user@computer:/tmp/tutorial$ mkdir -pv dir4/dir5
```

Now we know how to create multiple directories just by passing them as separate arguments to the `mkdir` command. But suppose we want to create a directory with a space in the name? Let's give it a go:


```
user@computer:/tmp/tutorial$ mkdir another folder
user@computer:/tmp/tutorial$ ls
another  dir1  dir2  dir3  dir4  folder
```

You probably didn't even need to type that one in to guess what would happen: two new folders, one called `another` and the other called `folder`. If you want to work with spaces in directory or file names, you need to **escape** them. Don't worry, nobody's breaking out of prison; *escaping* is a computing term that refers to using special codes to tell the computer to treat particular characters differently to normal. Enter the following commands to try out different ways to create folders with spaces in the name:

```
user@computer:/tmp/tutorial$ mkdir "folder 1"
user@computer:/tmp/tutorial$ mkdir 'folder 2'
user@computer:/tmp/tutorial$ mkdir folder\ 3
user@computer:/tmp/tutorial$ mkdir "folder 4" "folder 5"
user@computer:/tmp/tutorial$ mkdir -p "folder 6"/"folder 7"
user@computer:/tmp/tutorial$ ls
another   dir2   dir4    'folder 1'  'folder 3'  'folder 5'
```

Aqui lo hemos encontrado, siguiendo un poco para abajo en la misma pagina web hemos encontrado el comando que nos afirmaba que lo que nos decia la Inteligencia Artificial estaba bien. Ahora simplemente lo haremos en nuestra Terminal.

5.

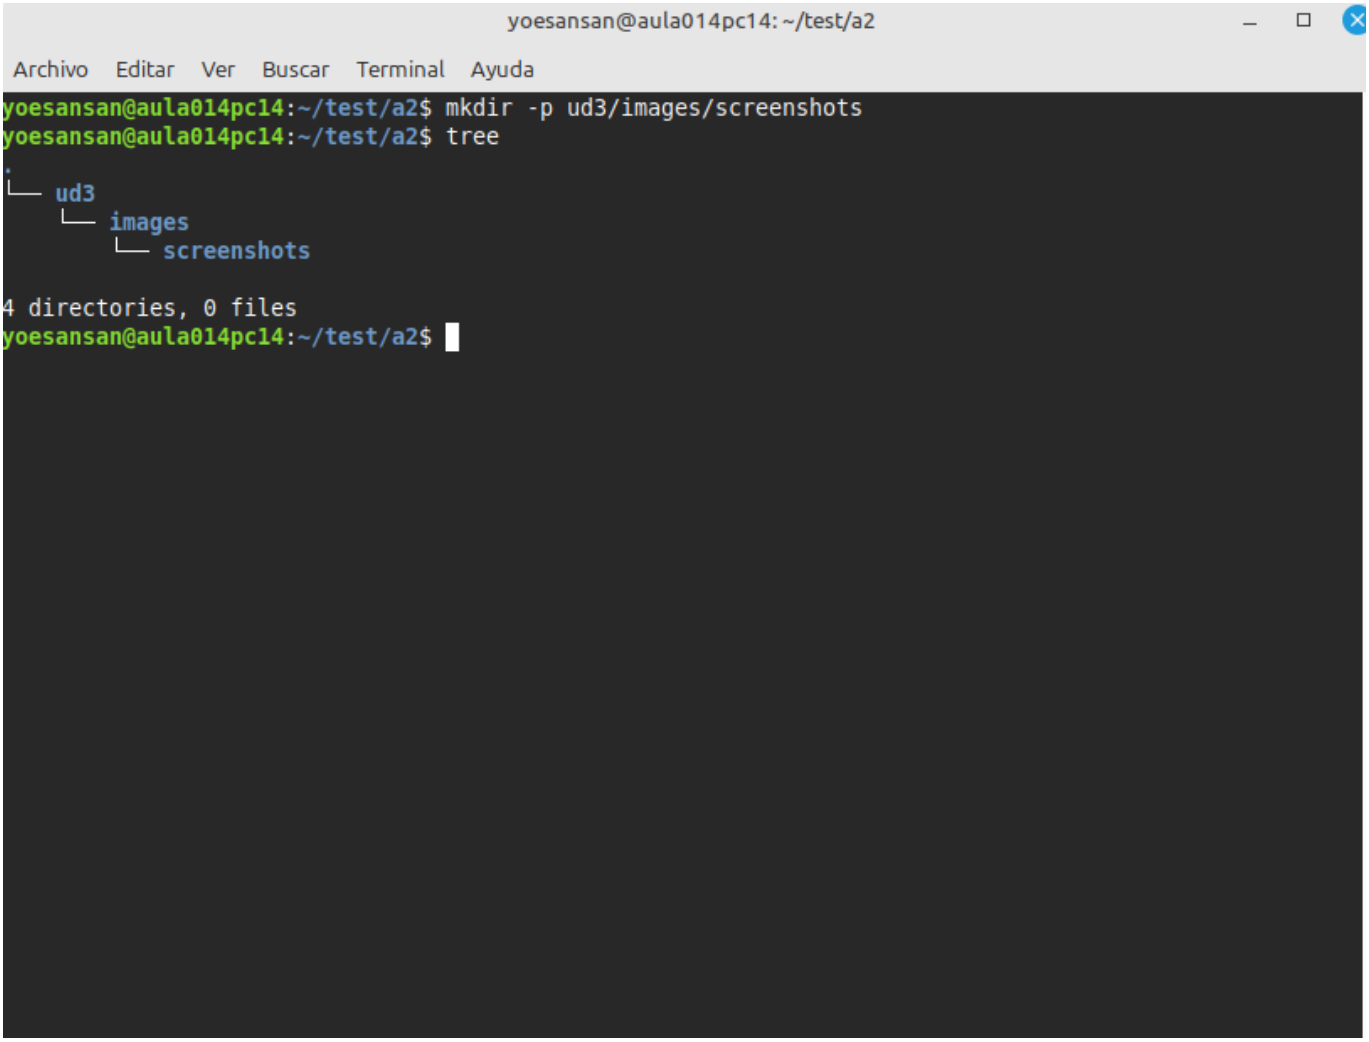

Aqui tenemos el resultado. Ponemos nuestro comando "mkdir -p" para crear varias carpetas a la vez despues ponemos "ud3/images/screenshots" que son las carpetas que queremos crear. Despues de eso para confirmar que se han creado una dentro de otra ponemos el comando "tree" que nos saca la estructura en modo arbol para que nos sea mas facil verlo