Dataset Details

Travel Review Ratings Dataset: project-provided CSV files, fields, purpose, and load-time preprocessing

Dataset name	Travel Review Ratings Dataset (as named in the project brief)
Data format	CSV (three project-provided files)
Provenance	Not independently verified
Version / date	Not specified

Compiled only from the uploaded Dataset_Details.md. The files are described as project-provided sample data with enriched, unverified fields. They are not presented as authentic TripAdvisor reviews.

Contents

1. Dataset Name 3

2. Dataset Source and Link 3

3. Data Format and Files 3

4. Key Fields 4

5. Dataset Purpose 5

6. Data Preprocessing Performed 6

1. Dataset Name

The project brief names the dataset **Travel Review Ratings Dataset** and refers to the TripAdvisor Travel Review Ratings Dataset as its primary dataset.

2. Dataset Source and Link

The files used by this project are the three project-provided CSVs described in Section 3. Their provenance has not been independently verified.

Item	Detail
Link provided in the project brief	UCI Restaurant & Consumer Data `https://archive.ics.uci.edu/dataset/485/restaurant+consumer+data`
Alternative source named in the brief	OULAD GitHub Hotel Reviews Dataset. The brief did not provide a direct repository URL.

> **Source mismatch.** The project brief's named primary source and provided URL do not appear to match: it names a TripAdvisor travel-review dataset but links to UCI Restaurant & Consumer Data.
>
> Do not claim that the provided files are authentic TripAdvisor reviews or originate from either linked source unless that provenance is verified separately. For this implementation, describe them as **project-provided sample data with enriched, unverified fields**.

3. Data Format and Files

All files are CSV. The enriched file contains **5,456 data rows** (excluding its header). The two rating-matrix files are related inputs retained for lineage/reference.

File	Contents	Role in this project
`data/sample_data.csv`	`User` plus generic `Category 1` to `Category 24` ratings	Raw rating matrix; retained as the original category-name version
`data/column_names_changed.csv`	`User` plus 24 descriptively named activity-rating columns	Rating matrix with readable activity names
`data/modified_data.csv`	24 activity-rating columns plus destination, visited categories, overall rating, review text, travel type, and visit date	Runtime retrieval corpus loaded by the application

The application reads `modified_data.csv`; it does not rewrite any of the source files.

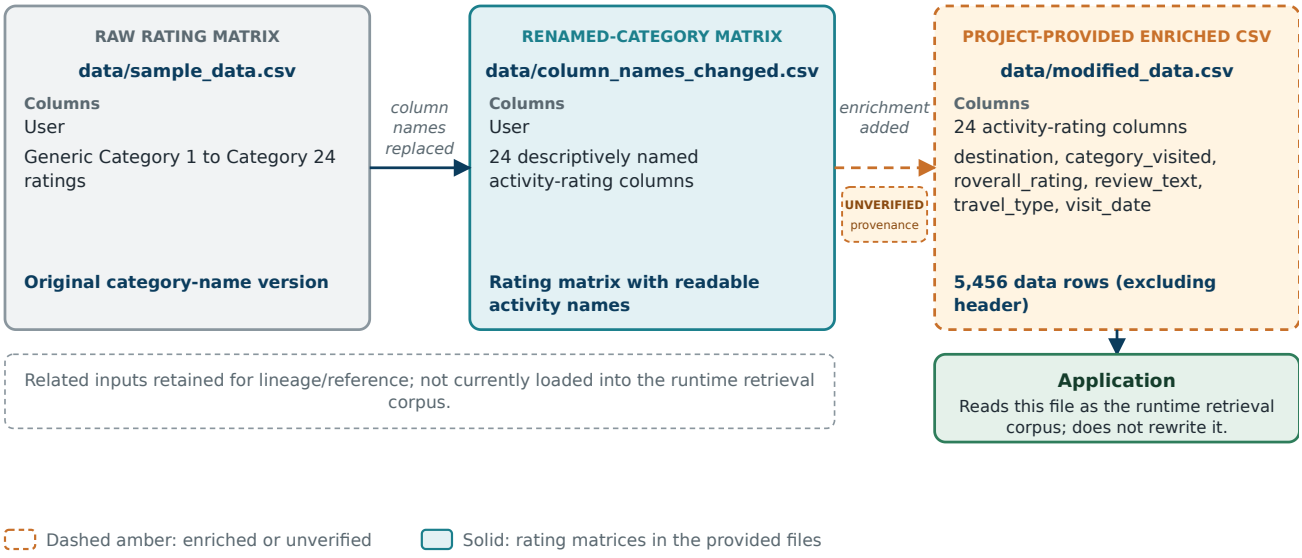


Figure 1. File lineage. The enrichment relationship is shown dashed because its provenance is unverified. The raw and renamed matrices are not currently loaded into the runtime retrieval corpus.

4. Key Fields

The *Status* column separates rating data present in the provided files from enriched fields that are synthetic or unverified.

Field(s)	Meaning	Status
`User`	Sample row identifier; normalized by the API as `experience_id`	In rating files
24 activity-rating columns	Numeric ratings for activity categories, expected in the range 0–5	In rating files
`destination`	Enriched destination label	Enriched, unverified
`category_visited`	Comma-separated activity categories associated with the row	Enriched, unverified
`roverall_rating`	Source overall-rating field; the header is misspelled in the CSV and normalized in memory to `overall_rating`	Enriched, unverified
`review_text`	Enriched narrative text used as retrieval evidence	Enriched, unverified
`travel_type`	Enriched traveler/group type, such as Solo, Couple, Family, Friends, or Business	Enriched, unverified
`visit_date`	Enriched visit date in `YYYY-MM-DD` format	Enriched, unverified

> The enriched columns are not present in the two rating-only files. Treat destination, overall rating, review text, travel type, and visit date as **synthetic or unverified enrichment**, not independently verified traveler history.

The 24 activity-rating columns

Listed in the order given in the source document. The source provides no category groupings, so none are shown.

1 churches	**2** resorts	**3** beaches	**4** parks
5 theatres	**6** museums	**7** malls	**8** zoos
9 restaurants	**10** pubs/bars	**11** local services	**12** burger/pizza shops
13 hotels/other lodgings	**14** juice bars	**15** art galleries	**16** dance clubs
17 swimming pools	**18** gyms	**19** bakeries	**20** beauty & spas
21 cafes	**22** view points	**23** monuments	**24** gardens

5. Dataset Purpose

The dataset supports a local demonstration of travel-experience similarity search and destination/activity ranking. The runtime uses each enriched row as one experience case. Its destination, travel type, visited categories, and review text are combined into a retrieval document; activity-rating columns support activity summaries and comparisons.

Limits of the data

The data does not include:

- actual prices
- activity durations
- hotel inventory
- booking availability
- live weather

It therefore cannot establish budget or itinerary feasibility for those fields.

6. Data Preprocessing Performed

At load time, the application performs these steps on `modified_data.csv`.

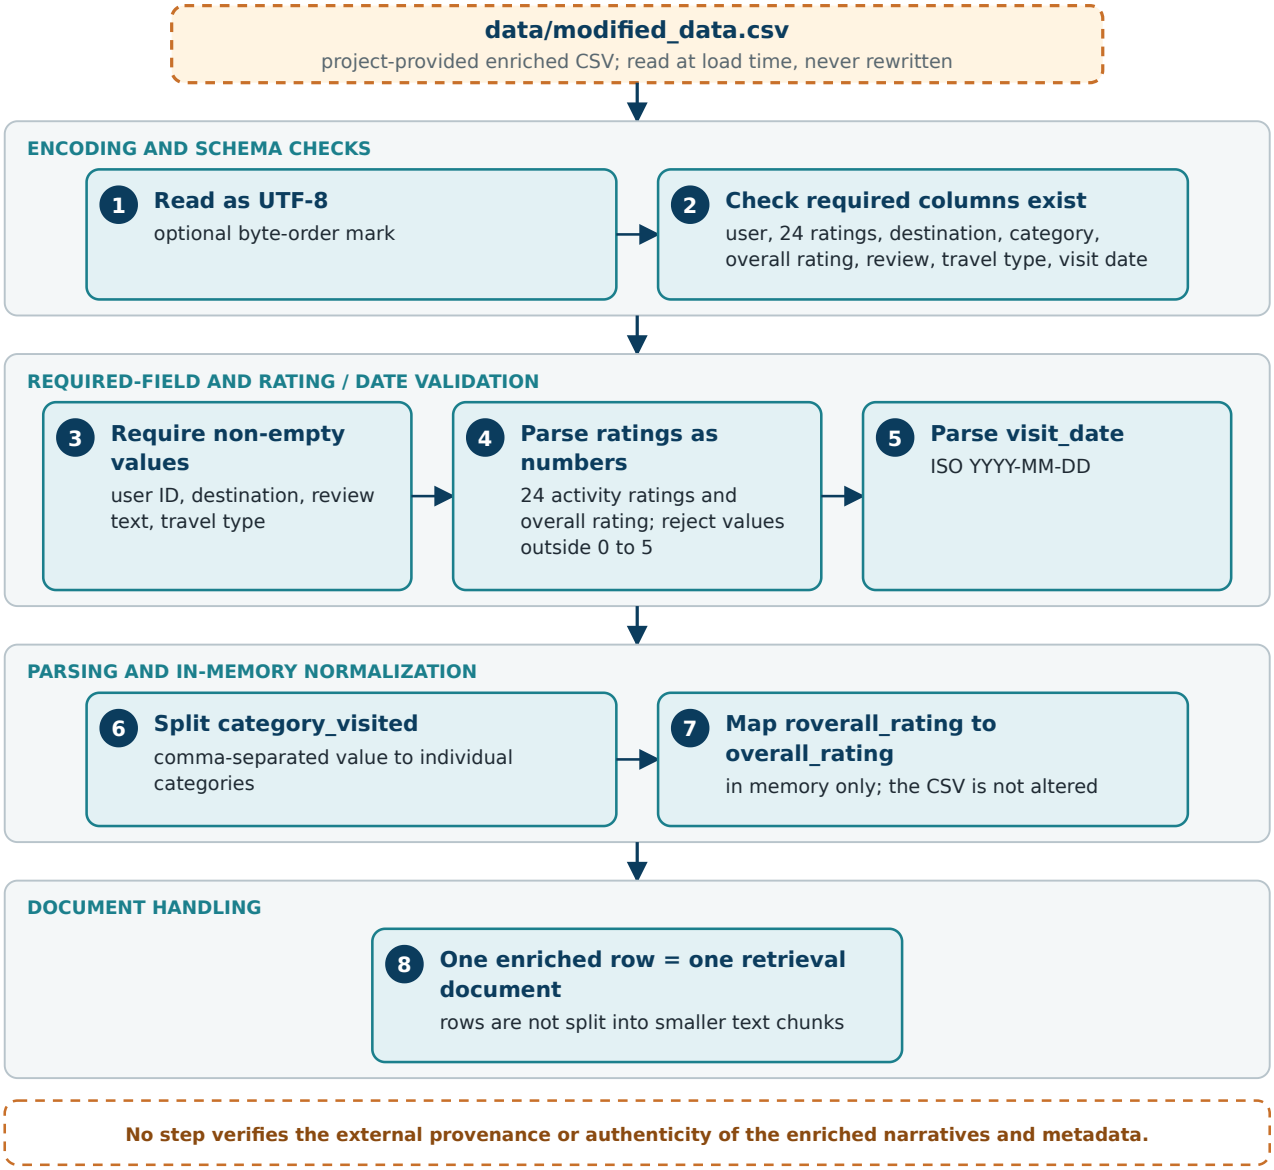


Figure 2. Preprocessing at load time. Step numbers match the table that follows.

#	Step
1	Reads `modified_data.csv` as UTF-8 with an optional byte-order mark.
2	Checks that the required user, activity-rating, destination, category, overall-rating, review, travel-type, and visit-date columns exist.
3	Requires non-empty user ID, destination, review text, and travel type.
4	Parses the 24 activity ratings and overall rating as numbers and rejects values outside 0–5.
5	Parses `visit_date` as an ISO `YYYY-MM-DD` date.
6	Splits the comma-separated `category_visited` value into individual categories.
7	Maps the misspelled `roverall_rating` header to the canonical `overall_rating` field in memory; it does not alter the CSV.
8	Uses one complete enriched row as one retrieval document; it does not split rows into smaller text chunks.

> No preprocessing step verifies the external provenance or authenticity of the enriched narratives and metadata. The generic raw and renamed rating matrices are not currently loaded into the runtime retrieval corpus.