Getting Started Tutorial

24.0.0.100

NEXACRO

TOBESOFT strives to maintain the accuracy of information provided in this document and will consistently modify and supplement it. However, we cannot guarantee accuracy of information in this document. TOBESOFT assumes no responsibility for errors and omissions. No liability is assumed for damages resulting from the use of information contained herein.

Users of this document implicitly agree that they understand the contents of this disclaimer.

Each trademark herein, including the product name of each company, is a solely registered trademark of each company who developed it, and is protected by patent laws and the copyright laws, and should be used for the purpose of reference only.

TOBESOFT Co.,Ltd.
2-5F INTOPS Building, 617 Bongeunsa-Ro, Gangnam-Gu,
Seoul 06083, Korea
www.tobesoft.com

Table of Contents

Copyright and Disclaimer (TOBESOFT) **2**

Table of Contents **3**

1. Installing Development Tools **5**

1.1 Installing Nexacro Studio 5

1.2 Running Nexacro Studio 9

1.2.1 Running Nexacro Studio for the First Time 9

1.2.2 About License Expiration When Running Nexacro Studio 10

1.3 Learn More 11

2. Creating a Page and Running It in a Web Browser **12**

2.1 Create a New Project 12

2.2 Opening a Page from the Project 15

2.3 Running the Page That's Been Created in a Web Browser 18

2.4 Reopening the Project 20

2.5 Creating a New Page 21

2.6 Learn More 22

3. Changing the Shape of the Button component **23**

3.1 Changing the Text Displayed on the Button Component 23

3.2 Changing the position of a Button Component 24

3.3 Changing the Size of a Button Component 25

3.4 Changing the position and Size of a Button component in the Properties pane 26

3.5 Checking Component Properties in Help 27

3.5.1 Finding in the Component List 27

3.5.2 Search by Item Name 29

3.6 Learn More 30

4. Placing Multiple Components **31**

4.1 Arranging and Placing Components According to Specific Criteria 31

4.2 Placing Components at Regular Intervals 32

4.3 Resizing Components Automatically When the Page Is Resized 34

4.4 Learn More 36

5. Processing the Following Actions Based on User Input 37

5.1 Displaying a Message When a Button Component Is Clicked 37

5.2 Displaying the Text Entered by the User as a Message 39

5.3 Learn More 40

6. Working with Tables and Data 41

6.1 Displaying Data in a Table 41

6.2 Modifying Selected Data in a Table in the Edit Component 45

6.3 Modifying Data in a Table 48

6.4 Learn More 50

1.


Installing Development Tools

Nexacro N provides Nexacro Studio, a development tool for write codes to design pages, show data to users, or process data entered by users. In this chapter, you'll learn how to install Nexacro Studio for the first time.

1.1 Installing Nexacro Studio


1. In File Explorer, select and run the Nexacro Studio installation file.

   The installation file will be designated NexacroN_SetupStudio.exe or NexacroN_SetupStudio_x64.exe.

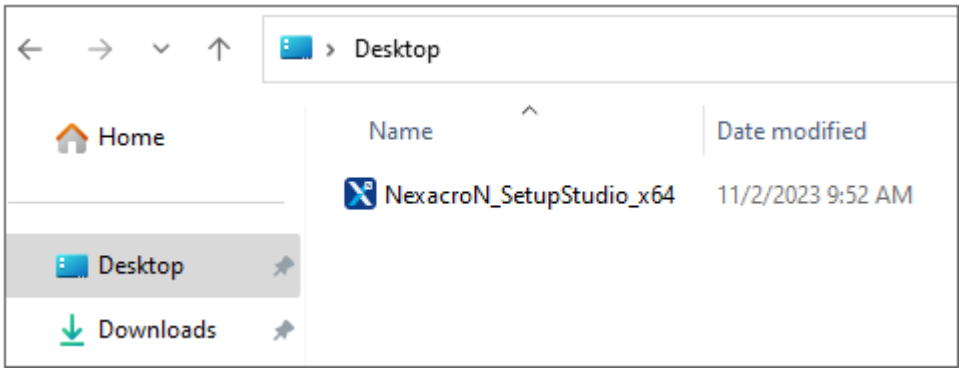


   The installation file can be downloaded from the Tobesoft website.

> Website [DEV.TOOL > NEXACRO > Download the trial version].
> https://www.tobesoft.com/product/nexacro

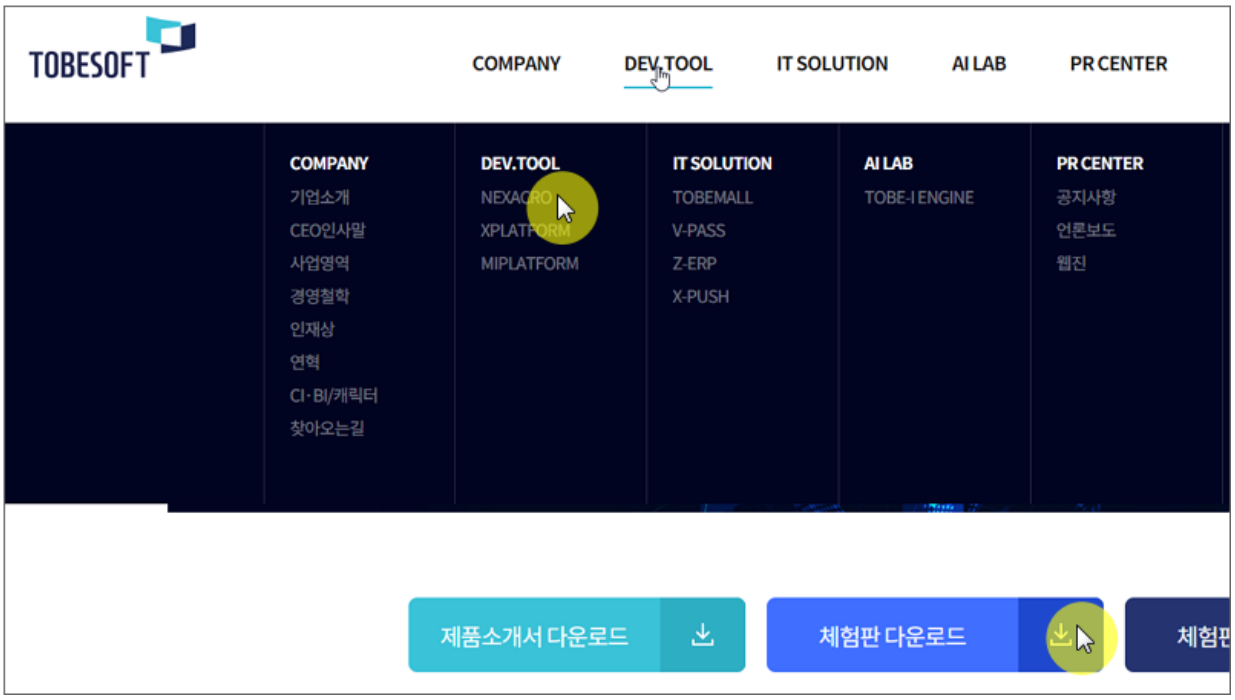


2 Select the language to be used in the Nexacro Studio installation process.

The default language will be the language set in the operating system. After selecting the language, click the [OK] button.

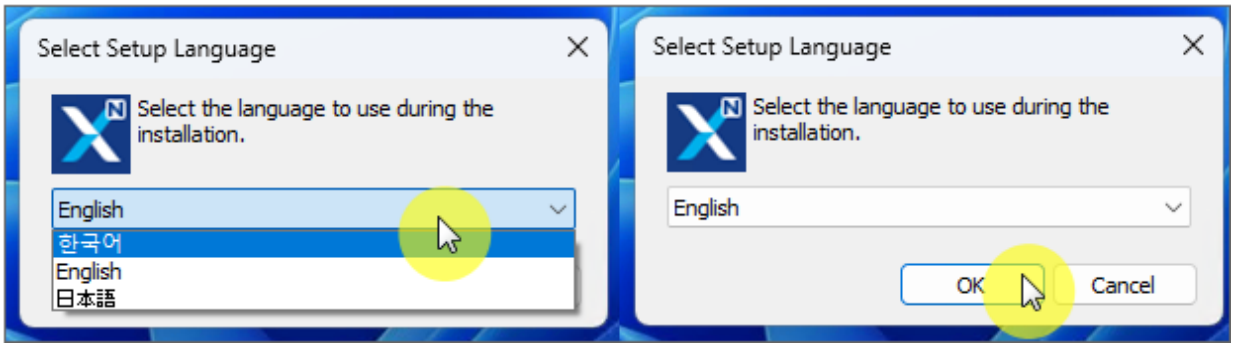


3 Read and agree to the software license agreement.


Check the software license agreement information, check off the "I accept the agreement," and click the [Next] button.

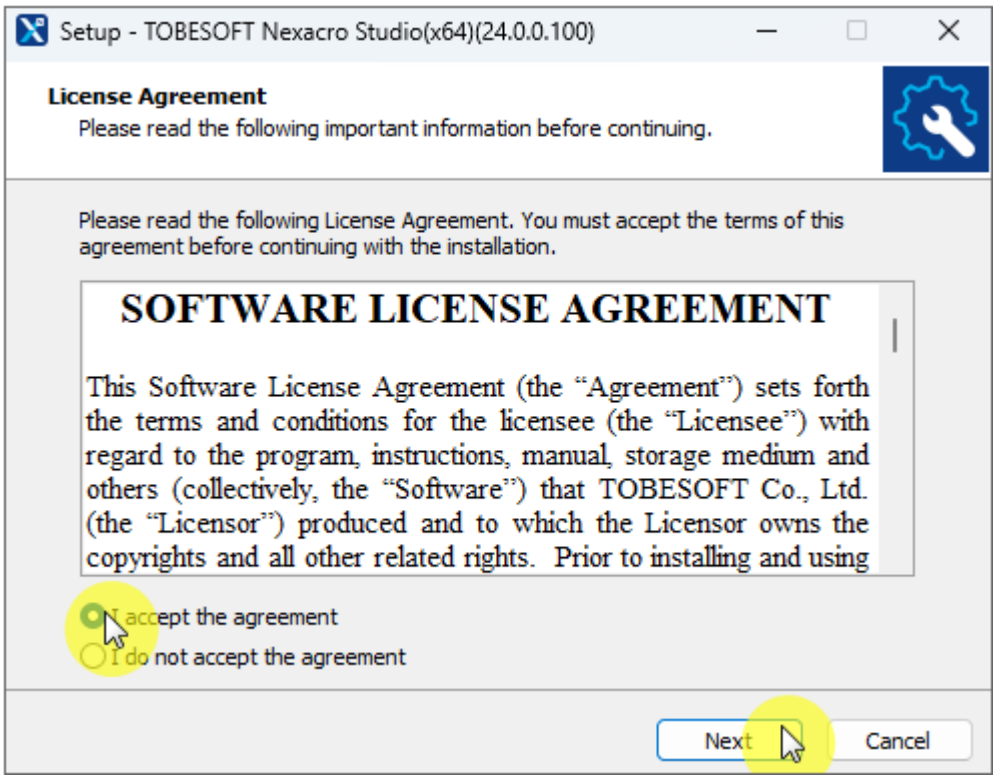

4 For additional options, click the [Next] button without changing the default values.

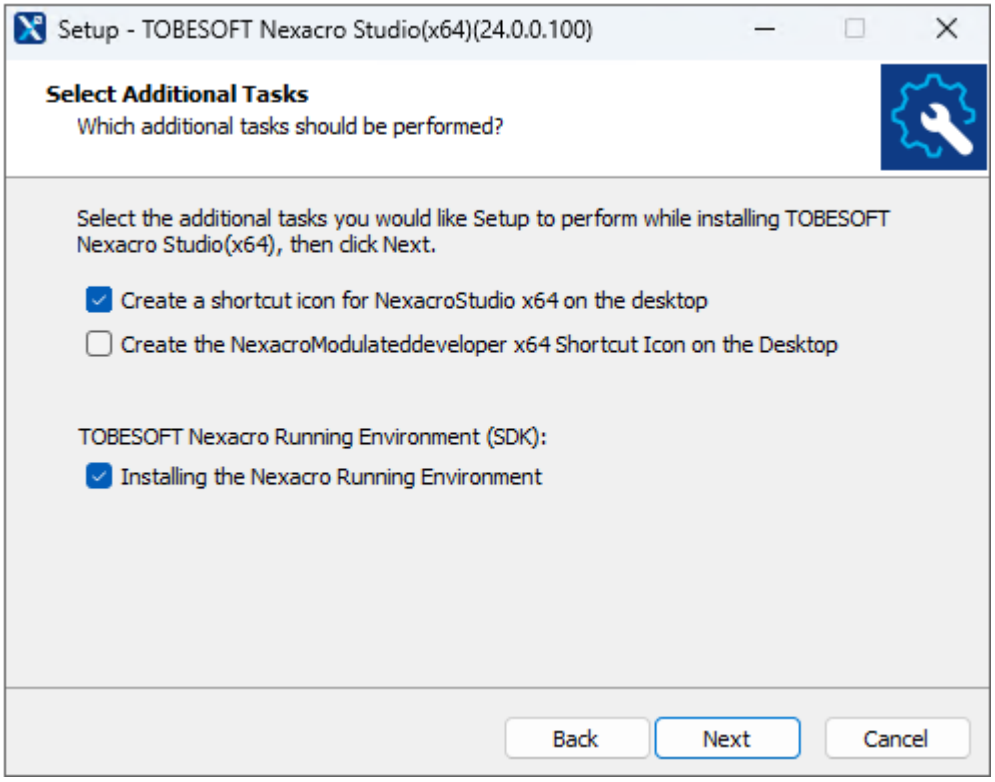


5 When the installation information is displayed, click the [Install] button.

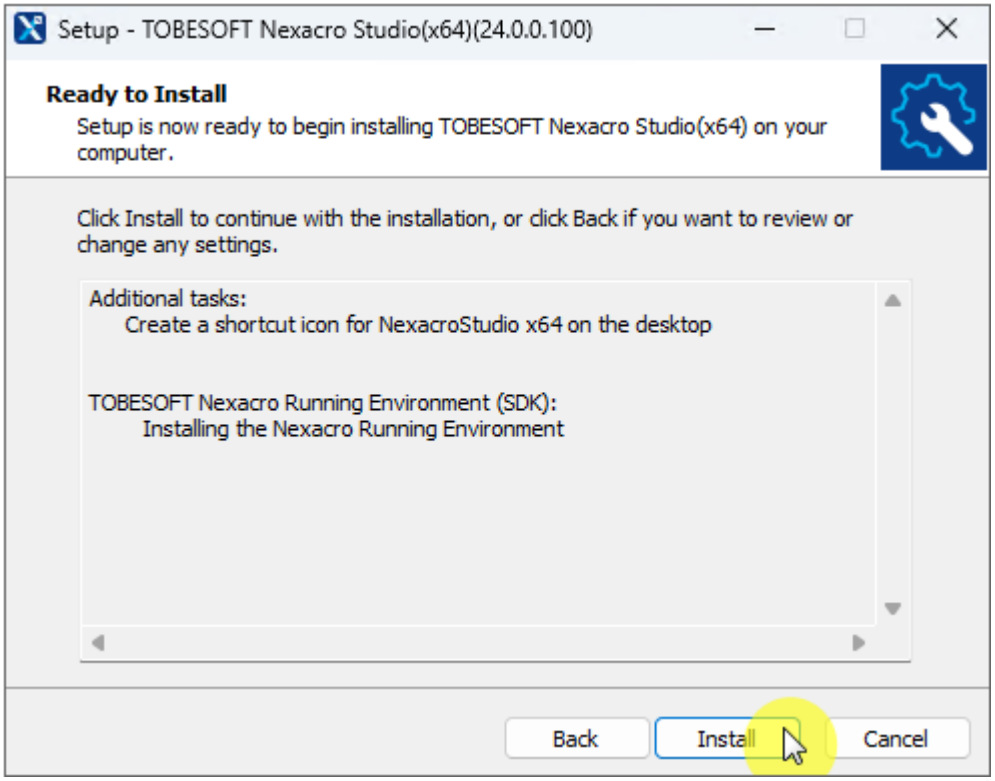

6 When the installation is complete, click the [Finish] button.

By default, clicking the [Finish] button will run Nexacro Studio that has been instaleld. If you do not wish to run it, uncheck the "Running the Nexacro Studio" box.

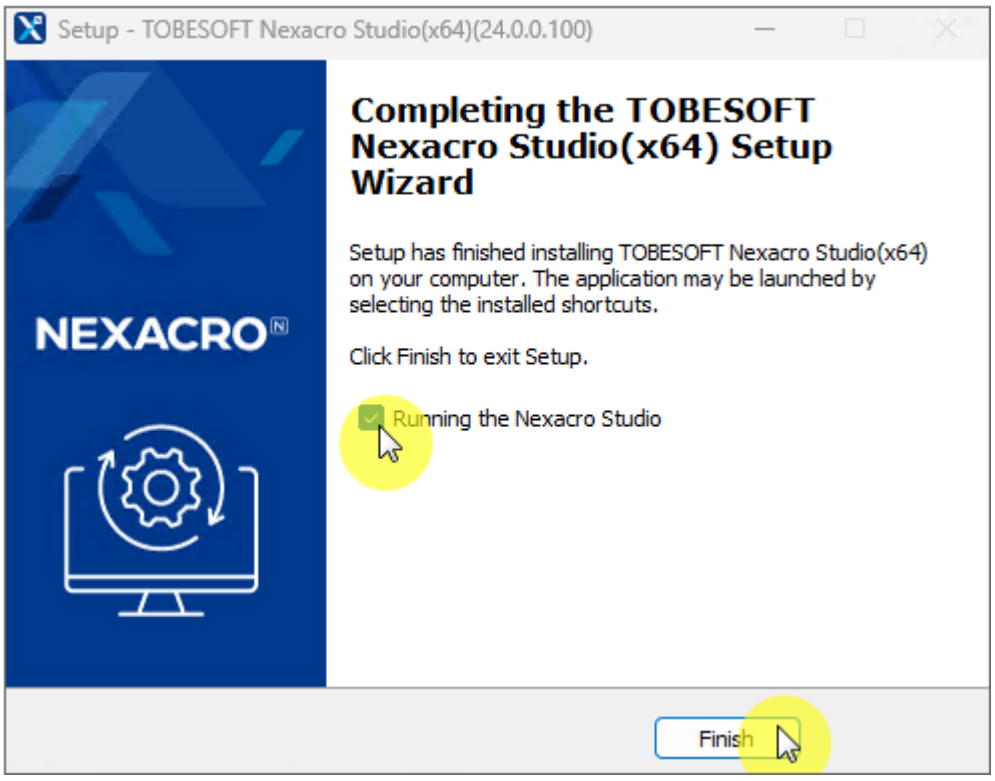

1.2 Running Nexacro Studio


When running Nexacro Studio, all messages except Help and property descriptions will be displayed in English only, regardless of the language selected during installation or the language set in the operating system.

1.2.1 Running Nexacro Studio for the First Time

This is the first time Nexacro Studio is being run after its installation. Any prompts or settings shown during the initial run will not be displayed when it is run subsequently.


1. If you see a statement about the license, click the [OK] button.

   Nexacro Studio will check for a license during the initial run, and if you don't have a license, it will be launched as a 60-day trial.

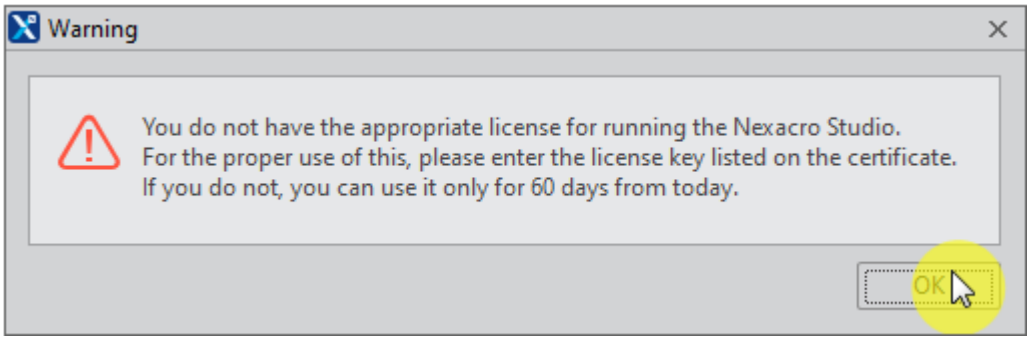


2. Click the [Start] button without changing the default values for the Nexacro Studio page options.

   After clicking the [Start] button, Nexacro Studio will be launched.

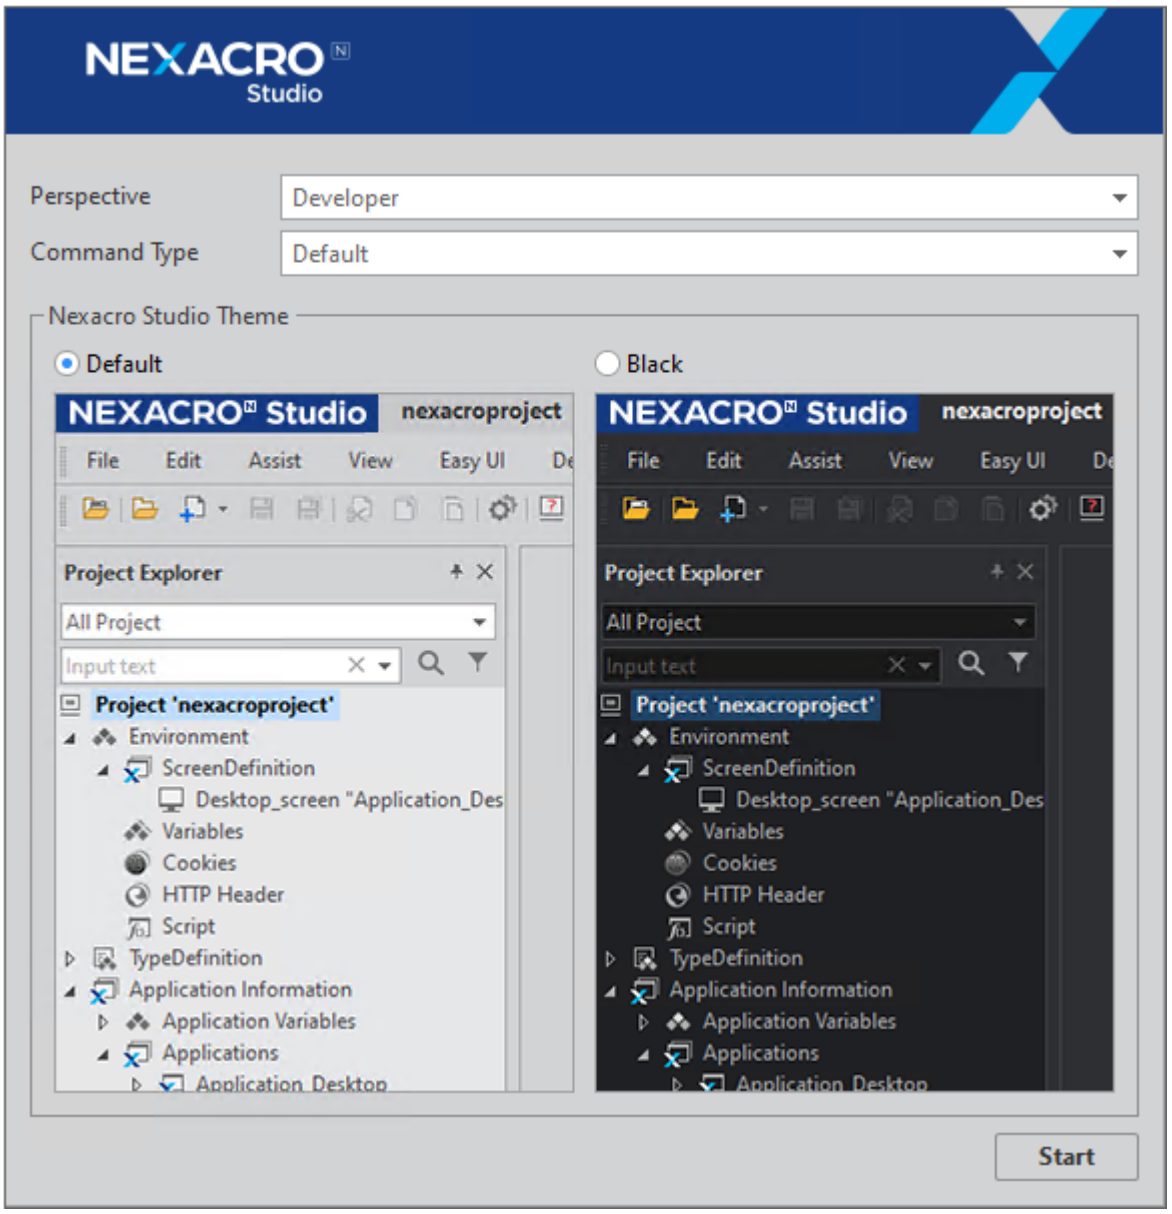

1.2.2 About License Expiration When Running Nexacro Studio

When using the trial version, the remaining license period will be displayed when Nexacro Studio is run, and it will be launched you click the [OK] button.

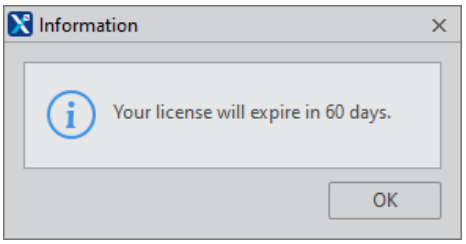

1.3 Learn More

For more information on installing and updating Nexacro Studio, see the Development Tools Guide.

- Development Tools Guide
  Installing Nexacro Studio, Start Page, Help

2.

Creating a Page and Running It in a Web Browser


Nexacro N is designed to enable anyone to develop simple web pages with ease. Now that you've installed the development tools, let's create a web page that can run in a web browser.

2.1 Create a New Project


A website usually consists of multiple pages. To manage multiple pages, you can create a project and adds pages within the project on Nexacro N.

1. Run Nexacro Studio.


2. Click the [New] button in the center of the page under the words "Start Project."

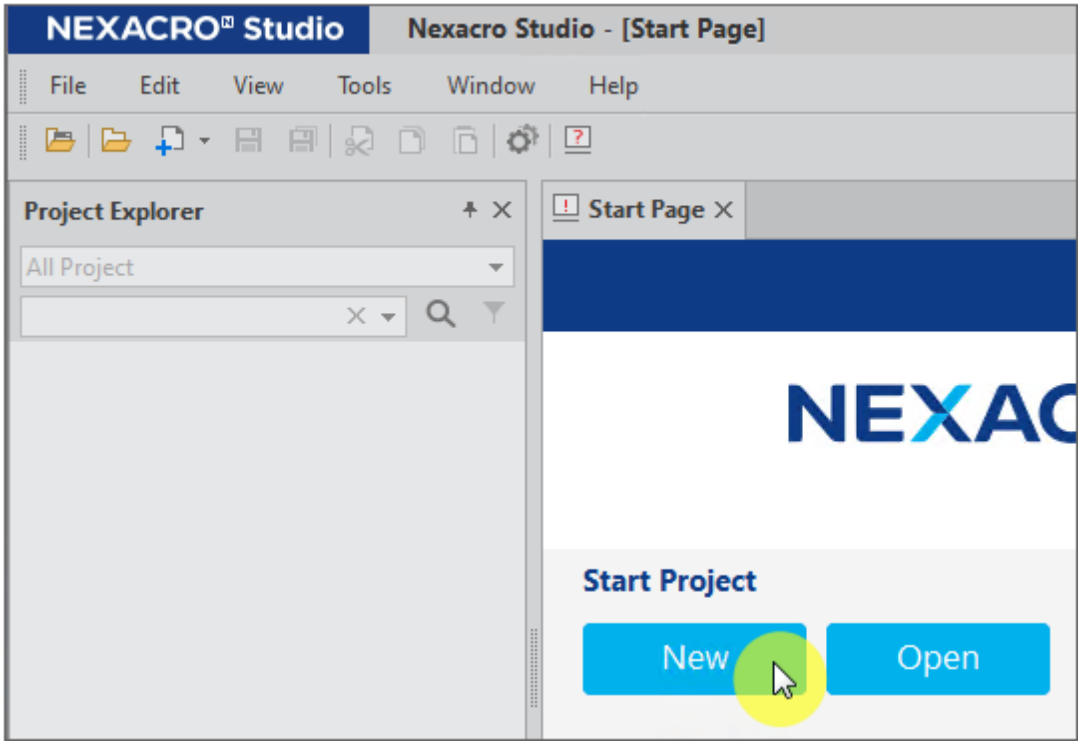


3 In the new window that opens, enter a name for the project in the Project Name field and click the [Next] button.

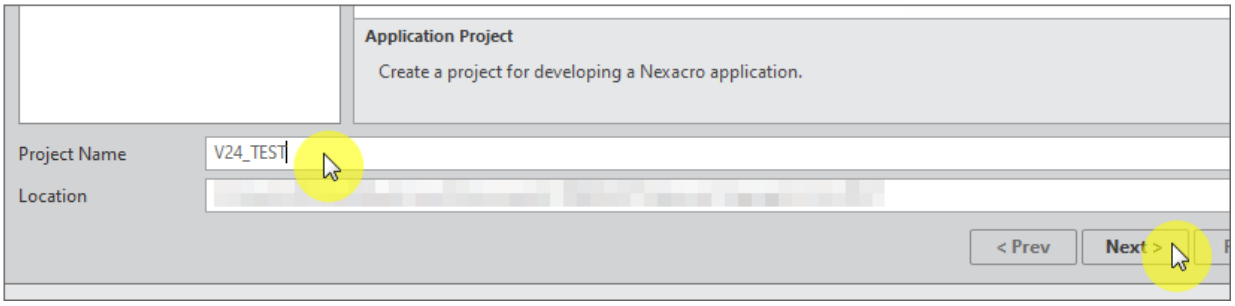

4 Keep the default Screen settings and click the [Next] button.

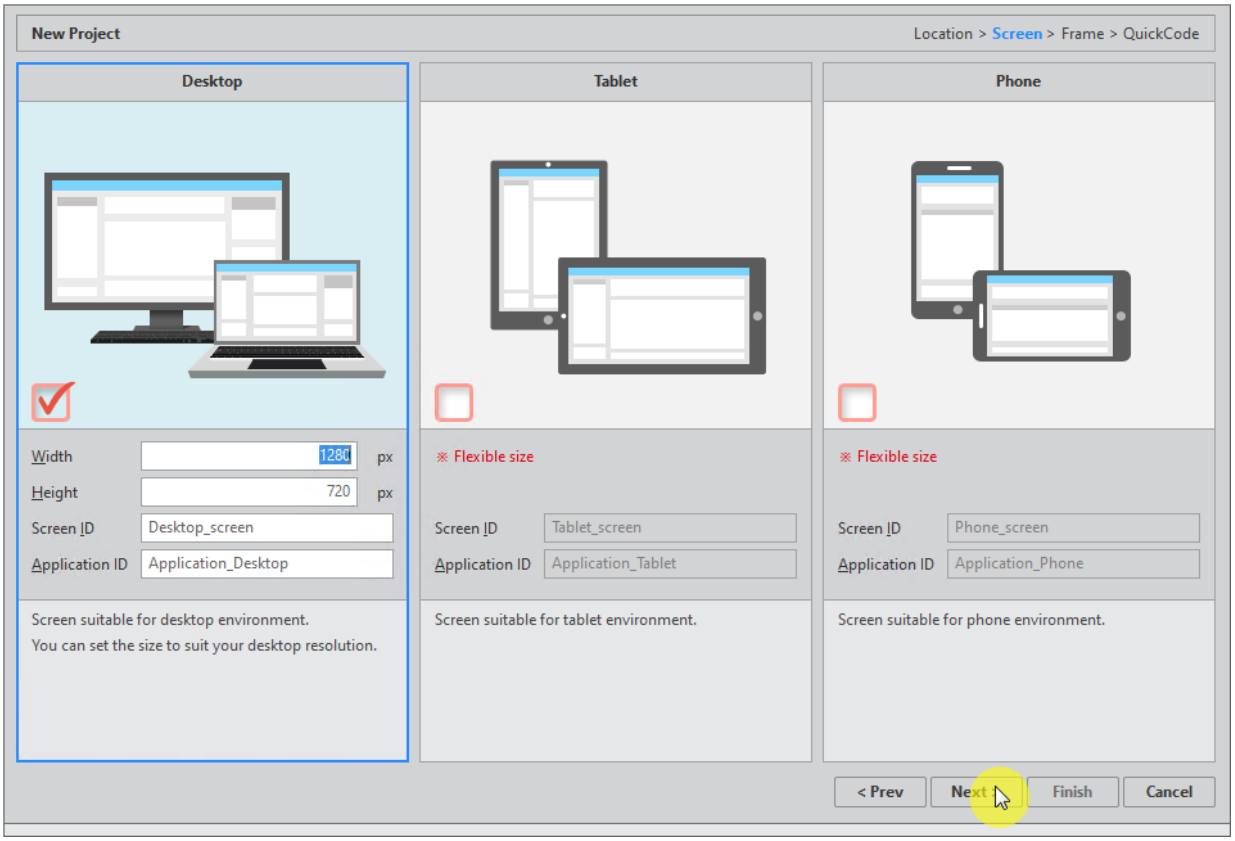


5 Keep the default frame settings and click the [Finish] button.

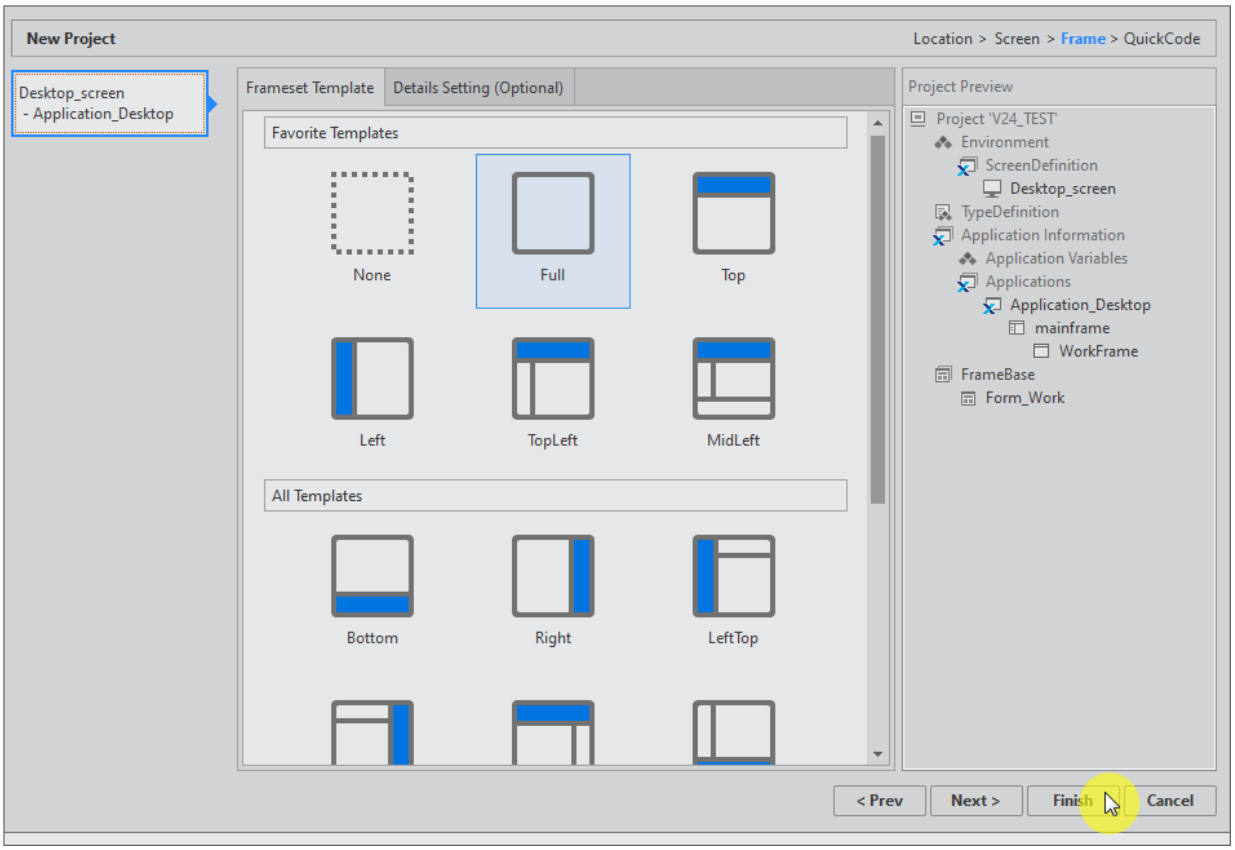

When you click the [Finish] button, the necessary files will be created internally.


6 Confirm that the project has been created in the Project Explorer area with the project name you entered earlier.

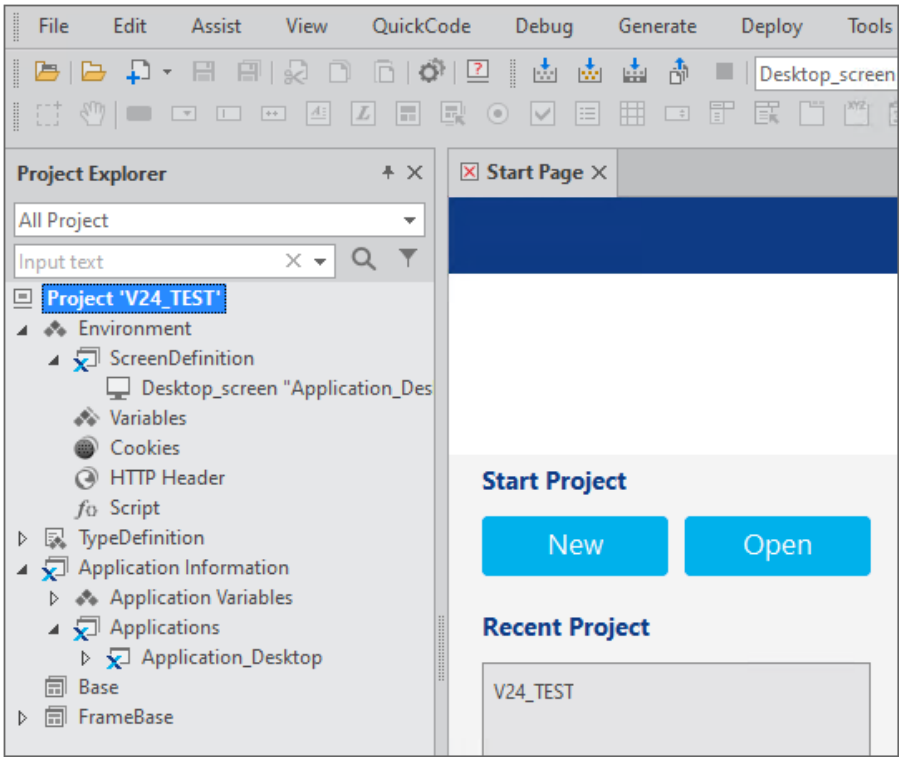

2.2 Opening a Page from the Project

Let's create a simple page using a file created in the basic setting.


1. In the Project Explorer area, locate the item called "FrameBase" and click the □ icon in front of it.

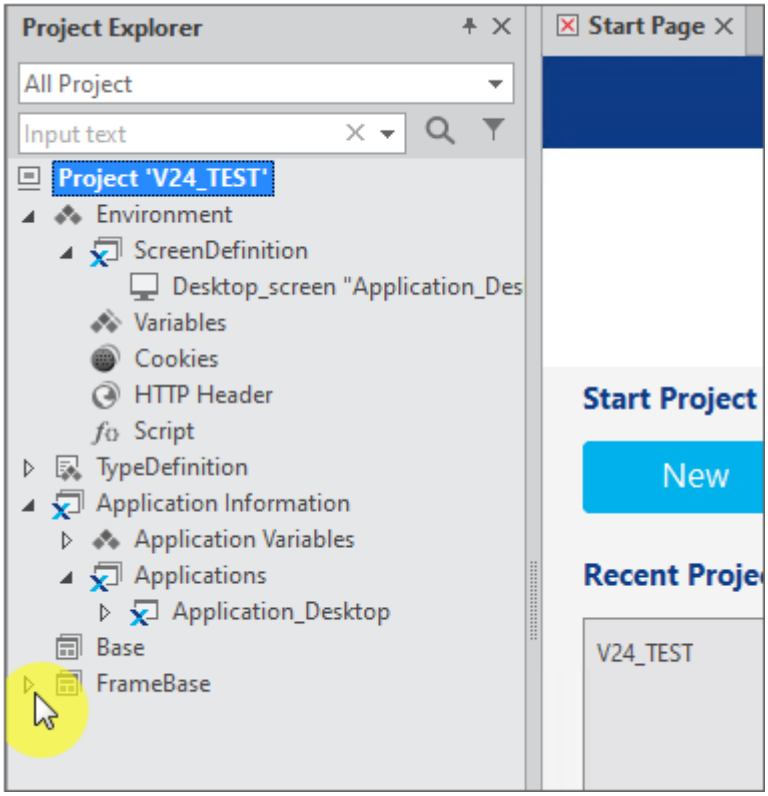

The "FrameBase" item will expand and reveal an item called "Form_Work."

2. Double-click "Form_Work."


A tab and page called "Form_Work.xfdl" will be added to the center of Nexacro Studio.

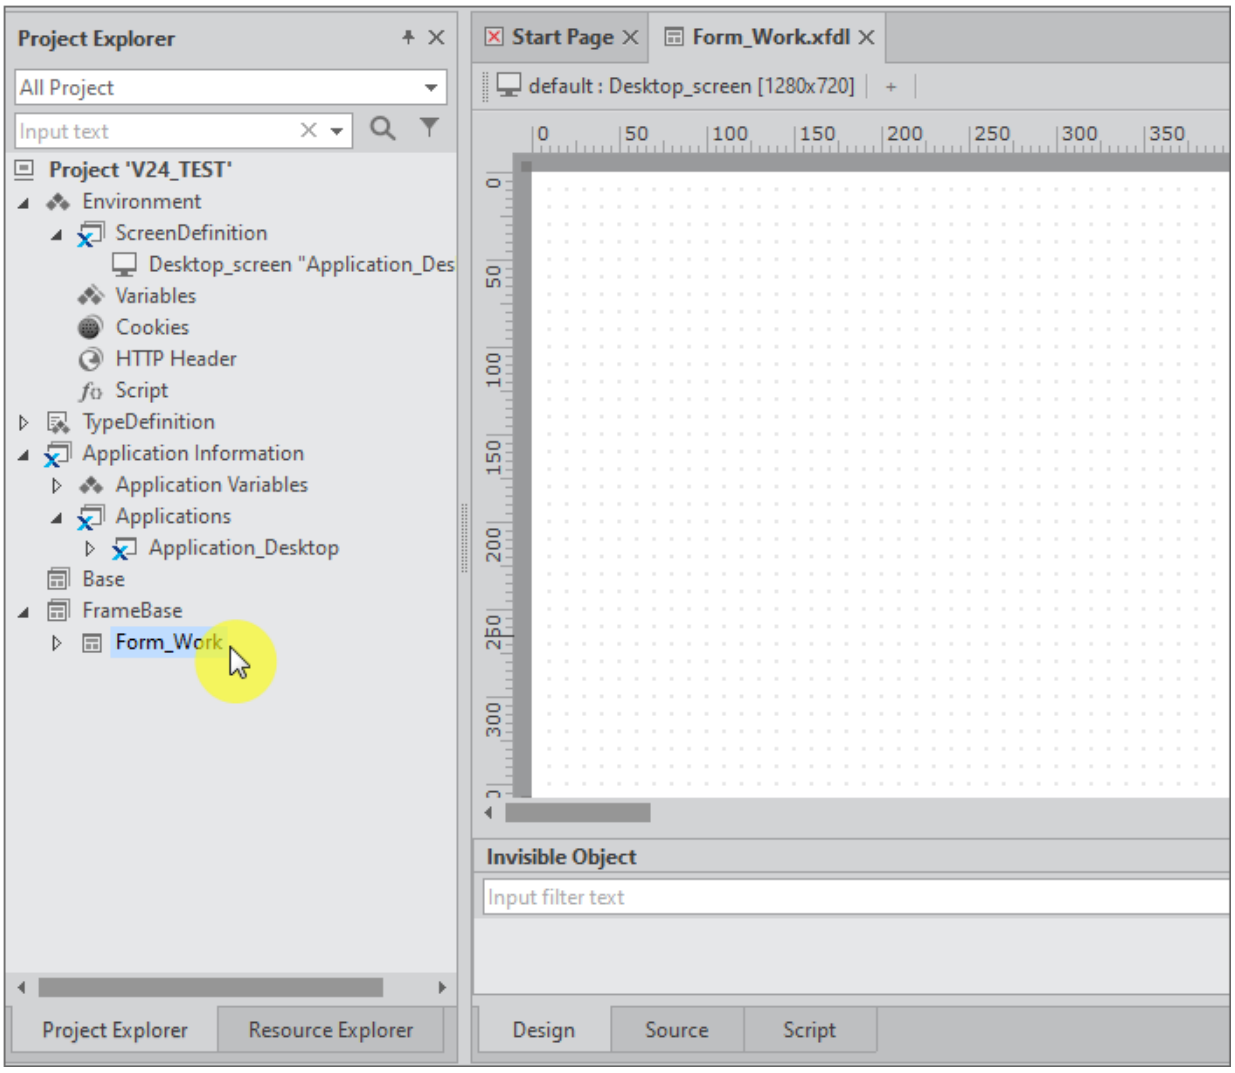


The page to be edited will open, and a toolbar will also appear at the top of the screen with the standard component icons provided on Nexacro N.

3 Click the third icon in the Components toolbar.


The third icon is the Button component. When you click on this icon, the Button component will be ready to be placed on the page.

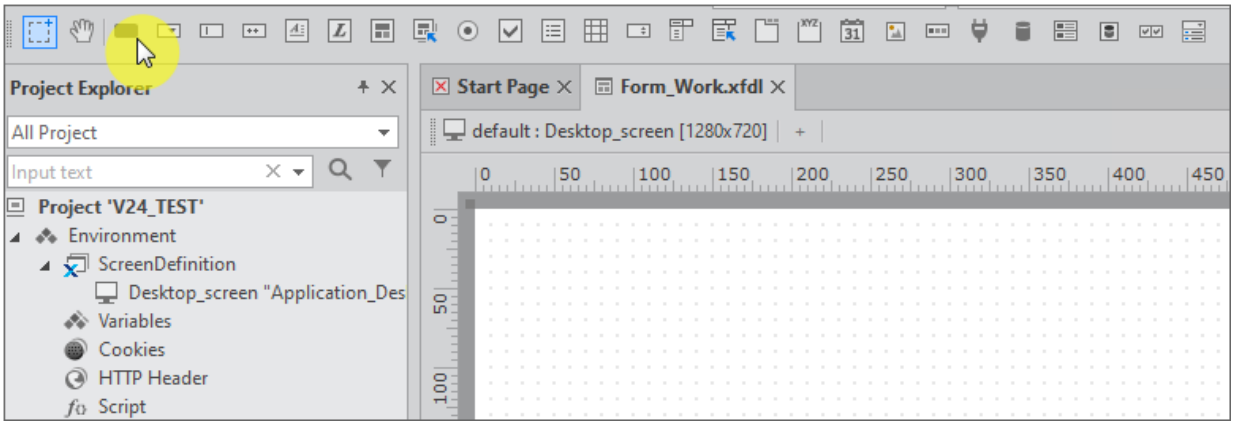


4 Notice that the mouse cursor changes to the shape of the Button component when you move it to the page area.

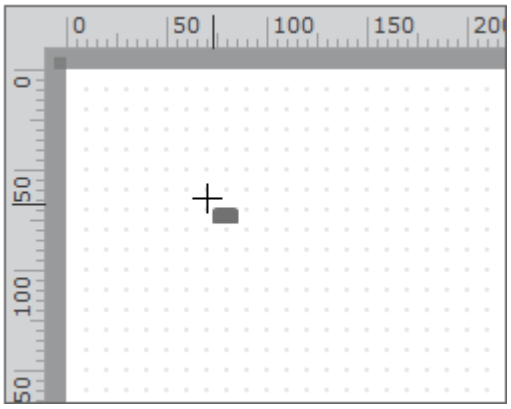

5 Click on the desired position on the page to place the Button component.

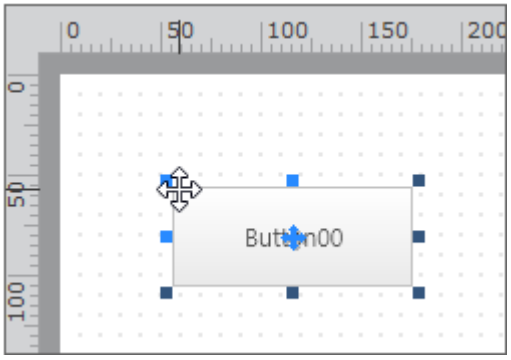


6 Click the Save icon on the toolbar to save the page you've created.

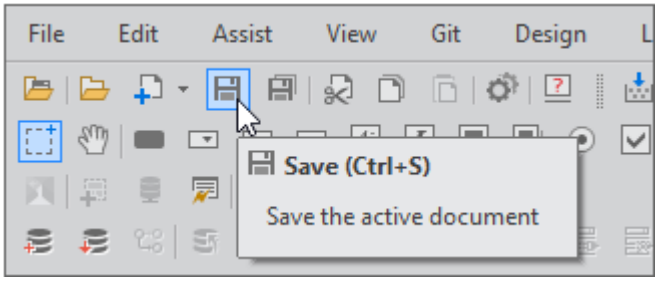

2.3 Running the Page That's Been Created in a Web Browser

Nexacro Studio provides a function to open the page that has been created directly in a web browser.


1. On the toolbar at the top of Nexacro Studio, click the ▼ icon next to "Nexacro Runtime Environment (x86)."

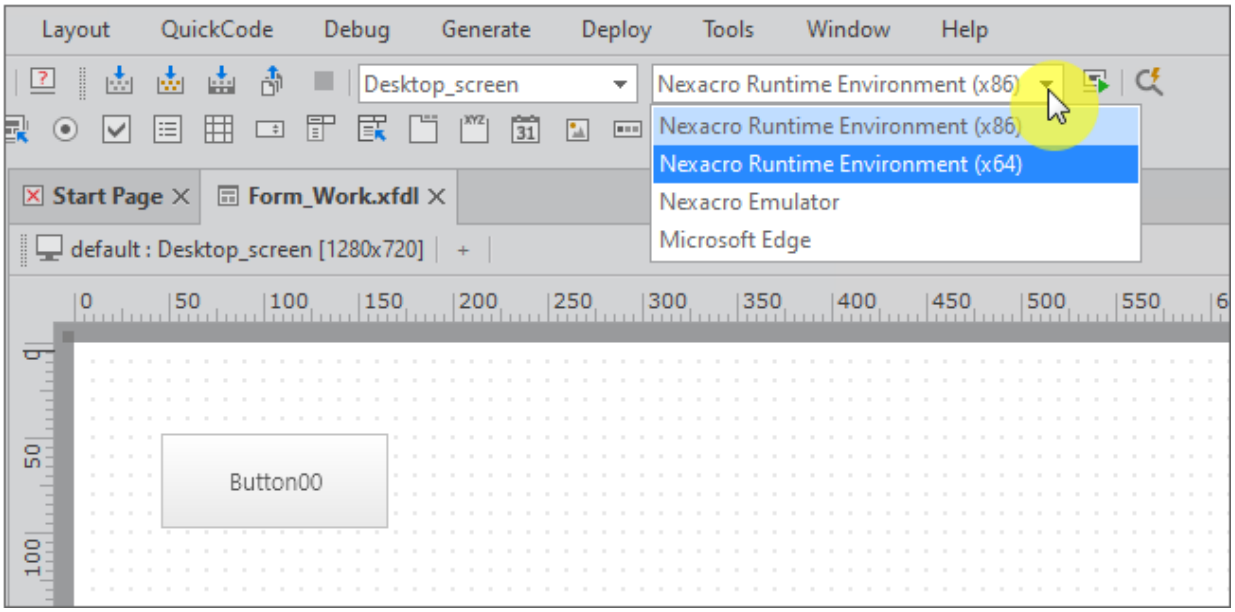


2. Select "Microsoft Edge" from the list.

   You may see an additional list of web browsers installed on your PC that are supported by Nexacro N.


3. Click the icon next to the list of browsers.

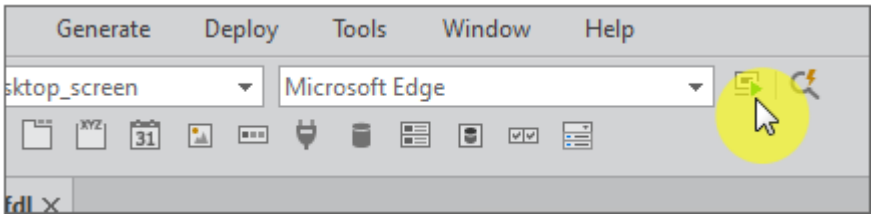

4. When the "Run Configuration" page appears, click the [Run] button.

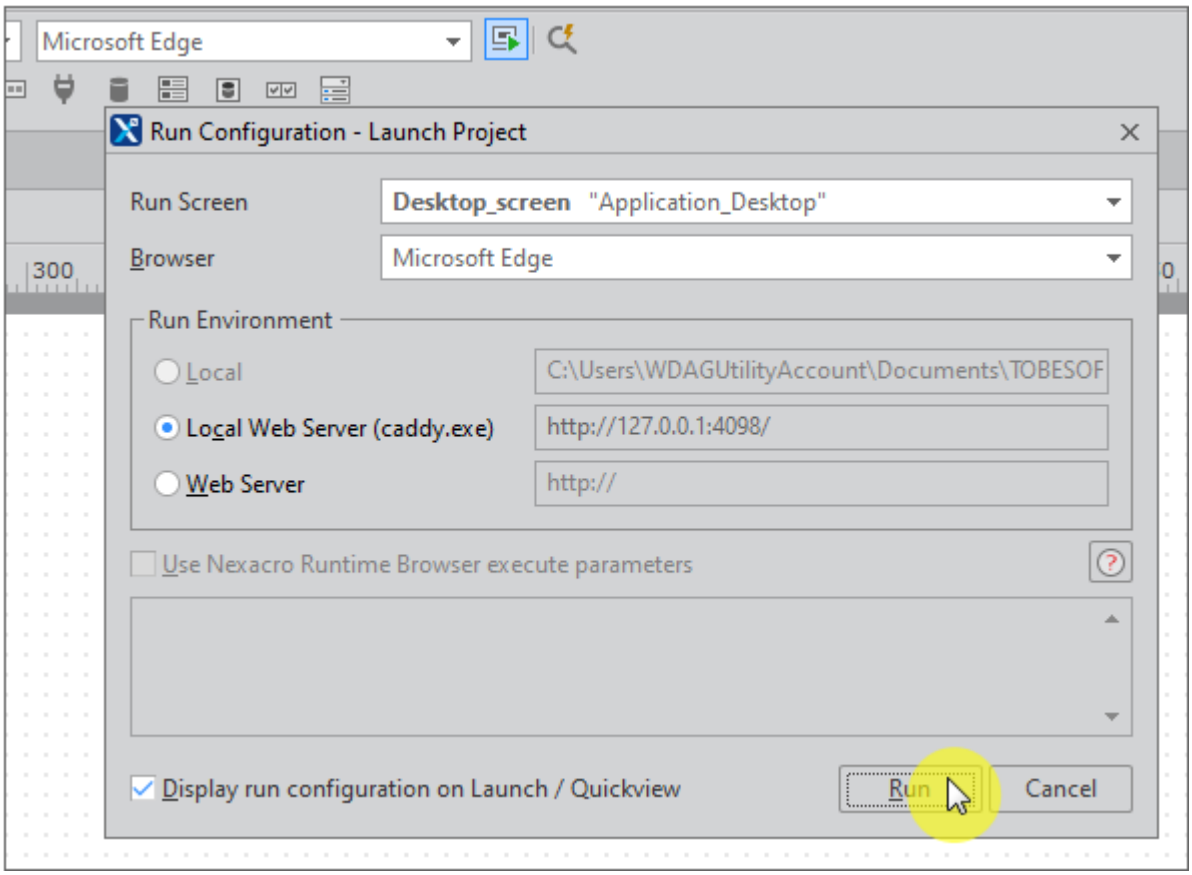


5 When a window appears asking if you want to create a file, click the [Yes] button.

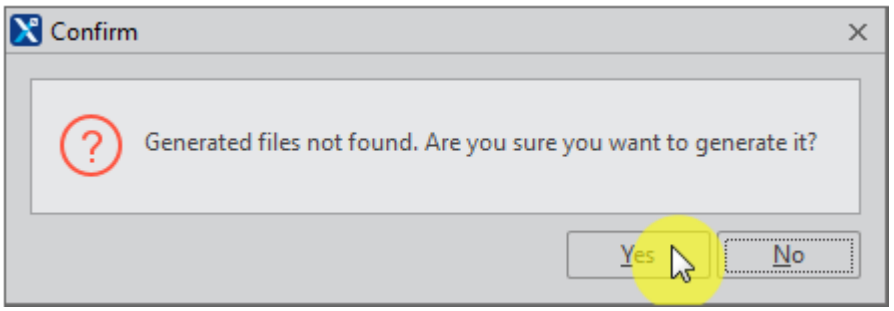

Clicking the [Yes] button will create the files necessary to display the page you created in the web browser. When the file creation process is complete, the web browser will be automatically launched.

6 Check that the Button component is visible in the web browser.

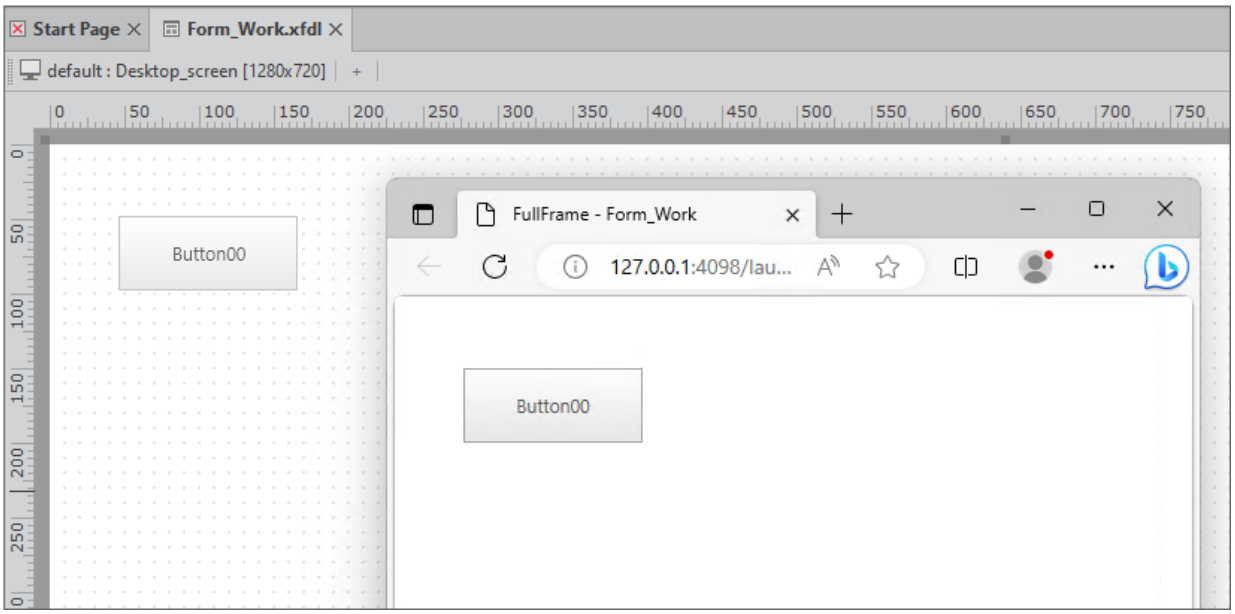


2.4 Reopening the Project

When you exit Nexacro Studio and open it again, it will run with nothing, just like when you launched it for the first time. Reopen the project you created earlier.

1. Run Nexaro Studio.

2. Double-click the project that appears in the center of the page under "Recent Project."

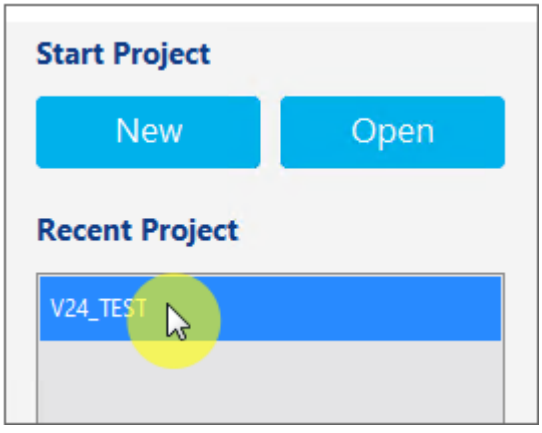


3. Check that the selected project opens in Nexacro Studio.

2.5 Creating a New Page

On Nexacro N, pages are called forms. Earlier, we used the page that was created when the project was created, but this time, let's create a new page (form).


1. Select the [File > New > Form (.xfdl)] from the menu.

   Clicking [File] will display the submenu, and clicking [New] will display the sub-items can be created.

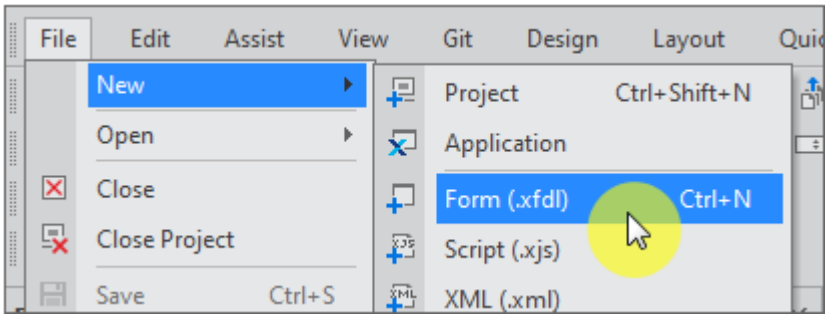


2. When a new window opens, enter the page name in the Name field and click the [Finish] button.

   Leave the position item as is if "Base" is selected, but if it is "FrameBase," then change it to "Base."

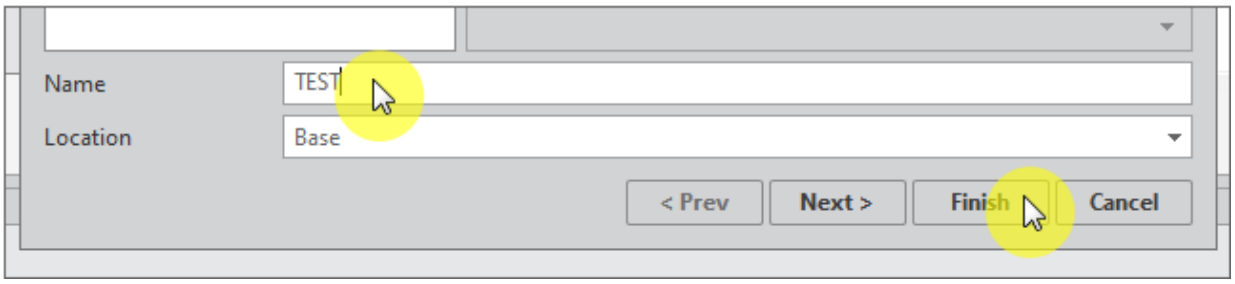

3. Notice that a "TEST" item is added to the Project Explorer area, and a tab and page called "TEST.xfdl" is added to the center of Nexacro Studio.

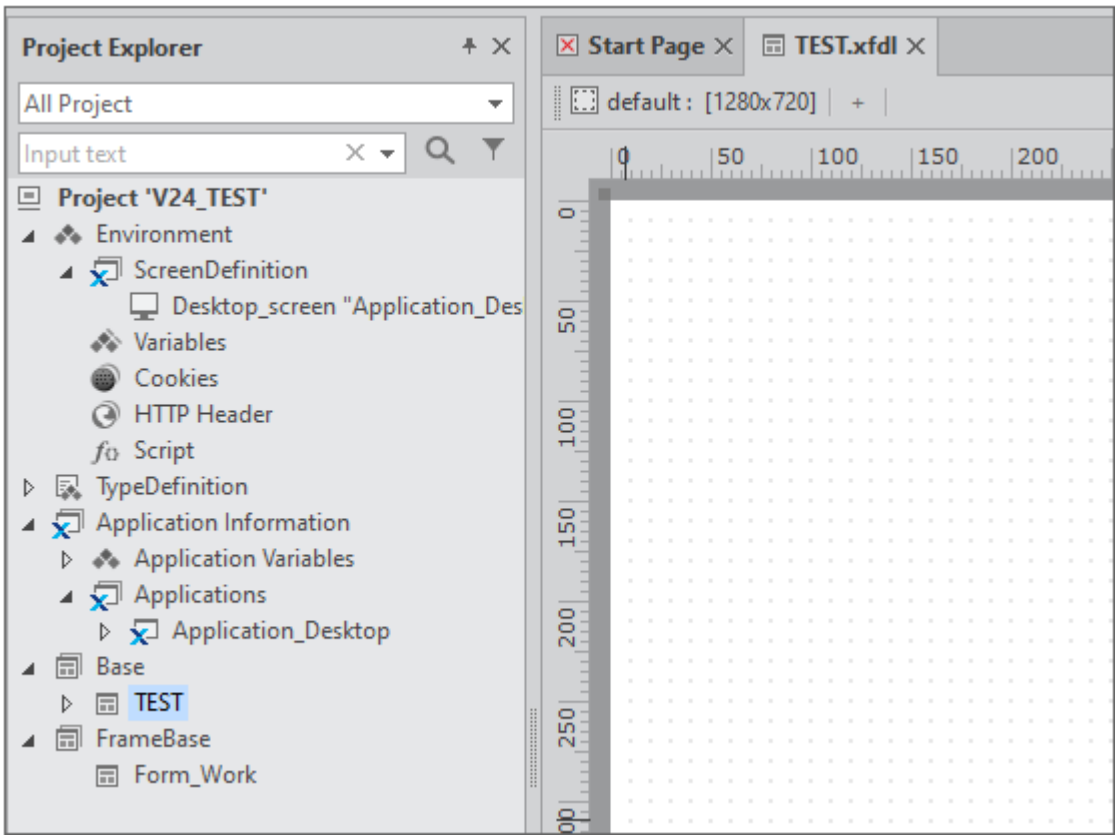

2.6 Learn More

For more options available when creating a project or form, see the Development Tools Guide.

- Development Tools Guide
  Wizard | Project and Application
  Wizard | Form and Other Files

3.

Changing the Shape of the Button component


In the previous chapter, we didn't modify anything when placing the component. However, you can make changes to the Button component such as the text that gets displayed, the component size, and whether or not the icon gets displayed. In this chapter, we will make several changes to the Button component.

3.1 Changing the Text Displayed on the Button Component

Change the text displayed on a component in the Nexacro Studio Properties pane.

1. Place two Button components on the page.


   Let's leave the first Button component (Button00) alone and make changes to only the second Button component (Button01).

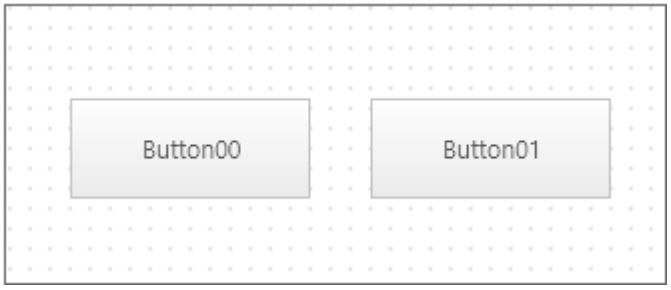


2. Left-click the second Button component.

   Left-clicking on a component will select it.

3. In Nexacro Studio, notice that "Button01" is displayed in the Properties pane labeled "Properties."

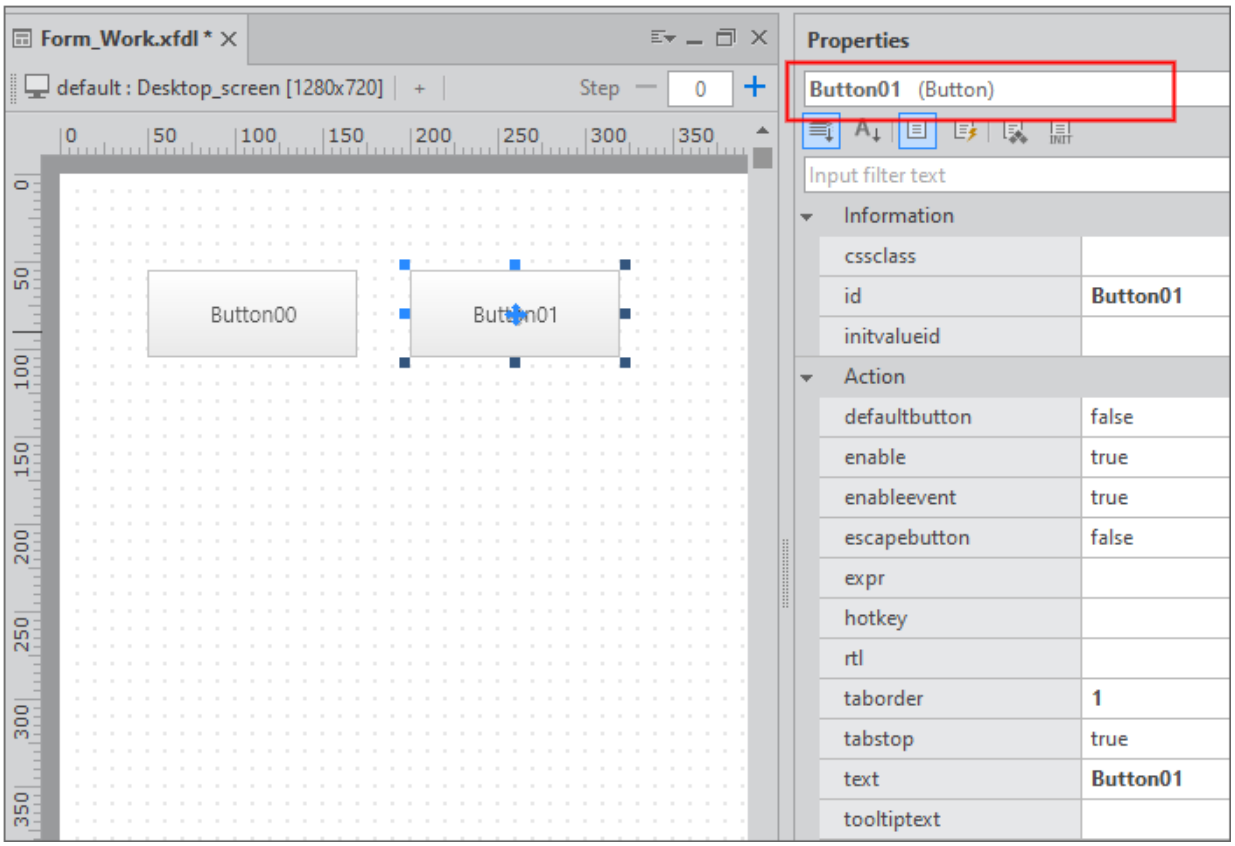

4 Find "text" in the list of properties and change the value to "Add to favorites" and press Enter.

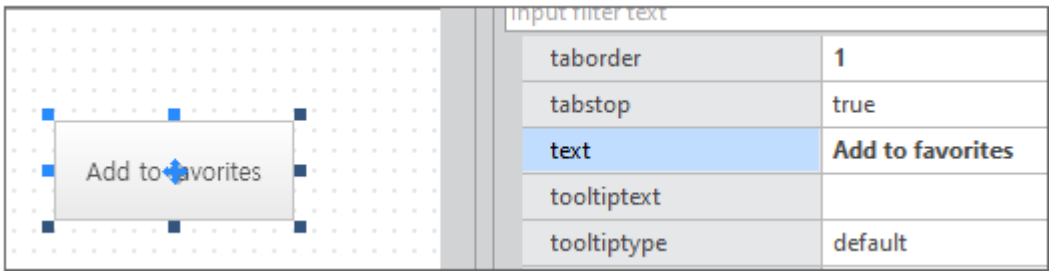

5 On the page, notice that the text displayed on the second Button component has changed.

3.2 Changing the position of a Button Component

Select the component in the page editing window to change its position. Placing and repositioning a component on the page in Nexacro Studio is similar to placing and repositioning things in a presentation software program.

1 Left-click the Button component.


Left-clicking on a component will select it.

2 Move the mouse pointer over the Button component.

The mouse pointer will change to a four-headed arrow.



3 Left-click and hold the Button component and move it to the desired position.

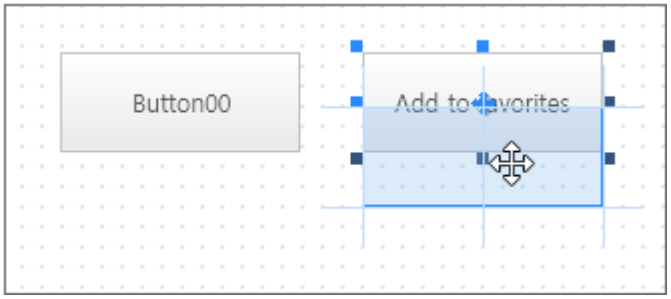

4 When you have moved it to the desired position, release the right mouse button to position the Button component in place.

3.3 Changing the Size of a Button Component


Select the component in the page editing window to change its size. Changing the size of a component in Nexacro Studio is similar to resizing things in a presentation software program.

1 Left-click the Button component.


Left-clicking on a component will select it.

2 Move the mouse pointer over the face or corner of the Button component that you want to resize.

The mouse pointer will change to a double-headed arrow. You can decrease or increase the size in the direction of the arrow.

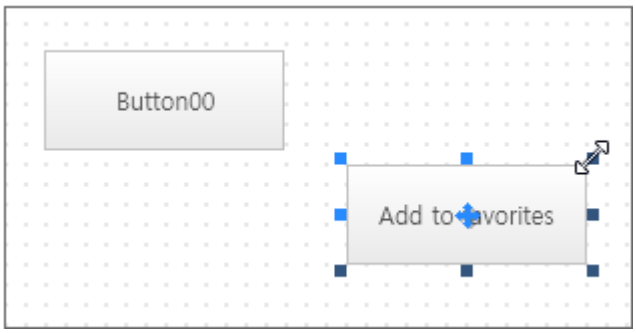

3 Left-click the Button component and move it in the desired direction to change the size.

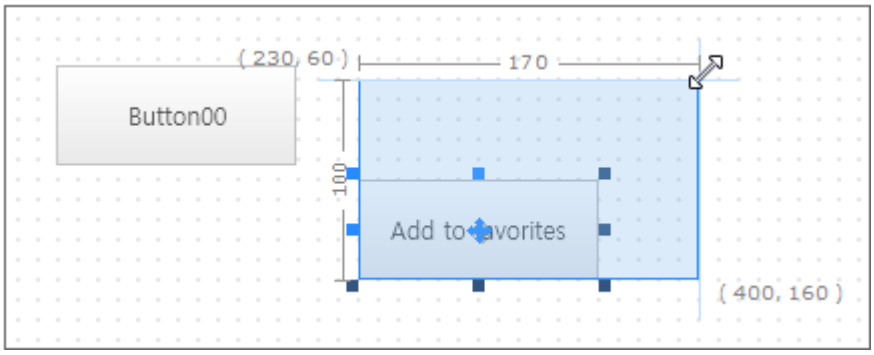

4 After adjusting to the desired size, release the right mouse button to complete the resizing process.

3.4 Changing the position and Size of a Button component in the Properties pane

In Nexacro N, the state of a component can be set based on its property values. Set the position with the left and top properties and set the size with the width and height properties.


1 Left-click the second Button component.

Left-clicking on a component will select it.

2 In Nexacro Studio, notice that "Button01" is displayed in the Properties pane labeled "Properties."

3 Scroll down the scrollbar in the Properties pane to "Position."

You will see the following items: left, top, width, and height.

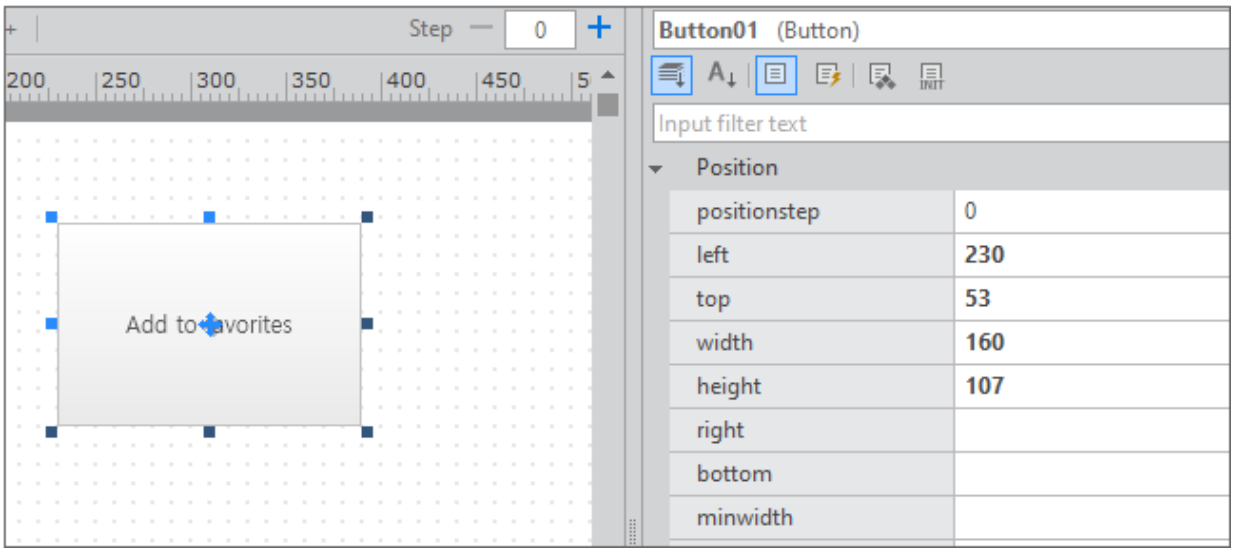

4 In the Properties pane, change the values for the left, top, width, and height properties.

You will see the position and size of the Button component change.

3.5 Checking Component Properties in Help


3.5.1 Finding in the Component List

1 In Nexacro Studio, press F1.


The Help popup window will open.

2 In the contents, find the Button component.


Components that can be placed on the page are displayed in alphabetical order under Components > Component. Click the "+" button to expand each item and show the sub-items.

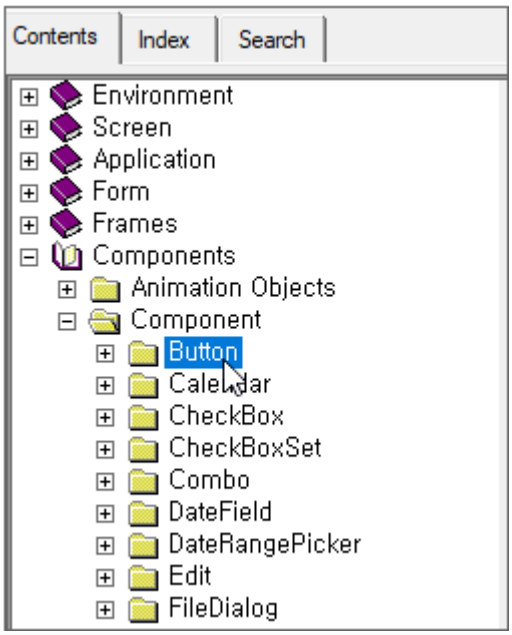

3 Click the Button component entry to see a basic description of the Button component, as well as its structural diagram.

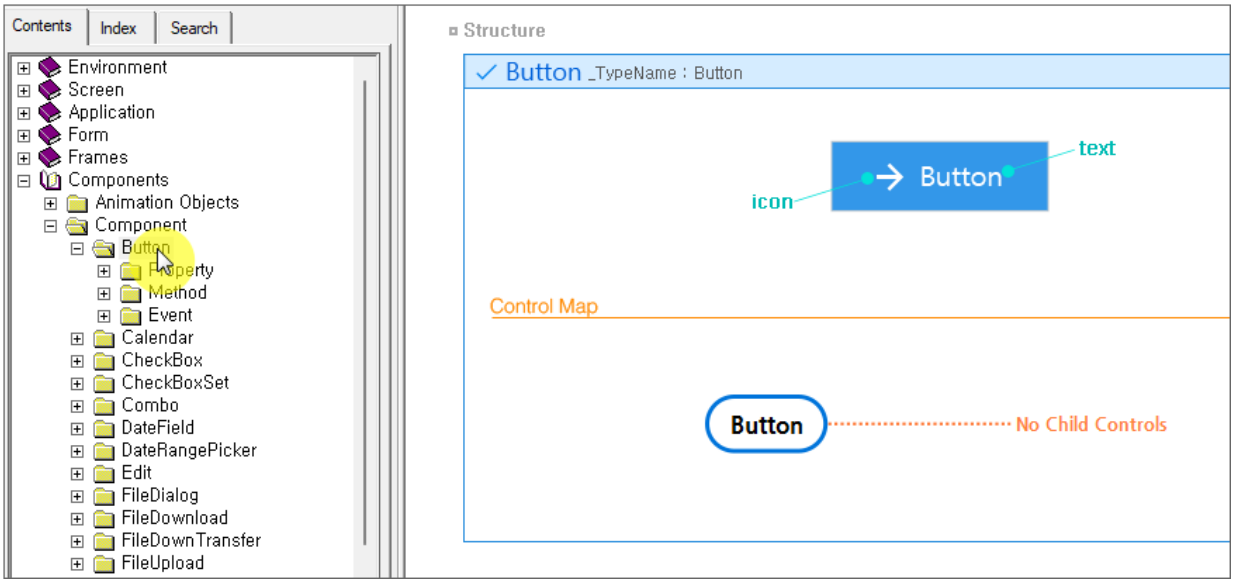


4 Click the desired item and a description of its properties, methods, and events will be shown on the right.

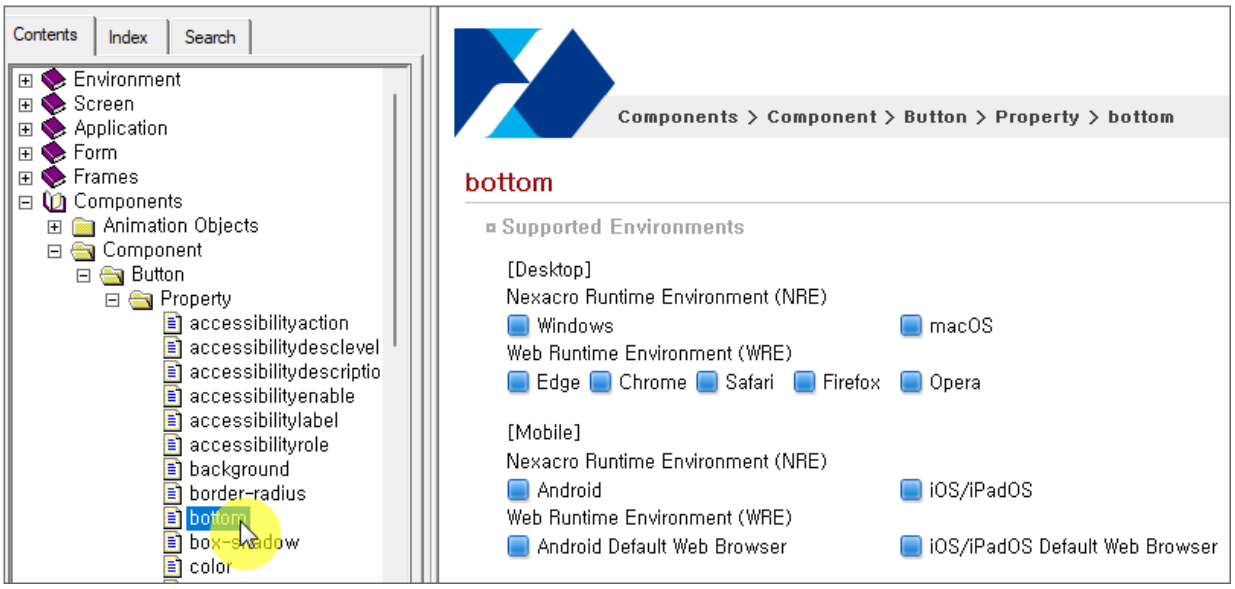

3.5.2 Search by Item Name

1. In Nexacro Studio, press F1.

2. Under the Index tab, enter the name of the item you want. Try entering "textwidth."

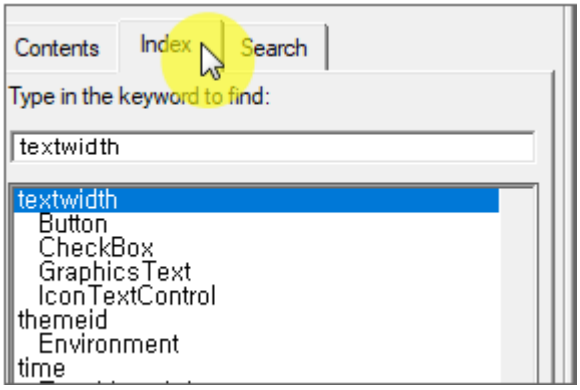

3. Under the "textwidth" item, select the Button item.

   Click on a component (object) item, and a description of its properties, methods, and events will be shown on the right.

3.6 Learn More

For more ways to edit a component's properties and change its design attributes, see the Development Tools Guide.

- Development Tools Guide
  Properties Window
  Form Designing | Arranging, Selecting, Moving and Setting
  Project Editing | Theme, XCSS

4.

Placing Multiple Components


In the previous chapter, you were allowed to freely place components wherever you wanted, but when you're creating a page for actual use, you will need to place the components for entering or selecting text, button components, etc., according to a certain set of standards. In this chapter, we'll examine how to place multiple components.

4.1 Arranging and Placing Components According to Specific Criteria

You can modify the coordinates after placing a component, but for the sake of simplicity, let's see how to adjust the position of a component on the page.


1. Place a Button component on the page.
2. In the Properties pane, change the value of the Button component's top property to 50.
3. Place another Button component on the page.
4. Move the mouse pointer over the second Button component.

   The mouse pointer will change to a four-headed arrow.

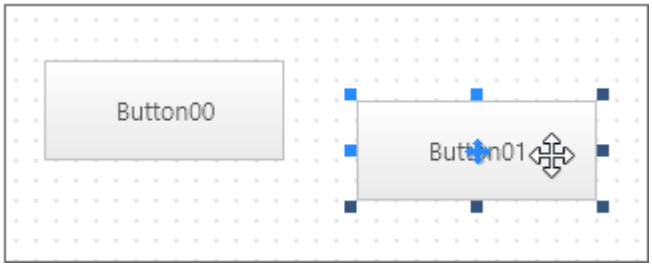

5 While holding the left click on the Button component, move it to the desired position.

6 Release the left mouse button where the blue line matches the first Button component.

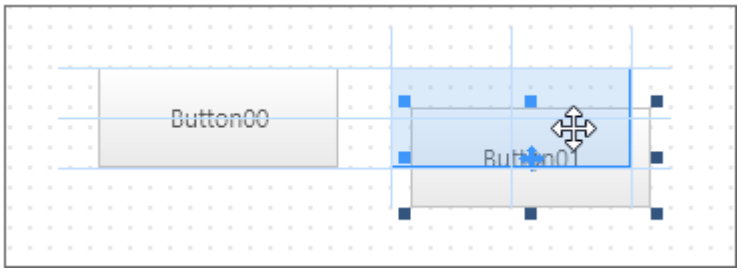

7 In the Properties pane, make sure the top property of the second Button component is 50, the same as the first Button component.

4.2 Placing Components at Regular Intervals

Let's see how you can automatically adjust the spacing of components, like in the case where you need to place icons of the same size at regular intervals, such as in a toolbar.

1 Place a Div component on the page.

The Div component will be found in the sixth position from the Button component in the Components toolbar.



2 Left-click the Div component.

3 In the Properties pane, change the value of the Div component's background property to "red."

> Normally, you won't need to specify a background color, but because of the nature of the Div component, the component is not very visible on the design page and the background color needs to be changed.

4 In the Properties pane, change the value of the Div component's type property to "horizontal."

5 Place the Button component inside the Div component area.


Unlike the previous exaples of placing a component, the Button component will not be placed where you clicked, but on the upper left side to the Div component.

Setting the type property to "horizontal" will place the components in order from the left side within the Div component area.



6 Place two more Button components.


The second and third Button components will be placed to the right of the first Button component.

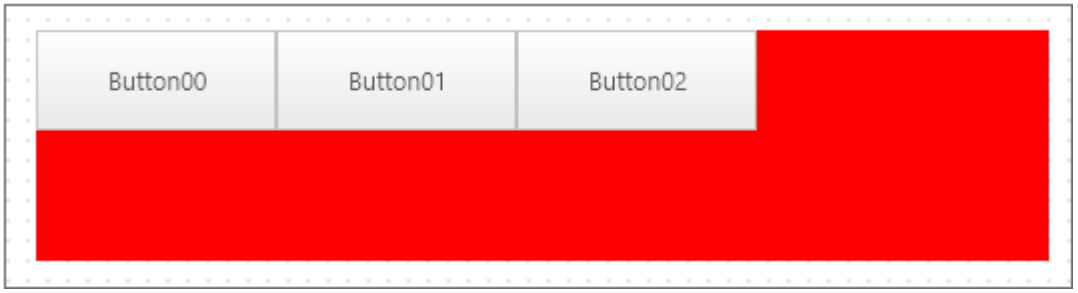

7 Left-click the Div component.

8 In the Properties pane, change the value of the horizontal gap property to 10.

9 Notice that the spacing of the components has been adjusted by 10.

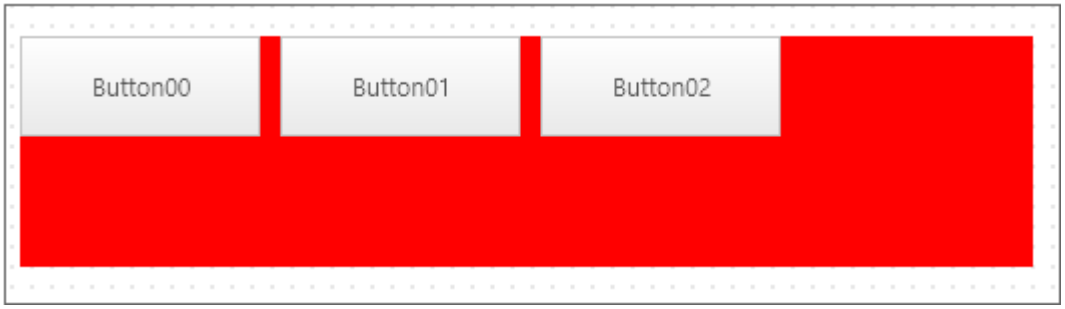

4.3 Resizing Components Automatically When the Page Is Resized

Let's see how to make the width of the Edit component change as the page width changes, while the Button component stays in place on the right side of the page.

1. Place an Edit component and a Button component on the page.

   The Edit component will be found in the second position from the Button component in the Component toolbar.



2. Left-click the Edit component.

3. In the Properties pane, change the values of the Edit component's left, top, and height properties as shown below.

   > left: 30
   > top: 30
   > height: 50

4. Left-click the Button component.

5. In the Properties pane, clear the left property value for the Button component and change the right, top, height, and width property values as shown below.


   You can fix the position of the Button component on the right side of the page by setting the right property value instead of the left property value.

   > right: 30
   > top: 30
   > height: 50
   > width: 120

6. Left-click the Edit component.

7. Move the mouse pointer over the "+" shape shown in the center of the Edit component.

Notice that the mouse pointer changes to a hand shape.

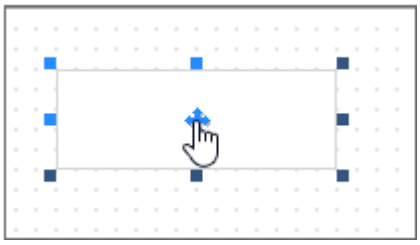


8 Hold down the left mouse button and drag it onto the Button component.


9 When the Button component changes color, release the left mouse button.

In the Edit window that appears above the Button component, change the number input field to 20, as shown in the image below.

This means that the Edit component's right coordinate value will be kept away from the Button component's left coordinate value by 20.

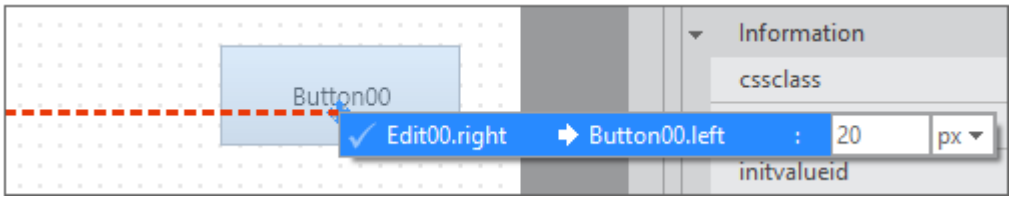


In case of placing the Edit component first, followed by the Button component, you will prompted with the following warning. Click the [Yes] button.

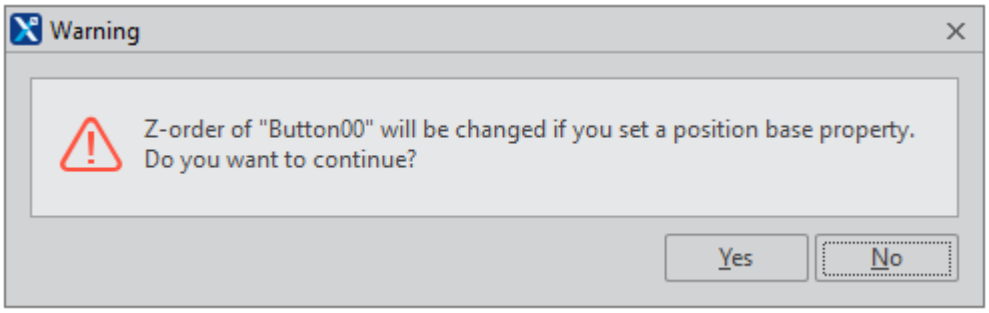

10 Click the magnifying glass icon on the toolbar at the top of Nexacro Studio.




Refer to the chapter Running the Page That's Been Created in a Web Browser
We used the Launch menu in the previous chapter, but here, we will use the QuickView menu.
Launch is used to launch the entire application, whereas QuickView is used to launch only the page you are currently editing.

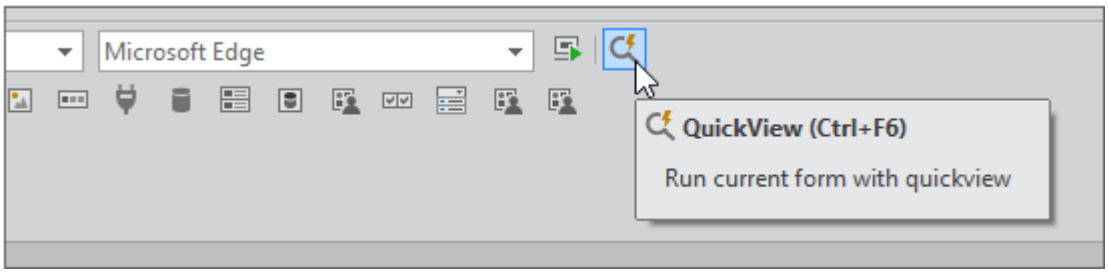

11 Check that the Edit component and Button component are visible in the web browser and try changing the width of the web browser.

As the web browser decreases in width, the width of the Edit component will decrease accordingly, bit the Button component will appear in the same position from the right side of the web browser.

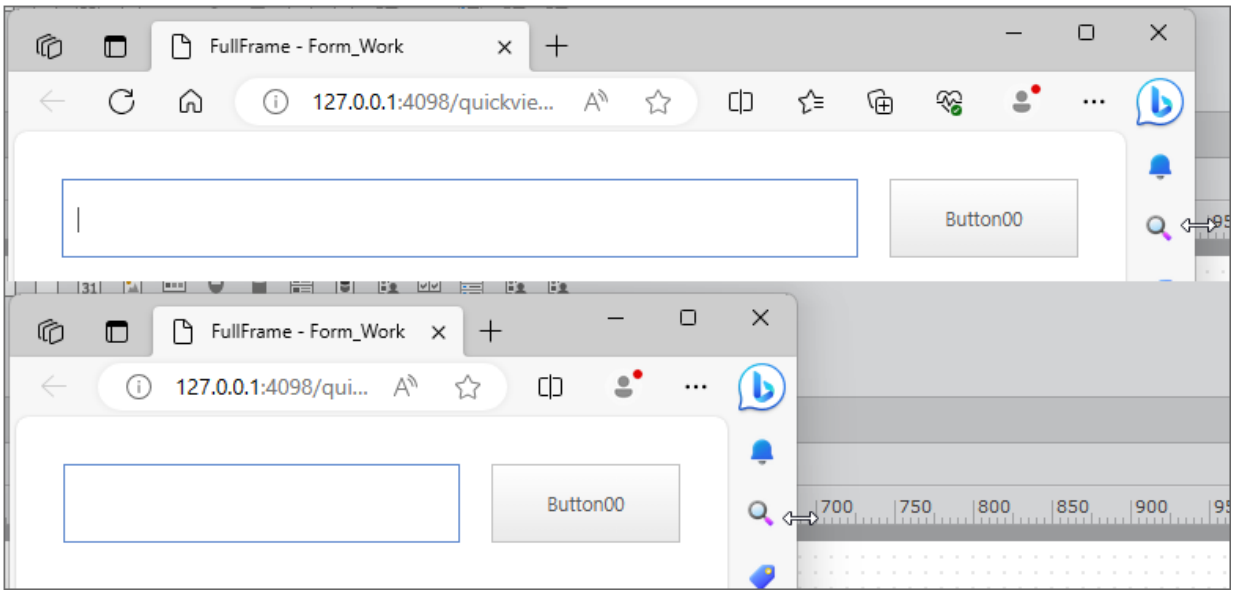

4.4 Learn More

For more information on how to position and align multiple components, refer to the Development Tools Guide.

- Development Tools Guide
  Form Designing | Arranging, Selecting, Moving and Setting
  Form Designing | Positions and Guides
  Form Designing | MLM, Fluid Layout

5.

Processing the Following Actions Based on User Input

An application can be used for displaying information only. But in business systems, they're often used for entering, viewing, and processing data. In this chapter, we'll examine how to process the user actions.


5.1 Displaying a Message When a Button Component Is Clicked

Let's see how Nexacro N handles basic events.

1. Place a Button component on the page.


2. In the Properties pane, click the Event icon.

   In the Properties pane, Property will be the default selection. When Property is selected, a list of properties will be displayed, and when Event is selected, a list of events will be displayed.

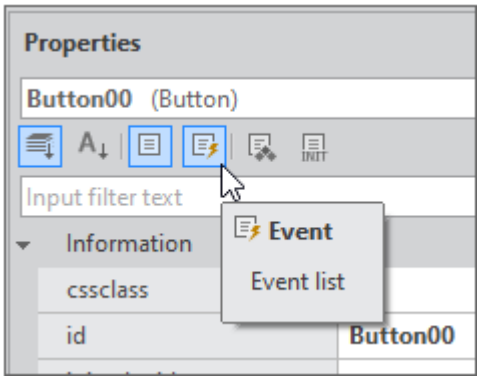


3. Find "onclick" in the list of events and double-click the input area.

   An onclick event is an event that occurs when the user clicks the Button component.

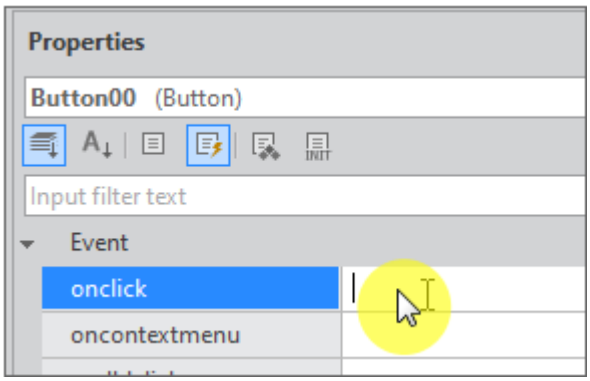

A value in the form of [Component ID Property Value]_[Event Name] will be entered, and the page will change to script mode.

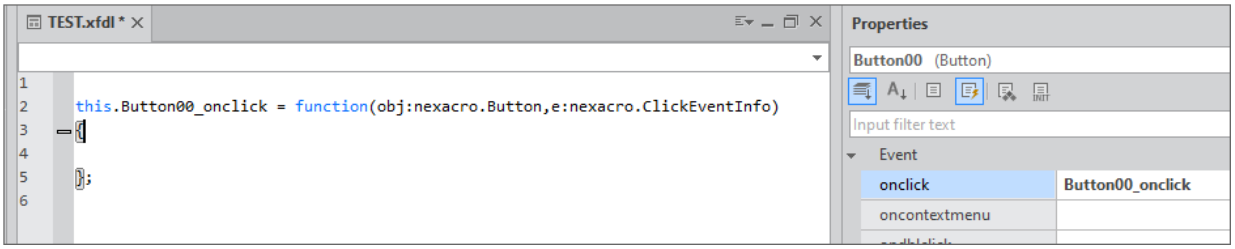

4 Add the following command to the script generated.


When the user clicks the Button component, the onclick event will occur, and the command written in the function below (event handler function) will be executed.

```
this.Button00_onclick = function
(obj:nexacro.Button,e:nexacro.ClickEventInfo)
{
    this.alert("TEST");
};
```

5 Click the magnifying glass icon (QuickView) on the toolbar at the top of Nexacro Studio.

6 Check that the Button component is displayed in the web browser.

7 Click the Button component, and check that a message is displayed.

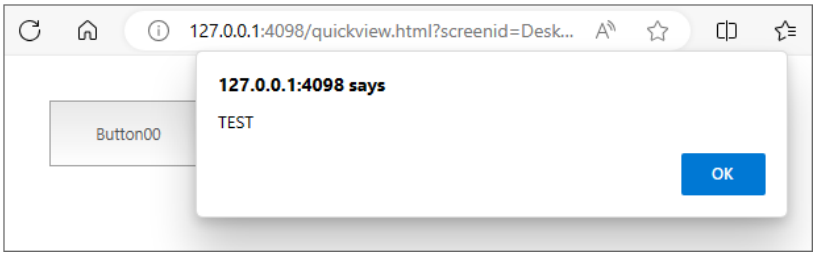

5.2 Displaying the Text Entered by the User as a Message


In this section, we'll learn how to display the text entered by the user in the Edit component as a message when the Button component is clicked.

1. Place an Edit component and a Button component on the page.

2. Select the Button component and click the Event icon in the Properties pane.

3. Find "onclick" in the list of events and double-click in the input area.

   A value in the form of [Component ID Property Value]_[Event Name] will be entered, and the page will change to script mode.

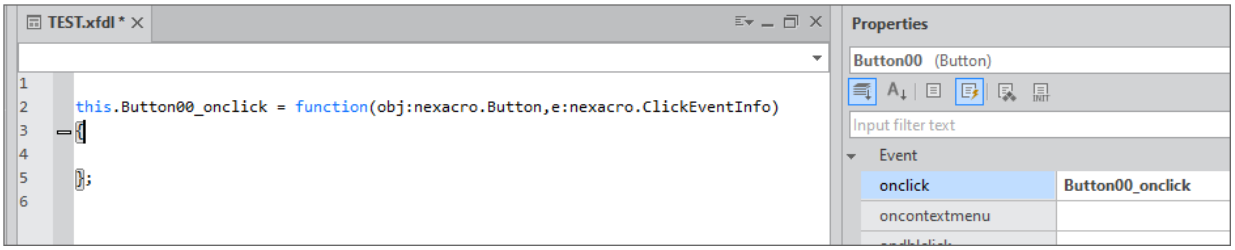

4. Add the following command to the script generated.

   The value entered in the Edit component will be saved as the property value. This value will be displayed as a message when the Button component is clicked.

```
this.Button00_onclick = function
(obj:nexacro.Button,e:nexacro.ClickEventInfo)
{
    this.alert("Hello, "+this.Edit00.value);
};
```

5. Click the magnifying glass icon (QuickView) on the toolbar at the top of Nexacro Studio.

6. Check that the Edit component and Button component is displayed in the web browser.

7. In the Edit component, type in your name.

8. Click the Button component and check that what you entered in the Edit component appears as a

message.



5.3 Learn More

Nexacro Studio supports many features that you can utilize when writing codes. Explore various ways to use them in the Development Tools Guide.

- Development Tools Guide
  Development Facilities

QuickCode lets you process various events without writing codes. Learn about QuickCode in the Development Tools Guide.

- Development Tools Guide
  QuickCode Core

6.

Working with Tables and Data

A table can be used to display multiple pieces of data at a glance and allow the data to be edited. In this chapter, we'll examine how to display and manipulate data in tables.


6.1 Displaying Data in a Table

Let's see how to use the Grid component to display data in a table.


In actual use, you'll use data from a remote database, but for the purposes of this chapter, you'll enter and use arbitrary data in Nexacro Studio.

1. Place a Dataset object on the page.

   Look for a cylinder icon on the Components toolbar.

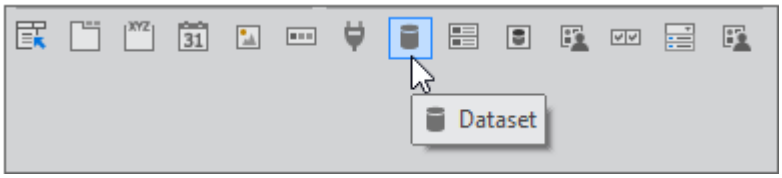


   Unlike the Button components, Dataset objects are not displayed on the page because they are invisible forms of managing data. They are instead displayed separately in the Invisible Object pane.

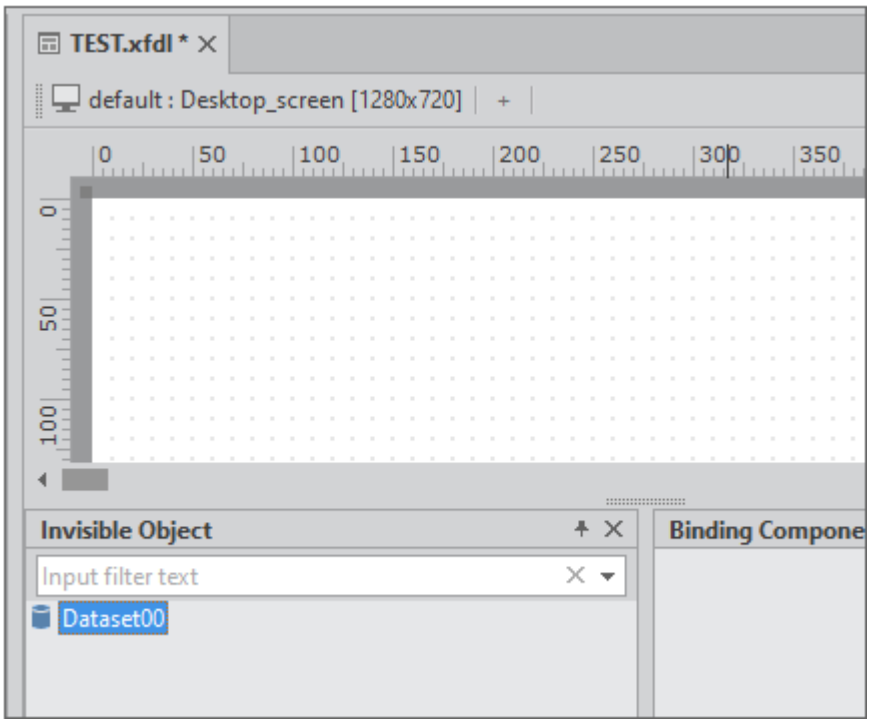


2 Double-click the Dataset object icon in the Invisible Objects pane.

You will see the Dataset Editor between the Edit page and the Properties pane.

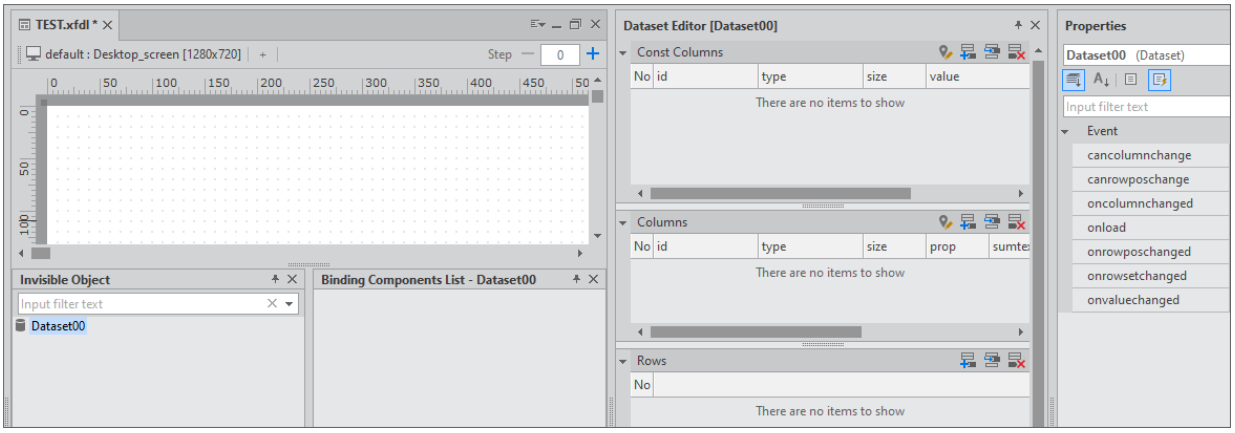

3 Click the "+" (Add column to the dataset) icon on the Columns toolbar in the Dataset Editor.

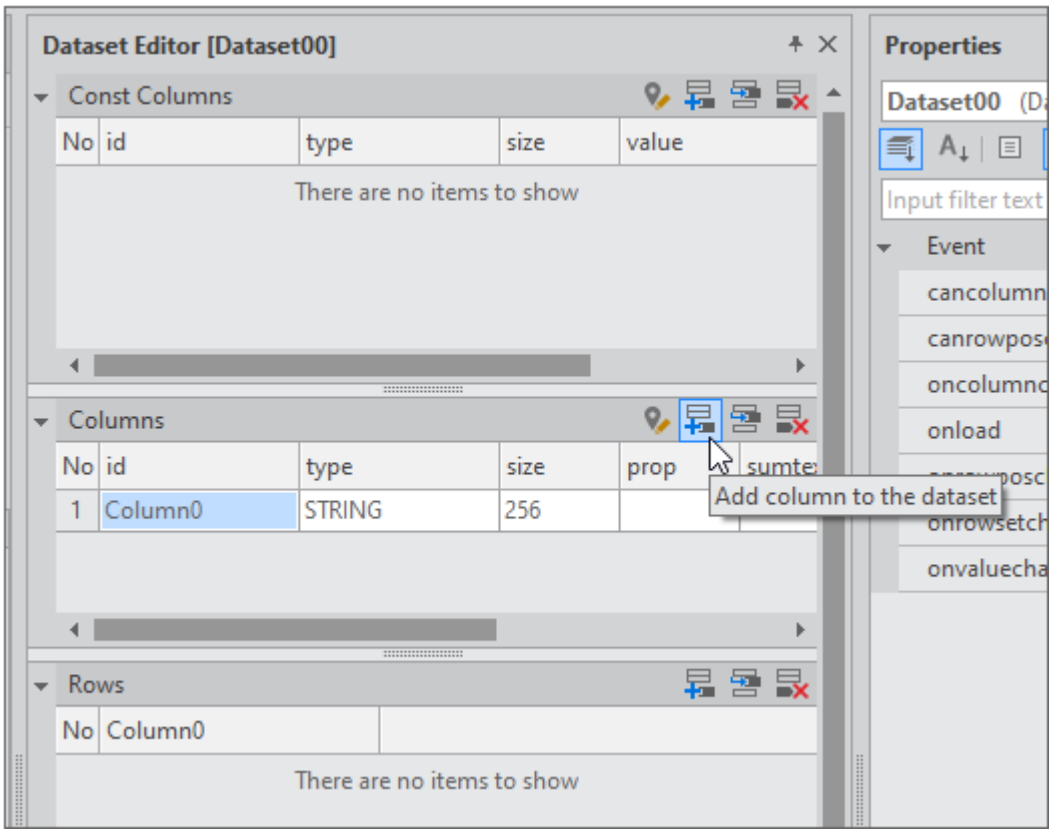

The first column item will be added with the ID, "Column0."

4. Click where the ID value is shown, and change it from "Column0" to "Name."


   In the case of the Columns items, the ID is the name that appears in the subject line of the table.

5. Click the "+" (Add column to the dataset) icon on the Columns toolbar in the Dataset Editor.


6. Change the ID value for the second column item to "City."

7. Click the "+" (Add row to the dataset) icon on the Rows toolbar in the Dataset Editor.


   This will create five empty rows.

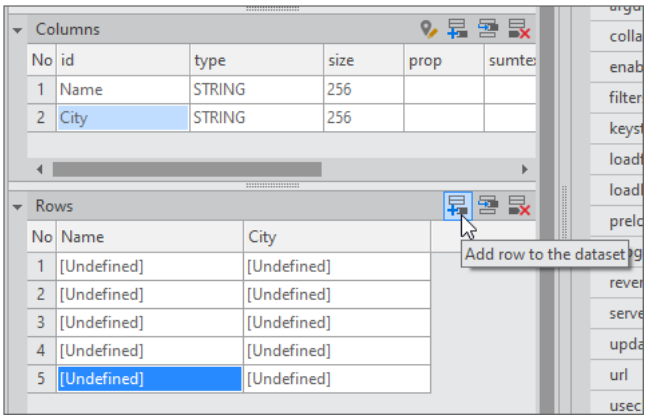

8 Enter the data for the Name and City columns.

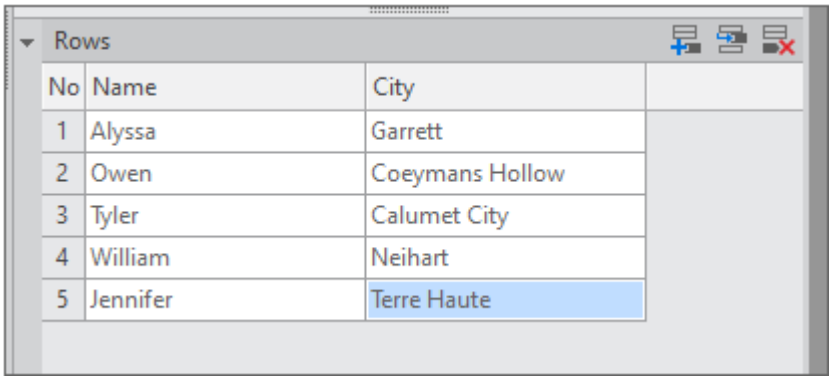


9 Place the Grid component on the page.

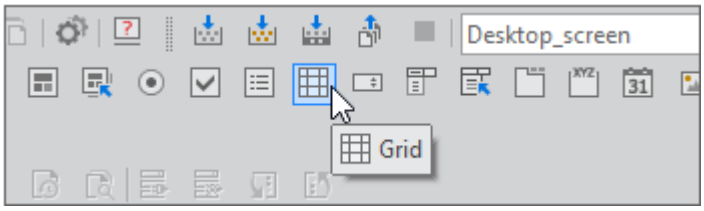


10 From the Invisible Object pane, left-click and drag the Dataset object icon onto the Grid component.

11 When the border of the Grid component turns bold, release the left mouse button.

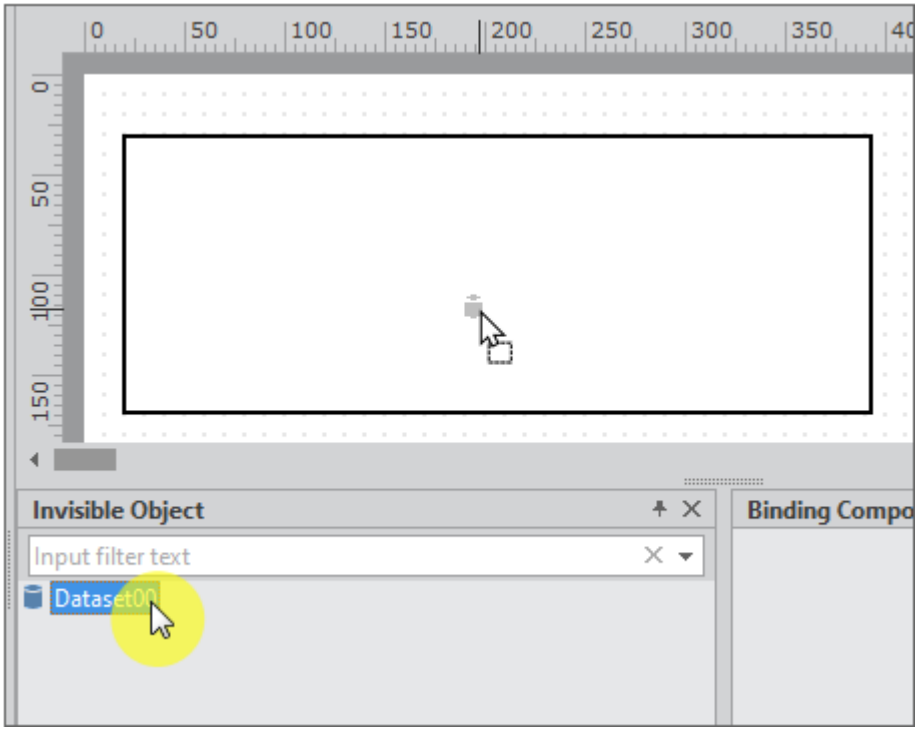

12 Notice that the data you entered in the Dataset object are shown in the Grid component.

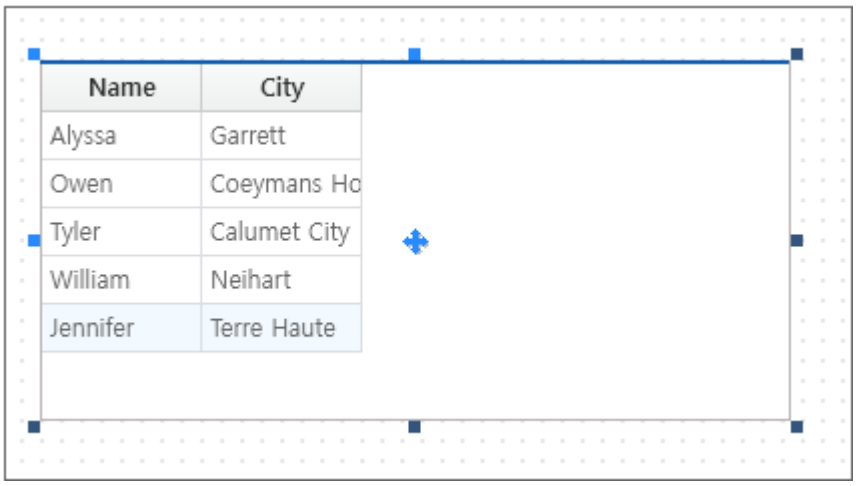


6.2 Modifying Selected Data in a Table in the Edit Component

Connecting a Dataset object to a Grid component to display data is called "data binding." In this section, we'll examine how to display and modify values in the Edit component that correspond to a selected row in the Grid component.

This is a continuation of what we did in "Displaying Data in a Table."

1. Select the Grid component and change the value of the autofittype property in the Properties pane to "col."

   This will automatically adjust the width of the columns to fit the size of the Grid.

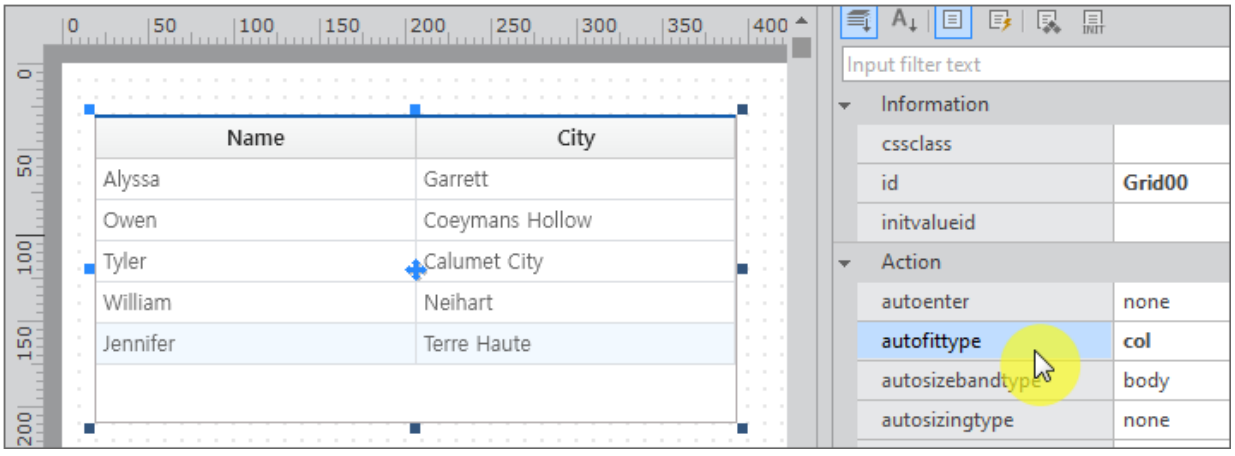


2. Place the Edit component on the page.

3 From the Invisible Object pane, left-click and drag the Dataset object icon onto the Edit Component.


4 When the border of the Grid component turns bold, release the left mouse button.

5 When the Bind Item window opens, select the Column ID item value as "Name" and click the [OK] button.

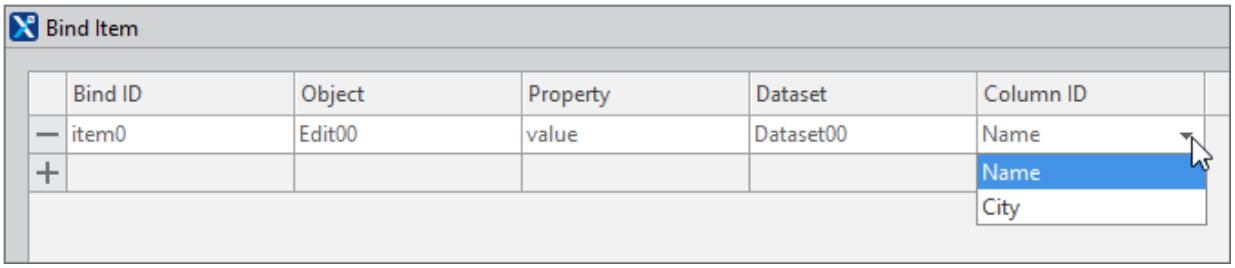


6 Click the magnifying glass icon (QuickView) on the toolbar at the top of Nexacro Studio.


7 Make sure the Grid component has the first row selected and the Edit component displays the Name data from the first row.

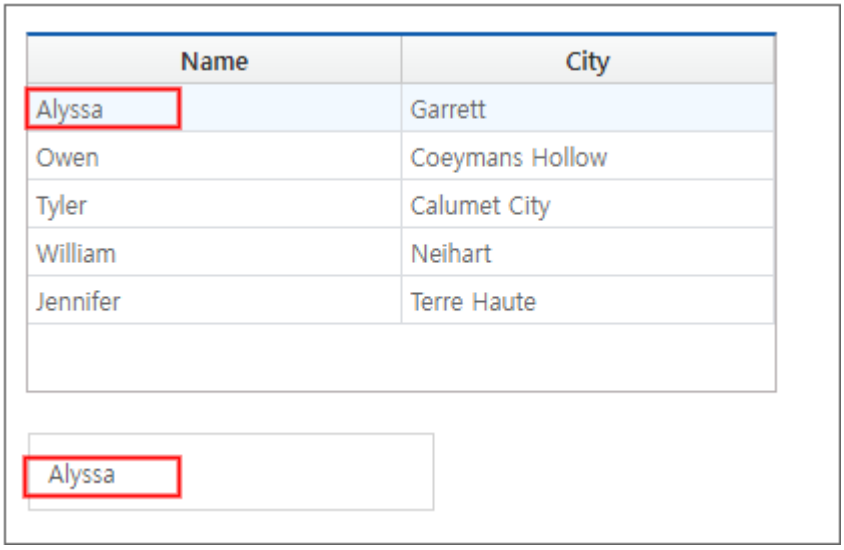

8 Check that when you select another row, the data for the selected row are displayed.

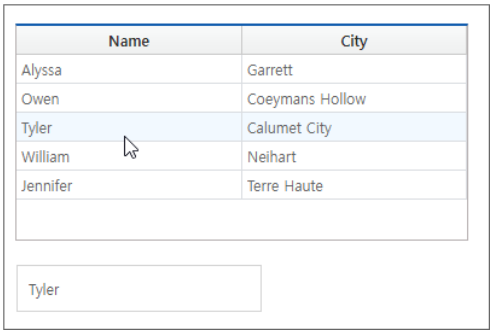

9 Enter a different value in the Edit component and check that the data in the Grid component change when you press Enter.

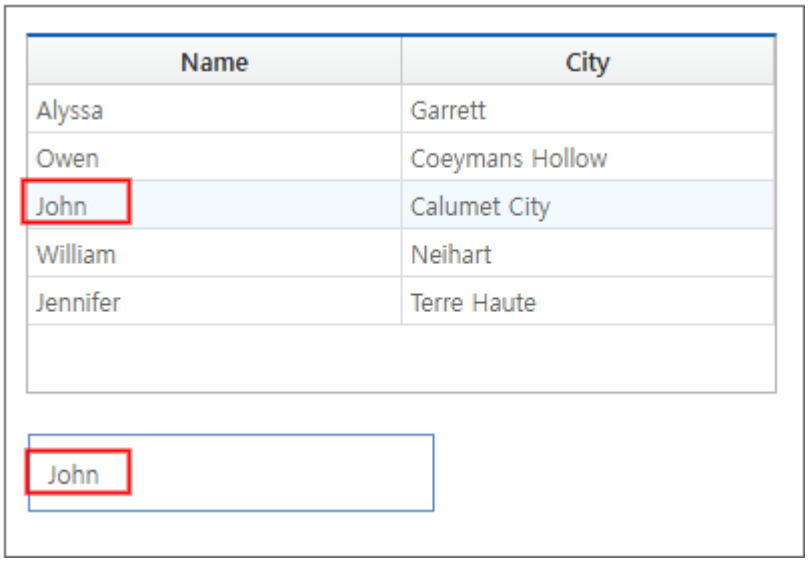


10 Return to Nexacro Studio and place another Edit component on the page.

11 In the Invisible Object pane, left-click the Dataset object icon and drag it to the second Edit component.


12 When the border of the Edit component turns bold, release the left mouse button.

13 When the Bind Item window opens, select "City" in the Column ID field and click the [OK] button.

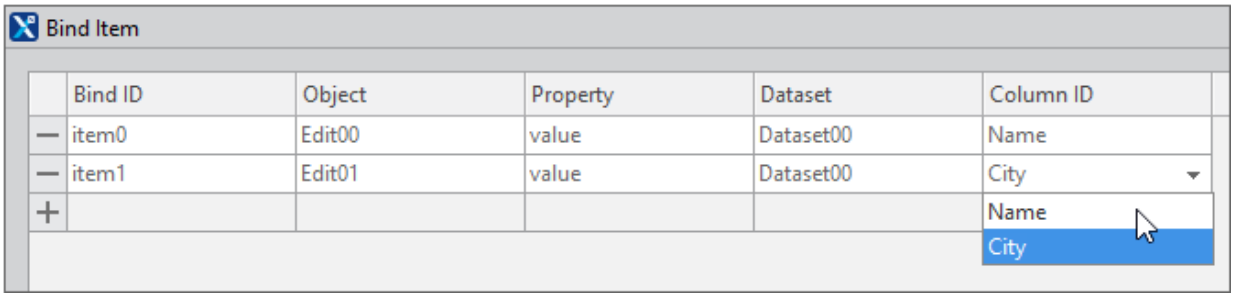

14 Click the magnifying glass icon (QuickView) on the toolbar at the top of Nexacro Studio.

15 Check that the Grid component has the first row selected and the Edit component displays the City data from the first row.

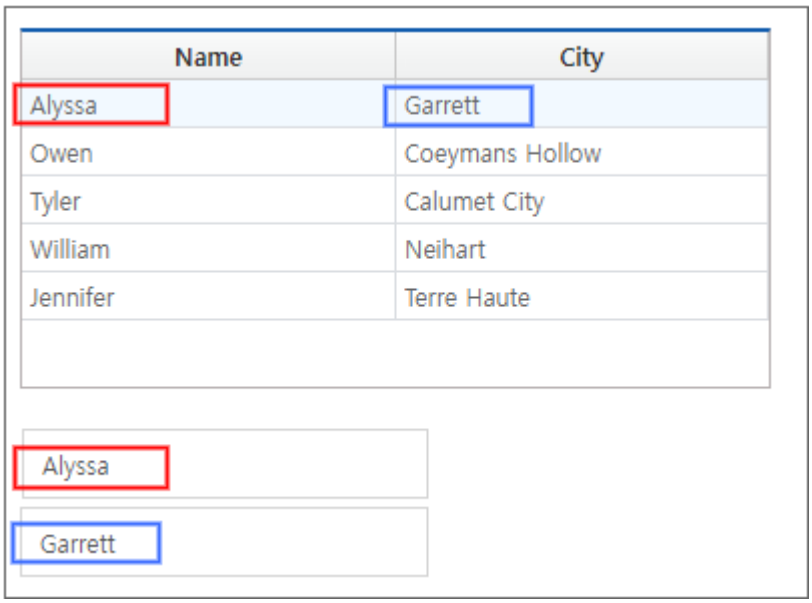


6.3 Modifying Data in a Table

We've learned how to connect the value corresponding to the selected row in the Grid component to the Edit component (data item binding) to display and modify data. This time, let's examine how to modify data directly in the Grid component.

This exercise is a continuation of what we created in "Displaying Data in a Table."


1. Double-click the Grid component.

2. Notice that the Grid Contents Editor is shown in a new window.

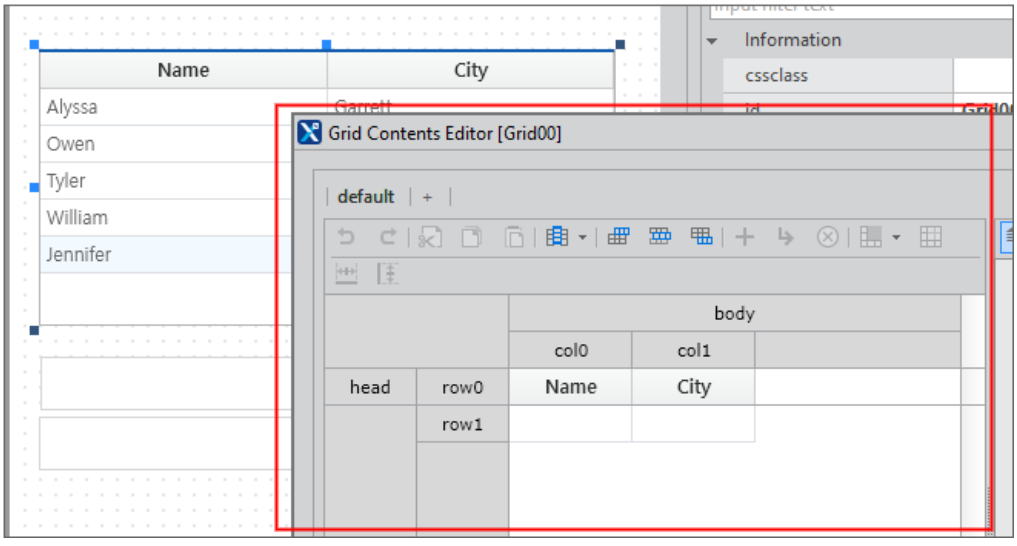

3 Click row1 under the Name column.


4 In the Grid Contents Editor properties pane, locate editype and change the property value to "text."

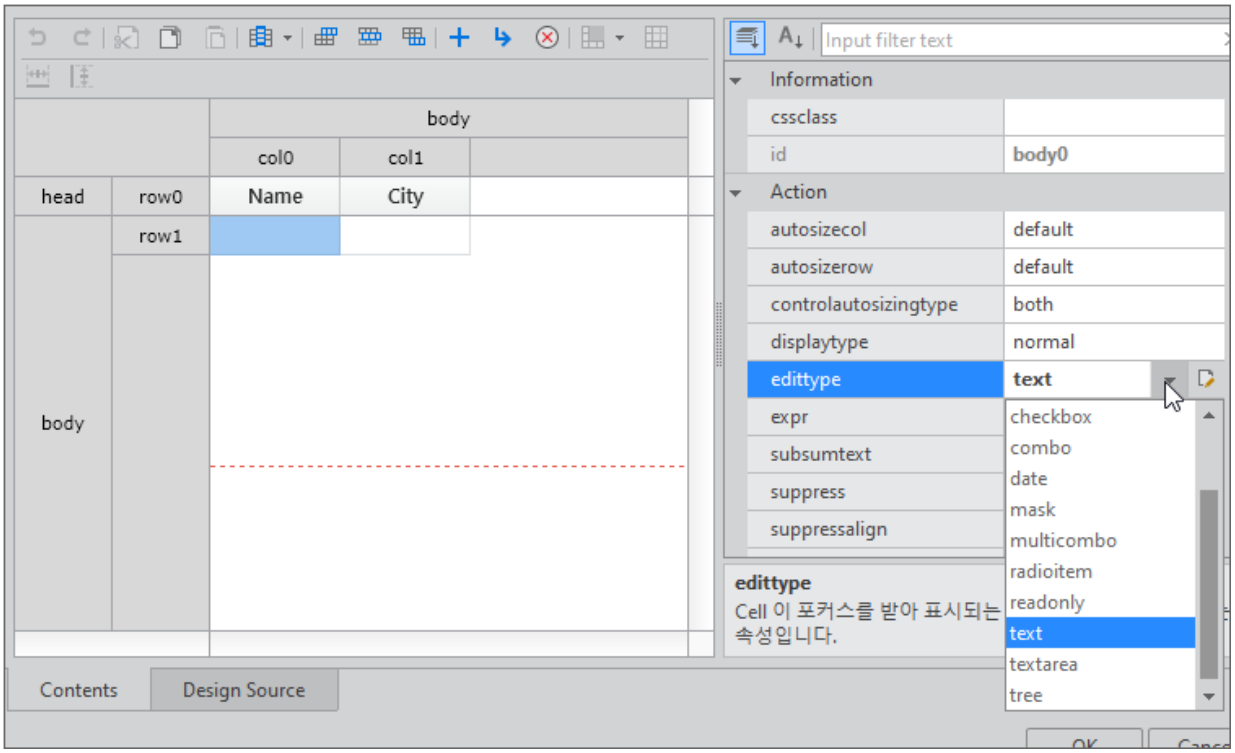


5 Click the [OK] button and close the Grid Contents Editor.

6 Click the magnifying glass icon (QuickView) on the toolbar at the top of Nexacro Studio.

7 Double-click the Name column item in the row you want to modify to make it editable. Type in the desired value and press Enter.

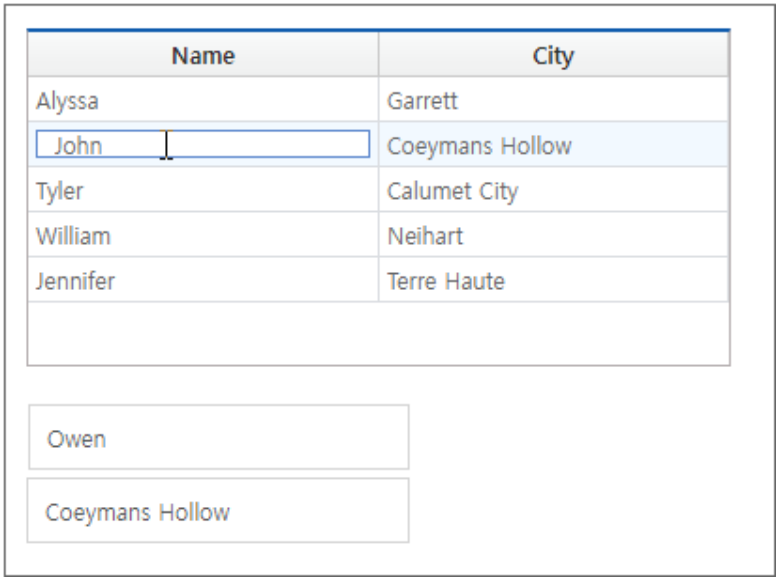

8 Notice that the value you changed is reflected in the Grid component and the Edit component.

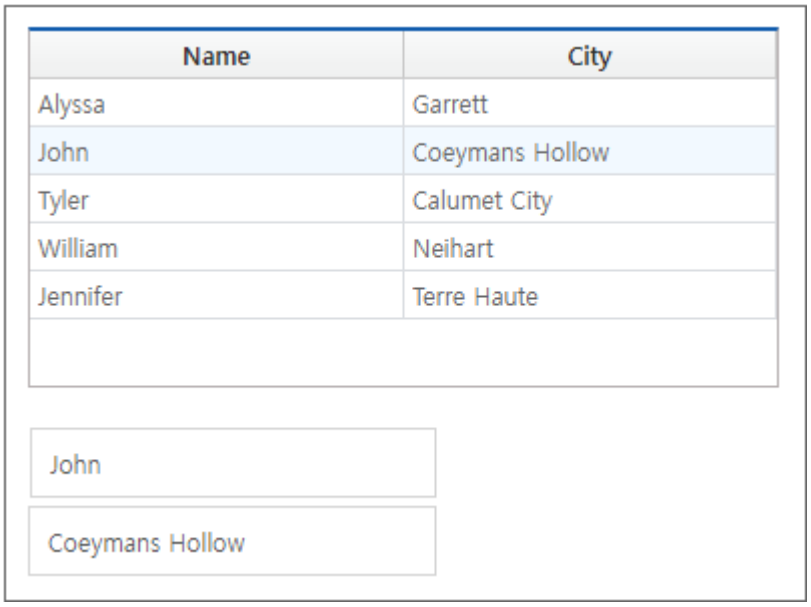

6.4 Learn More

The Grid component supports a variety of features. Explore different ways to use it in the Component Utilization Workbook.

- Component Utilization Workbook
  Grid Basics
  Grid Layout
  Grid Cell
  Grid Application

Also, explore the ListView component, which is similar to the Grid component but allows you to edit it more freely in various forms.

- Component Utilization Workbook
  ListView

You can export the data displayed in the Grid component as a spreadsheet file, or import data from a spreadsheet file into the Grid component.

- Component Utilization Workbook
  ExcelExportObject / ExcelImportObject