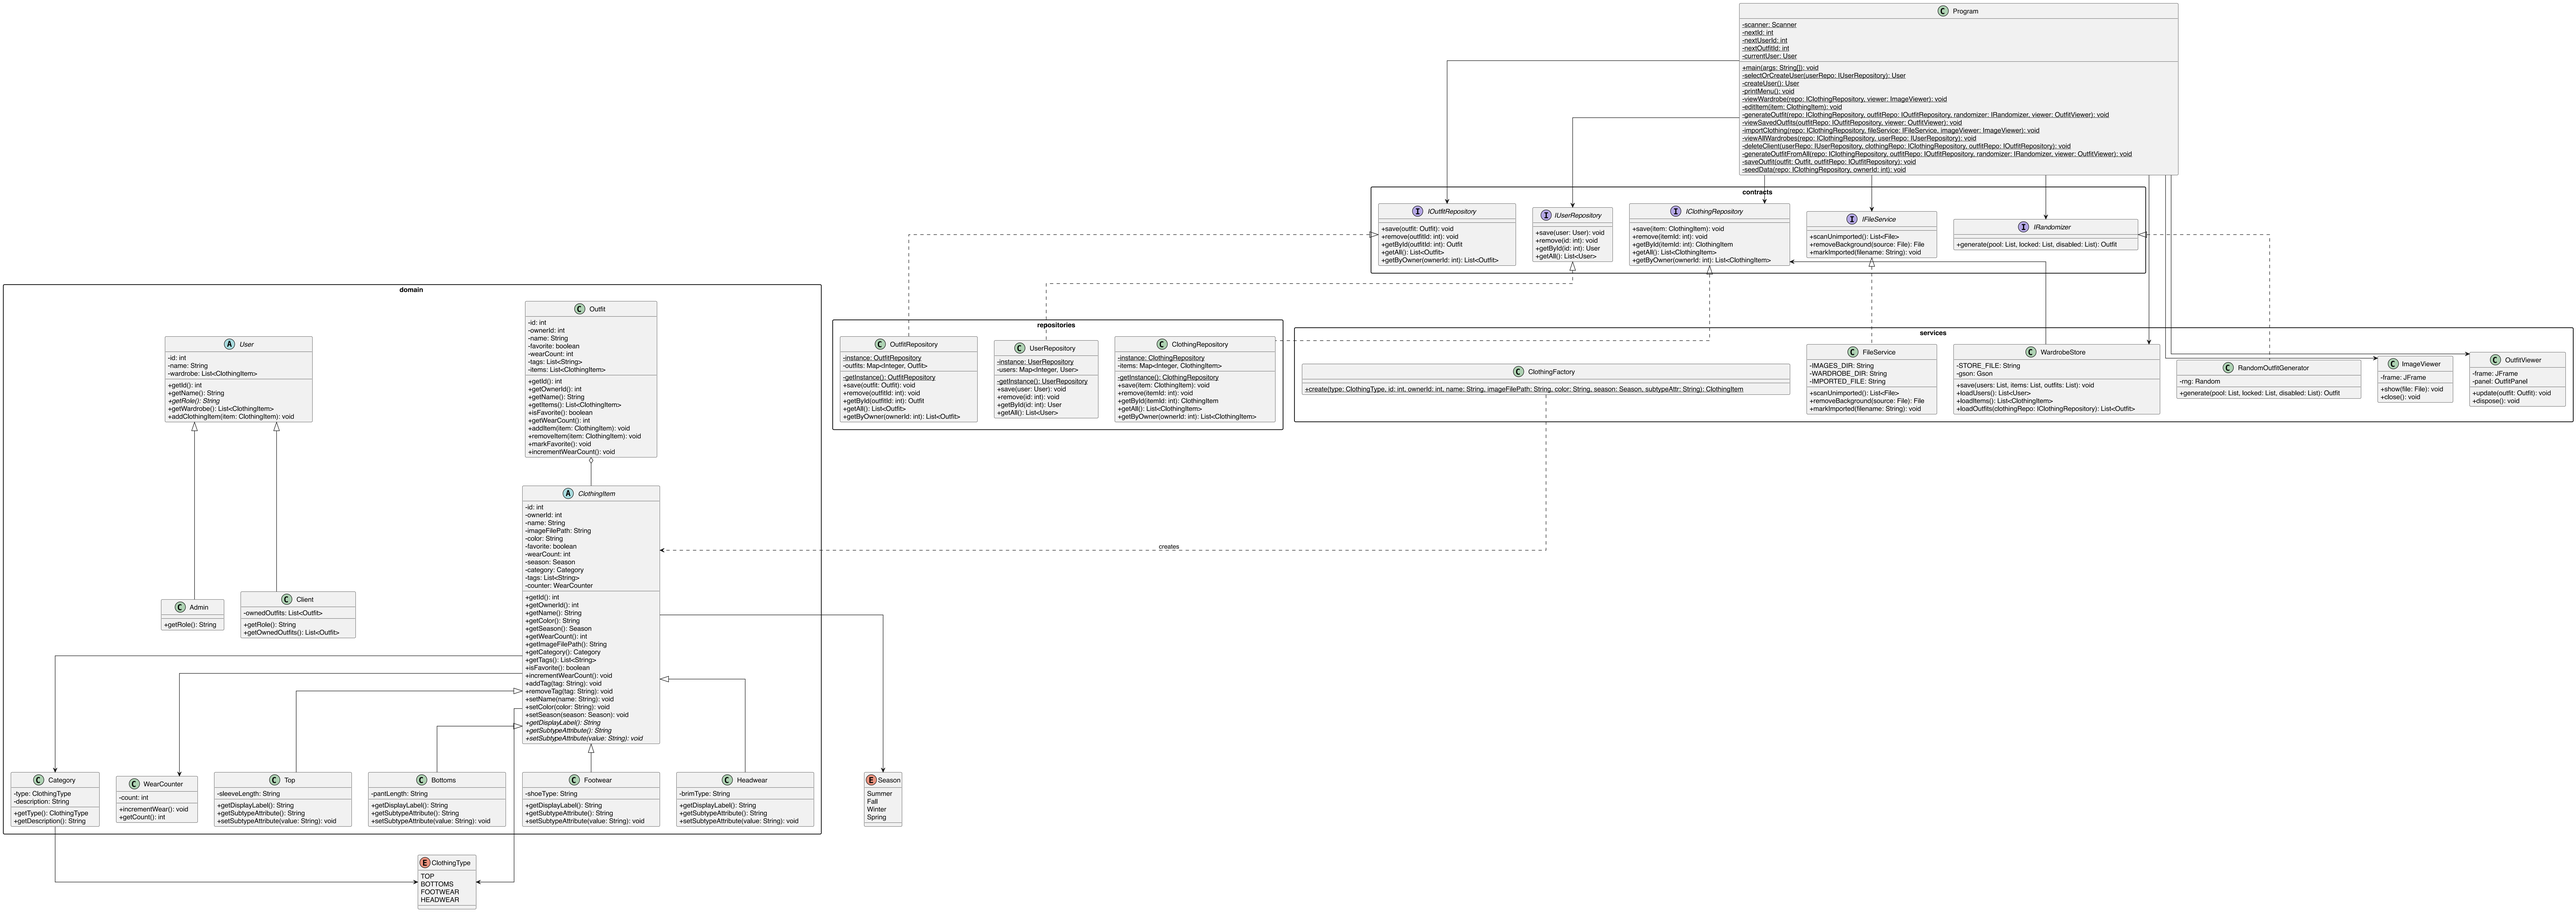
Program
-scanner: Scanner
-nextId: int
-nextUserId: int
-nextOutfitId: int
-currentUser: User
+main(args: String[]): void
-selectOrCreateUser(userRepo: IUserRepository): User
-createUser(): User
-printMenu(): void
-viewWardrobe(repo: IClothingRepository, viewer: ImageViewer): void
-tclItem(item: ClothingItem): void
-generateOutfit(repo: IClothingRepository, outfitRepo: IOutfitRepository, randomizer: IRandomizer, viewer: OutfitViewer): void
-viewSavedOutfits(outfitRepo: IOutfitRepository, viewer: OutfitViewer): void
-importClothing(repo: IClothingRepository, fileService: IFileService, imageViewer: ImageViewer): void
-viewAllWardrobes(repo: IClothingRepository, userRepo: IUserRepository): void
-deleteClient(userRepo: IUserRepository, clothingRepo: IClothingRepository, outfitRepo: IOutfitRepository): void
-generateOutfitFromAll(repo: IClothingRepository, outfitRepo: IOutfitRepository, randomizer: IRandomizer, viewer: OutfitViewer): void
-saveOutfit(outfit: Outfit, outfitRepo: IOutfitRepository): void
-seedData(repo: IClothingRepository, ownerId: int): void
contracts
IOutfitRepository
+save(outfit: Outfit): void
+remove(outfitId: int): void
+getById(outfitId: int): Outfit
+getAll(): List<Outfit>
+getByOwner(ownerId: int): List<Outfit>
IUserRepository
+save(user: User): void
+remove(id: int): void
+getById(id: int): User
+getAll(): List<User>
IClothingRepository
+save(item: ClothingItem): void
+remove(itemId: int): void
+getById(itemId: int): ClothingItem
+getAll(): List<ClothingItem>
+getByOwner(ownerId: int): List<ClothingItem>
IFileService
+scanUnimported(): List<File>
+removeBackground(source: File): File
+markImported(filename: String): void
IRandomizer
+generate(pool: List, locked: List, disabled: List): Outfit
domain
User
-id: int
-name: String
-wardrobe: List<ClothingItem>
+getId(): int
+getName(): String
+getRole(): String
+getWardrobe(): List<ClothingItem>
+addClothingItem(item: ClothingItem): void
Outfit
-id: int
-ownerId: int
-name: String
-favorite: boolean
-wearCount: int
-tags: List<String>
-items: List<ClothingItem>
+getId(): int
+getOwnerId(): int
+getName(): String
+getItems(): List<ClothingItem>
+isFavorite(): boolean
+getWearCount(): int
+addItem(item: ClothingItem): void
+removeItem(item: ClothingItem): void
+markFavorite(): void
+incrementWearCount(): void
ClothingItem
-id: int
-ownerId: int
-name: String
-imageFilePath: String
-color: String
-favorite: boolean
-wearCount: int
-season: Season
-category: Category
-tags: List<String>
-counter: WearCounter
+getId(): int
+getOwnerId(): int
+getName(): String
+getColor(): String
+getSeason(): Season
+getWearCount(): int
+getImageFilePath(): String
+getCategory(): Category
+getTags(): List<String>
+isFavorite(): boolean
+incrementWearCount(): void
+addTag(tag: String): void
+removeTag(tag: String): void
+setName(name: String): void
+setColor(color: String): void
+setSeason(season: Season): void
+getDisplayLabel(): String
+getSubtypeAttribute(): String
+setSubtypeAttribute(value: String): void
Admin
+getRole(): String
Client
-ownedOutfits: List<Outfit>
+getRole(): String
+getOwnedOutfits(): List<Outfit>
Category
-type: ClothingType
-description: String
+getType(): ClothingType
+getDescription(): String
WearCounter
-count: int
+incrementWear(): void
+getCount(): int
Top
-sleeveLength: String
+getDisplayLabel(): String
+getSubtypeAttribute(): String
+setSubtypeAttribute(value: String): void
Bottoms
-pantLength: String
+getDisplayLabel(): String
+getSubtypeAttribute(): String
+setSubtypeAttribute(value: String): void
Footwear
-shoeType: String
+getDisplayLabel(): String
+getSubtypeAttribute(): String
+setSubtypeAttribute(value: String): void
Headwear
-brimType: String
+getDisplayLabel(): String
+getSubtypeAttribute(): String
+setSubtypeAttribute(value: String): void
Season
Summer
Fall
Winter
Spring
ClothingType
TOP
BOTTOMS
FOOTWEAR
HEADWEAR
repositories
OutfitRepository
-instance: OutfitRepository
-outfits: Map<Integer, Outfit>
-getInstance(): OutfitRepository
+save(outfit: Outfit): void
+remove(outfitId: int): void
+getById(outfitId: int): Outfit
+getAll(): List<Outfit>
+getByOwner(ownerId: int): List<Outfit>
UserRepository
-instance: UserRepository
-users: Map<Integer, User>
-getInstance(): UserRepository
+save(user: User): void
+remove(id: int): void
+getById(id: int): User
+getAll(): List<User>
ClothingRepository
-instance: ClothingRepository
-items: Map<Integer, ClothingItem>
-getInstance(): ClothingRepository
+save(item: ClothingItem): void
+remove(itemId: int): void
+getById(itemId: int): ClothingItem
+getAll(): List<ClothingItem>
+getByOwner(ownerId: int): List<ClothingItem>
services
ClothingFactory
+create(type: ClothingType, id: int, ownerId: int, name: String, imageFilePath: String, color: String, season: Season, subtypeAttr: String): ClothingItem
creates
FileService
-IMAGES_DIR: String
-WARDROBE_DIR: String
-IMPORTED_FILE: String
+scanUnimported(): List<File>
+removeBackground(source: File): File
+markImported(filename: String): void
WardrobeStore
-STORE_FILE: String
-gson: Gson
+save(users: List, items: List, outfits: List): void
+loadUsers(): List<User>
+loadItems(): List<ClothingItem>
+loadOutfits(clothingRepo: IClothingRepository): List<Outfit>
RandomOutfitGenerator
-rng: Random
+generate(pool: List, locked: List, disabled: List): Outfit
ImageViewer
-frame: JFrame
+show(file: File): void
+close(): void
OutfitViewer
-frame: JFrame
-panel: OutfitPanel
+update(outfit: Outfit): void
+dispose(): void