

jiebaRD本地安装方式

2026/4/16


写在前面：没想到想用这个包还有点小麻烦，但是问题不大 😊

- 因为直接用 `install_github()` 大概率会遇到网络问题，所以我们用本地源文件安装的方式来安装这个 `jiebaRD` 包！
- （复杂的原因，可以不看 😊）但是，这个仓库（`jiebaRD / jiebaR`）比较老（2019），而且很多文件是在 Windows + 非 UTF-8 （这个编码我们在之前的课程里提到过！）环境生成的，且没有显示声明 `Encoding` 字段，和新版本的 R 不兼容！
- 所以要做以下修改：

1. 在DESCRIPTION在文件末尾加一行 `Encoding: UTF-8`：

```
Package: jiebaRD
Type: Package
Title: Chinese Text Segmentation Data for jiebaR Package
Description: jiebaR is a package for Chinese text segmentation, keyword extraction
  and speech tagging. This package provides the data files required by jiebaR.
Version: 0.1
Date: 2015-01-03
Author: Qin Wenfeng
Maintainer: Qin Wenfeng <mail@qinwenfeng.com>
License: MIT + file LICENSE
Suggests:
  jiebaR
URL: https://github.com/qinwf/jiebaRD/
BugReports: https://github.com/qinwf/jiebaRD/issues
NeedsCompilation: no
Encoding: UTF-8
```

2. 随后，将这个文件保存为 UTF-8 编码：

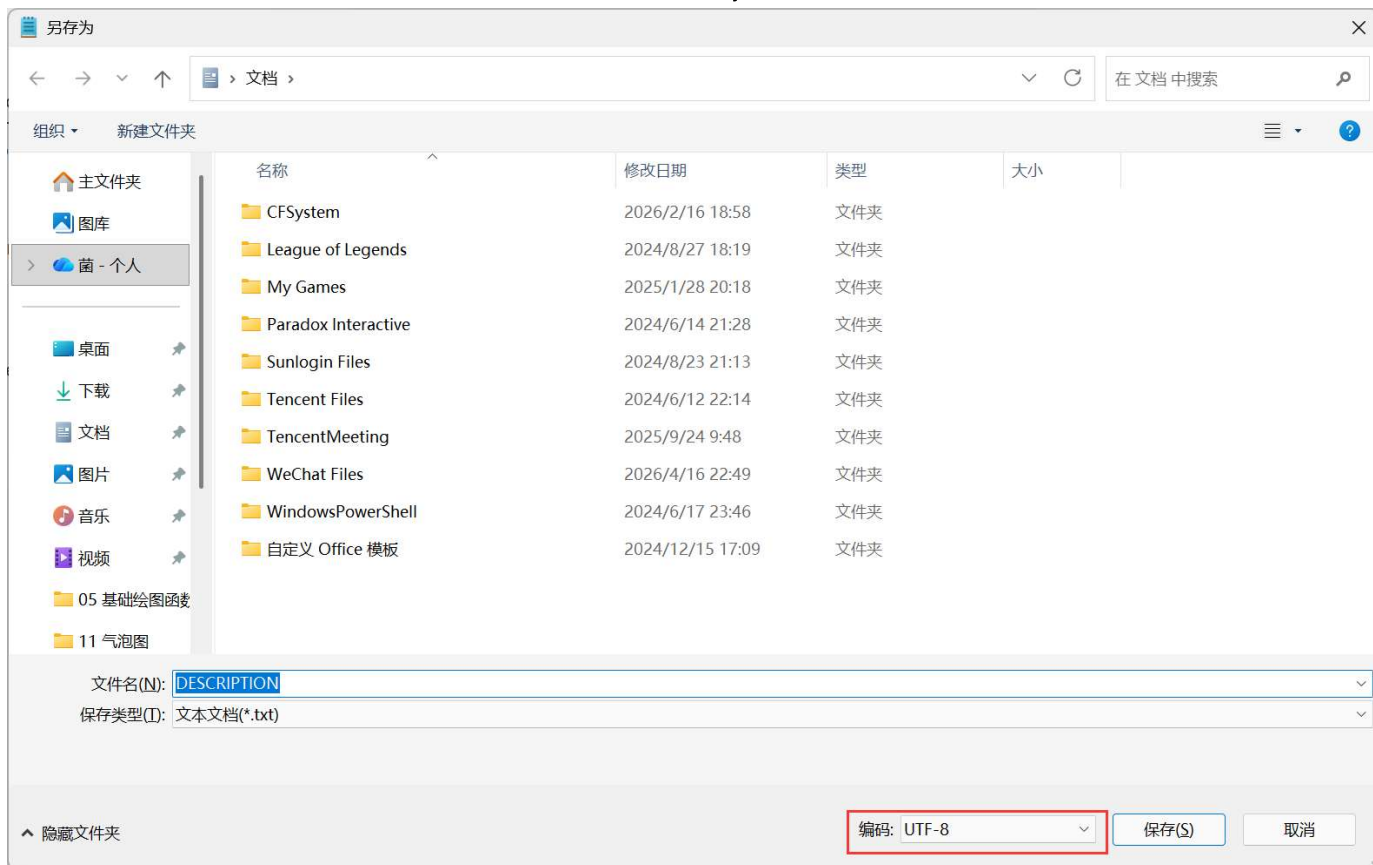

3. 安装这个包！

```
install_local('./jiebaRD-master/') # 注意路径！现在是把jiebaRD-master放到了R201文件夹下面！
```

4. 安装效果展示：

```
> ## 本地安装
> install_local('./jiebaRD-master/') # 记得把解压后的文件夹移动到R201文件夹下！
— R CMD build
✓ checking for file 'C:\Users\70408\AppData\Local\Temp\RtmpctPSoh\file4e20645b2f7d\jiebaRD-master\DESCRIPTION'
— preparing 'jiebaRD':
✓ checking DESCRIPTION meta-information ...
— checking for LF line-endings in source and make files and shell scripts
— checking for empty or unneeded directories
— building 'jiebaRD_0.1.tar.gz'

将程序包安装入'C:/Users/70408/AppData/Local/R/win-library/4.5'
(因为'lib'没有被指定)

* installing *source* package 'jiebaRD' ...
** this is package 'jiebaRD' version '0.1'
** using staged installation
** R
** inst
** byte-compile and prepare package for lazy loading
** help
*** installing help indices
** building package indices
** testing if installed package can be loaded from temporary location
** testing if installed package can be loaded from final location
** testing if installed package keeps a record of temporary installation path
* DONE (jiebaRD)

> install_local('./jiebaRD-master/')
These packages have more recent versions available.
It is recommended to update all of them.
Which would you like to update?

1: All
2: CRAN packages only
```

- jiebaR 的安装方式就很简单啦，我们之前装过 RTools ，所以直接这么安装就好：

```
install_local('./jiebaR-master/')
```

安装时会提醒你更新部分包，直接回车就可以！

```
> install_local('./jiebaR-master/')
These packages have more recent versions available.
It is recommended to update all of them.
which would you like to update?

1: All
2: CRAN packages only
3: None
4: Rcpp      (1.1.1 -> 1.1.1-1) [CRAN]
5: jiebaRD   (0.1   -> NA      ) [local]

Enter one or more numbers, or an empty line to skip updates:
R CMD build
✓ checking for file 'C:\Users\70408\AppData\Local\Temp\RtmpctPsoh\file4e202f77107f\jiebaR-master\DESCRIPTION'
- preparing 'jiebaR':
✓ checking DESCRIPTION meta-information ...
- cleaning src
- checking for LF line-endings in source and make files and shell scripts
- checking for empty or unneeded directories
  Removed empty directory 'jiebaR/.github'
- building 'jiebaR_0.11.tar.gz'

将程序包安装入'C:/Users/70408/AppData/Local/R/win-library/4.5'
(因为'lib'没有被指定)

* installing *source* package 'jiebaR' ...
** this is package 'jiebaR' version '0.11'
** using staged installation
** libs
using C++ compiler: 'G__1.EXE (GCC) 14.3.0'
using C++11
g++ -std=gnu++11 -I"C:/PROGRA~1/R/R-45~1.3/include" -DNDEBUG -I../inst/include -DLOGGING_LEVEL=LL_WARNING -I'C:/Users/70408/AppData/Local/R/win-library/4.5/Rcpp/include' -I"C:/rtools45/x86_64-w64-mingw32.static.posix/include" -O2 -Wall -mfpmath=sse -msse2 -mstackrealign -c RcppExports.cpp -o RcppExports.o
g++ -std=gnu++11 -I"C:/PROGRA~1/R/R-45~1.3/include" -DNDEBUG -I../inst/include -DLOGGING_LEVEL=LL_WARNING -I'C:/Users/70408/AppData/Local/R/win-library/4.5/Rcpp/include' -I"C:/rtools45/x86_64-w64-mingw32.static.posix/include" -O2 -Wall -mfpmath=sse -msse2 -mstackrealign -c detect.cpp -o detect.o
g++ -std=gnu++11 -I"C:/PROGRA~1/R/R-45~1.3/include" -DNDEBUG -I../inst/include -DLOGGING_LEVEL=LL_WARNING -I'C:/Users/70408/AppData/Local/R/win-library/4.5/Rcpp/include' -I"C:/rtools45/x86_64-w64-mingw32.static.posix/include" -O2 -Wall -mfpmath=sse -msse2 -mstackrealign -c get_idf.cpp -o get_idf.o
g++ -std=gnu++11 -I"C:/PROGRA~1/R/R-45~1.3/include" -DNDEBUG -I../inst/include -DLOGGING_LEVEL=LL_WARNING -I'C:/Users/70408/AppData/Local/R/win-library/4.5/Rcpp/include' -I"C:/rtools45/x86_64-w64-mingw32.static.posix/include" -O2 -Wall -mfpmath=sse -msse2 -mstackrealign -c get_tuple.cpp -o get_tuple.o
g++ -std=gnu++11 -I"C:/PROGRA~1/R/R-45~1.3/include" -DNDEBUG -I../inst/include -DLOGGING_LEVEL=LL_WARNING -I'C:/Users/70408/AppData/Local/R/win-library/4.5/Rcpp/include' -I"C:/rtools45/x86_64-w64-mingw32.static.posix/include" -O2 -Wall -mfpmath=sse -msse2 -mstackrealign -c segtype-v4.cpp -o segtype-v4.o
g++ -std=gnu++11 -I"C:/PROGRA~1/R/R-45~1.3/include" -DNDEBUG -I../inst/include -DLOGGING_LEVEL=LL_WARNING -I'C:/Users/70408/AppData/Local/R/win-library/4.5/Rcpp/include' -I"C:/rtools45/x86_64-w64-mingw32.static.posix/include" -O2 -Wall -mfpmath=sse -msse2 -mstackrealign -c util.cpp -o util.o
g++ -std=gnu++11 -I"C:/PROGRA~1/R/R-45~1.3/include" -DNDEBUG -I../inst/include -DLOGGING_LEVEL=LL_WARNING -I'C:/Users/70408/AppData/Local/R/win-library/4.5/Rcpp/include' -I"C:/rtools45/x86_64-w64-mingw32.static.posix/include" -O2 -Wall -mfpmath=sse -msse2 -mstackrealign -c word_freq.cpp -o word_freq.o
g++ -shared -s -static-libgcc -o jiebaR.dll tmp.def RcppExports.o detect.o get_idf.o get_tuple.o segtype-v4.o util.o word_freq.o -LC:/rtools45/x86_64-w64-mingw32.static.posix/lib/x64 -LC:/rtools45/x86_64-w64-mingw32.static.posix/lib -LC:/PROGRA~1/R/R-45~1.3/bin/x64 -lr
installing to C:/Users/70408/AppData/Local/R/win-library/4.5/00LOCK-jiebaR/00new/jiebaR/libs/x64
** R
** inst
** byte-compile and prepare package for lazy loading
** help
*** installing help indices
** building package indices
** installing vignettes
** testing if installed package can be loaded from temporary location
** testing if installed package can be loaded from final location
** testing if installed package keeps a record of temporary installation path
* DONE (jiebaR)
> # 加载jiebaR
> library(jiebaR)
```

安装后的效果如下:

```
R 4.5.3 - D:/Codez/R_Learning/03-系列数字2(BV1U0o3jZlgn)/R2017
-mfpmath=sse -msse2 -mstackrealign -c RcppExports.cpp -o RcppExports.o
g++ -std=gnu++11 -I"C:/PROGRA~1/R/R-45~1.3/include" -DNDEBUG -I../inst/include -DLOGGING_LEVEL=LL_WARNING -I'C:/Users/70408/AppData/Local/R/win-library/4.5/Rcpp/include' -I"C:/rtools45/x86_64-w64-mingw32.static.posix/include" -O2 -Wall -mfpmath=sse -msse2 -mstackrealign -c detect.cpp -o detect.o
g++ -std=gnu++11 -I"C:/PROGRA~1/R/R-45~1.3/include" -DNDEBUG -I../inst/include -DLOGGING_LEVEL=LL_WARNING -I'C:/Users/70408/AppData/Local/R/win-library/4.5/Rcpp/include' -I"C:/rtools45/x86_64-w64-mingw32.static.posix/include" -O2 -Wall -mfpmath=sse -msse2 -mstackrealign -c get_idf.cpp -o get_idf.o
g++ -std=gnu++11 -I"C:/PROGRA~1/R/R-45~1.3/include" -DNDEBUG -I../inst/include -DLOGGING_LEVEL=LL_WARNING -I'C:/Users/70408/AppData/Local/R/win-library/4.5/Rcpp/include' -I"C:/rtools45/x86_64-w64-mingw32.static.posix/include" -O2 -Wall -mfpmath=sse -msse2 -mstackrealign -c get_tuple.cpp -o get_tuple.o
g++ -std=gnu++11 -I"C:/PROGRA~1/R/R-45~1.3/include" -DNDEBUG -I../inst/include -DLOGGING_LEVEL=LL_WARNING -I'C:/Users/70408/AppData/Local/R/win-library/4.5/Rcpp/include' -I"C:/rtools45/x86_64-w64-mingw32.static.posix/include" -O2 -Wall -mfpmath=sse -msse2 -mstackrealign -c segtype-v4.cpp -o segtype-v4.o
g++ -std=gnu++11 -I"C:/PROGRA~1/R/R-45~1.3/include" -DNDEBUG -I../inst/include -DLOGGING_LEVEL=LL_WARNING -I'C:/Users/70408/AppData/Local/R/win-library/4.5/Rcpp/include' -I"C:/rtools45/x86_64-w64-mingw32.static.posix/include" -O2 -Wall -mfpmath=sse -msse2 -mstackrealign -c util.cpp -o util.o
g++ -std=gnu++11 -I"C:/PROGRA~1/R/R-45~1.3/include" -DNDEBUG -I../inst/include -DLOGGING_LEVEL=LL_WARNING -I'C:/Users/70408/AppData/Local/R/win-library/4.5/Rcpp/include' -I"C:/rtools45/x86_64-w64-mingw32.static.posix/include" -O2 -Wall -mfpmath=sse -msse2 -mstackrealign -c word_freq.cpp -o word_freq.o
g++ -shared -s -static-libgcc -o jiebaR.dll tmp.def RcppExports.o detect.o get_idf.o get_tuple.o segtype-v4.o util.o word_freq.o -LC:/rtools45/x86_64-w64-mingw32.static.posix/lib/x64 -LC:/rtools45/x86_64-w64-mingw32.static.posix/lib -LC:/PROGRA~1/R/R-45~1.3/bin/x64 -lr
installing to C:/Users/70408/AppData/Local/R/win-library/4.5/00LOCK-jiebaR/00new/jiebaR/libs/x64
** R
** inst
** byte-compile and prepare package for lazy loading
** help
*** installing help indices
** building package indices
** installing vignettes
** testing if installed package can be loaded from temporary location
** testing if installed package can be loaded from final location
** testing if installed package keeps a record of temporary installation path
* DONE (jiebaR)
> # 加载jiebaR
> library(jiebaR)
```