ExampleRelay · Claude Sonnet X audit

ExampleRelay vs Anthropic official API • 2026-01-15 • group `claude-official` • non-streaming / streaming / errors

> **Bottom line: Fictional example**: the backend is real Claude on AWS Bedrock (not the first-party API), with no injection and no model swap; invalid params are swallowed into 200, and the price is official × 1.2.

Bedrock

Backend

id prefix `msg_bdrk`, not first-party

Real model

Model

input_tokens equal official count_tokens

Swallows params

API

temperature=9: official 400, relay 200

1.2×

Cost

price = official list × 1.2

1 Claimed vs measured

Item	ExampleRelay claims	Measured (vs official)
Mismatch Channel	Anthropic first-party	AWS Bedrock (`msg_bdrk` prefix)
Match Model	claude-sonnet-x	claude-sonnet-x (tokens match one by one)

2 For ExampleRelay to address

1. **Return 400 for invalid params as-is**: clients rely on 400 to catch wrong params; swallowing them hides bugs
2. **Invalid params swallowed**: vendor must pass 400 through

3 How we tested

Target	Requests	Spent	Baseline
ExampleRelay group `claude-official`	12 free probes + 6 paid	$0.02	official count_tokens (same day) + official docs

All data is fictional; it only shows how to fill findings.json.

4 Is it the real thing: authenticity evidence

Four required checks.

Evidence	Official (Anthropic official API)	ExampleRelay
Bedrock Response id prefix	`msg_011C…`	`msg_bdrk_01…`
Equal Input tokens vs official	14 / 1,203 (with text_editor)	14 / 1,203
No swap Model swapped?	max_tokens 9999999 → 400 names claude-sonnet-x	same: claude-sonnet-x
None Prompt injected?	—	no extra tokens, can't recite a system prompt

5 Differences from official (by impact)

Affects customers 1 item(s)

Item	Official	ExampleRelay
Invalid temperature customers can't see their param mistakes	400 invalid_request_error	200, value dropped

Affects integration 1 item(s)

Item	Official	ExampleRelay
Response headers rate limiting needs your own retry policy	`request-id` , ratelimit headers	only `x-oneapi-request-id`


6 Parameters and errors

Input	Official	ExampleRelay
Swallowed temperature=9	400 invalid_request_error · temperature: range: 0..1	`200 {"id": "msg_bdrk_01ExampleRelay2", "type": "message", "role": "assistant", "model": "claude-sonnet-x", "content": [{"type": "text", "text": "OK"}], "stop_reason": "end_turn", "usage": {"input_tokens": 14, "output_tok…`

7 Cost ratio

From the site's `/api/pricing` billing_expr × group_ratio.

Tier	Official ($ / M tokens)	ExampleRelay ($ / M tokens)	Ratio	Basis
Input	2	2.4	120%	billing_expr p*2 × ratio 1.2
Output	10	12	120%	billing_expr c*10 × ratio 1.2

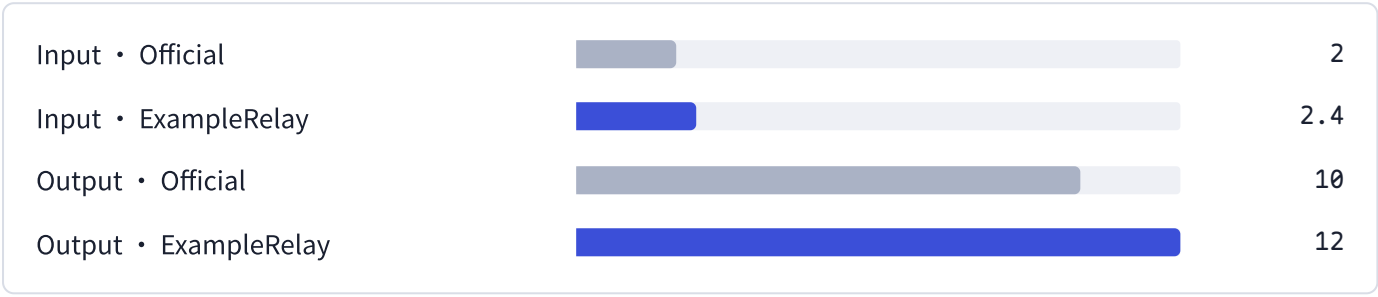

RMB top-up rate unknown; ask the vendor.

Appendix · raw requests and responses

Keys masked; only the server / x-new-api-version / x-request-id response headers kept; long text, base64 and signed links truncated. All raw records are in the task's artifacts/ folder.

Non-streaming · minimal request

Official request

```
POST {base}/v1/messages
x-api-key: ***
anthropic-version: 2023-06-01
content-type: application/json

{
 "model": "claude-sonnet-x",
 "max_tokens": 16,
 "messages": [{"role": "user", "content": "Reply with the single word OK."}]
}
```

ExampleRelay request

```
POST {base}/v1/messages
Authorization: Bearer ***
Content-Type: application/json

{
 "model": "claude-sonnet-x",
 "max_tokens": 16,
 "messages": [{"role": "user", "content": "Reply with the single word OK."}]
}
```

Official response

```
HTTP 200
{
 "id": "msg_011CExampleOfficial",
 "type": "message",
 "role": "assistant",
 "model": "claude-sonnet-x",
 "content": [{"type": "text", "text": "OK"}],
 "stop_reason": "end_turn",
 "usage": {
  "input_tokens": 14,
  "output_tokens": 4,
  "cache_creation_input_tokens": 0,
  "cache_read_input_tokens": 0
 }
}
```

ExampleRelay response

```
HTTP 200
{
 "id": "msg_bdrk_01ExampleRelay",
 "type": "message",
 "role": "assistant",
 "model": "claude-sonnet-x",
 "content": [{"type": "text", "text": "OK"}],
 "stop_reason": "end_turn",
 "usage": {"input_tokens": 14, "output_tokens":
4}
}
```