

Week 9

1. Software Processes: DevOps

Dr. Andreas S. Maniatis

Assistant Professor

School of Computer Science

COMP.2800 – Software Development [2026W]

Monday, March 2nd, 2026 | 14:30 – 15:50 | ER 1118



University of Windsor

Agenda



Software Processes:


- **Software Process Models**
- **Process Activities**
- **Coping with Change**
- **About DevOps**

Source

Adapted from:

- **Software Engineering**
10th Edition
Ian Sommerville

<https://software-engineering-book.com/>

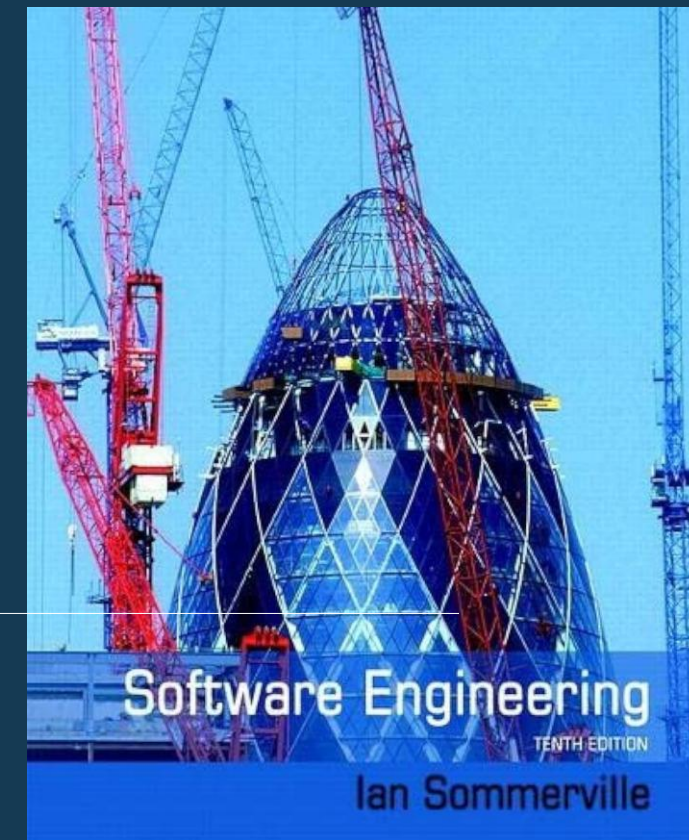

Objectives



Objectives

- Software process models
- Three generic process models
- Process activities
- Coping with change
- DevOps
 - From SDLC to DevOps



Part I

Software Processes



The Software Processes



The software process

- A structured set of activities required to develop a software system.



The software process

- A structured set of activities required to develop a software system.
- Many different software processes but all involve:
 - Specification – defining what the system should do;
 - Design and implementation – defining the organization of the system and implementing the system;
 - Validation – checking that it does what the customer wants;
 - Evolution – changing the system in response to changing customer needs.



The software process

- A structured set of activities required to develop a software system.
- Many different software processes but all involve:
 - Specification – defining what the system should do;
 - Design and implementation – defining the organization of the system and implementing the system;
 - Validation – checking that it does what the customer wants;
 - Evolution – changing the system in response to changing customer needs.
- A software process model is an abstract representation of a process. It presents a description of a process from some particular perspective.



The Software Process Descriptions



Software process descriptions

- When we describe and discuss processes, we usually talk about the activities in these processes such as specifying a data model, designing a user interface, etc. and the ordering of these activities.




Software process descriptions

- Process descriptions may also include:
 - Products, which are the outcomes of a process activity;
 - Roles, which reflect the responsibilities of the people involved in the process;
 - Pre- and post-conditions, which are statements that are true before and after a process activity has been enacted or a product produced.



The software processes: Plan Driven vs Agile

- A structured set of activities required to develop a software system.

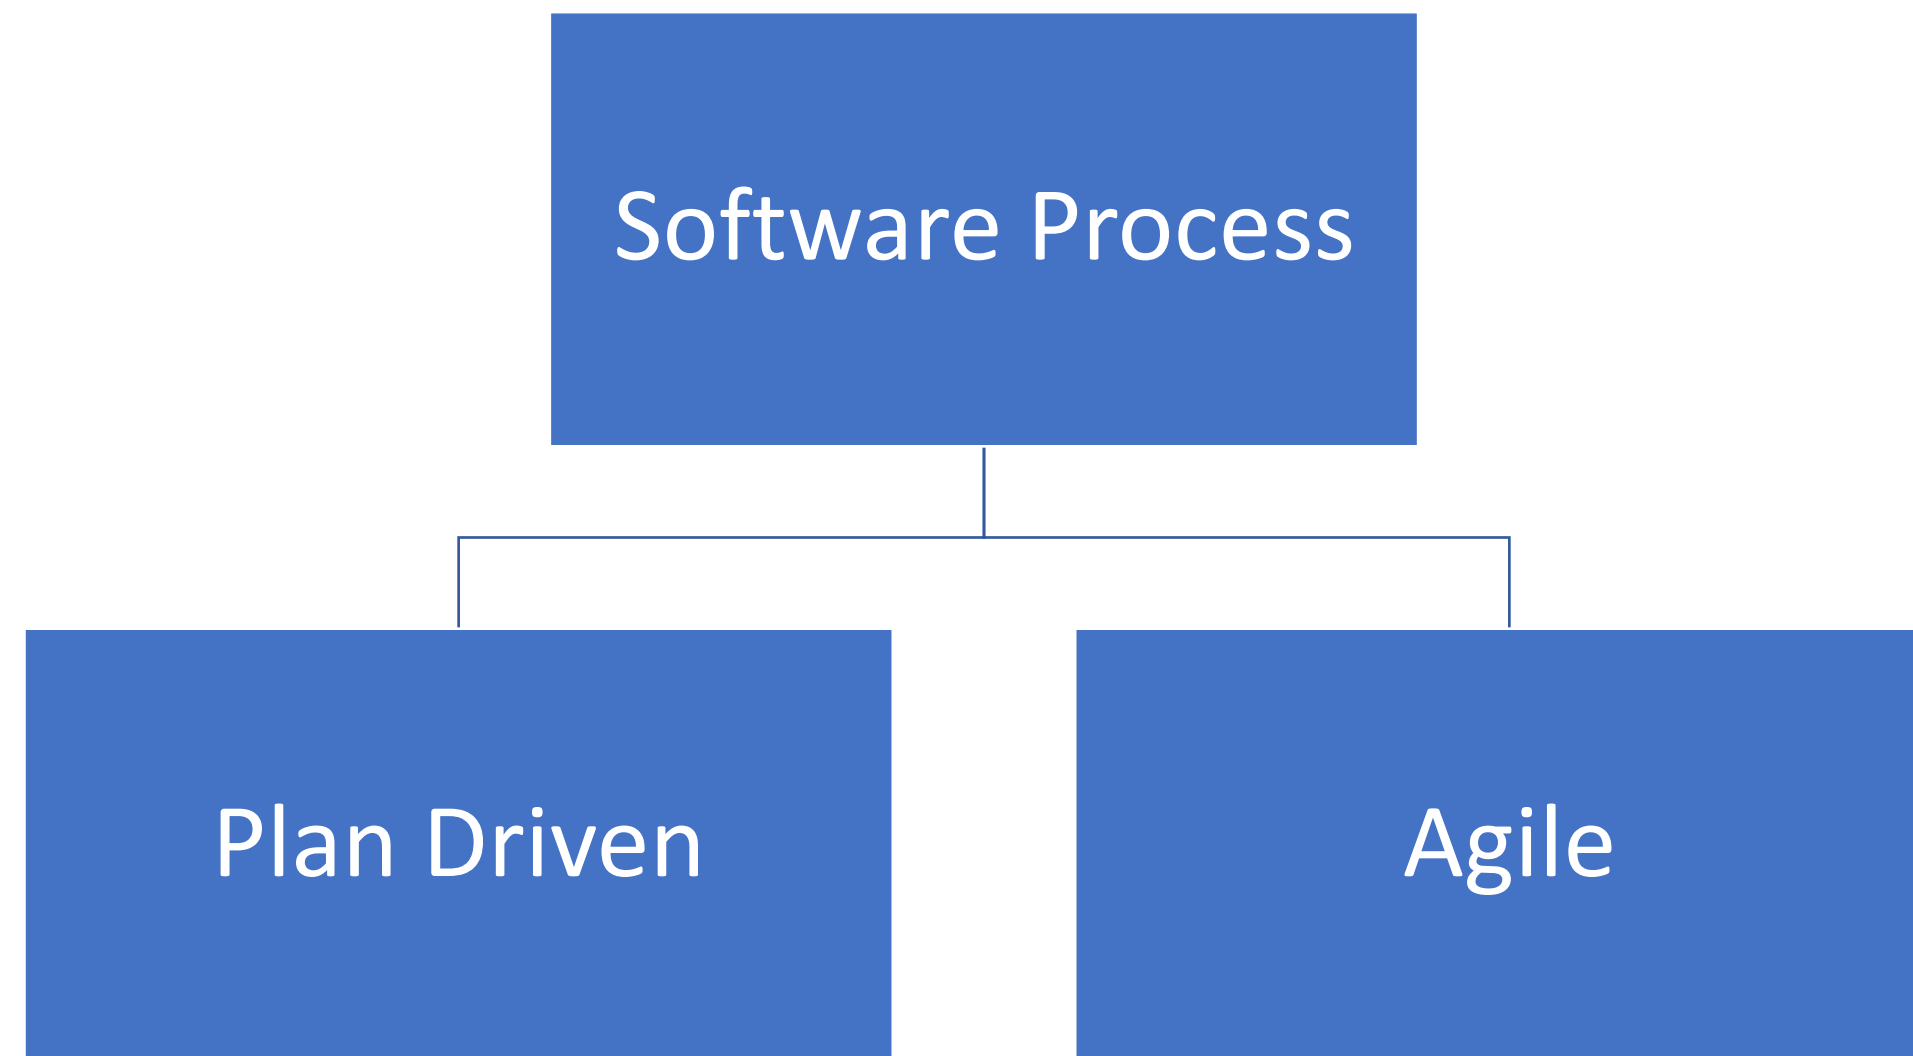

Plan-driven and Agile processes

- Plan-driven processes are processes where all the process activities are planned in advance and progress is measured against this plan.
- In Agile processes, planning is incremental and it is easier to change the process to reflect changing customer requirements.
- In practice, most practical processes include elements of both plan-driven and agile approaches.
- There are no right or wrong software processes.



Part II

Software Process Models



Software Process Models



Software Process models


- The Waterfall Model
 - Plan-driven model. Separate and distinct phases of specification and development.
- Incremental Development
 - Specification, development and validation are interleaved. May be plan-driven or agile.
- Integration and Configuration
 - The system is assembled from existing configurable components. May be plan-driven or agile.
- In practice, most large systems are developed using a process that incorporates elements from all these models.



The Waterfall Process Model



The Waterfall Model

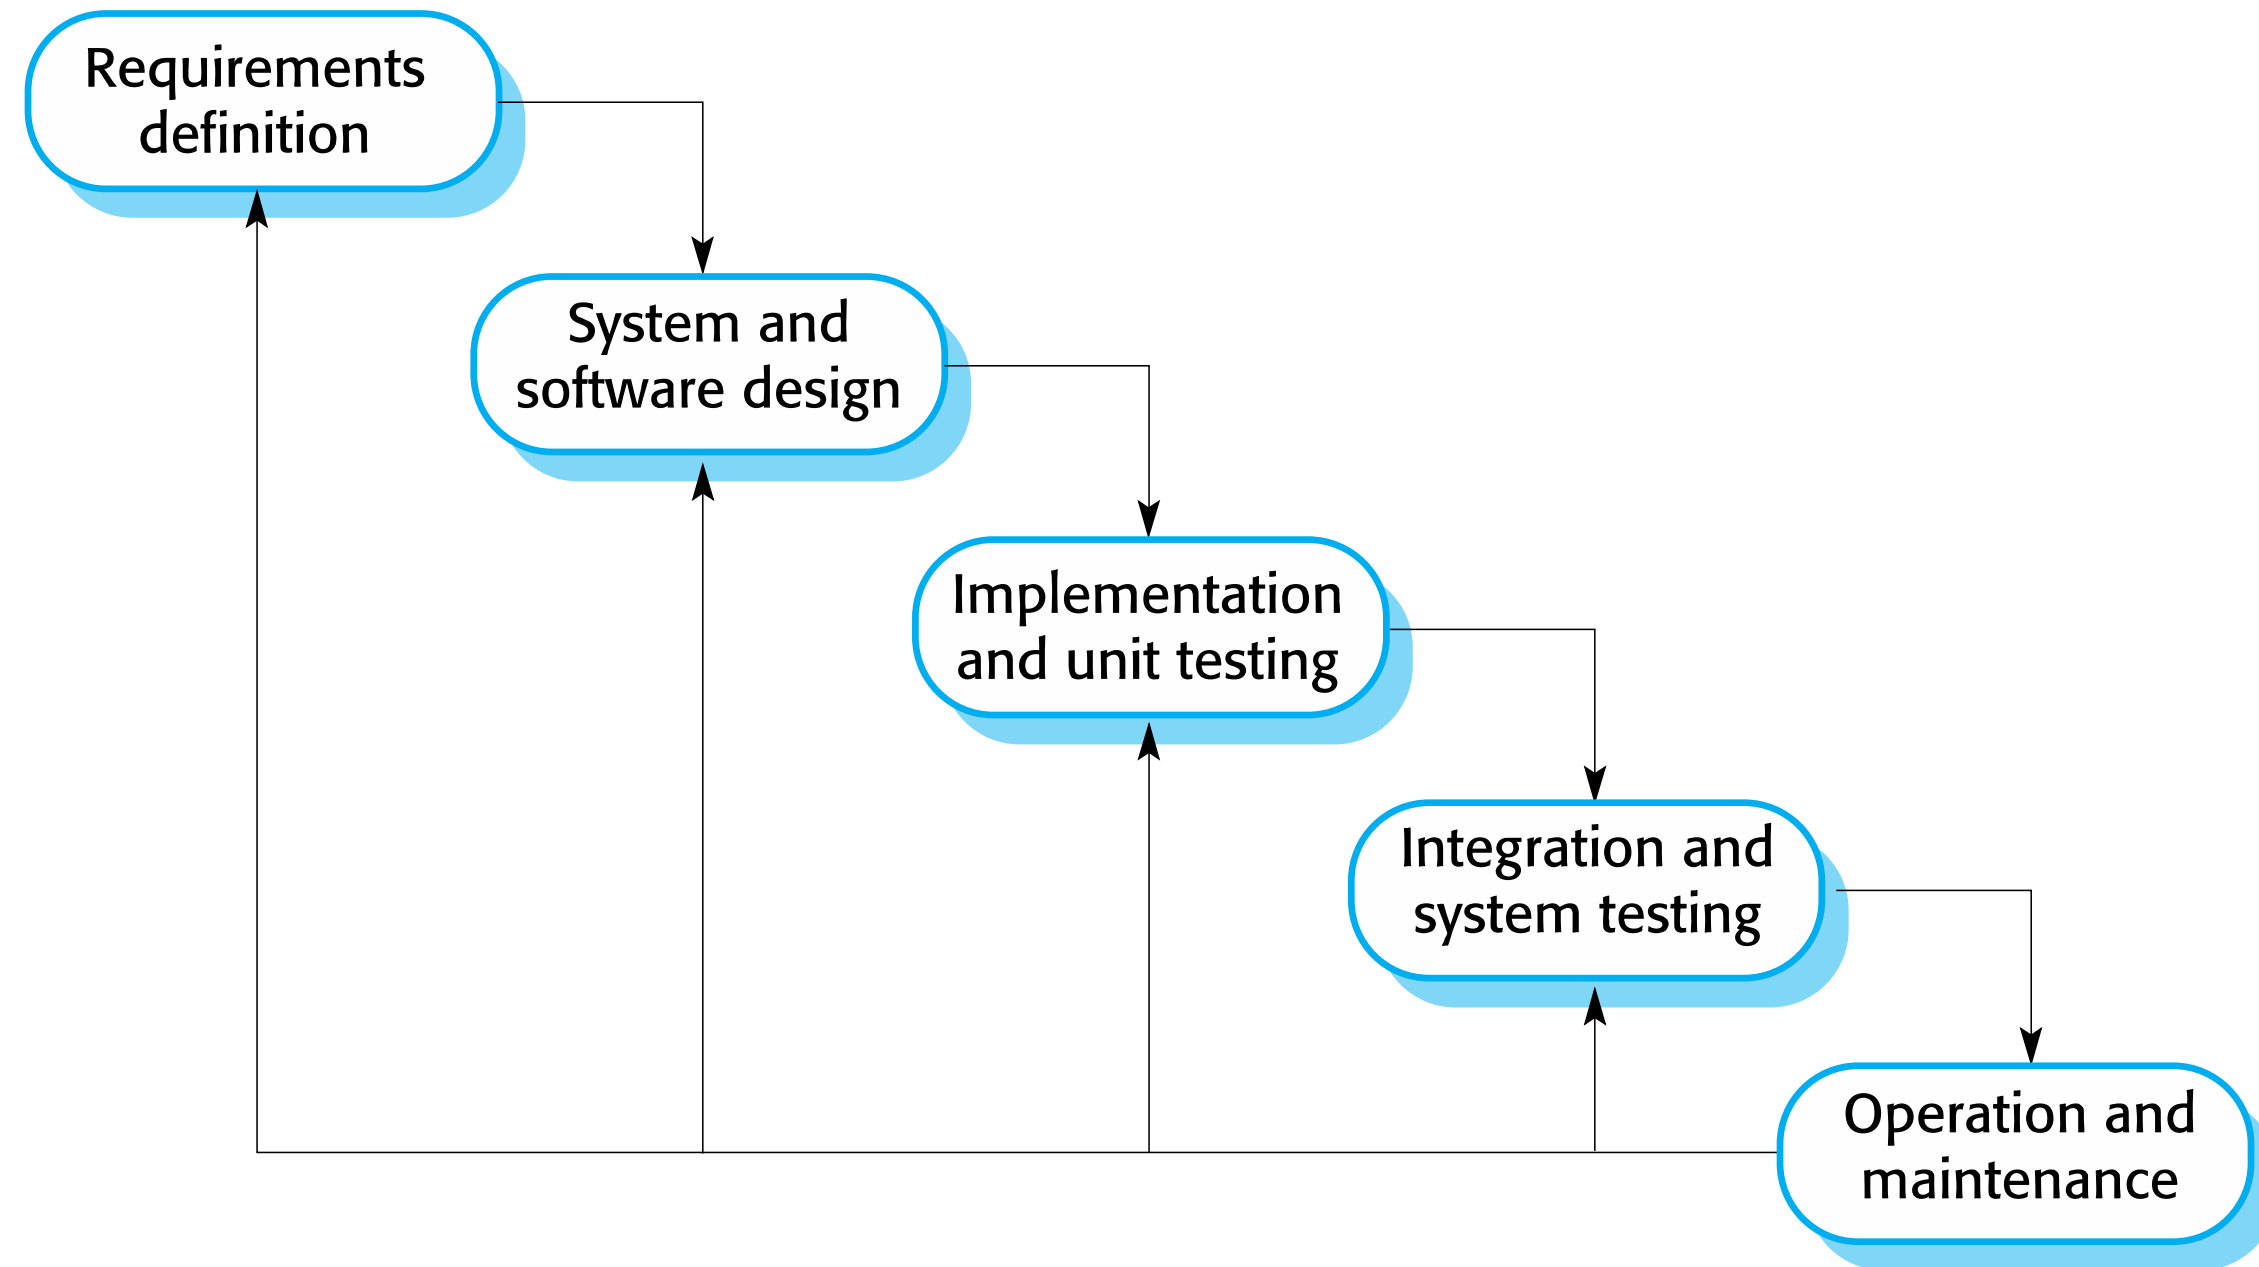

Waterfall Model phases

- There are separate identified phases in the waterfall model:
 - Requirements analysis and definition
 - System and software design
 - Implementation and unit testing
 - Integration and system testing
 - Operation and maintenance
- The main drawback of the waterfall model is the difficulty of accommodating change after the process is underway. In principle, a phase must be complete before moving onto the next phase.

Waterfall Model problems


- Inflexible partitioning of the project into distinct stages makes it difficult to respond to changing customer requirements.
 - Therefore, this model is only appropriate when the requirements are well-understood and changes will be fairly limited during the design process.
 - Few business systems have stable requirements.
- The waterfall model is mostly used for large systems engineering projects where a system is developed at several sites.
 - In those circumstances, the plan-driven nature of the waterfall model helps coordinate the work.



Incremental Development Process Models



Incremental Development

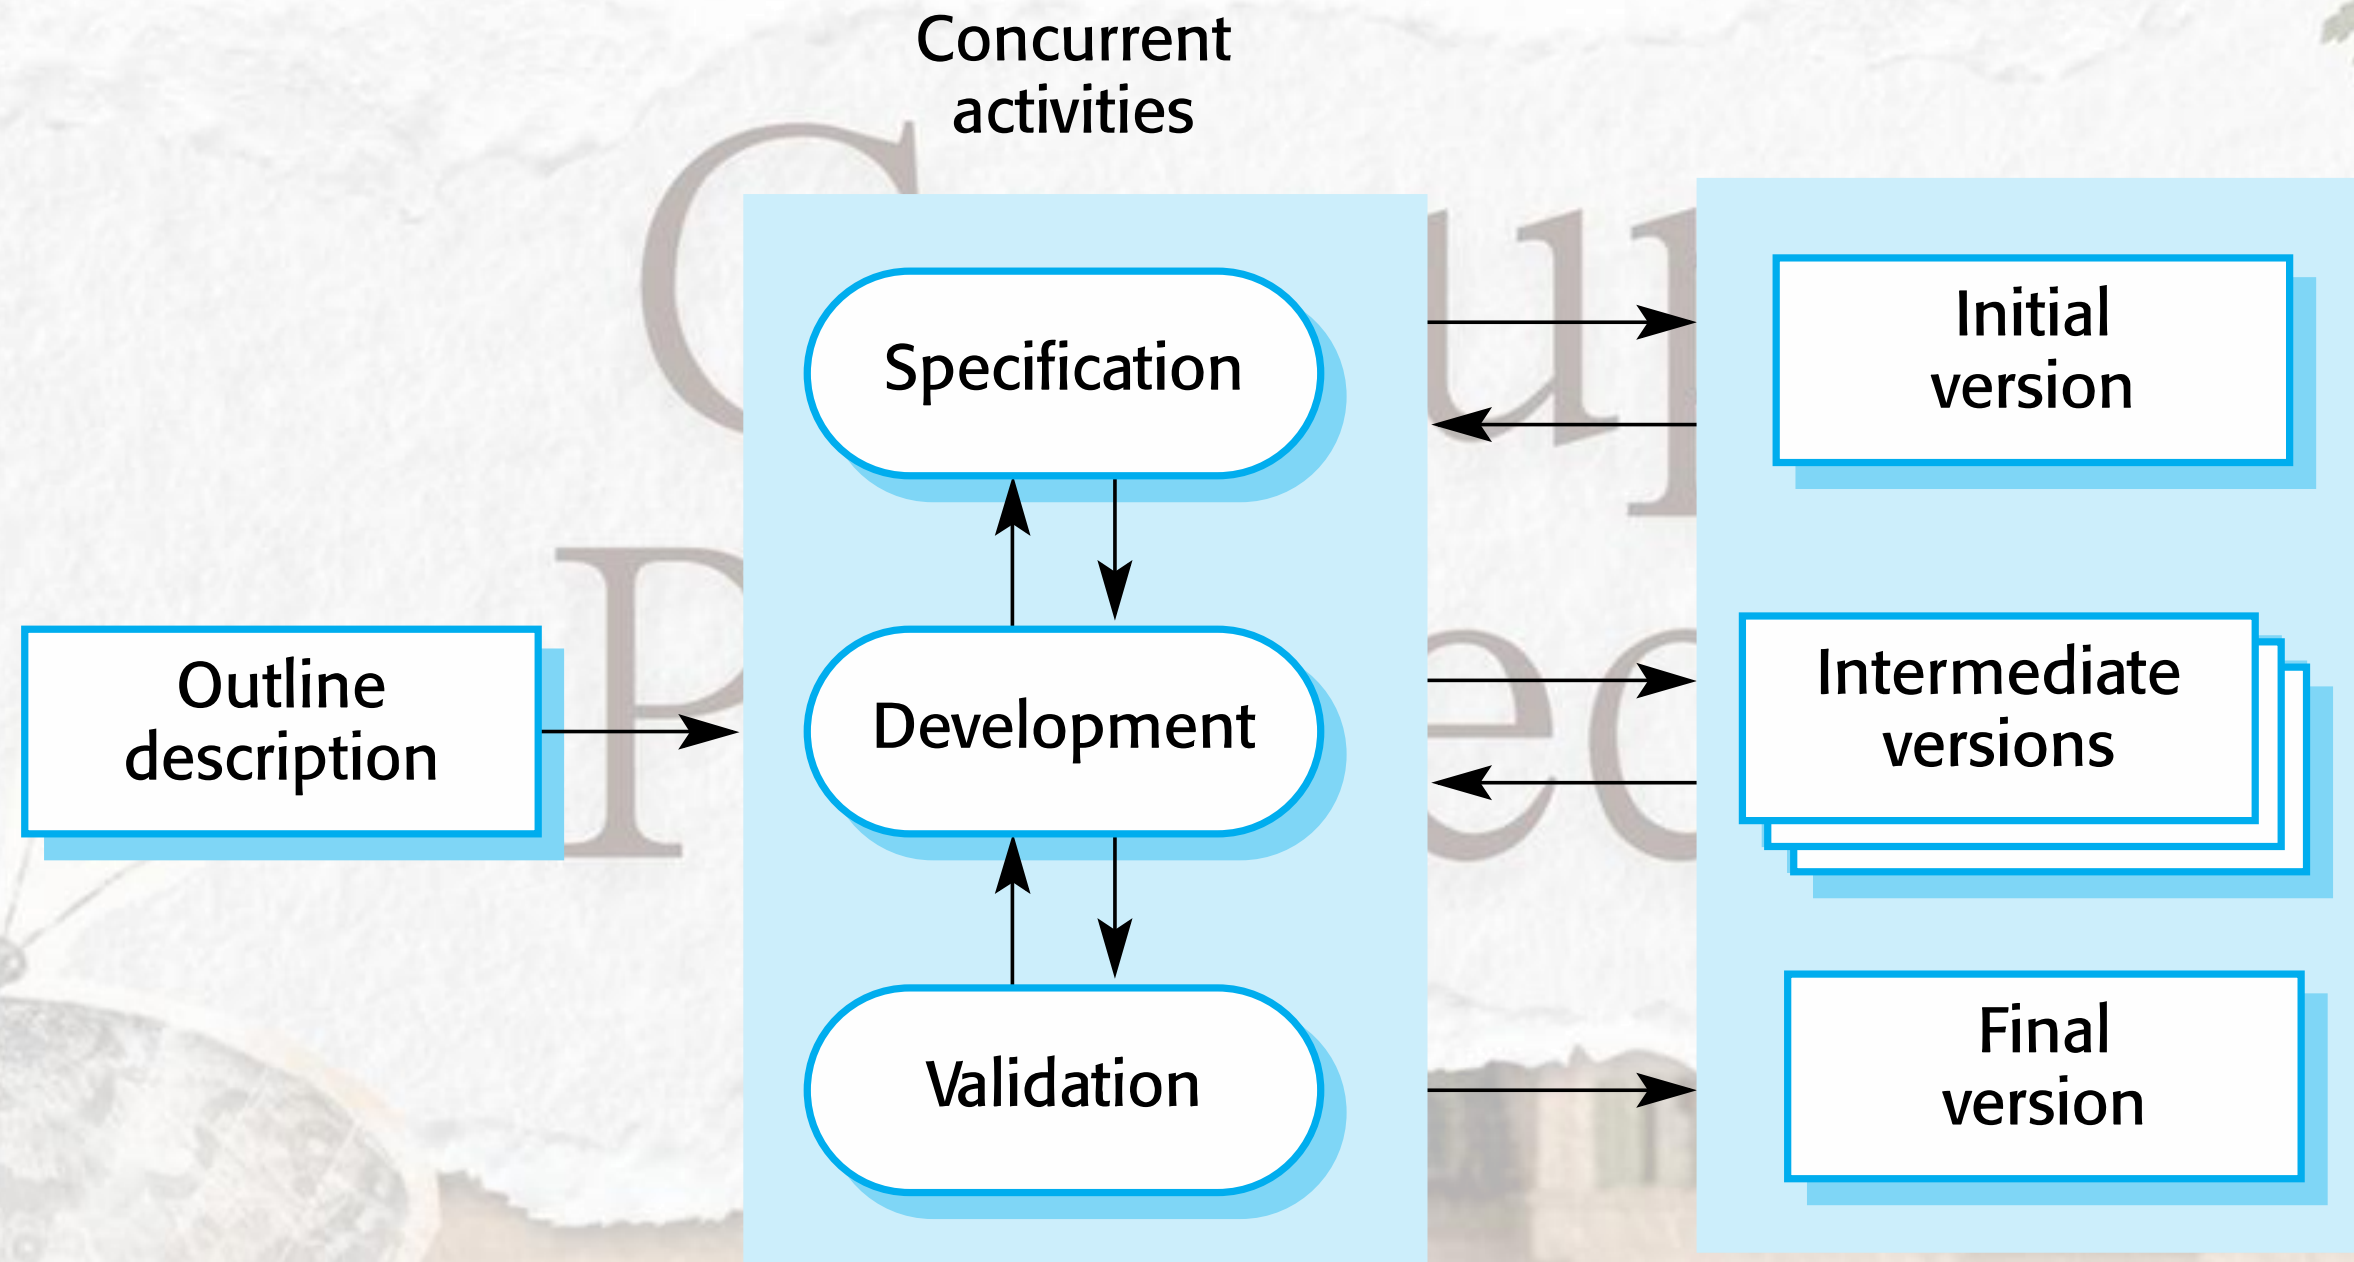

Incremental Development benefits

- The cost of accommodating changing customer requirements is reduced.
 - The amount of analysis and documentation that must be redone is much less than is required with the waterfall model.



Incremental Development benefits

- The cost of accommodating changing customer requirements is reduced.
 - The amount of analysis and documentation that has to be redone is much less than is required with the waterfall model.
- It is easier to get customer feedback on the development work that has been done.
 - Customers can comment on demonstrations of the software and see how much has been implemented.



Incremental Development benefits

- The cost of accommodating changing customer requirements is reduced.
 - The amount of analysis and documentation that must be redone is much less than is required with the waterfall model.
- It is easier to get customer feedback on the development work that has been done.
 - Customers can comment on demonstrations of the software and see how much has been implemented.
- More rapid delivery and deployment of useful software to the customer is possible.
 - Customers can use and gain value from the software earlier than is possible with a waterfall process.



Incremental Development problems

- The process is not visible.
 - Managers need regular deliverables to measure progress. If systems are developed quickly, it is not cost-effective to produce documents that reflect every version of the system.



Incremental Development problems

- The process is not visible.
 - Managers need regular deliverables to measure progress. If systems are developed quickly, it is not cost-effective to produce documents that reflect every version of the system.
- System structure tends to degrade as new increments are added.
 - Unless time and money is spent on refactoring to improve the software, regular change tends to corrupt its structure. Incorporating further software changes becomes increasingly difficult and costly.



Integration and Configuration



Integration and Configuration

- Based on software reuse where systems are integrated from existing components or application systems (sometimes called COTS -Commercial-Off-The-Shelf) systems).
- Reused elements may be configured to adapt their behaviour and functionality to a user's requirements
- Reuse is now the standard approach for building many types of business system.



Reusable Software




Types of reusable software

- Stand-alone application systems (sometimes called COTS) that are configured for use in a particular environment.
- Collections of objects that are developed as a package to be integrated with a component framework such as .NET or J2EE.
- Web services that are developed according to service standards and which are available for remote invocation.



Reuse-oriented software engineering

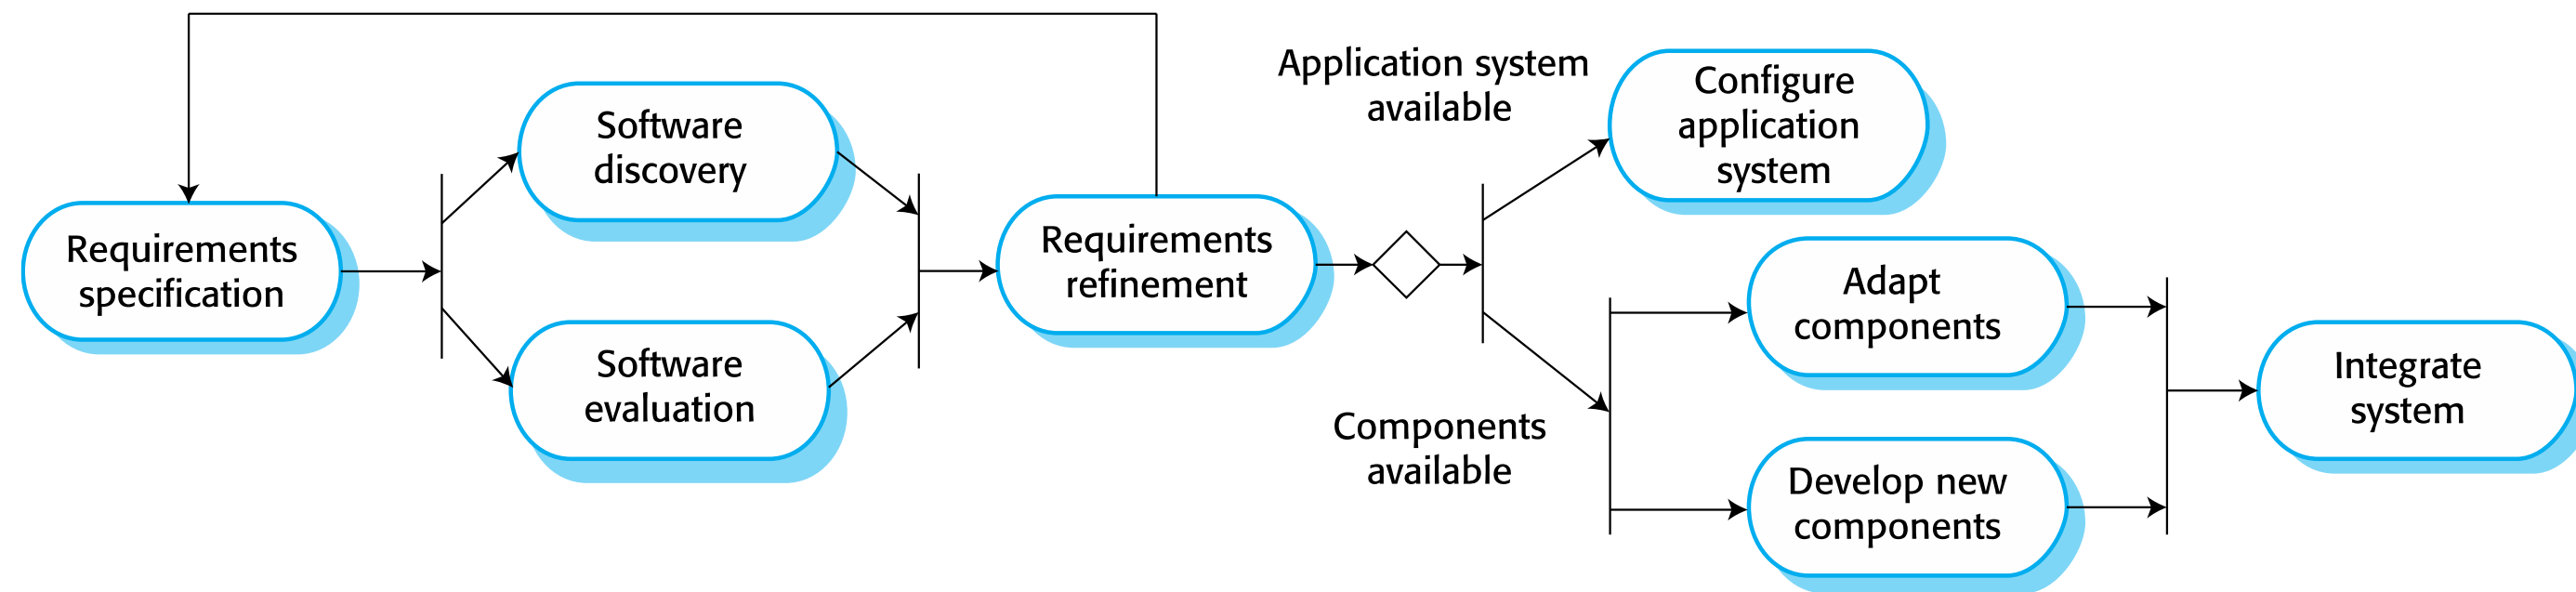

Key process stages

- Requirements specification
- Software discovery and evaluation
- Requirements refinement
- Application system configuration
- Component adaptation and integration



Advantages and Disadvantages



Advantages and Disadvantages

- Learner input – What do you think?
 - Advantages
 - Faster implementation
 - Less errors
 - Easier integration (dependent on tool)
 - Disadvantages
 - Slower implementation (not every developer is in sync)



Advantages and Disadvantages

- Reduced costs and risks as less software is developed from scratch
- Faster delivery and deployment of system
- But requirements compromises are inevitable so system may not meet real needs of users
- Loss of control over evolution of reused system elements



Part III

Software Process Activities



Software Process Activities



Process Activities


- Real software processes are inter-leaved sequences of technical, collaborative and managerial activities with the overall goal of specifying, designing, implementing and testing a software system.
- The four basic process activities of specification, development, validation and evolution are organized differently in different development processes.
- For example, in the waterfall model, they are organized in sequence, whereas in incremental development they are interleaved.



Software Requirements Engineering Process



The Requirements Engineering Process

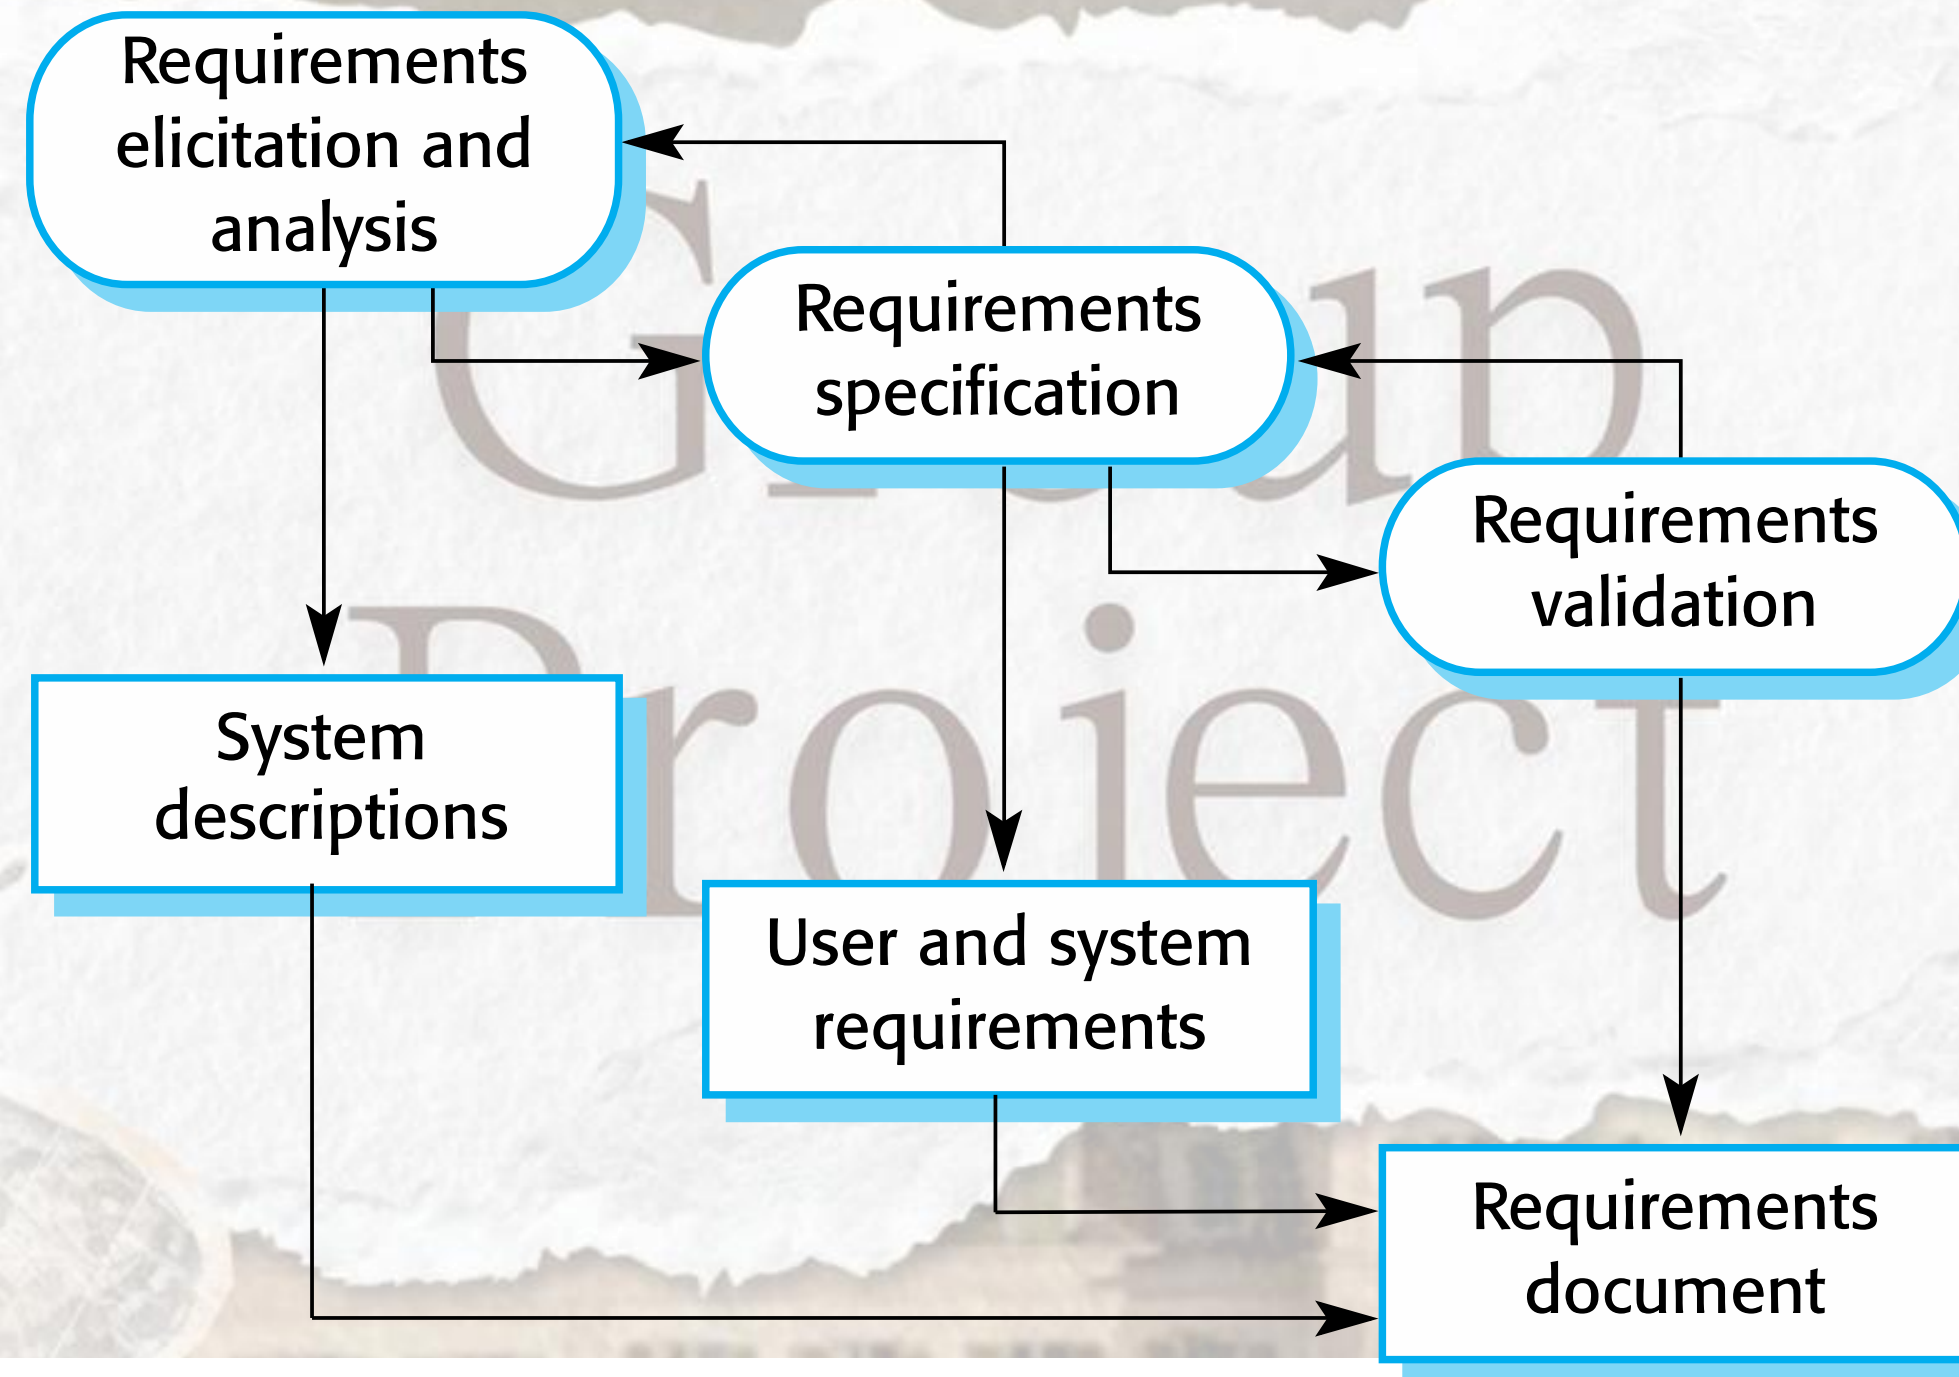


Software Specification

- The process of establishing what services are required and the constraints on the system's operation and development.
- Requirements engineering process
 - Requirements elicitation and analysis
 - What do the system stakeholders require or expect from the system?
 - Requirements specification
 - Defining the requirements in detail
 - Requirements validation
 - Checking the validity of the requirements

Software Design and Implementation

- The process of converting the system specification into an executable system.
- Software design
 - Design a software structure that realises the specification;
- Implementation
 - Translate this structure into an executable program;
- The activities of design and implementation are closely related and may be inter-leaved.

A General Model of the Design Process

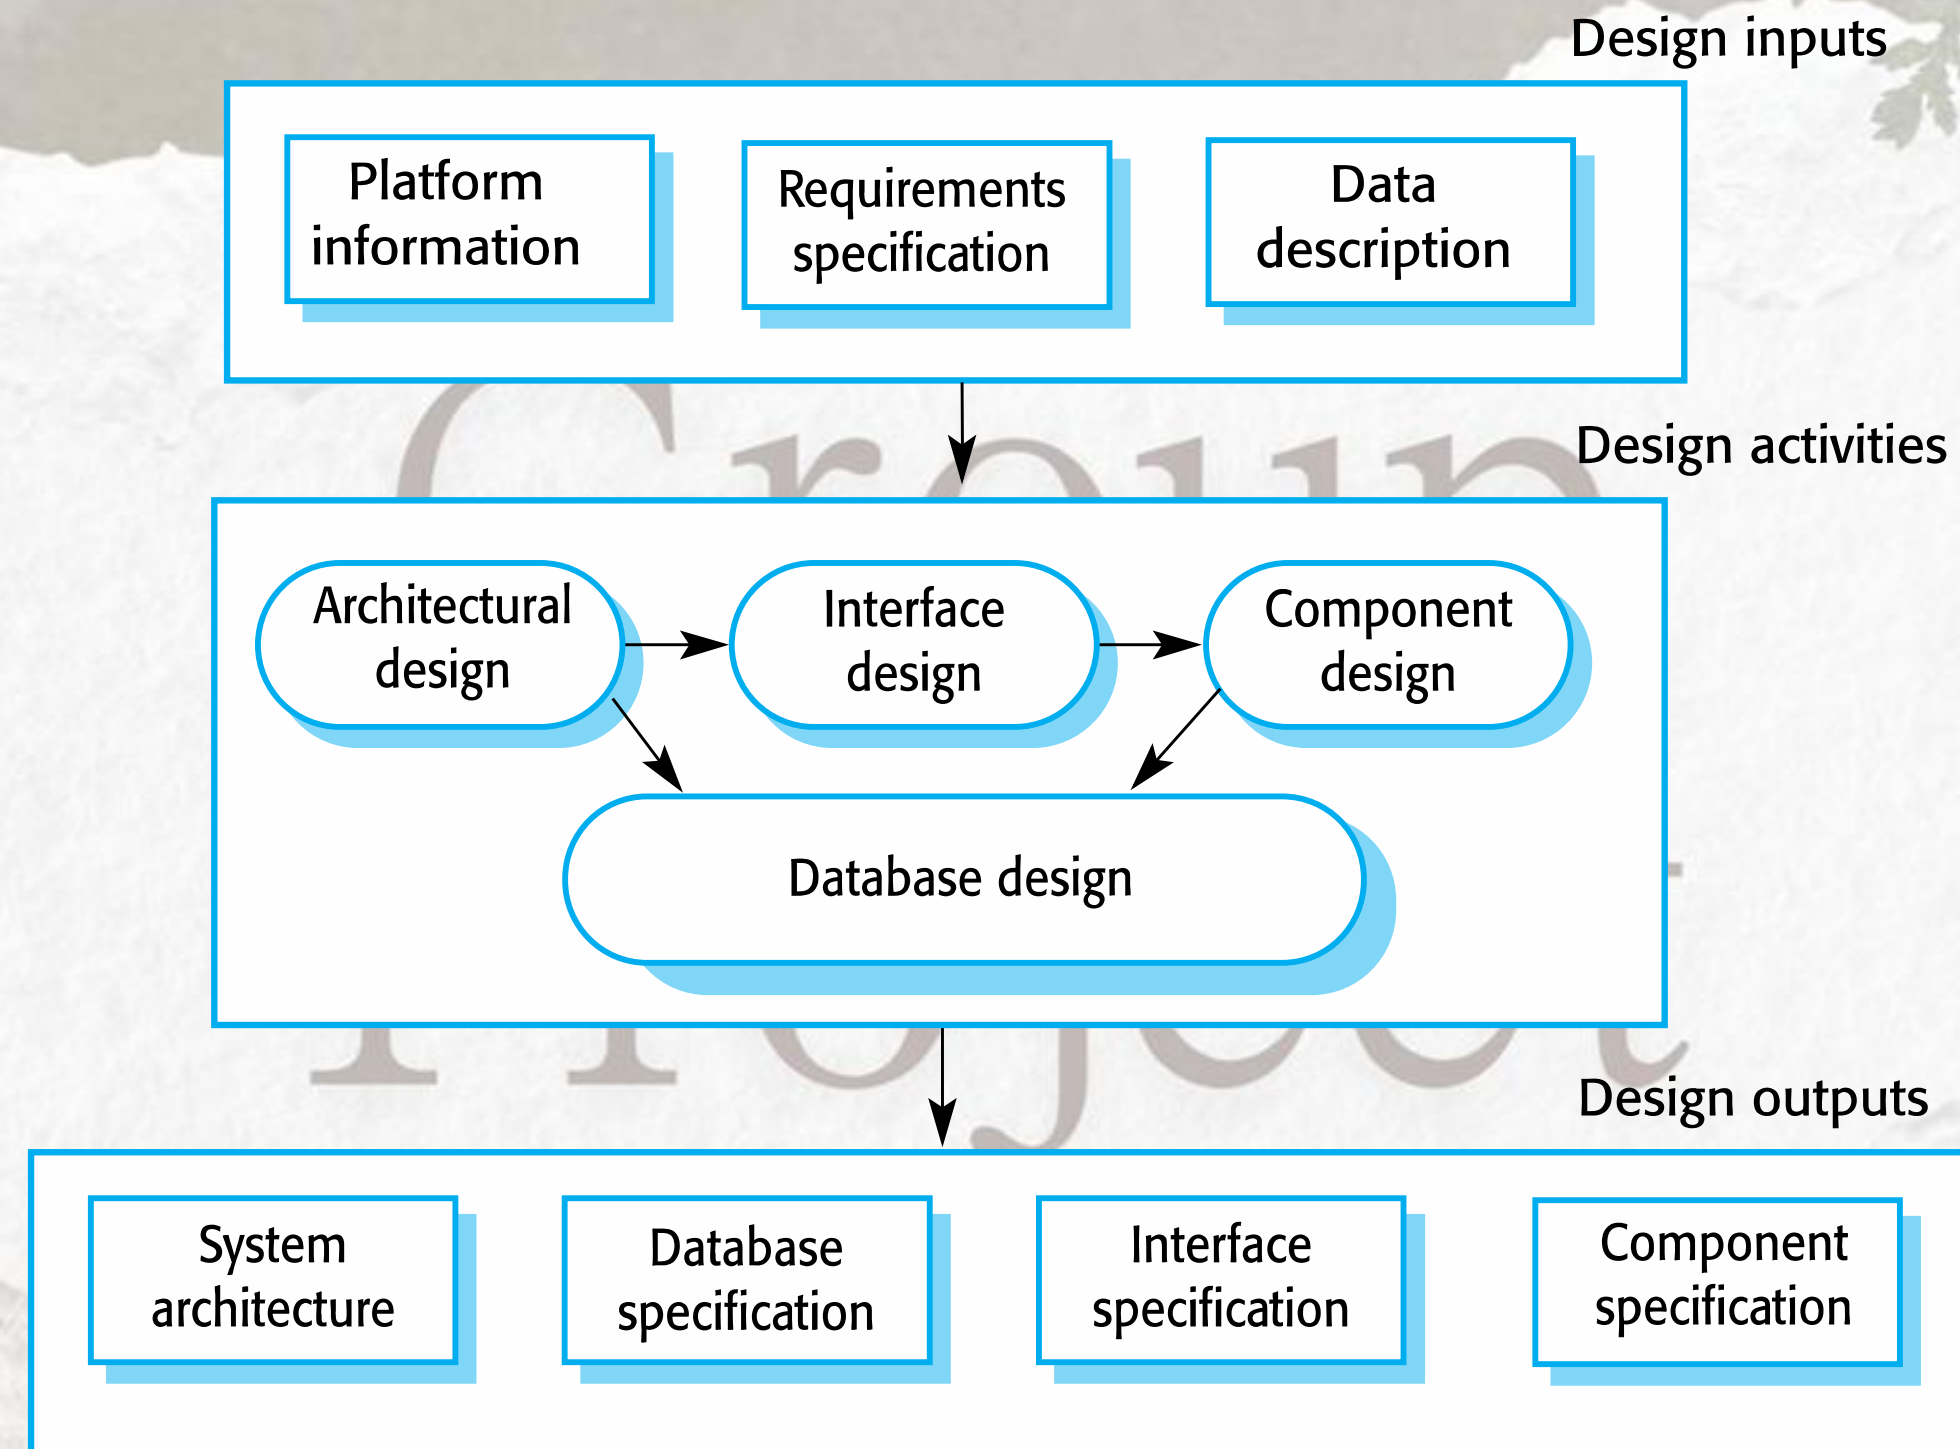

*Discuss the methods the group used to collect data, conduct research, or complete a project.
Describe the specific strategies, techniques, or steps used to achieve the project's goals in a
systematic and structured manner.*

Group Project

Design Activities



University of Windsor

Design Activities

- *Architectural design*, where you identify the overall structure of the system, the principal components (subsystems or modules), their relationships and how they are distributed.



Design Activities

- *Architectural design*, where you identify the overall structure of the system, the principal components (subsystems or modules), their relationships and how they are distributed.
- *Database design*, where you design the system data structures and how these are to be represented in a database.



Design Activities

- *Architectural design*, where you identify the overall structure of the system, the principal components (subsystems or modules), their relationships and how they are distributed.
- *Database design*, where you design the system data structures and how these are to be represented in a database.
- *Interface design*, where you define the interfaces between system components.



Design Activities

- *Architectural design*, where you identify the overall structure of the system, the principal components (subsystems or modules), their relationships and how they are distributed.
- *Database design*, where you design the system data structures and how these are to be represented in a database.
- *Interface design*, where you define the interfaces between system components.
- *Component selection and design*, where you search for reusable components. If unavailable, you design how it will operate.



*Discuss the methods the group used to collect data, conduct research, or complete a project.
Describe the specific strategies, techniques, or steps used to achieve the project's goals in a
systematic and structured manner.*

Group Project

System Implementation



System Implementation

- The software is implemented either by developing a program or programs or by configuring an application system.
- Design and implementation are interleaved activities for most types of software system.
- Programming is an individual activity with no standard process.
- Debugging is the activity of finding program faults and correcting these faults.



Software Validation

- Verification and validation (V & V) is intended to show that a system conforms to its specification and meets the requirements of the system customer.
- Involves checking and review processes and system testing.
- System testing involves executing the system with test cases that are derived from the specification of the real data to be processed by the system.
- Testing is the most used V & V activity.




*Discuss the methods the group used to collect data, conduct research, or complete a project.
Describe the specific strategies, techniques, or steps used to achieve the project's goals in a
systematic and structured manner.*

Group Project

Testing



Testing Stages

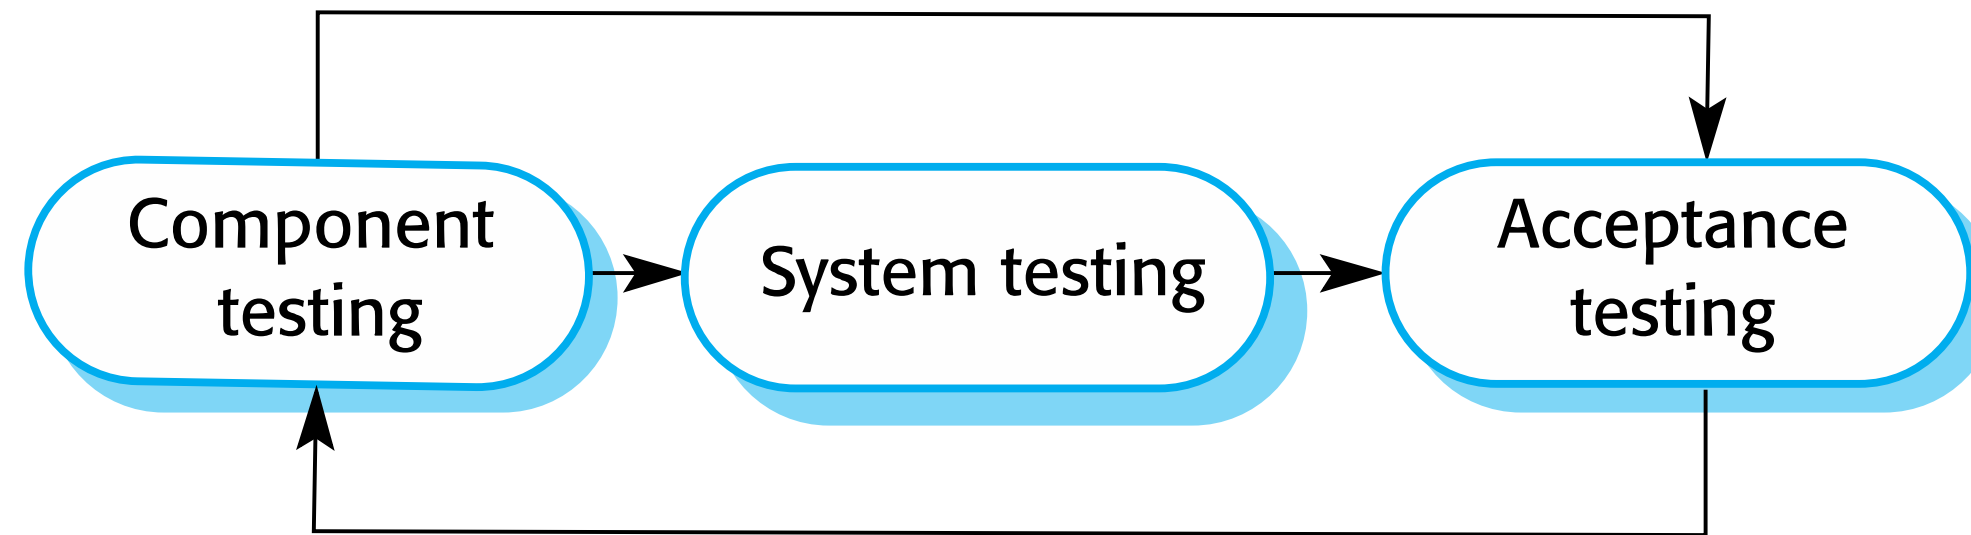


Testing stages

- **Component testing**
 - Individual components are tested independently;
 - Components may be functions or objects or coherent groupings of these entities.
- **System testing**
 - Testing of the system as a whole. Testing of emergent properties is particularly important.
- **Customer testing**
 - Testing with customer data to check that the system meets the customer's needs.



Testing Phases in a plan-driven software process (V-model)

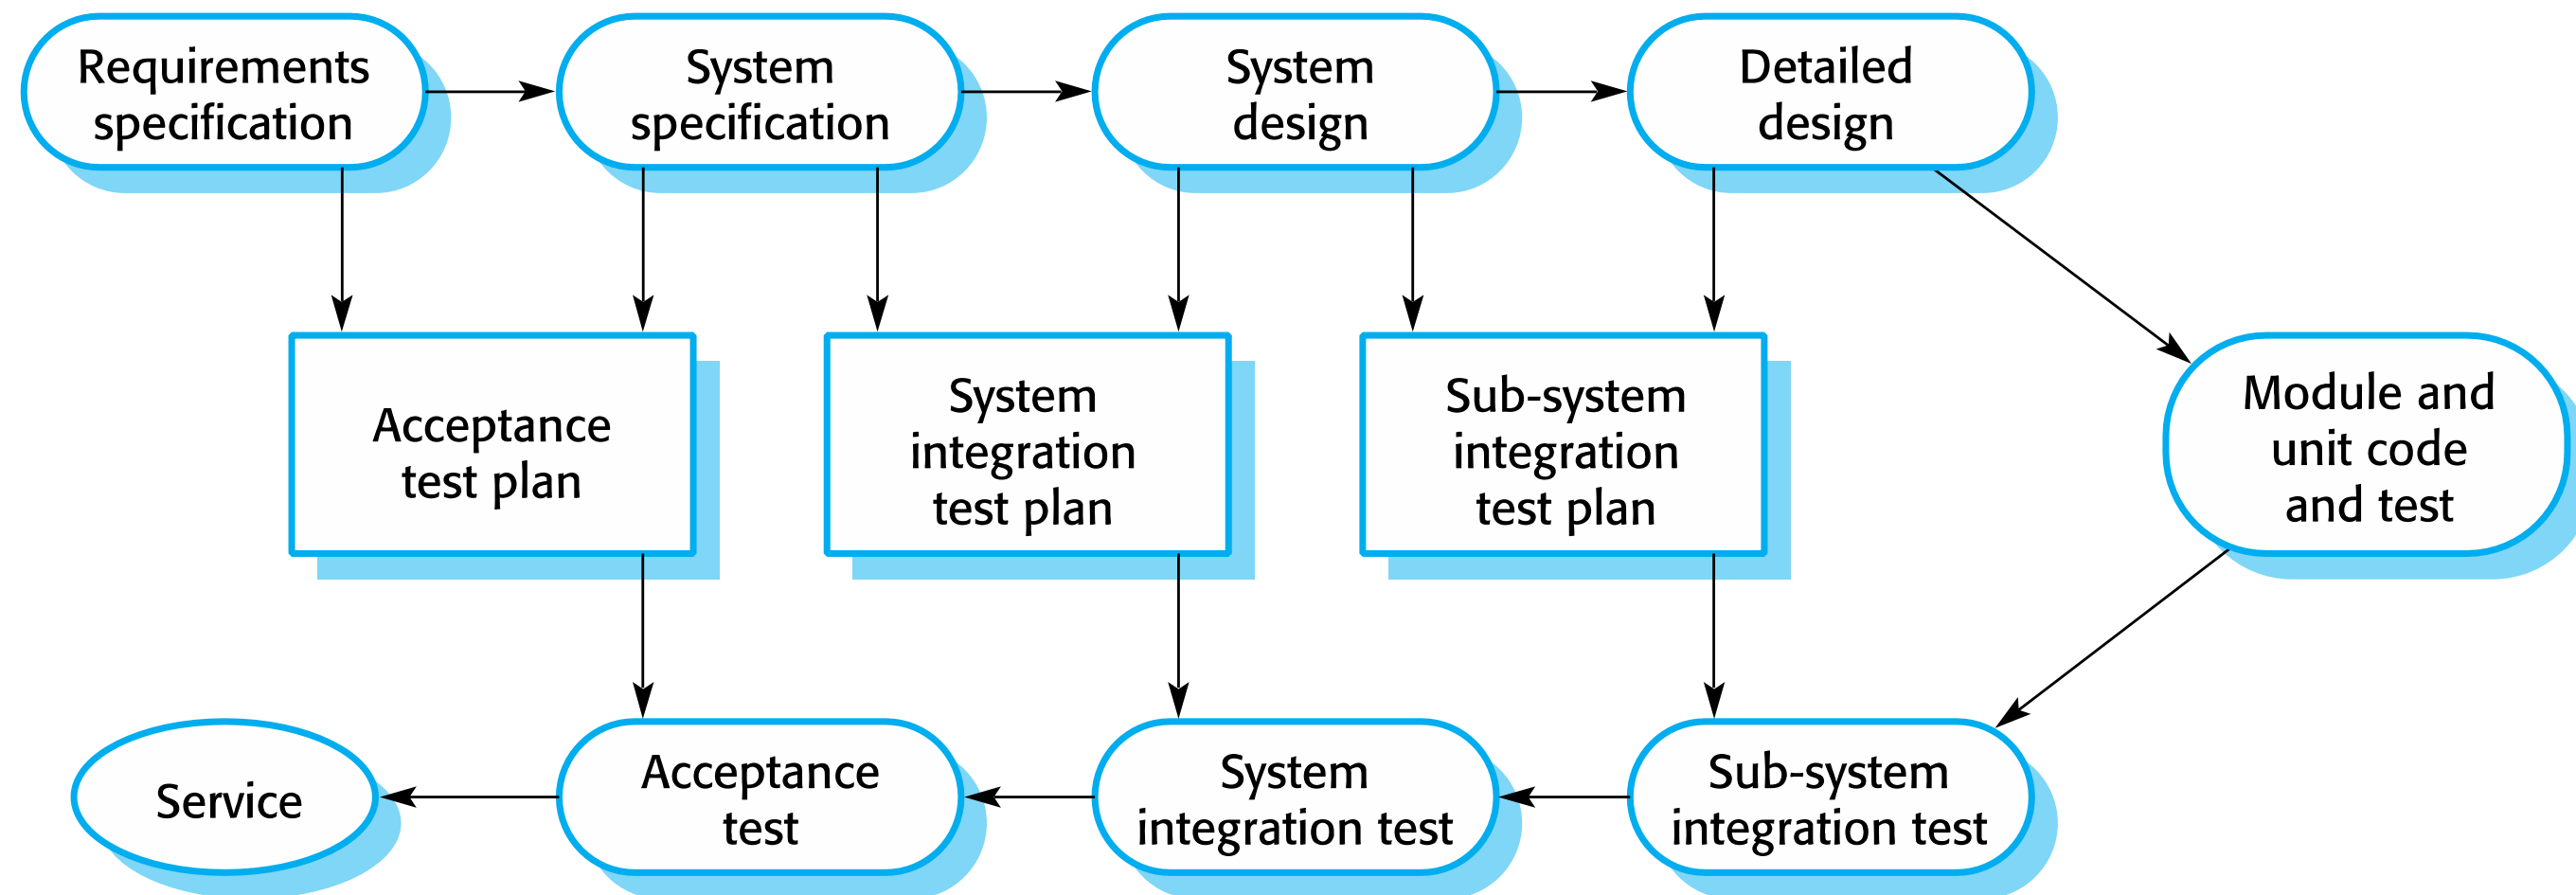

Group Project

System and Software Evolution




Software Evolution

- Software is inherently flexible and can change.
- As requirements change through changing business circumstances, the software that supports the business must also evolve and change.
- Although there has been a demarcation between development and evolution (maintenance) this is increasingly irrelevant as fewer systems are completely new.



System Evolution

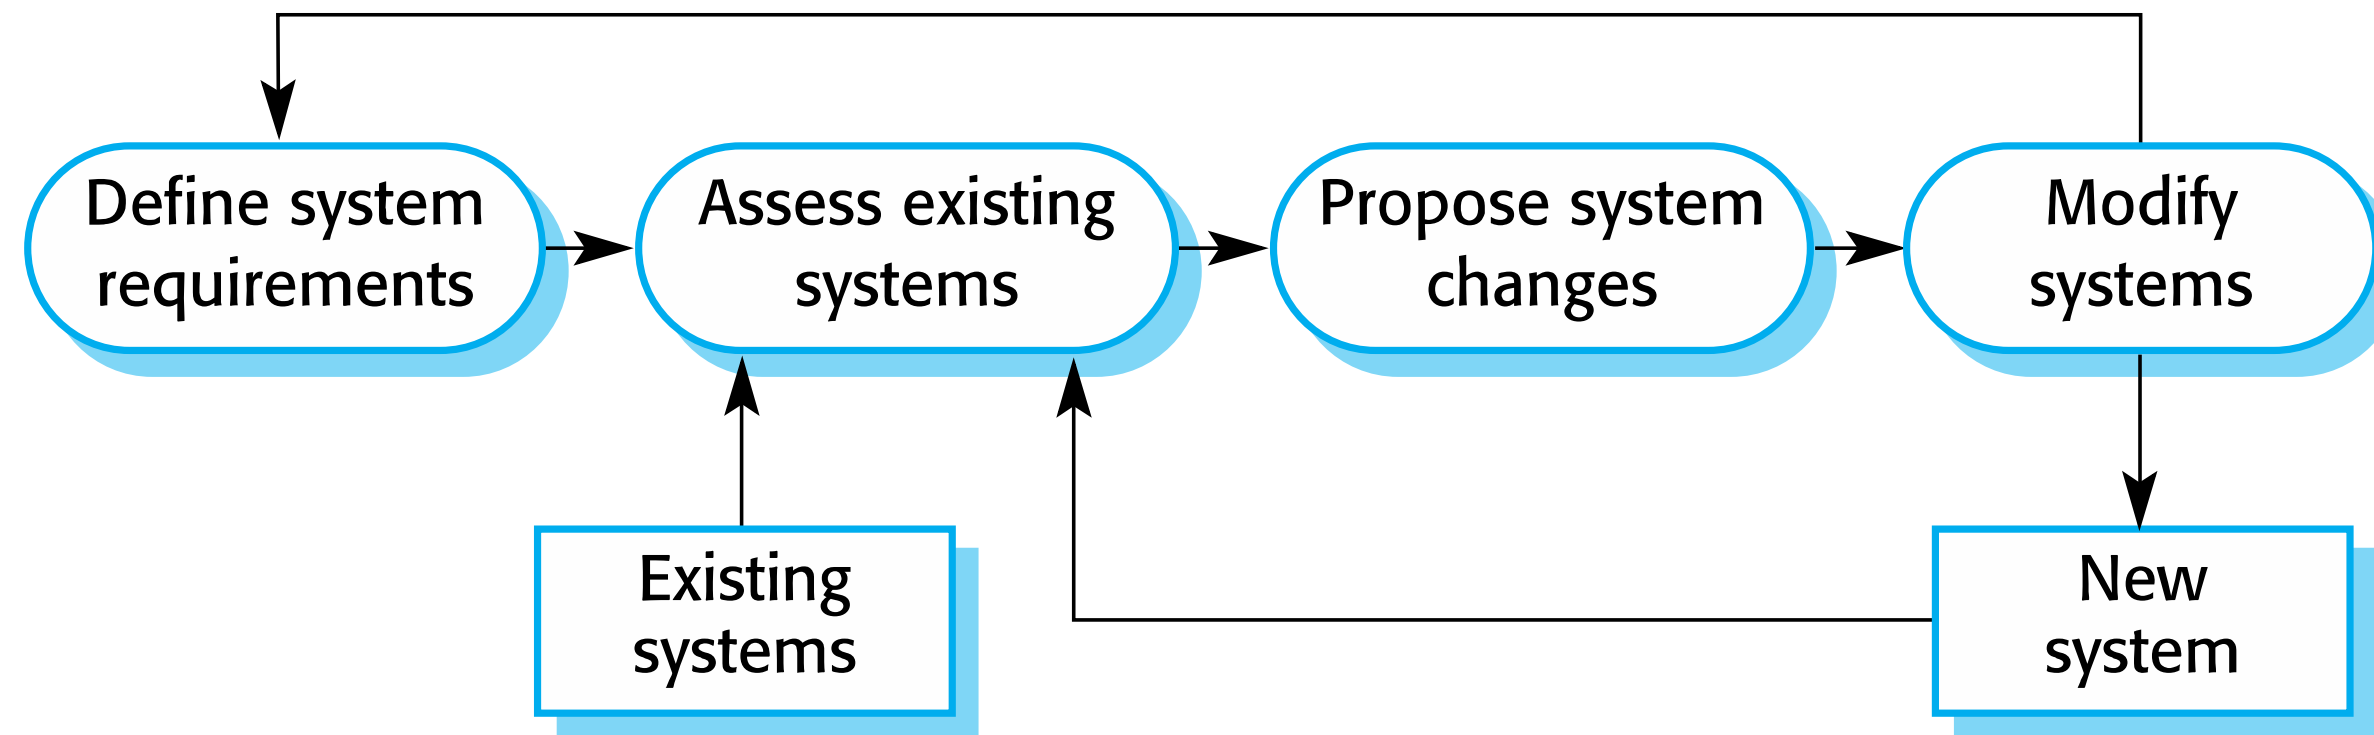

Part III

Change Management: Coping with Change



Coping with Change



Coping with Change

- Change is inevitable in all large software projects.
 - Business changes lead to new and changed system requirements
 - New technologies open new possibilities for improving implementations
 - Changing platforms require application changes
- Change leads to rework so the costs of change include both rework (e.g., re-analysing requirements) as well as the costs of implementing new functionality
- Change Management!

Reducing the Costs of Rework

- Change anticipation, where the software process includes activities that can anticipate possible changes before significant rework is required.
 - For example, a prototype system may be developed to show some key features of the system to customers.



Reducing the Costs of Rework

- Change tolerance, where the process is designed so that changes can be accommodated at relatively low cost.
 - This normally involves some form of incremental development. Proposed changes may be implemented in increments that have not yet been developed. If this is impossible, then only a single increment (a small part of the system) may have to be altered to incorporate the change.



Coping with Changing Requirements

- System prototyping, where a version of the system or part of the system is developed quickly to check the customer's requirements and the feasibility of design decisions. This approach supports change anticipation.



Coping with Changing Requirements

- System prototyping, where a version of the system or part of the system is developed quickly to check the customer's requirements and the feasibility of design decisions. This approach supports change anticipation.
- Incremental delivery, where system increments are delivered to the customer for comment and experimentation. This supports both change avoidance and change tolerance.



Software Prototyping

- A prototype is an initial version of a system used to demonstrate concepts and try out design options.
- A prototype can be used in:
 - The requirements engineering process to help with requirements elicitation and validation;
 - In design processes to explore options and develop a UI design;
 - In the testing process to run back-to-back tests.




Benefits of Prototyping

- Improved system usability.
- A closer match to users' real needs.
- Improved design quality.
- Improved maintainability.
- Reduced development effort.



The process of Prototype Development

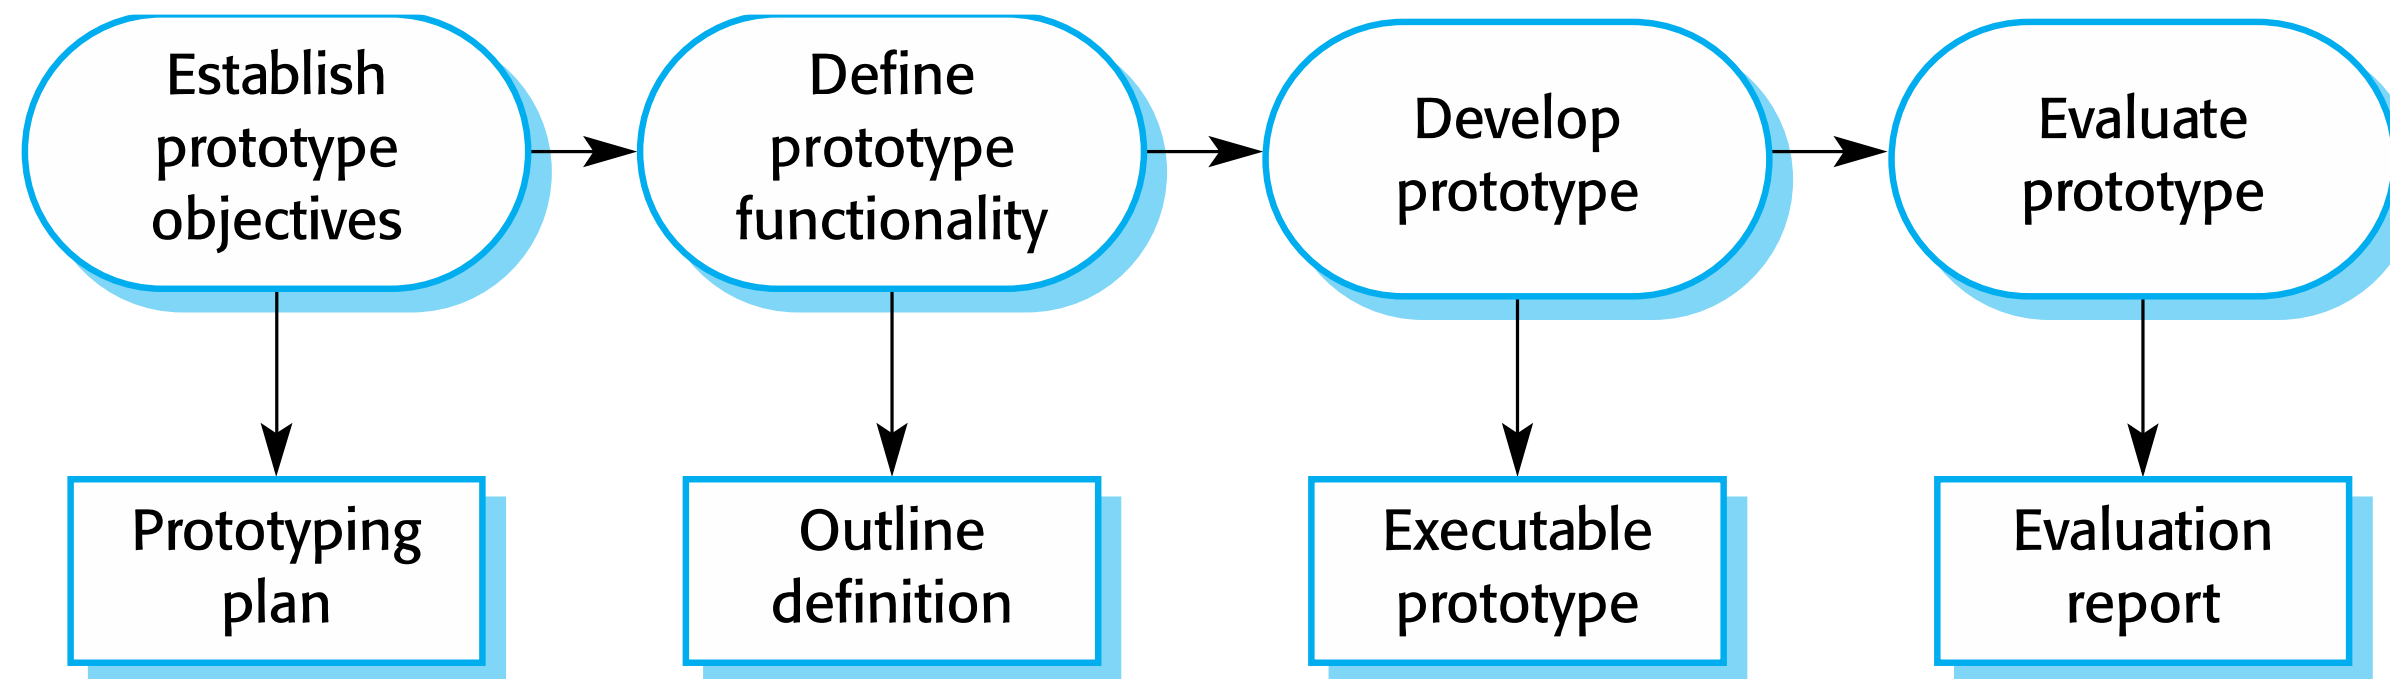

Prototype Development

- May be based on rapid prototyping languages or tools (RAD)
- May involve leaving out functionality
 - Prototype should focus on areas of the product that are not well-understood;
 - Error checking and recovery may not be included in the prototype;
 - Focus on functional rather than non-functional requirements such as reliability and security



Throw-away Prototypes

- Prototypes should be discarded after development as they are not a good basis for a production system:
 - It may be impossible to tune the system to meet non-functional requirements;
 - Prototypes are normally undocumented;
 - The prototype structure is usually degraded through rapid change;
 - The prototype probably will not meet normal organisational quality standards.

Incremental Delivery



Incremental Delivery

- Rather than deliver the system as a single delivery, the development and delivery is broken down into increments with each increment delivering part of the required functionality.
- User requirements are prioritised and the highest priority requirements are included in early increments.
- Once the development of an increment is started, the requirements are frozen though requirements for later increments can continue to evolve.



Incremental Development and Delivery


- Incremental development
 - Develop the system in increments and evaluate each increment before proceeding to the development of the next increment;
 - Normal approach used in agile methods;
 - Evaluation done by user/customer proxy.



Incremental Development and Delivery

- Incremental development
 - Develop the system in increments and evaluate each increment before proceeding to the development of the next increment;
 - Normal approach used in agile methods;
 - Evaluation done by user/customer proxy.
- Incremental delivery
 - Deploy an increment for use by end-users;
 - More realistic evaluation about practical use of software;
 - Difficult to implement for replacement systems as increments have less functionality than the system being replaced.

Incremental Delivery

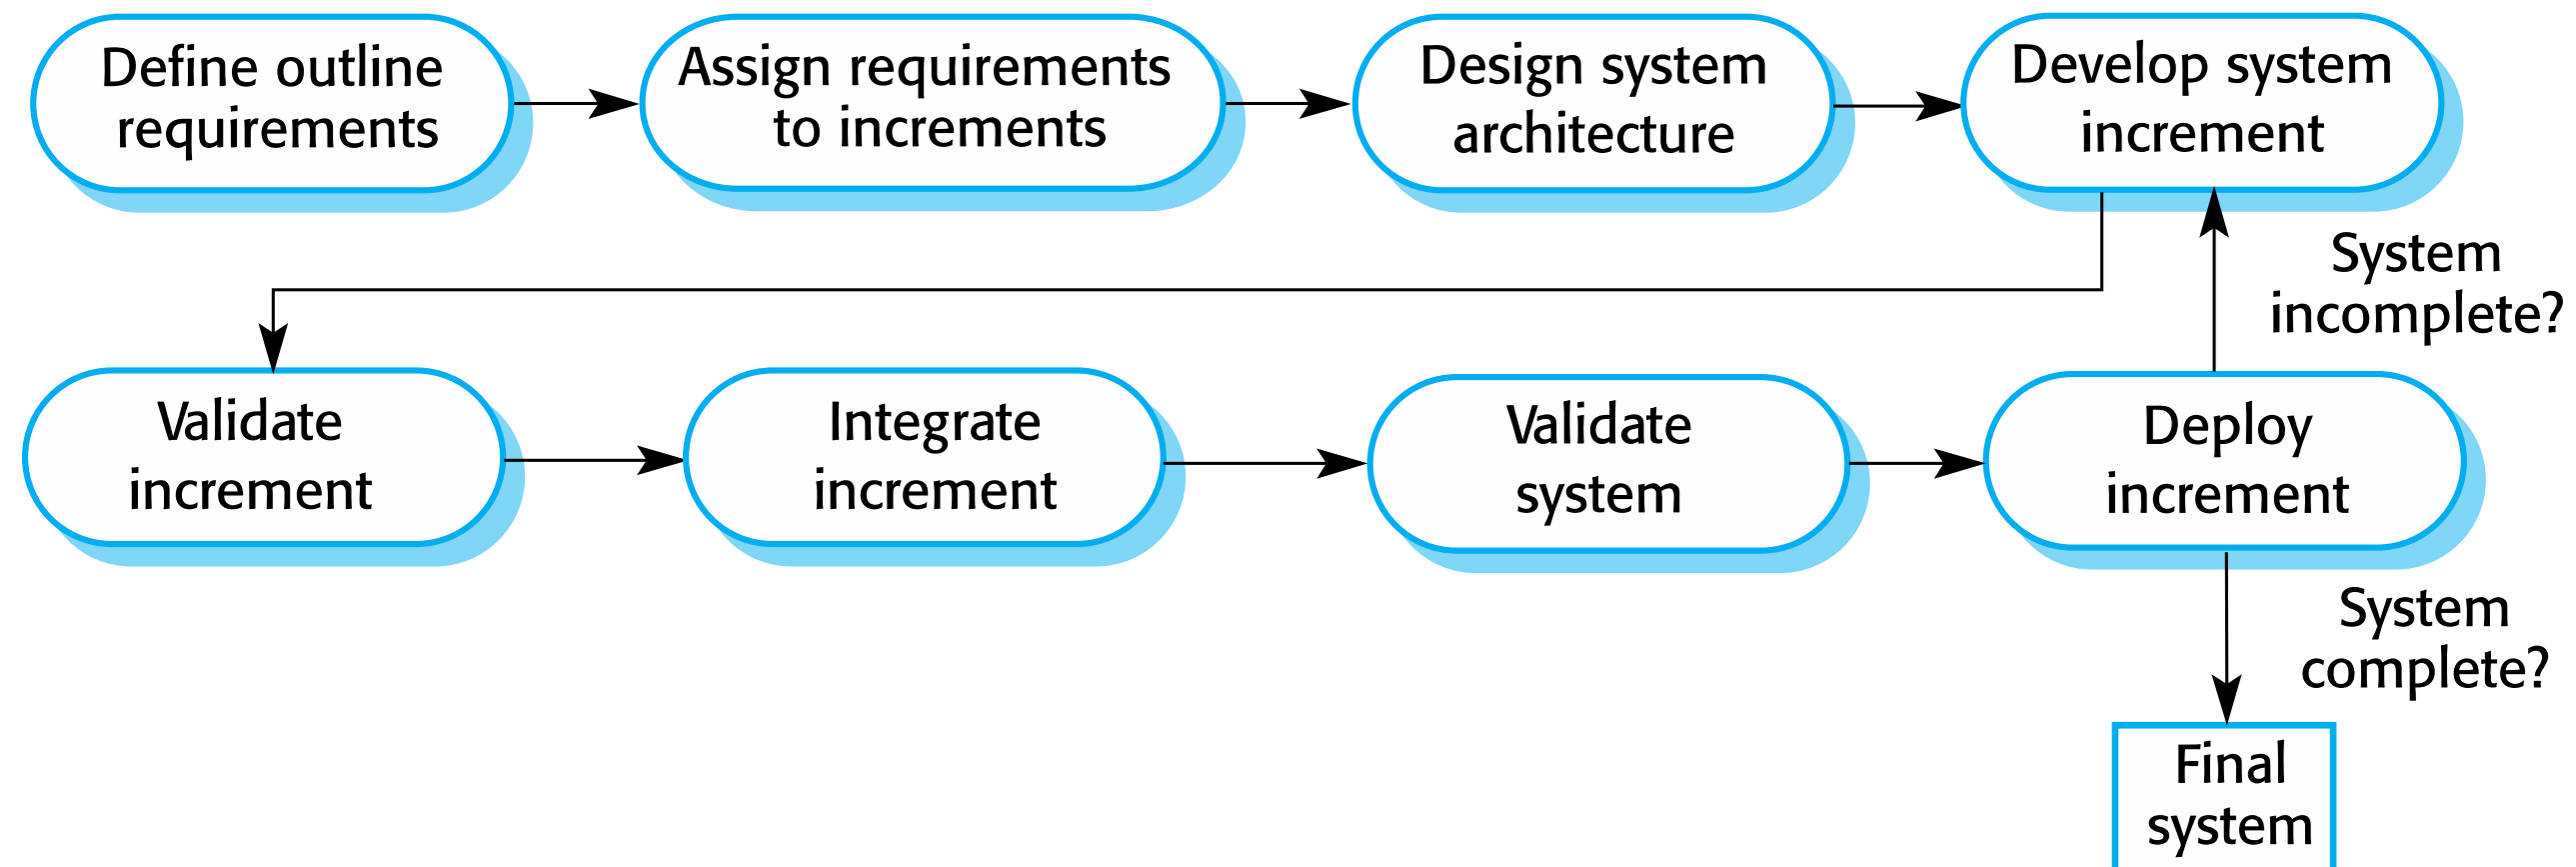

Incremental Delivery Advantages



Incremental Delivery Advantages

- Customer value can be delivered with each increment, so system functionality is available earlier.
- Early increments act as a prototype to help elicit requirements for later increments.
- Lower risk of overall project failure.
- The highest priority system services tend to receive the most testing.

Incremental Delivery Problems



Incremental Delivery Problems

- Most systems require a set of basic facilities that are used by different parts of the system.
 - As requirements are not defined in detail until an increment is to be implemented, it can be hard to identify common facilities that are needed by all increments.



Incremental Delivery Problems

- Most systems require a set of basic facilities that are used by different parts of the system.
 - As requirements are not defined in detail until an increment is to be implemented, it can be hard to identify common facilities that are needed by all increments.
- The essence of iterative processes is that the specification is developed in conjunction with the software.
 - However, this conflicts with the procurement model of many organizations, where the complete system specification is part of the system development contract.



Part IV

From the SDLC to DevOps





Recap: SDLC



The Software Development Life Cycle (SDLC)

- Software Development Lifecycle: Overview
- Software Development Phases
 - *Phase 0: Business Triggers*
 - Phase 1: Requirements Analysis and Plan
 - Phase 2: Design and Architecture
 - Phase 3: Coding and Implementation
 - Phase 4: Testing and Quality Assurance
 - Phase 5: Deployment
 - Phase 6: Maintenance and Feedback

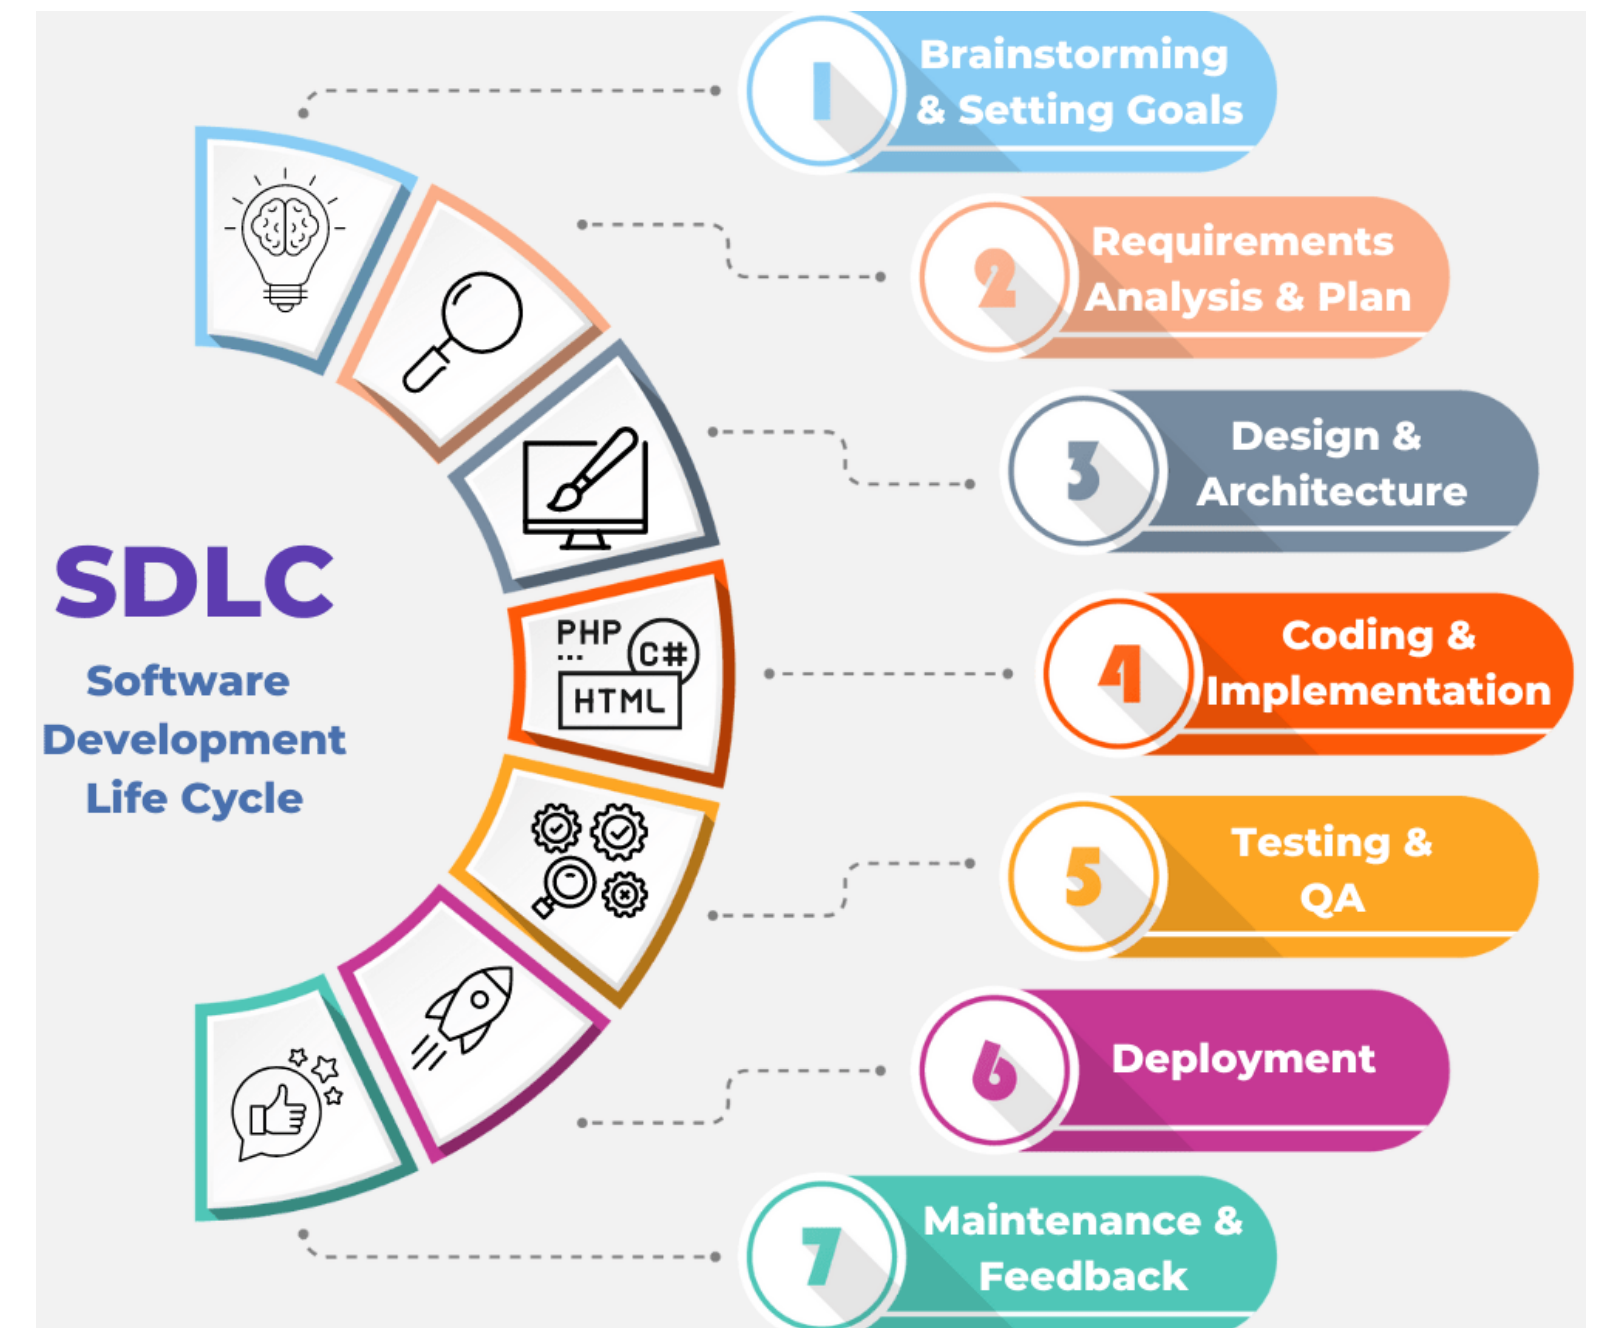




DevOps



University of Windsor

Development and Operations (DevOps)

- DevOps and the Application Lifecycle:

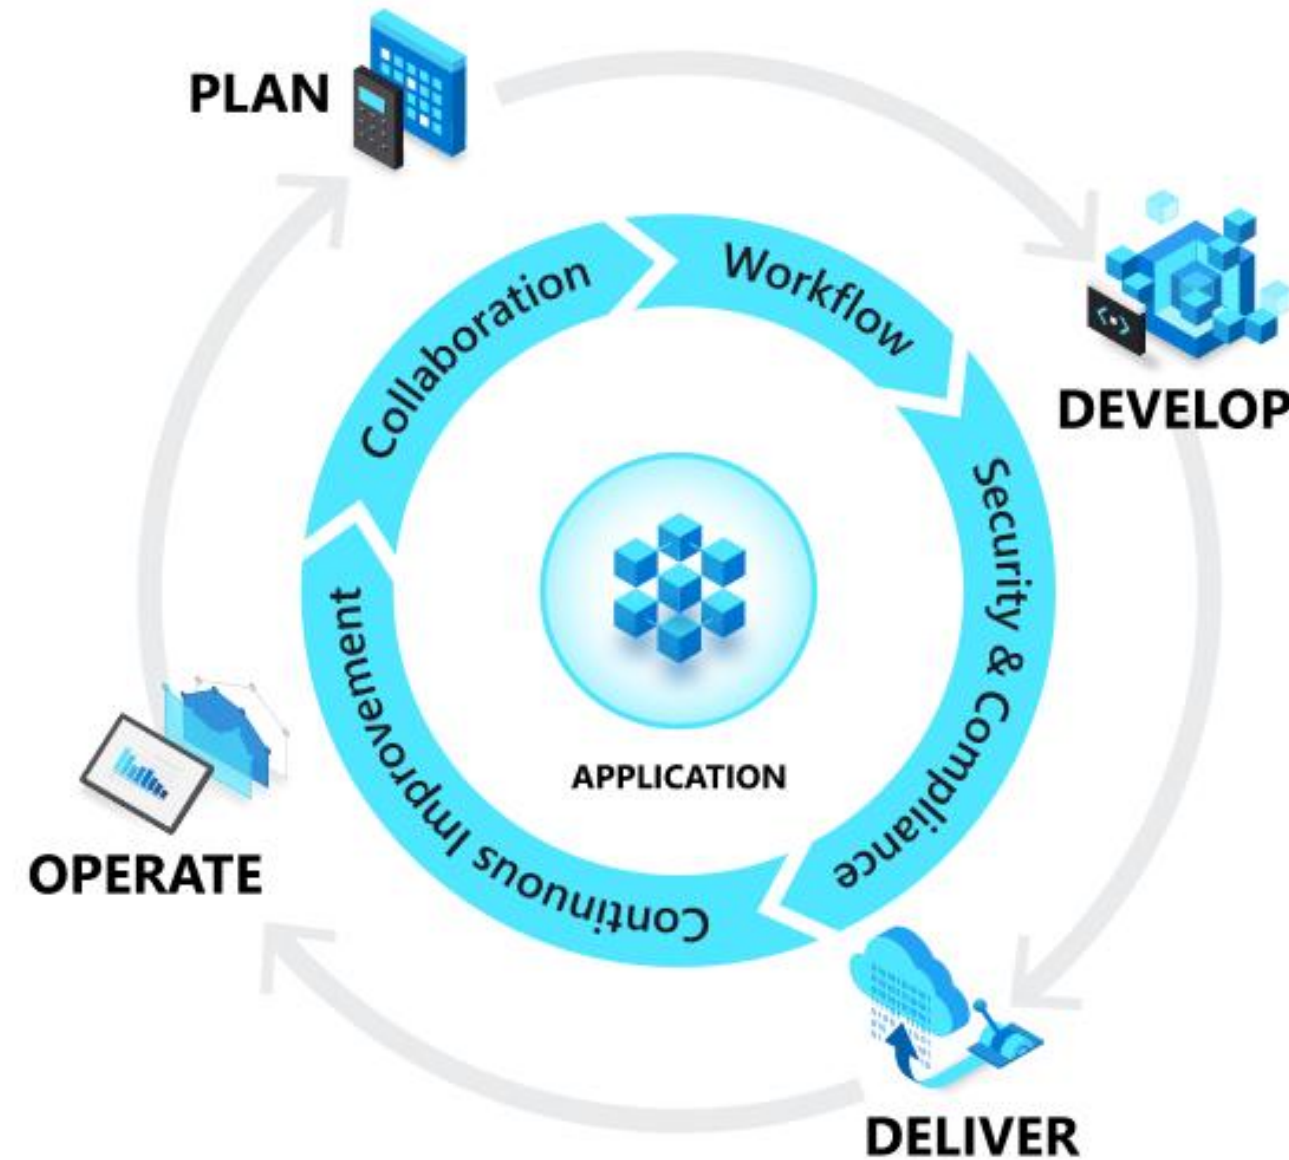

Source: <https://learn.microsoft.com/en-us/devops/what-is-devops>

Development and Operations (DevOps)

- You may [Optionally] manage your project using Azure DevOps
- Create accounts in Azure DevOps (<https://dev.azure.com/>):
 - Create an account.
 - Add your team members.
- Assignment #2 is based on a DevOps Tutorial.
- It is ok if you and your team are already using other technologies and tools.



Part V

Recap: Key Points



Key Points



Key Points

- Software processes are the activities involved in producing a software system. Software process models are abstract representations of these processes.
- General process models describe the organization of software processes.
 - Examples of these general models include the 'waterfall' model, incremental development, and reuse-oriented development.
- Requirements engineering is the process of developing a software specification.



Key Points

- Design and implementation processes are concerned with transforming a requirements specification into an executable software system.
- Software validation is the process of checking that the system conforms to its specification and that it meets the real needs of the users of the system.
- Software evolution takes place when you change existing software systems to meet new requirements.
The software must evolve to remain useful.
- Processes should include activities such as prototyping and incremental delivery to cope with change.



Part VI

What's Next



Next Lecture



University of Windsor

Next Lecture

- Software Development Processes:
 - Agile Methodologies / SCRUM
- Introduction to Activity #2 (Build a space game using DevOps)



Thank you!
Questions?

Dr. Andreas S. Maniatis

Assistant Professor

Andreas.Maniatis@UWindsor.ca

<http://www.linkedin.com/in/andreasmaniatis>



University of Windsor