


Chapter 8: Tables

Tables are used on web pages to organize tabular information

Composed of rows and columns – similar to a spreadsheet.

Each individual table cell is at the intersection of a specific row and column.

Configured with table, tr, and td elements

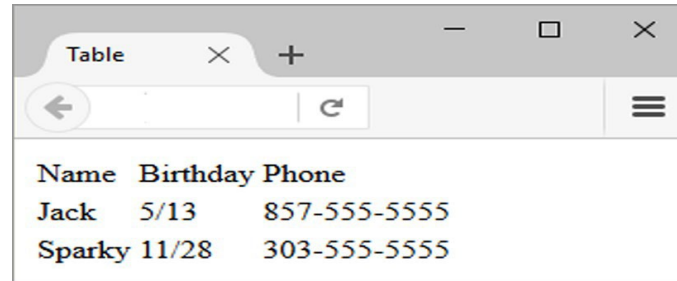A screenshot of a web browser window. The browser has a single tab titled 'Table'. The address bar is empty. The main content area displays a table with three columns: 'Name', 'Birthday', and 'Phone'. The first row contains the headers. The second row contains 'Jack', '5/13', and '857-555-5555'. The third row contains 'Sparky', '11/28', and '303-555-5555'.

Name	Birthday	Phone
Jack	5/13	857-555-5555
Sparky	11/28	303-555-5555

Figure 8.1 Table with three rows and three columns

HTML Table Elements

- `<table>`
Contains the table
- `<tr>`
Contains a table row
- `<td>`
Contains a table cell
- `<caption>`
Configures a description of the table

HTML Table Example

```
<table>
<caption>Bird Sightings</caption>
  <tr>
    <td>Name</td>
    <td>Date</td>
  </tr>
  <tr>
    <td>Bobolink</td>
    <td>5/25/20</td>
  </tr>
  <tr>
    <td>Upland Sandpiper</td>
    <td>6/03/20</td>
  </tr>
</table>
```

Name	Date
Bobolink	5/25/20
Upland Sandpiper	6/03/20

Figure 8.2 The caption for this table is “Bird Sightings”

Table Borders

Obsolete Method: HTML border attribute

Modern Method: CSS border Property

table, td, th { border: 1px solid #000; }

HTML Table Example 2

```
<table>
  <tr>
    <th>Name</th>
    <th>Birthday</th>
  </tr>
  <tr>
    <td>James</td>
    <td>11/08</td>
  </tr>
  <tr>
    <td>Karen</td>
    <td>4/17</td>
  </tr>
  <tr>
    <td>Sparky</td>
    <td>11/28</td>
  </tr>
</table>
```

Using the <th> Element

Name	Birthday
James	11/08
Karen	4/17
Sparky	11/28

HTML Table Attributes

- align (obsolete)
- bgcolor (obsolete)
- border (obsolete)
- cellpadding (obsolete)
- cellspacing (obsolete)
- summary (obsolete)
- width (obsolete)
- align (obsolete)
- bgcolor (obsolete)
- colspan
- rowspan
- valign (obsolete)
- height (deprecated)
- width (deprecated)

Use CSS to configure most table cell characteristics instead of HTML attributes

HTML colspan Attribute

```
<table>
  <tr>
    <td colspan="2"> Birthday List</td>
  </tr>
  <tr>
    <td>James</td>
    <td>11/08</td>
  </tr>
  <tr>
    <td>Karen</td>
    <td>4/17</td>
  </tr>
</table>
```

Birthday List	
James	11/08
Karen	4/17

HTML rowspan Attribute

```
<table>
  <tr>
    <td rowspan="2">This spans two rows</td>
    <td>Row 1 Column 2</td>
  </tr>
  <tr>
    <td>Row 2 Column 2</td>
  </tr>
</table>
```

This spans two rows	Row 1 Column 2
	Row 2 Column 2

Figure 8.6 Table with a column that spans two rows

Accessibility and Tables

Use table header elements (<th> tags) to indicate column or row headings.

Use the caption element to provide a text title or caption for the table.

➤ Complex tables:

Associate table cell values with their corresponding headers

- <th> tag id attribute
- <td> tag headers attribute

Accessibility and Tables

```
<table>
```

```
<caption>Bird Sightings</caption>
```

```
<tr>
```

```
<th id="name">Name</th>
```

```
<th id="date">Date</th>
```

```
</tr>
```

```
<tr>
```

```
<td headers="name">Bobolink</td>
```

```
<td headers="date">5/25/20</td>
```

```
</tr>
```

```
<tr>
```

```
<td headers="name">Upland Sandpiper</td>
```

```
<td headers="date">6/03/20</td>
```

```
</tr>
```

```
</table>
```

Name	Date
Bobolink	5/25/20
Upland Sandpiper	6/03/20

Figure 8.8 This simple data table uses <th> tags and the caption element to provide accessibility

Using CSS to Style a Table

HTML Attribute	CSS Property
align	Center align a table: table { width: 75%; margin: auto; } Center align within a table cell: text-align: center;
bgcolor	background-color
cellpadding	padding
cellspacing	border-spacing or border-collapse
height	height
valign	vertical-align
width	width
border	border, border-style, or border-spacing
--	background-image

CSS Structural Pseudo-classes

Table 8.5 Common CSS structural pseudo-classes

Pseudo-class	Purpose
:first-of-type	Applies to the first element of the specified type
:first-child	Applies to the first child of an element (CSS2 selector)
:last-of-type	Applies to the last element of the specified type
:last-child	Applies to the last child of an element
:nth-of-type(n)	Applies to the “nth” element of the specified type Values: a number, odd, or even


TableRow Groups

```
<table> <caption>Time Sheet</caption>
  <thead>
    <tr>
      <th id="day">Day</th>
      <th id="hours">Hours</th>
    </tr>
  </thead>
<tbody>
  <tr>
    <td headers="day">Monday</td>
    <td headers="hours">4</td>
  </tr>
  ...
  <tr>
    <td headers="day">Friday</td>
    <td headers="hours">3</td>
  </tr>
</tbody>
<tfoot>
  <tr>
    <td headers="day">Total</td>
    <td headers="hours">18</td>
  </tr>
</tfoot>
</table>
```

<thead>
table head rows

<tbody>
table body rows

<tfoot>
table footer row

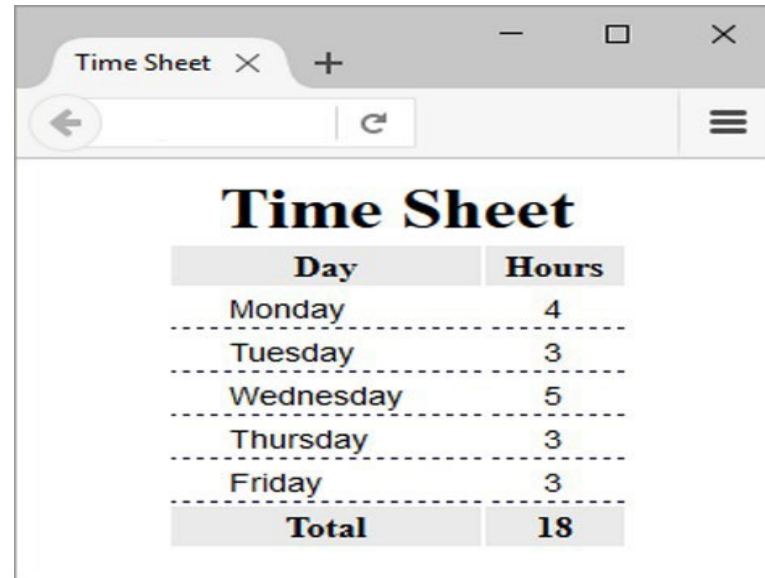

Day	Hours
Monday	4
Tuesday	3
Wednesday	5
Thursday	3
Friday	3
Total	18

Figure 8.12 CSS configures the `thead`, `tbody`, and `tfoot` element selectors

