
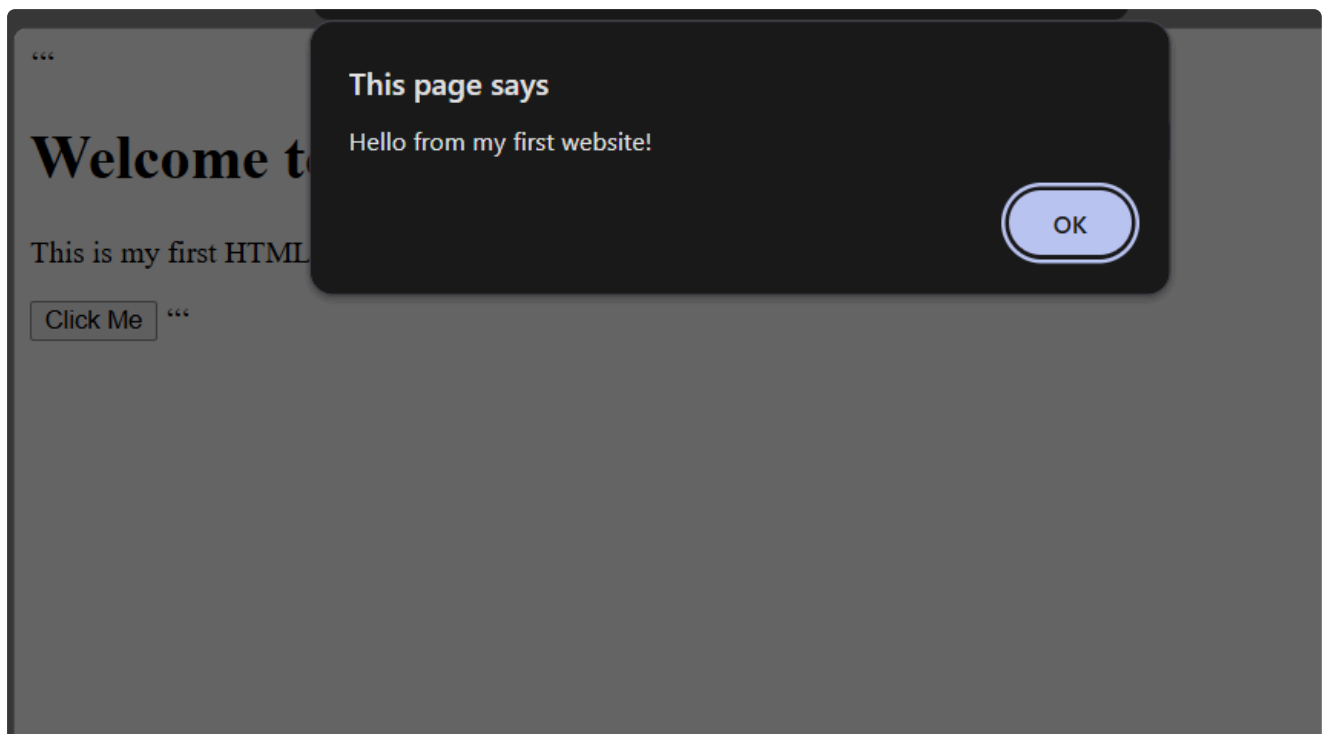



hello.html

The first exercise is an implementation for a clickable button on html

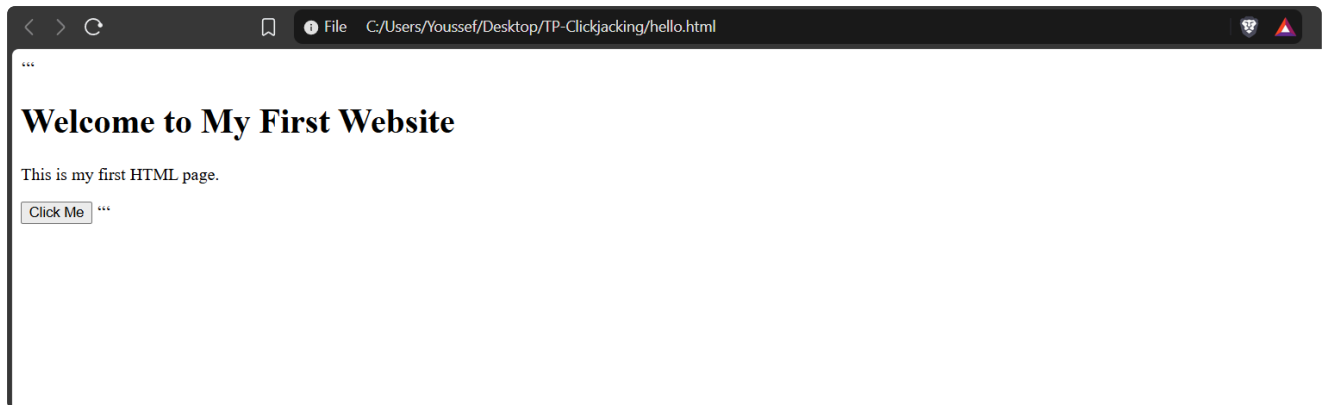


portal.html

The second exercise is for the implementation of a login form on html

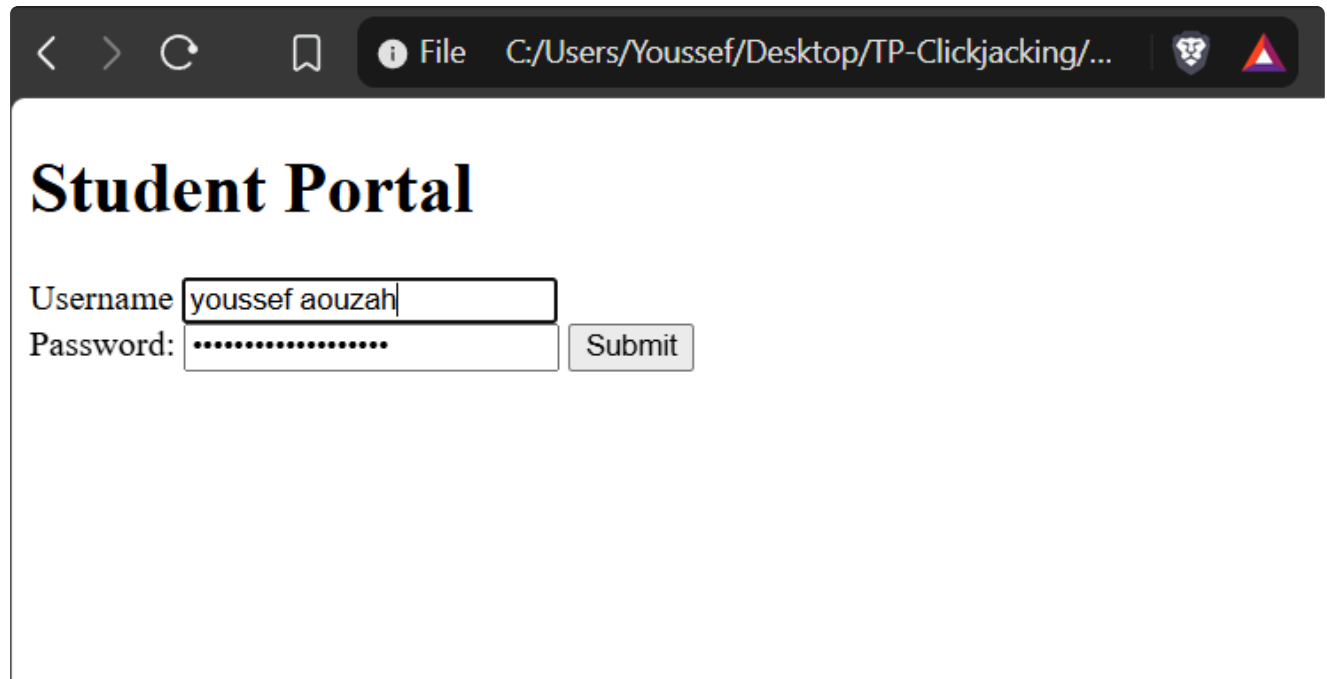



A screenshot of a web browser window. The address bar shows the file path: C:/Users/Youssef/Desktop/TP-Clickjacking/... The page title is "Student Portal". Below the title, there is a login form with two input fields: "Username" containing "youssef aouzah" and "Password" containing a series of dots. To the right of the password field is a "Submit" button.

it succesfully shows a login message

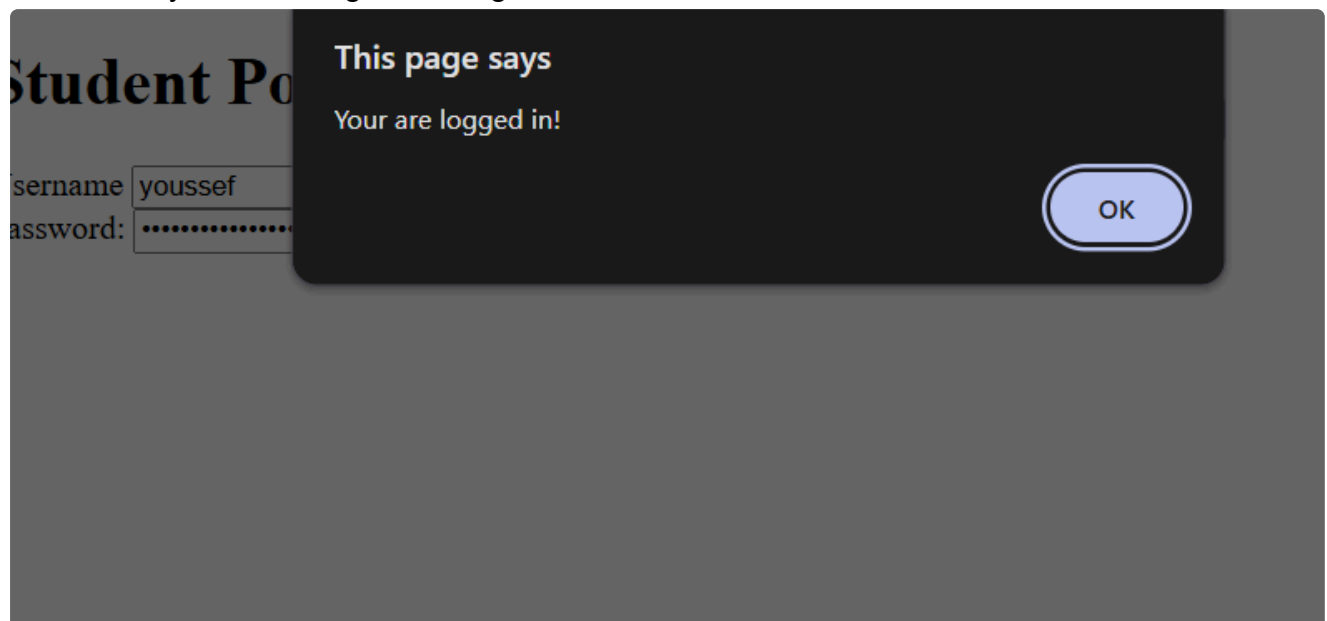


game.html

The catchme game,the score increase with clicks,and the button changes randomly its position after each click

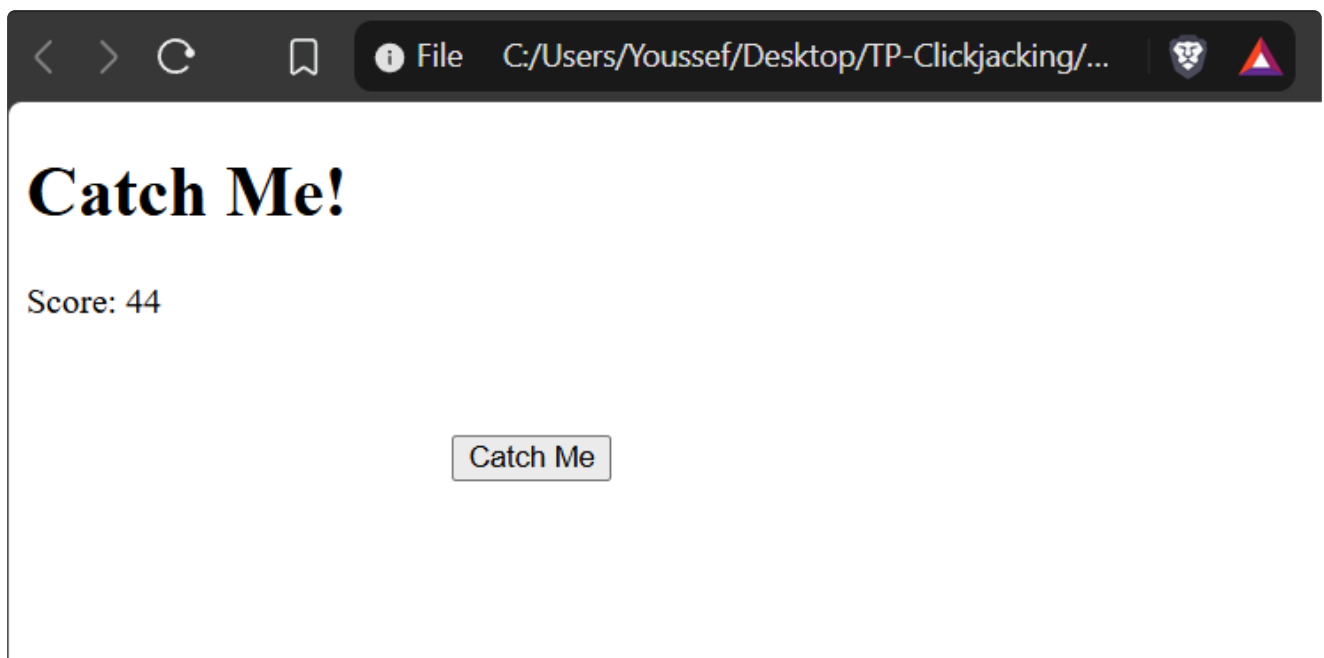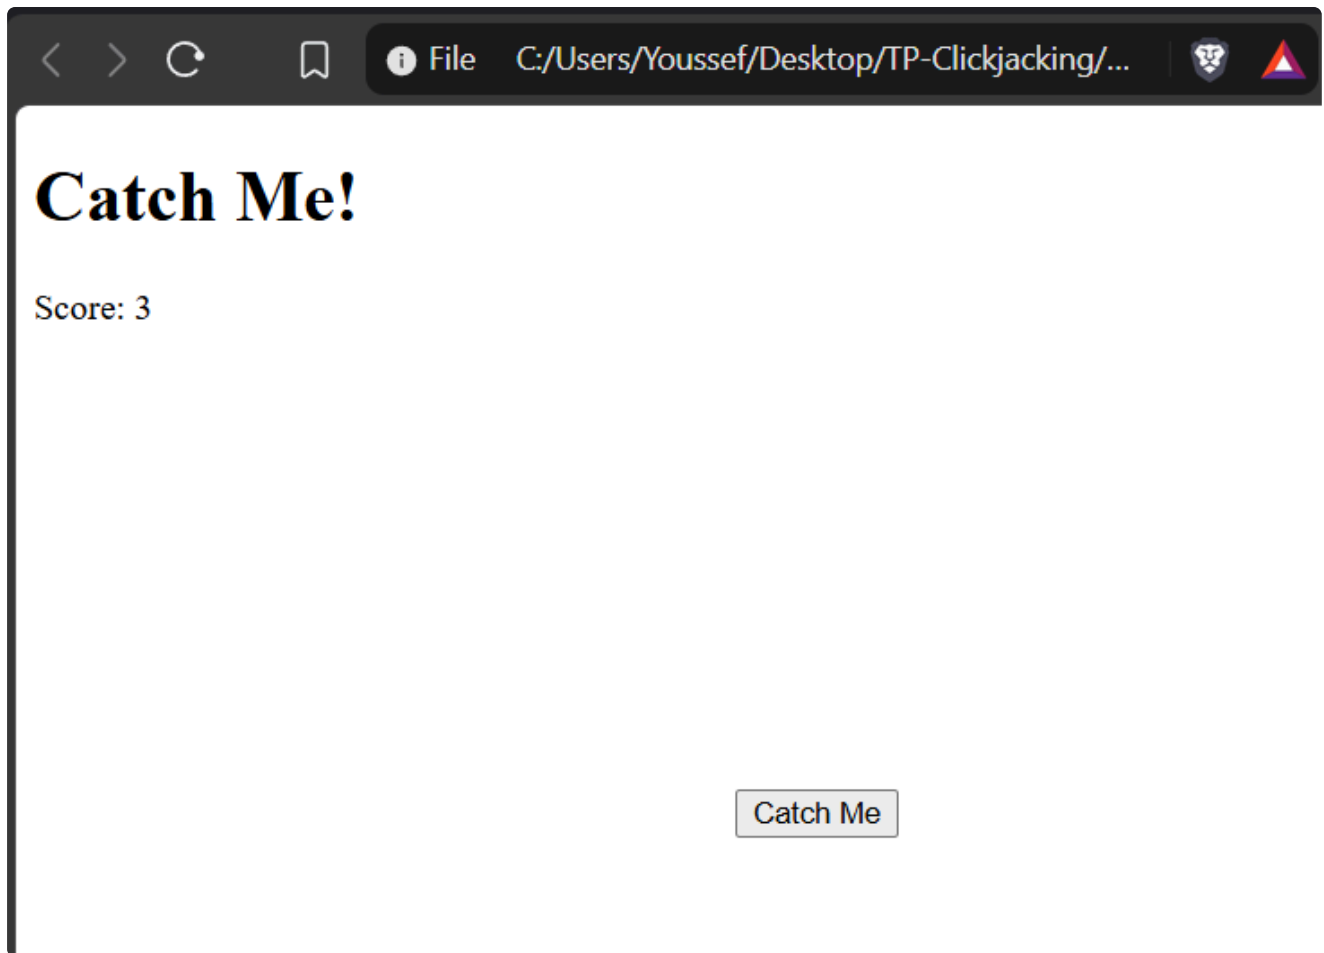


Iframing


Setting the portal frame on the game fram

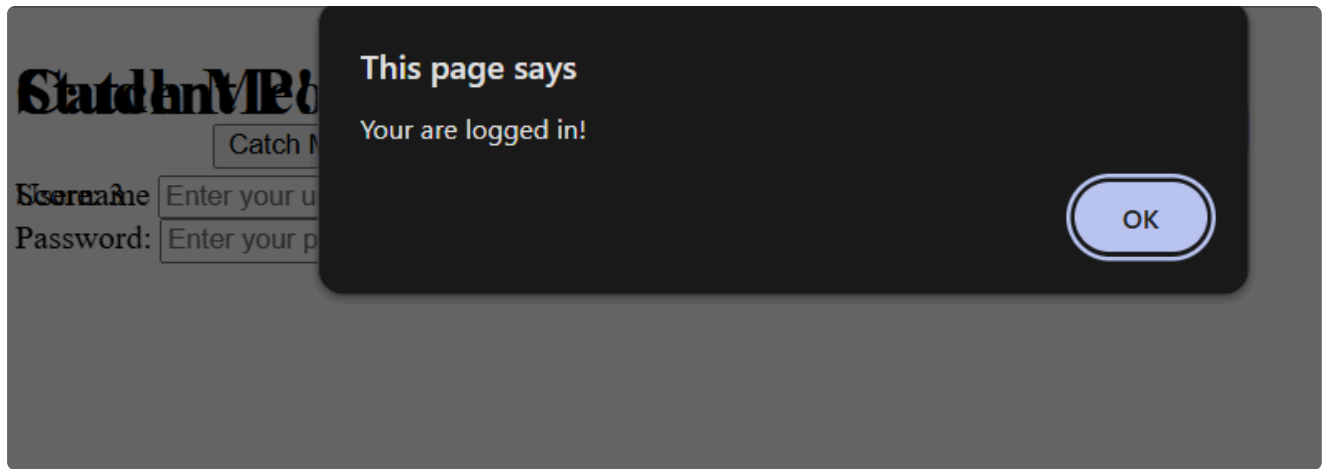


at opacity 1:

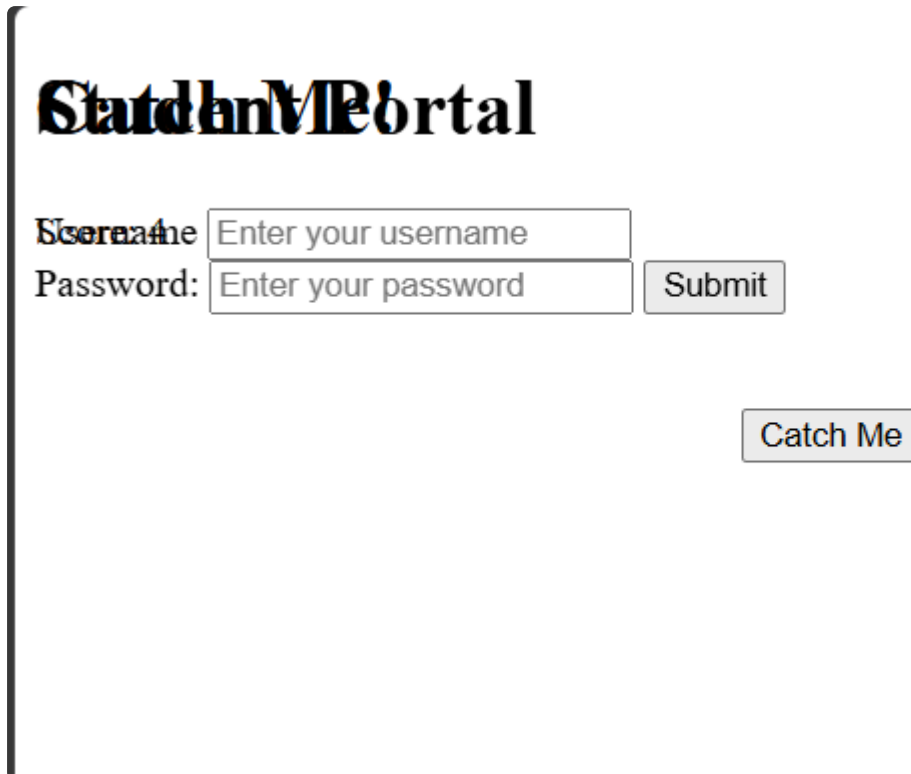


at opacity 0.5:

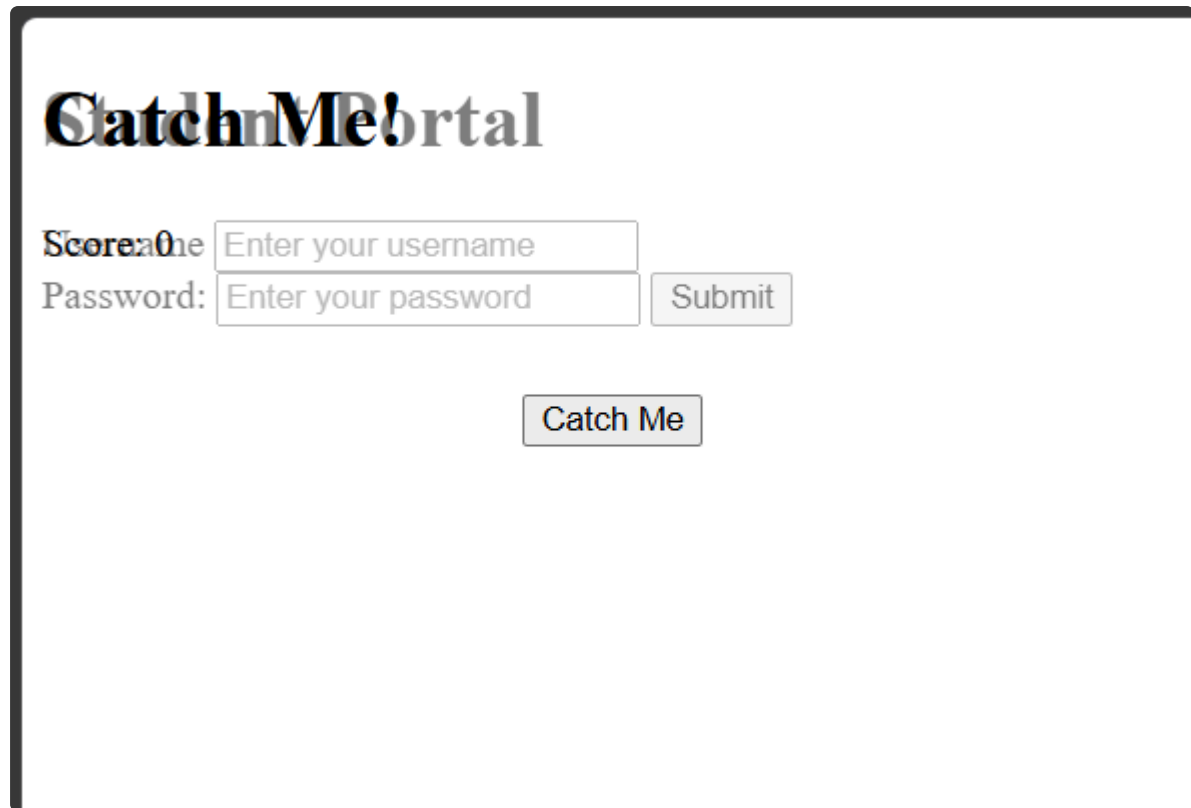


at opacity 0 : the portal frame is completely hidden



and we can still interact with the portal

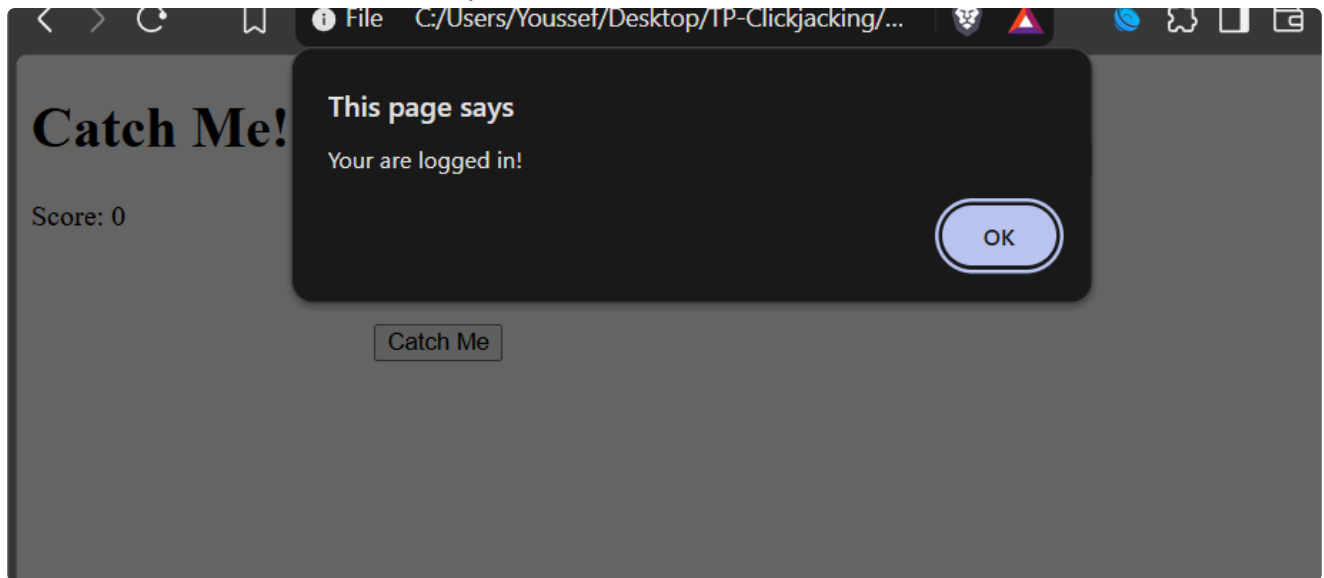

now when the score reaches 4 the catchme button alignes with the login button:

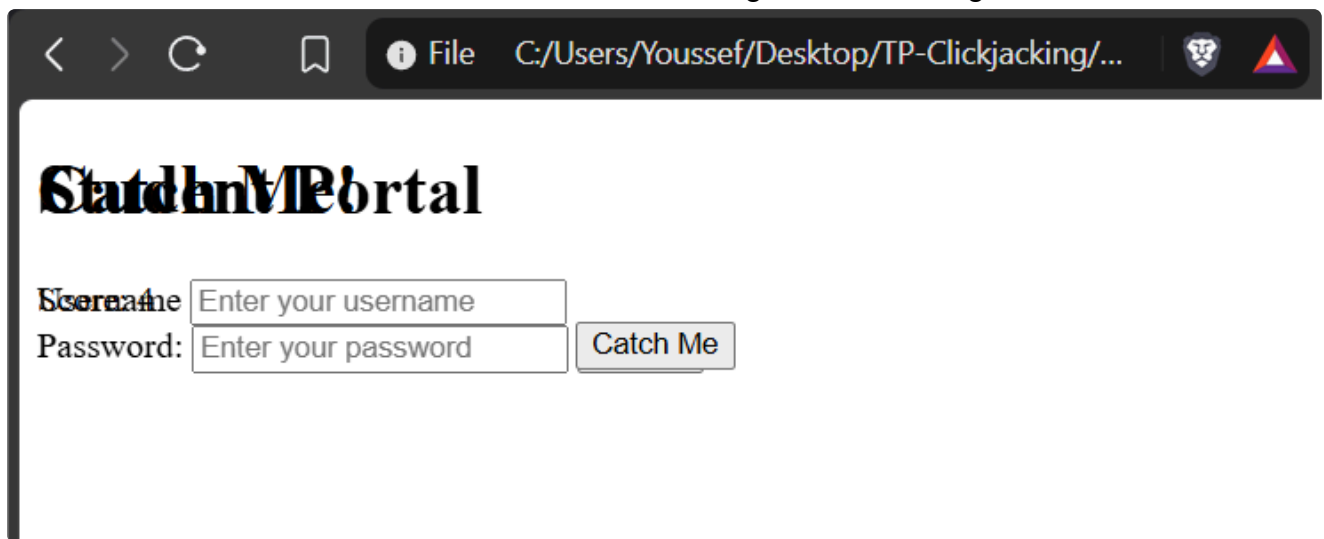

Now hiding the portal page with opacity 0,when the score is 4 the portal is still hidden but its z index increases to make it clickable,and the catchme button aligns with the login button

,which results in this:

