

Phase 5

ETA Compliance

OmniERP — Egyptian Tax Authority Integration
e-Invoicing & e-Receipt · canonical signing, rate governance,
submission state machine, 72-hour B2C window

Verified against ETA SDK, July 2026 — 6-7 weeks

DOCUMENT	Phase 5 Specification
VERSION	1.0
DATE	26 July 2026
AUTHOR	Principal Architecture & Product
AUDIENCE	Principal Systems Architect & coding assistant
STATUS	7 open questions (Q-25 to Q-31)

0. Five Findings That Change the Architecture

These emerged from reading the current ETA SDK. Three contradict assumptions in earlier blueprints. Read this section before designing anything.

F-1 — Rate limits are per ERP system, not per taxpayer ⚠️ CRITICAL

ETA's throttling is enforced per ERP or POS system calling the solution, with the stated objective of enforcing fair usage among the different systems. Concretely: Search Published Codes is limited to one request every ten seconds, EGS code usage search to one request every five seconds, Get Document and Search Documents to two per second, and Get Recent Documents to three per second.

If OmniERP registers as a single ERP system with ETA, all 10,000 tenants share one 2-request-per-second budget. Not two per second each. Two per second in total.

This invalidates any design where each tenant's worker independently calls ETA. **Phase 5 must include a global, cross-tenant rate governor** — a centralised token-bucket per ETA endpoint, backed by Redis, with fair queuing across tenants so one high-volume merchant cannot starve the rest (§5.2).

Open question for ETA/your provider (Q-25): whether a multi-tenant SaaS registers once or per-taxpayer materially changes this. Confirm before designing. If per-taxpayer registration is possible, the constraint largely evaporates. If not, the governor is launch-blocking and needs to be sized against your projected tenant count.

F-2 — Callbacks are the recommended integration; polling is explicitly second-best

Blueprint v2.0 (FR-610) specified a periodic reconciliation job that pulls document status. **ETA lists that pattern as an anti-pattern.** Their documentation states that checking submission status via Get Recent Documents, Search Documents, Get Document, Get Document Details, or the receipt equivalents is an anti-pattern, since those APIs are designed for retrieval after submission and validation rather than during the submission operation.

The recommended flow is registering a callback before submission, with the ERP implementing `PUT /notifications/documents` and `PUT /notifications/receipts` endpoints to receive completion notifications. Polling is described as a second-priority approach for cases where callbacks cannot be implemented.

Revision to FR-610: callback-first, with polling as a bounded fallback for documents whose callback never arrived beyond a threshold. Not as the primary mechanism.

Architectural consequence: you need a **publicly reachable, ETA-authenticated inbound webhook endpoint**. On Egyptian on-soil hosting behind a WAF, that is a firewall, TLS, and IP-allowlist conversation to have in week 1, not week 5.

F-3 — Auth tokens must be cached for their full lifetime

Acquiring a new authentication token with every API call is a listed anti-pattern; tokens are valid by default for 60 minutes and should be reused while valid. Calling `/connect/token` without proper `client_id`, `grant_type` or `client_secret` results in calls being automatically blocked.

Token cache is **per taxpayer credential**, in Redis, with proactive refresh before expiry and a single-flight lock so a burst of jobs cannot trigger a token stampede.

F-4 — Re-submission is penalised

Resending the same submission without regard to the results is an anti-pattern; any 20x response should be accepted and the submission not resent, or it will be flagged as duplicate and the system may begin throttling that ERP.

This makes idempotency an external-facing requirement, not just an internal one. Your submission queue must distinguish "no response received" (retry permitted) from "20x received, awaiting validation result" (retry forbidden). Conflating them will get your entire platform throttled — across all tenants, per F-1.

F-5 — Mass PDF generation via ETA is throttled

Get Document Printout is not designed for mass PDF generation and such usage will be throttled. It is limited to one request every five seconds.

You must render your own compliant invoice PDF with the QR code, rather than fetching ETA's printout. That is Arabic PDF work — which is exactly why Blueprint II put the Arabic PDF pipeline in Phase 0 week 7. If that pipeline was not built, it lands here.

1. Regulatory Context

Facts as of July 2026 — confirm current state, since this moves.

ITEM	CURRENT POSITION
Registration threshold	Resolution 281/2025 cut the mandatory VAT and e-invoicing registration threshold from EGP 500,000 to EGP 250,000 in annual revenue
Deadline	Businesses whose 2025 revenue exceeded EGP 250,000 were required to register by 31 March 2026 — this date has passed
Penalty regime	A three-tier system applies: first offence is a warning flag for 90 days; a second offence within 12 months brings EGP 5,000 per late invoice capped at EGP 50,000 monthly plus High Risk classification and quarterly audits; three or more offences within 12 months bring EGP 10,000 per late invoice with no cap
Severe non-compliance	ETA may suspend the ability to issue valid invoices, freezing B2B transactions until the backlog is cleared
Scope	Zero-rated and exempt supplies are not exempt from e-invoicing — an e-invoice is still generated, carrying a 0% or exempt code

Commercial implication worth acting on: the registration deadline passed four months ago. A large portion of your target segment is currently non-compliant and accruing exposure. "We get you compliant in an afternoon" is a stronger sales message today than it was when the blueprint was written, and it may justify a compliance-only entry SKU.

2. Architectural Goals

1. **ETA is a subsystem with a hard boundary.** Sales and accounting know nothing about UUIDs, CAdES-BES, or submission states. They emit events; the ETA context reacts. Your Phase 4 bounded-context discipline carries forward unchanged.
 2. **Nothing is ever lost, and nothing is ever double-submitted.** The queue is durable, the state machine is explicit, and idempotency is enforced against both internal replay and external duplicate detection (F-4).
 3. **The platform is one API consumer with a shared budget.** A global rate governor with per-tenant fairness (F-1). No worker calls ETA directly.
 4. **The merchant never sees a UUID, a JSON path, or an ETA error code.** Rejections are translated into plain Arabic with a deep link to the field that needs fixing.
 5. **Signing is an interface, not an implementation.** Cloud HSM and local agent are two providers behind one contract.
 6. **The 72-hour B2C window is a tracked, alerting countdown,** not a hope.
 7. **Invoicing never blocks on ETA.** ETA down means documents queue. It never means a merchant cannot sell.
-

3. Domain Entities


EtaTenantConfig	-- one per tenant, secrets by reference only
tenant_id, environment	preproduction production
client_id, client_secret_ref	-> Vault, never in DB
taxpayer_rin	registration/tax number
activity_code	ETA activity classification
branch_eta_codes{}	branch_id -> ETA branch code
signing_provider	cloud_hsm local_agent
signing_credential_ref	
callback_secret_ref	
is_live, went_live_at	
preflight_state	see FR-609
EtaDocument	-- the queue and the state machine
id, tenant_id	
internal_doc_type	sales_invoice credit_note debit_note
internal_doc_id	
eta_document_type	I C D (invoice/credit/debit)
eta_document_typeversion	"1.0"
internal_id	taxpayer-side document number
uuid	ETA-assigned, populated on acceptance
long_id	public verification id
submission_uuid	ETA submission reference
state	see §4.1
payload_json	the built document, pre-signature
canonical_string_hash	sha256 of the serialized form
signature_b64	CAdES-BES
signature_type	I S
attempts, next_attempt_at	
submitted_at, accepted_at, rejected_at	
validation_errors	jsonb, raw from ETA
translated_errors	jsonb, Arabic + field deep links
date_time_issued	drives the submission window
deadline_at	computed; drives at-risk alerting
public_url, qr_payload	
EtaSubmission	-- a batch of documents
id, tenant_id, submission_uuid	
document_ids[], document_count	
submitted_at, response_status	
accepted_count, rejected_count	
callback_received_at	
EtaReceiptBatch	-- e-Receipt is batch-oriented, JSON only
id, tenant_id, pos_terminal_id	
receipt_ids[], batch_canonical_hash	
signature_b64	signature covers the WHOLE batch (§5.1)
submission_uuid, state	
window_deadline_at	72h from earliest receipt
EtaReceipt	
id, tenant_id, batch_id, internal_doc_id	
receipt_number, uuid, previous_uuid	-- receipt chaining
state, qr_payload, public_url	
EgsCode	-- item code registry
item_id, variant_id	
code_type	GS1 EGS
code_value	
verified_at, verification_source	
is_active	
EtaCodeCache	-- ETA published codes, heavily cached (F-1)
code_type	tax_type tax_subtype unit_type
	activity country currency
code, name_ar, name_en, is_active, fetched_at	
EtaRateBudget	-- Redis-backed, platform-global

```
endpoint, window_seconds, max_calls
(runtime state lives in Redis, not Postgres)

EtaSigningRequest          -- audit of every signature operation
eta_document_id, provider, requested_at, completed_at
certificate_serial, error
```

4. Functional Requirements

4.1 The Submission State Machine

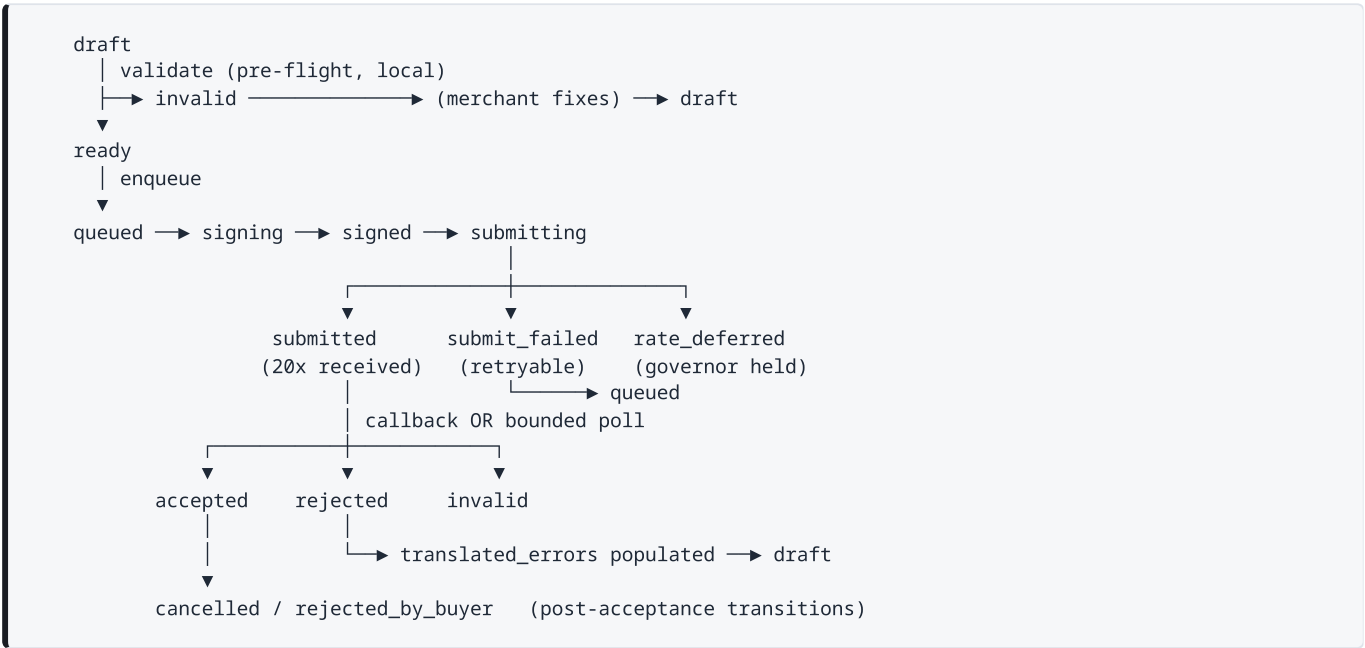

FR-501 (P0): `submitted` is a terminal-until-callback state. **A document in `submitted` must never be re-submitted** (F-4). Only `submit_failed` and `rate_deferred` return to the queue.

4.2 Configuration & Onboarding

ID	REQUIREMENT
FR-510	Per-tenant ETA configuration with credentials stored by reference in Vault , never in Postgres. <code>client_secret</code> must not appear in any log, trace, or error payload
FR-511	Environment toggle per tenant: preproduction ↔ production, with an explicit, irreversible-by-accident go-live action
FR-512	Guided pre-flight checklist blocking go-live until: credentials validated by a successful token fetch · taxpayer RIN verified · all branches mapped to ETA branch codes · every active item has an EGS/GS1 code · tax codes mapped to ETA tax types/subtypes · signing provider tested end-to-end · callback endpoint reachable and authenticated · at least 3 documents accepted in preproduction
FR-513	Branch → ETA branch code mapping, since Phase 1c gave every transaction a branch dimension
FR-514	Unit-of-measure → ETA unit type mapping, per item

ID	REQUIREMENT
FR-515	Tax code → ETA tax type + subtype mapping, including zero-rated and exempt (both still require submission per §1)

4.3 Item Coding

ID	REQUIREMENT
FR-520	EGS/GS1 code registry per item and variant, with bulk assignment and CSV import
FR-521	Pre-submission validation gate: a document containing an item without a valid code cannot enter <code>ready</code> . The merchant is told before they hit an ETA rejection, not after
FR-522	Coverage widget: "47 of 312 items are missing tax codes" with one-click drill to a bulk-fix screen. This is the single largest onboarding blocker for a real merchant
FR-523	ETA published-code cache with a long TTL and a scheduled refresh. Given the one-call-per-ten-seconds platform-wide limit (F-1), this cache is shared across all tenants and refreshed by a single job, never on demand

4.4 Document Build, Sign, Submit

ID	REQUIREMENT
FR-530	Document builder mapping OmniERP sales invoices, credit notes and debit notes to the ETA schema, with <code>documentTypeVersion</code> pinned in config so a schema bump is a config change
FR-531	Canonical serialization implemented exactly per §5.1, with the ETA reference vectors as unit tests
FR-532	SHA-256 over the UTF-8 bytes of the canonical string as specified in ETA's signature creation process
FR-533	SigningProvider interface with two implementations (§5.3). Provider selectable per tenant
FR-534	Signature type <code>I</code> and <code>S</code> both supported. Signed content for type <code>I</code> is the entire document structure excluding the signature section; for type <code>S</code> it is the structure plus the previous signature
FR-535	Batched submission — multiple documents per submission call, with per-document acceptance/rejection handled independently
FR-536	Credit and debit notes correctly reference the original document UUID
FR-537	Document cancellation and rejection flows within ETA's permitted windows
FR-538	Export invoices as a distinct document type where the tenant sells abroad

4.5 Rate Governance & Resilience

ID	REQUIREMENT
FR-540	Platform-global rate governor (§5.2). Every ETA call passes through it. No exceptions, no direct HTTP clients elsewhere in the codebase — enforce with a CI lint rule the way you enforced the <code>search_path</code> ban in Phase 0
FR-541	Per-tenant fair queuing inside the governor. One merchant submitting 5,000 backlog invoices must not starve another merchant's single urgent one

ID	REQUIREMENT
FR-542	Handle 429 by honouring the Retry-After header, waiting longer than the returned value as ETA advises; handle 503 with bounded backoff
FR-543	Token cache per taxpayer credential, 60-minute lifetime, proactive refresh, single-flight lock (F-3)
FR-544	Circuit breaker per ETA endpoint. Open circuit → documents accumulate in <code>queued</code> , merchant sees "التقديم متوقف مؤقتًا", nothing fails
FR-545	Invoicing never blocks on ETA. A tenant with a broken ETA configuration can still create, post, and print invoices

4.6 Callbacks & Reconciliation

ID	REQUIREMENT
FR-550	Implement <code>PUT /notifications/documents</code> and <code>PUT /notifications/receipts</code> per ETA's callback contract (F-2)
FR-551	Callback endpoint authenticated, replay-protected, and idempotent — the same notification arriving twice must be a no-op
FR-552	Callback handler writes to the outbox and returns immediately. No synchronous processing inside the request
FR-553	Bounded reconciliation fallback: only documents in <code>submitted</code> with no callback after N hours are polled, via <code>Search Documents</code> (not <code>Get Recent Documents</code>) which ETA identifies as the more optimised API. This is an exception path, not a schedule
FR-554	Divergence alarm: a document accepted at ETA but not locally, or vice versa, is a P1 incident

4.7 Rejection Translation

ID	REQUIREMENT
FR-560	Error translation layer mapping ETA validation codes to plain Arabic with a deep link to the offending field. Example: <code>اصطط هنا لإضافته - GS1 الصنف «كوب زجاج» ناقصه كود</code>
FR-561	Unmapped errors show the raw ETA message with a "report this" action that logs it for us to add to the mapping. The mapping table grows from production data; seed it from preproduction testing
FR-562	Rejected documents return to <code>draft</code> with errors attached and a one-click resubmit after fixing
FR-563	Bulk rejection triage: group by error type, fix once, resubmit many

4.8 e-Receipt (B2C / POS)

ID	REQUIREMENT
FR-570	Receipt batching. For e-Receipt, receipts are grouped into batches, each batch processed as one submission, with serialization applied to the entire batch, and JSON only is supported — this differs fundamentally from e-Invoice, where each document is serialized and signed individually. Do not share the serialization code path without accounting for this
FR-571	72-hour submission window tracked per receipt with a countdown, escalating alerts at 48h / 60h / 68h

ID	REQUIREMENT
FR-572	At-Risk queue — receipts approaching the deadline are prioritised in the rate governor above all other traffic
FR-573	Receipt chaining via <code>previous_uuid</code> where required
FR-574	Offline POS reconciliation. Your POS has an offline IndexedDB queue. Receipts created offline must enter the ETA window from their <i>issue</i> time, not their sync time. A terminal offline for 3 days produces receipts that are already late on arrival — surface this loudly rather than silently submitting
FR-575	Verification QR code on printed receipts , generated locally
FR-576	Self-rendered A4 and 80mm thermal receipt templates in Arabic (F-5)

4.9 Merchant-Facing Surface

ID	REQUIREMENT
FR-580	ETA Health dashboard widget: submitted today · pending · rejected · at-risk-of-late · circuit state. The merchant must never be surprised by a penalty
FR-581	Per-document status badge in plain Arabic on every invoice list and detail view
FR-582	Public verification link and QR on every accepted document
FR-583	Compliance report: submission timeliness over a period, exportable — evidence for an ETA audit
FR-584	Onboarding wizard walking a merchant from "no ETA account" to "first accepted invoice"

4.10 Architected-For (not built)

ID	REQUIREMENT
FR-590	The <code>EInvoicingProvider</code> abstraction must permit a <code>ZatcaProvider</code> (Saudi) later without touching the sales module

5. The Hard Problems

5.1 Canonical Serialization — where every implementation fails

This is the highest-risk code in Phase 5. A single character wrong produces a valid-looking signature that ETA rejects, with an error message that will not tell you why.

ETA's algorithm, verbatim in behaviour:

Documents are processed recursively from the document root. All property names are converted to culture-invariant uppercase. All property values are taken without any processing, exactly as they appear in the input — a value of `0.0` must serialize as `0.0` and must not become `0` or `0.00`. All property names and simple values are enclosed in double quotes. In JSON, the entire array serialization is prefixed with the array property name and every array element is

additionally preceded by that same array property name — which differs from XML, where the array has one prefix and elements have their own names. In XML, double quotes within field values are escaped to prevent constructing different documents with identical serialization output; this is unnecessary in JSON.


The traps, ranked by how likely they are to bite you:

1. **Number formatting.** Python's `Decimal` / `float` round-tripping will silently normalise `0.0` to `0`. **Build the document with strings for all numeric fields, or serialize from the raw JSON text you will actually transmit.** Never let a JSON library re-encode numbers between canonicalization and submission.
2. **The array rule.** The array name appears once as a prefix *and again before every element*. Read that twice.
3. **Document root ≠ submission root.** For JSON, the document root is the object enclosing the document's attributes, not the enclosing documents array.
4. **e-Receipt serializes the whole batch**, not each receipt (FR-570).
5. **Key ordering.** Serialize in document order, not sorted order, not `dict` insertion order after a round-trip.

Requirement (FR-531a): implement against ETA's published reference vectors — the sample document, its expected canonical string, and the resulting hash — as unit tests in CI. ETA publishes these step-by-step examples for both JSON and XML. **Do not write a line of signing code before those vectors pass.** Also note ETA's own caveat that the sample files may not reflect the most recent document structure and the Postman collection is the current reference.

5.2 The Global Rate Governor

The design that follows from F-1:

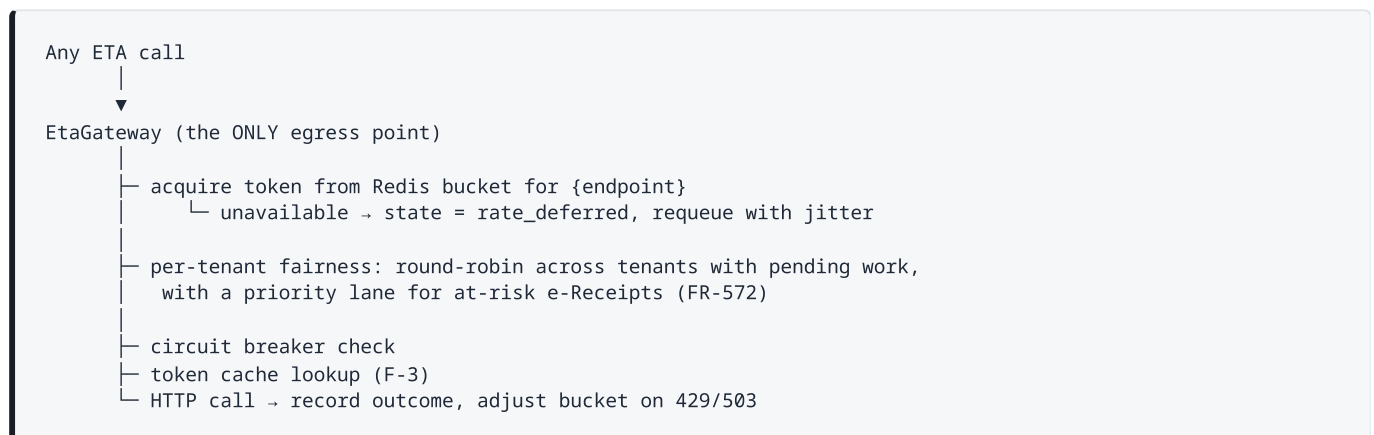

Bucket configuration, from the published limits (Search Published Codes 1/10s; EGS usage search 1/5s; Get Document, Get Document Details, Search Documents, receipt equivalents 2/1s; Get Recent Documents and Get Recent Receipts 3/1s; Get Document Printout 1/5s). Submission endpoints are not listed in the published table — **treat their limit as unknown and discover it empirically in preproduction (Q-26).**

Design consequences to accept now: - Batch aggressively. One submission of 100 documents costs one call; 100 submissions cost 100. - Never call code-lookup APIs per tenant. One platform-wide cache job. - Callbacks are not just recommended — at your target scale, **polling is arithmetically impossible**. At 2 requests/second shared across 10,000 tenants, a polling design cannot check every tenant's documents even once per hour. F-2 is not a style preference; it is a scaling requirement.

5.3 Signing — the cloud SaaS problem

The mainstream ETA integration path is a **hardware USB token**: the reference tooling drives a PKCS#11 library (`eps2003csp11.dll`) against a Feitian ePass2003 device, with a local signing agent that unlocks the token by PIN, computes the SHA-256, signs on the token hardware so the private key never leaves it, and returns a Base64 CAdES-BES signature.

For a cloud, multi-tenant, Arabic-first SaaS, requiring every merchant to install a Windows driver and keep a USB dongle plugged in is an adoption catastrophe. It also breaks the mobile and POS story entirely.

Interface:

```
class SigningProvider(Protocol):
    async def sign_cades_bes(
        self, canonical_bytes: bytes, tenant_id: UUID
    ) -> SignatureResult: ... # -> {signature_b64, certificate_serial, signed_at}

class CloudHsmProvider(SigningProvider): ... # via ITIDA-licensed provider
class LocalAgentProvider(SigningProvider): ... # HTTP to merchant-side agent
```

Recommendation unchanged from SRS v2.0 FR-601: launch on cloud HSM only. Build `LocalAgentProvider` behind the interface for the enterprise tenant who insists on holding their own token, but do not put a driver install in your onboarding funnel.

Q-27, and it is urgent: I could not verify from public sources which providers are currently ITIDA-licensed for cloud e-seal issuance, or their pricing and lead times. **Confirm directly with ITIDA and get quotes this week.** This is the single external dependency on your critical path and you do not control its timeline.

5.4 The 72-Hour Window Meets an Offline POS

Your POS queues offline in IndexedDB and syncs on reconnect. A terminal that loses connectivity for four days syncs receipts whose 72-hour window has already expired.

This is not a bug you can fix at sync time — the receipt was legally due yesterday. Design honestly:

1. Window is computed from `date_time_issued`, never from sync time.
2. Receipts arriving already-expired are flagged `late_on_arrival` and submitted immediately with a distinct audit record. Submit them anyway; a late submission beats a missing one.
3. **The POS warns the cashier when offline duration approaches the window** — "غير متصل من 40 ساعة، لازم تتصل" "بالإنترنت خلال 32 ساعة".
4. The ETA Health widget shows offline terminals as a risk, with elapsed time.
5. Given the penalty regime counts each invoice separately, the merchant-facing message must convey real urgency without inducing panic.

5.5 Idempotency Across an External Boundary

Your Phase 0 `processed_events` pattern handles internal replay. ETA adds a second axis: **you may have submitted successfully and not know it** — a network timeout after ETA processed the request.

Rules: - `submitting` is a *committed intent*. Persist it **before** the HTTP call. - On timeout or connection error, the document goes to `submit_uncertain`, **not** `submit_failed`. - `submit_uncertain` resolves only by lookup (`Search Documents` by `internalId`), never by blind resubmission. - Only an explicit non-2xx error permits retry. - Every submission carries a stable `internalId` so ETA-side lookup is always possible.

This is the requirement that protects you from F-4's platform-wide throttling.

6. Bounded Context & Events

```

eta ← consumes:
  sales.invoice_posted      → build, validate, enqueue EtaDocument
  sales.credit_note_posted  → type C, referencing original UUID
  sales.debit_note_posted   → type D
  pos.receipt_issued        → enqueue EtaReceipt into current batch
  inventory.item_updated    → invalidate EGS validation cache

eta → publishes:
  eta.document_accepted     {internal_doc_id, uuid, long_id, public_url, qr}
  eta.document_rejected     {internal_doc_id, translated_errors[]}
  eta.receipt_accepted      {internal_doc_id, uuid, qr}
  eta.submission_at_risk    {tenant_id, count, earliest_deadline}
  eta.circuit_opened / eta.circuit_closed

sales ← consumes:
  eta.document_accepted     → stamp uuid + public_url on the invoice
  eta.document_rejected     → surface status badge; document remains posted

```

Contract rule: ETA acceptance **never** alters accounting state. A rejected e-invoice is a compliance problem, not a reversal. The GL entry stands. This keeps your Phase 3 ledger invariants untouched by an external system's availability.

7. Exit Criteria

- ✓ Canonical serialization matches ETA's published reference vectors byte-for-byte, in CI, for both a simple and a multi-line multi-tax document
- ✓ Numeric values survive build → canonicalize → sign → submit without reformatting (0.0 stays 0.0)
- ✓ **500 documents submitted in preproduction with ≥97% first-attempt acceptance**
- ✓ Global rate governor holds platform-wide limits under a simulated 200-tenant concurrent load; zero 429 responses in a 1-hour soak
- ✓ Per-tenant fairness verified: one tenant with a 5,000-document backlog does not delay another tenant's single document beyond a defined SLA
- ✓ Callback endpoint receives, authenticates, deduplicates, and processes ETA notifications; a replayed notification is a no-op
- ✓ Network timeout mid-submission resolves to `submit_uncertain` and is settled by lookup, never by blind resubmit
- ✓ Credit note correctly references the original document UUID and is accepted
- ✓ e-Receipt batch serialization (whole-batch) proven distinct from e-Invoice (per-document), with both signing correctly
- ✓ A receipt created offline 80 hours ago is flagged `late_on_arrival`, submitted, and surfaced in the health widget
- ✓ Rejection translation covers the top 20 error codes observed in preproduction, in Arabic, with working field deep links
- ✓ Self-rendered Arabic invoice PDF with valid, scannable QR — verified on a physical thermal printer and an A4 printer
- ✓ **Killing the ETA integration entirely leaves invoicing, POS, and accounting fully functional**
- ✓ Pre-flight checklist blocks go-live on every listed condition

15. ☒ No credential appears in any log, trace, or error payload — verified by grep against a full test-run log

8. Suggested Sequencing (6–7 weeks)

WEEK	WORK
0 (now)	ITIDA / cloud HSM provider procurement. Register for preproduction credentials. Firewall + TLS design for the inbound callback endpoint
1	Config entities, Vault integration, token cache, EtaGateway skeleton, rate governor
2	Canonical serialization against reference vectors. Nothing else. This week is pass/fail
3	Signing providers, document builder, schema mapping, EGS registry + coverage UI
4	Submission queue, state machine, idempotency, callback endpoint, reconciliation fallback
5	e-Receipt batching, 72h window, offline reconciliation, QR, self-rendered PDFs
6	Rejection translation, health widget, pre-flight wizard, compliance report
7	Preproduction soak: 500 documents, load test the governor, buffer

Week 2 is the gate. If serialization is not producing ETA's exact reference hashes by end of week 2, stop and fix it before building anything on top — every subsequent component assumes it works.

9. Open Questions

#	QUESTION	URGENCY
Q-25	Does a multi-tenant SaaS register once with ETA, or once per taxpayer? This determines whether F-1's shared rate budget is a hard platform ceiling or a non-issue. Ask ETA directly	Blocking — design cannot be finalised without it
Q-26	What are the actual rate limits on the <i>submission</i> endpoints? Not in the published table. Discover empirically in preproduction	Week 1
Q-27	Which providers are currently ITIDA-licensed for cloud e-seal issuance? Pricing? Lead time? Has procurement started?	This week
Q-28	Was the Arabic PDF pipeline built in Phase 0 week 7, or does it land here? (F-5 makes it mandatory)	Week 1 scoping
Q-29	Do you have preproduction ETA credentials yet? Without them week 2 cannot complete	This week
Q-30	Third engineer — if hired, ETA is their package. Confirm	Now

#	QUESTION	URGENCY
Q-31	Given the March 2026 deadline has passed and much of your market is now exposed, should a compliance-only entry SKU be added to pricing?	Commercial, pre-launch

Q-25 and Q-27 are the two that can move the timeline. Everything else is engineering you control.