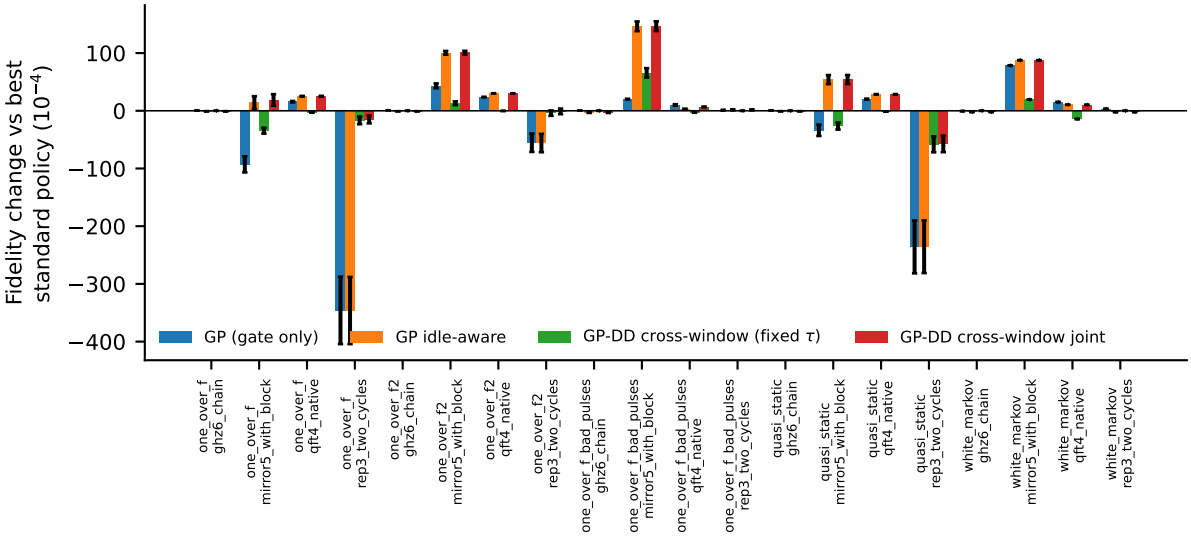
Fidelity change vs best standard policy (10^{-4})
100
0
−100
−200
−300
−400
GP (gate only)
GP idle-aware
GP-DD cross-window (fixed τ)
GP-DD cross-window joint
one_over_f ghz6_chain
one_over_f mirror5_with_block
one_over_f qft4_native
one_over_f rep3_two_cycles
one_over_f2 ghz6_chain
one_over_f2 mirror5_with_block
one_over_f2 qft4_native
one_over_f2 rep3_two_cycles
one_over_f_bad_pulses ghz6_chain
one_over_f_bad_pulses mirror5_with_block
one_over_f_bad_pulses qft4_native
one_over_f_bad_pulses rep3_two_cycles
quasi_static ghz6_chain
quasi_static mirror5_with_block
quasi_static qft4_native
quasi_static rep3_two_cycles
white_markov ghz6_chain
white_markov mirror5_with_block
white_markov qft4_native
white_markov rep3_two_cycles