



Youssef Alexander Khalifa Quispe

PASO 1

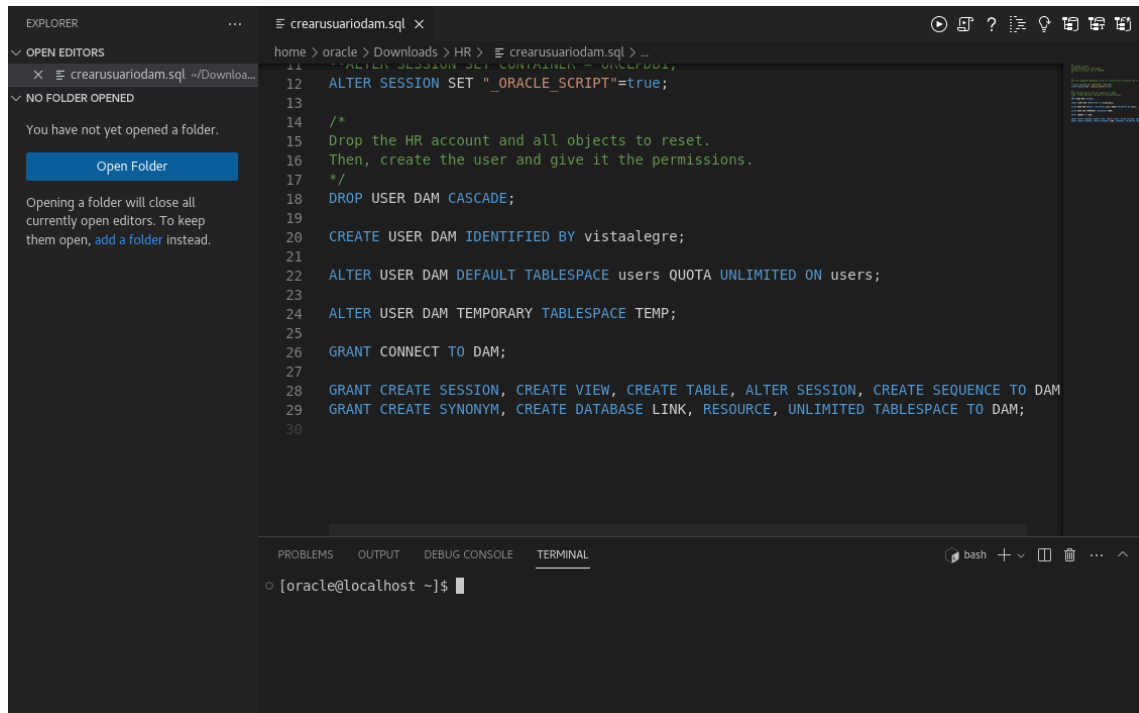

PASO 2, 3 y 4 (ya había creado la conexión de system)

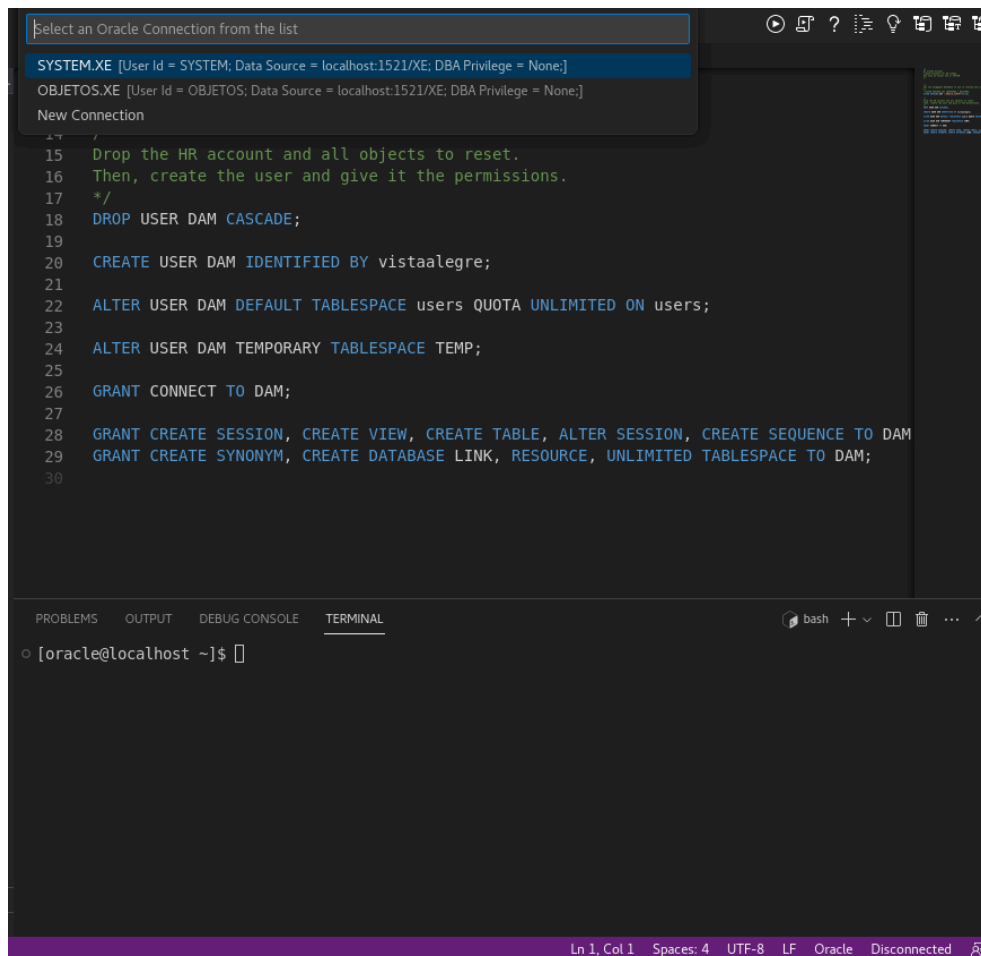

PASO 5

```
crearusuariodam.sql  Results: crearusuariodam.sql x
3 Then, create the user and give it the permissions.
4 */
SQL> DROP USER DAM CASCADE;

USER dropped.

SQL> CREATE USER DAM IDENTIFIED BY vistaalegre;

USER created.

SQL> ALTER USER DAM DEFAULT TABLESPACE users QUOTA UNLIMITED ON users;

USER altered.

SQL> ALTER USER DAM TEMPORARY TABLESPACE TEMP;

USER altered.

SQL> GRANT CONNECT TO DAM;

Grant succeeded.

SQL> GRANT CREATE SESSION, CREATE VIEW, CREATE TABLE, ALTER SESSION, CREATE SEQUENCE TO DAM;

Grant succeeded.

SQL> GRANT CREATE SYNONYM, CREATE DATABASE LINK, RESOURCE, UNLIMITED TABLESPACE TO DAM;

Grant succeeded.
```

PASO 6

```
bash: sqlplus: command not found...
[oracle@localhost ~]$ sqlplus dam/vistaalegre

SQL*Plus: Release 21.0.0.0.0 - Production on Jue Abr 25 20:03:34 2024
Version 21.3.0.0.0

Copyright (c) 1982, 2021, Oracle. All rights reserved.

Conectado a:
Oracle Database 21c Express Edition Release 21.0.0.0.0 - Production
Version 21.3.0.0.0

SQL>
```

PASO 7

```
SQL> show user
USER es "DAM"
SQL>
```