

## PASO 1

**Create New Connection** ⓘ

User

Connection Type: Basic (Host, Port, Service Name) ▼

Database host name: localhost

Port number: 1521

Service name: XE

Connection string: localhost:1521/XE Copy

Role: Default ▼


User name: DAM

Password: ••••••••

☐ Save password

☐ Set as default connection

Connection name: DAM.XE Color

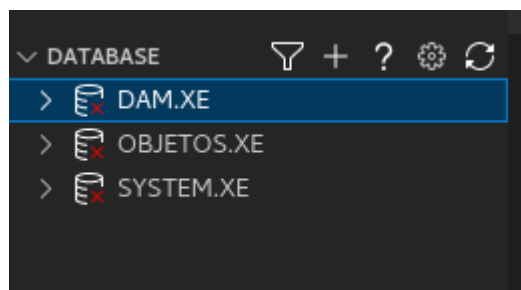

## PASO 2

```
home > oracle > Downloads > TAREAS > tarea01.sql > Type tObjCodPostal
1 Create type tObjCodPostal as OBJECT (
2     CodProvincia      NUMBER,
3     CodLocalidad      NUMBER
4 );
5 /
```

### PASO 3

```
SQL> show user
USER es "DAM"
SQL> desc tObjCodPostal
  Nombre                                Nulo?  Tipo
-----
  CODPROVINCIA                          NUMBER
  CODLOCALIDAD                          NUMBER

SQL> █
```