


# Chapter 2: Operating-System Services

---



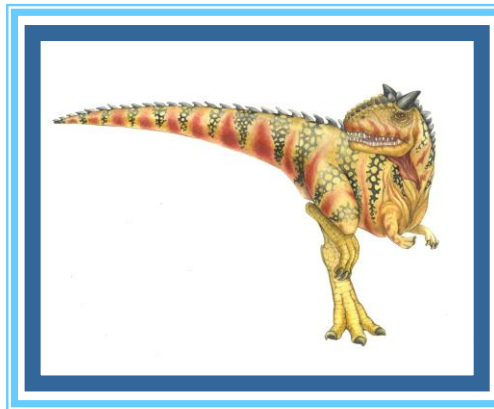

# Outline

---

- Operating System Services
  - User and Operating System-Interface
  - System Calls
- System Services
  - Linkers and Loaders
  - Why Applications are Operating System Specific
- Design and Implementation
  - Operating System Structure
  - Building and Booting an Operating System
  - Operating System Debugging





# Objectives

---

- Identify services provided by an OS
- Illustrate how **system calls** are used to provide OS services
- Compare and contrast monolithic, layered, microkernel, modular, and hybrid **strategies for designing OS**
- Illustrate the process for booting an OS
- Apply tools for monitoring OS performance





# Operating System Services

---

- OSes provide an environment for execution of programs and services to programs and users
- One set of OS services provides functions that are helpful to the user:
  - **User interface** - Almost all OSes have a user interface (**UI**).
    - ▶ Varies between **Command-Line (CLI)**, **Graphics User Interface (GUI)**, **touch-screen**, **Batch**
  - **Program execution** - The system must be able to load a program into memory and to run that program, end execution, either normally or abnormally (indicating error)





# Operating System Services

---


- One set of OS services provides functions that are helpful to the user (cont.):
  - **I/O operations** - A running program may require I/O, which may involve a file or an I/O device
  - **File-system manipulation** - The file system is of particular interest
    - ▶ Programs need to read and write files and directories, create and delete them, search them, list file information, permission management





# Operating System Services (Cont.)

- One set of OS services provides functions that are helpful to the user (Cont.):
  - **Communications** – Processes may exchange information, on the same computer or between computers over a network
    - ▶ Communications may be via shared memory or through message passing (packets moved by the OS)
  - **Error detection** – OS needs to be constantly aware of possible errors
    - ▶ May occur in the CPU and memory hardware, in I/O devices, in user program
    - ▶ For each type of error, OS should take the appropriate action to ensure correct and consistent computing
    - ▶ Debugging facilities can greatly enhance the user's and programmer's abilities to efficiently use the system






# Operating System Services (Cont.)

- Another set of OS functions exists for ensuring the efficient operation of the system itself via resource sharing
  - **Resource allocation** - When multiple users or multiple jobs running concurrently, resources must be allocated to each of them
    - ▶ Many types of resources - CPU cycles, main memory, file storage, I/O devices
  - **Logging** - To keep track of which users use how much and what kinds of computer resources
  - **Protection and security** - The owners of information stored in a multiuser or networked computer system may want to control use of that information, concurrent processes should not interfere with each other
    - ▶ **Protection** involves ensuring that all access to system resources is controlled
    - ▶ **Security** of the system from outsiders requires user authentication, extends to defending external I/O devices from invalid access attempts





# A View of Operating System Services

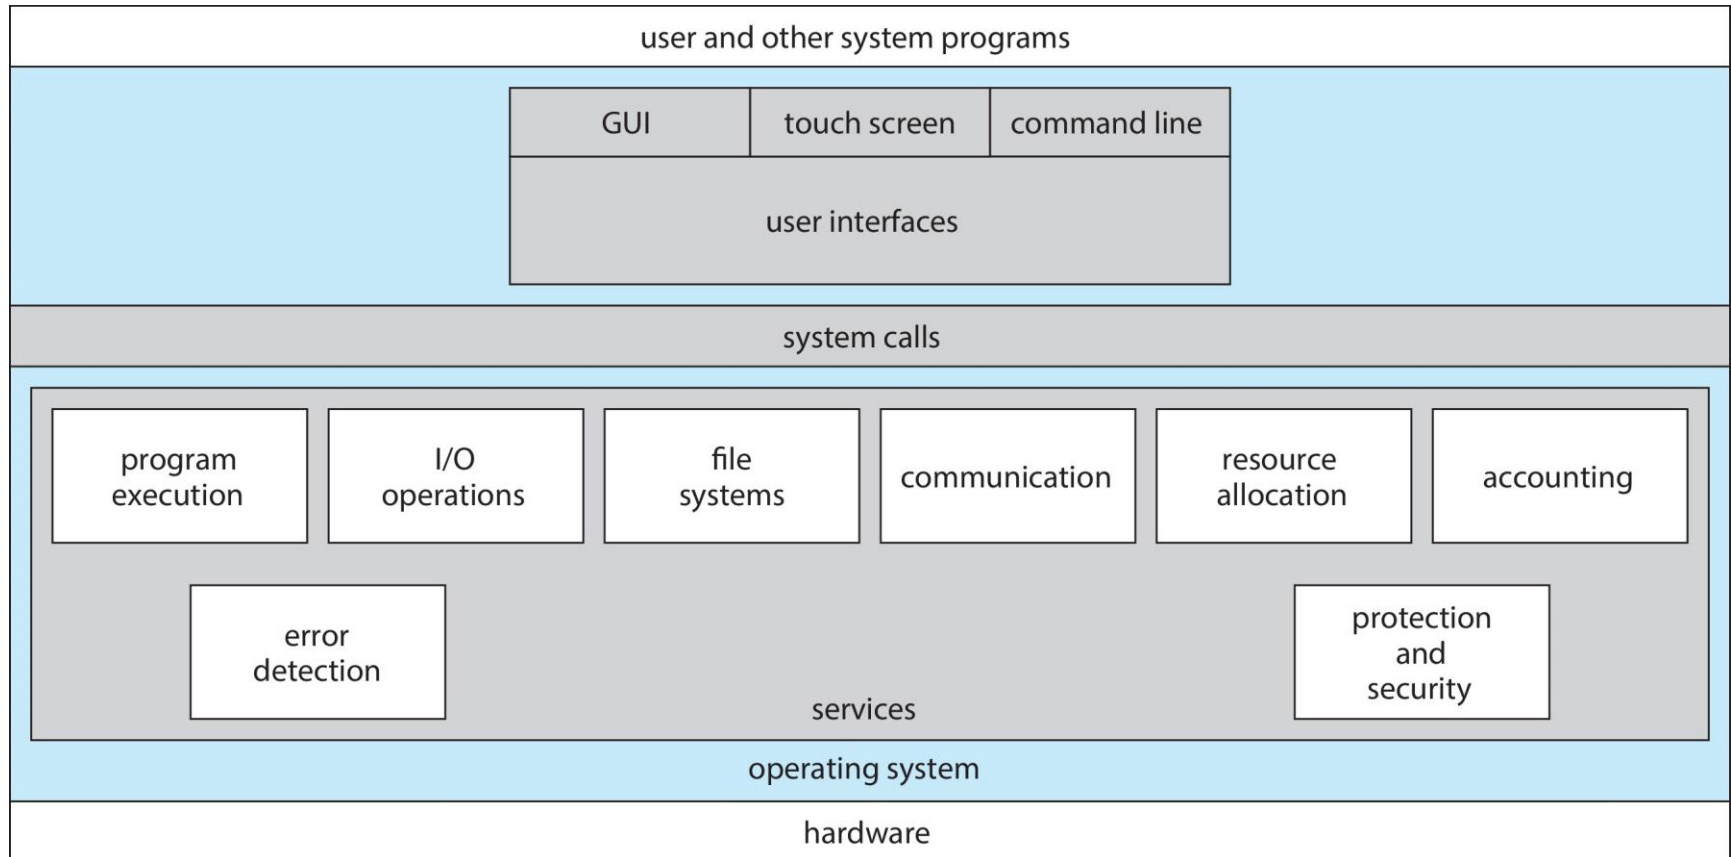





# Command Line interpreter

---

- CLI allows direct command entry
- Sometimes implemented in kernel, sometimes by systems program
- Sometimes multiple flavors implemented – **shells**
- Primarily fetches a command from user and executes it
- Sometimes commands built-in, sometimes just names of programs
  - If the latter, adding new features doesn't require shell modification






# Bourne Shell Command Interpreter

```
1. root@r6181-d5-us01:~ (ssh)
× root@r6181-d5-u...  %1 × ssh  %2 × root@r6181-d5-us01...  %3

Last login: Thu Jul 14 08:47:01 on ttys002
iMacPro:~ pbg$ ssh root@r6181-d5-us01
root@r6181-d5-us01's password:
Last login: Thu Jul 14 06:01:11 2016 from 172.16.16.162
[root@r6181-d5-us01 ~]# uptime
 06:57:48 up 16 days, 10:52,  3 users,  load average: 129.52, 80.33, 56.55
[root@r6181-d5-us01 ~]# df -kh
Filesystem                Size      Used Avail Use% Mounted on
/dev/mapper/vg_ks-lv_root    50G       19G   28G  41% /
tmpfs                      127G      520K   127G   1% /dev/shm
/dev/sda1                   477M       71M   381M  16% /boot
/dev/dssd0000               1.0T     480G   545G  47% /dssd_xfs
tcp://192.168.150.1:3334/orangefs
                          12T     5.7T   6.4T  47% /mnt/orangefs
/dev/gpfs-test              23T     1.1T    22T   5% /mnt/gpfs
[root@r6181-d5-us01 ~]#
[root@r6181-d5-us01 ~]# ps aux | sort -nrk 3,3 | head -n 5
root      97653 11.2  6.6 42665344 17520636 ?    S<Ll  Jul13 166:23 /usr/lpp/mmfs/bin/mmfstd
root      69849  6.6  0.0      0      0 ?        S    Jul12 181:54 [vpthread-1-1]
root      69850  6.4  0.0      0      0 ?        S    Jul12 177:42 [vpthread-1-2]
root       3829  3.0  0.0      0      0 ?        S    Jun27 730:04 [rp_thread 7:0]
root       3826  3.0  0.0      0      0 ?        S    Jun27 728:08 [rp_thread 6:0]
[root@r6181-d5-us01 ~]# ls -l /usr/lpp/mmfs/bin/mmfstd
-r-x----- 1 root root 20667161 Jun  3  2015 /usr/lpp/mmfs/bin/mmfstd
[root@r6181-d5-us01 ~]#
```





# User Operating System Interface - GUI

---


- User-friendly **desktop** metaphor interface
  - Usually mouse, keyboard, and monitor
  - **Icons** represent files, programs, actions, etc
  - Various mouse buttons over objects in the interface cause various actions (provide information, options, execute function, open directory (known as a **folder**))
  - Invented at Xerox PARC
- Many systems now include both CLI and GUI interfaces
  - Microsoft Windows is GUI with CLI “command” shell
  - Apple Mac OS X is “Aqua” GUI interface with UNIX kernel underneath and shells available
  - Unix and Linux have CLI with optional GUI interfaces (CDE, KDE, GNOME)






# Touchscreen Interfaces

- Touchscreen devices require new interfaces
  - Mouse not possible or not desired
  - Actions and selection based on gestures
  - Virtual keyboard for text entry
- Voice commands

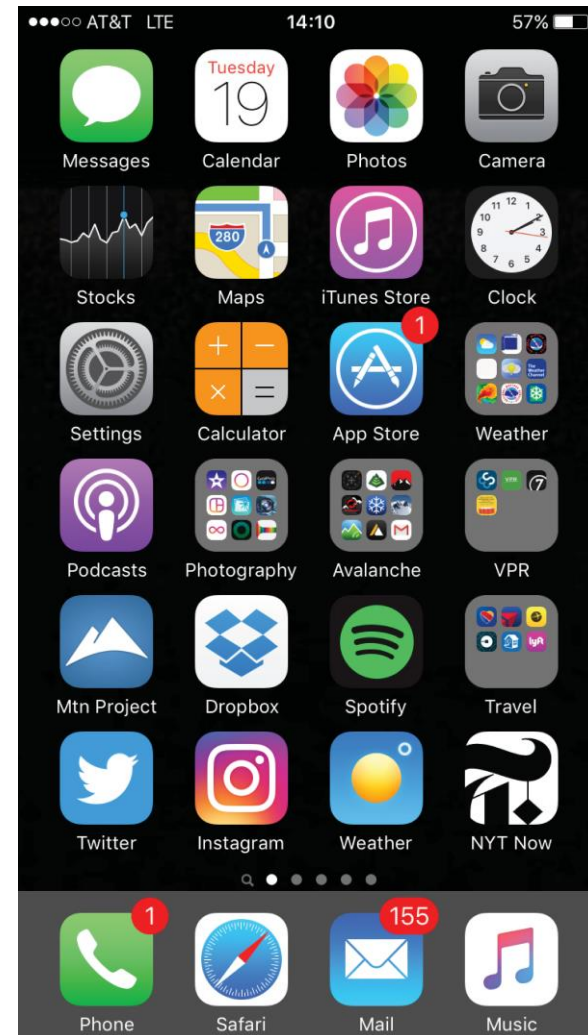



# The Mac OS X GUI

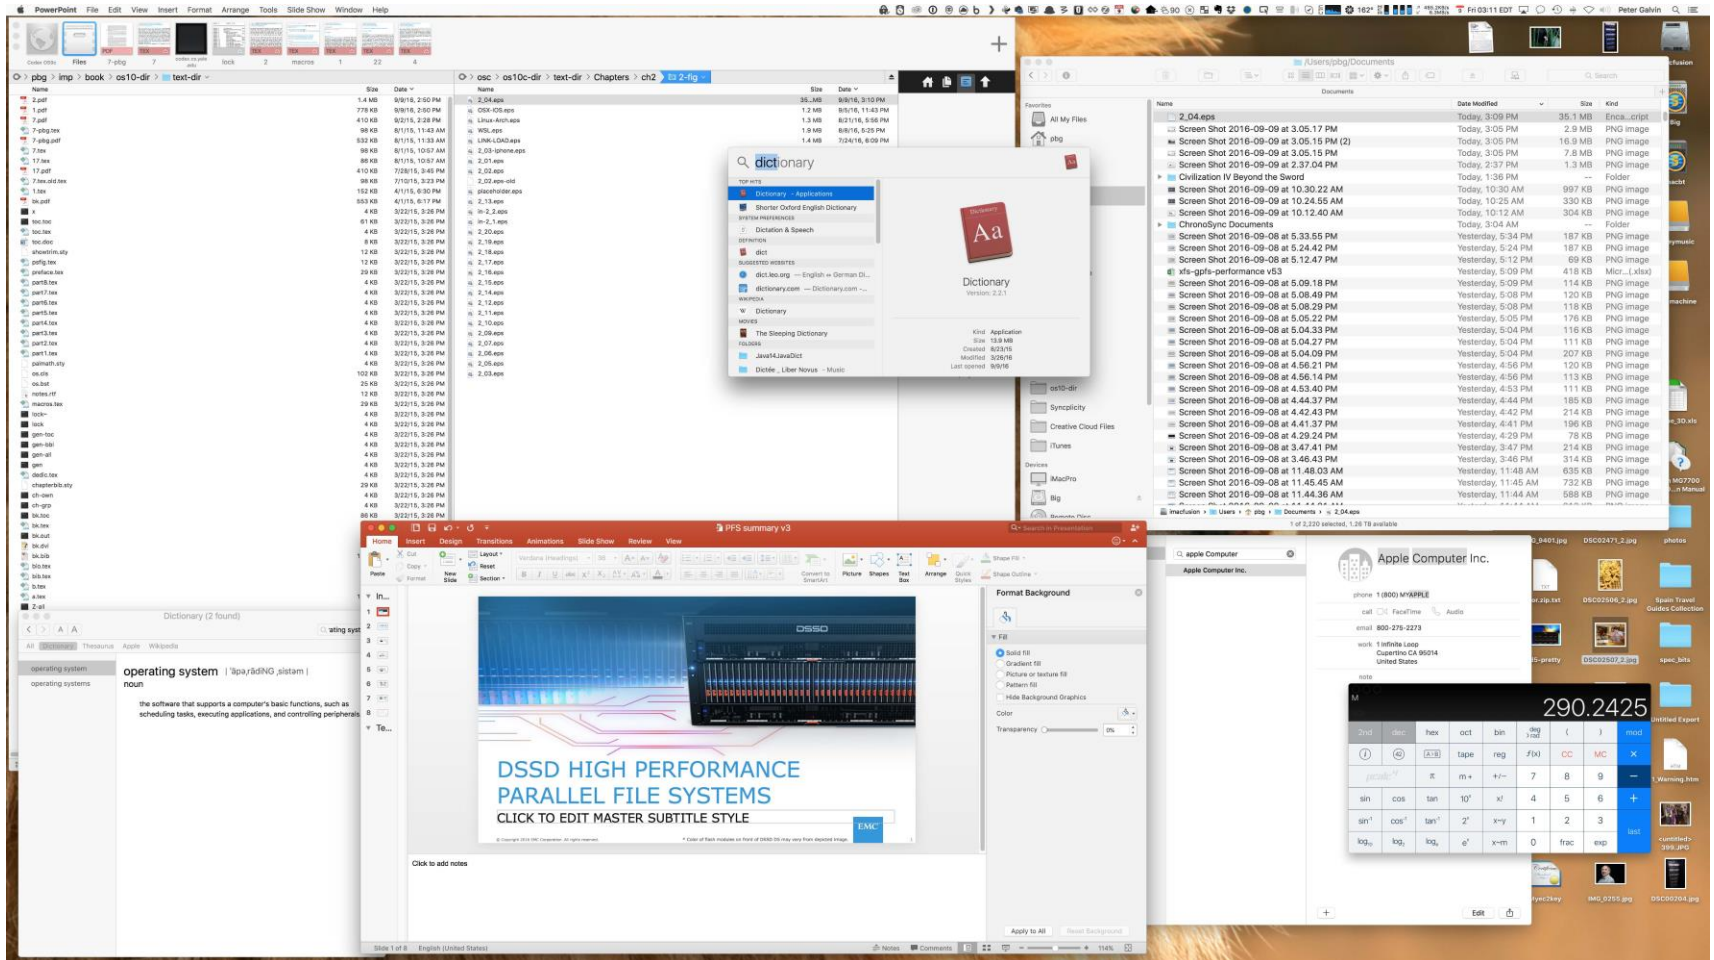





# System Calls

---

- Programming interface to the services provided by the OS
- Typically written in a high-level language (C or C++)
- Mostly accessed by programs via a high-level **Application Programming Interface (API)** rather than direct system call
- Three most common APIs:
  - Win32 API for Windows
  - POSIX API for POSIX-based systems (including virtually all versions of UNIX, Linux, and Mac OS X)
  - Java API for the Java virtual machine (JVM)


Note that the system-call names used throughout this text are generic





# Example of System Calls

- System call sequence to copy the contents of one file to another file

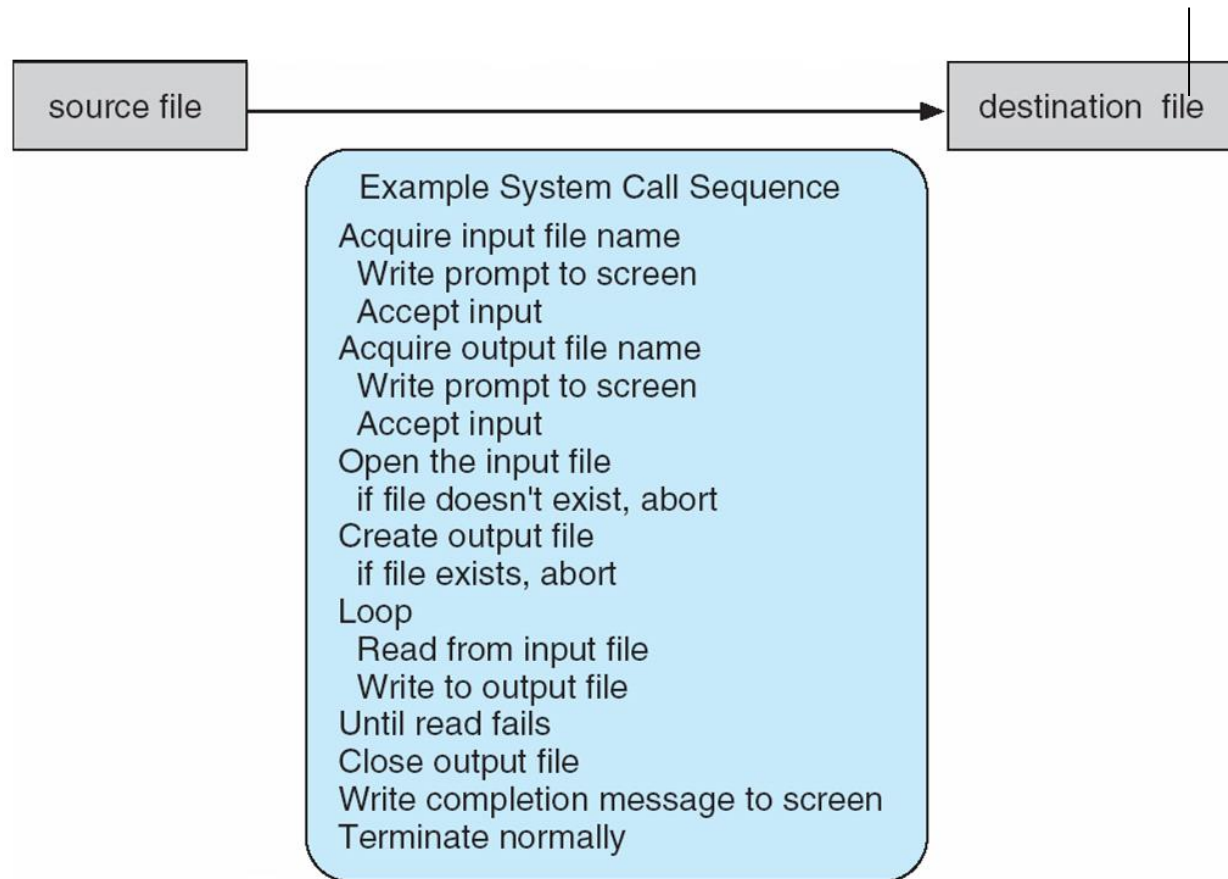



# Example of Standard API

## EXAMPLE OF STANDARD API

As an example of a standard API, consider the `read()` function that is available in UNIX and Linux systems. The API for this function is obtained from the man page by invoking the command

```
man read
```

on the command line. A description of this API appears below:

<pre>#include &lt;unistd.h&gt;</pre>		
<pre>ssize_t</pre>	<pre>read(int fd, void *buf, size_t count)</pre>	
return	function	parameters
value	name	

A program that uses the `read()` function must include the `unistd.h` header file, as this file defines the `ssize_t` and `size_t` data types (among other things). The parameters passed to `read()` are as follows:

- `int fd`—the file descriptor to be read
- `void *buf`—a buffer into which the data will be read
- `size_t count`—the maximum number of bytes to be read into the buffer

On a successful read, the number of bytes read is returned. A return value of 0 indicates end of file. If an error occurs, `read()` returns `-1`.







# System Call Implementation


---

- Typically, a number is associated with each system call
  - **System-call interface** maintains a table indexed according to these numbers
- The system call interface invokes the intended system call in OS kernel and returns status of the system call and any return values
- The caller needs to know nothing about how the system call is implemented
  - Just needs to obey API and understand what OS will do as a result call
  - Most details of OS interface hidden from programmer by API
    - ▶ Managed by run-time support library (set of functions built into libraries included with compiler)





# API – System Call – OS Relationship

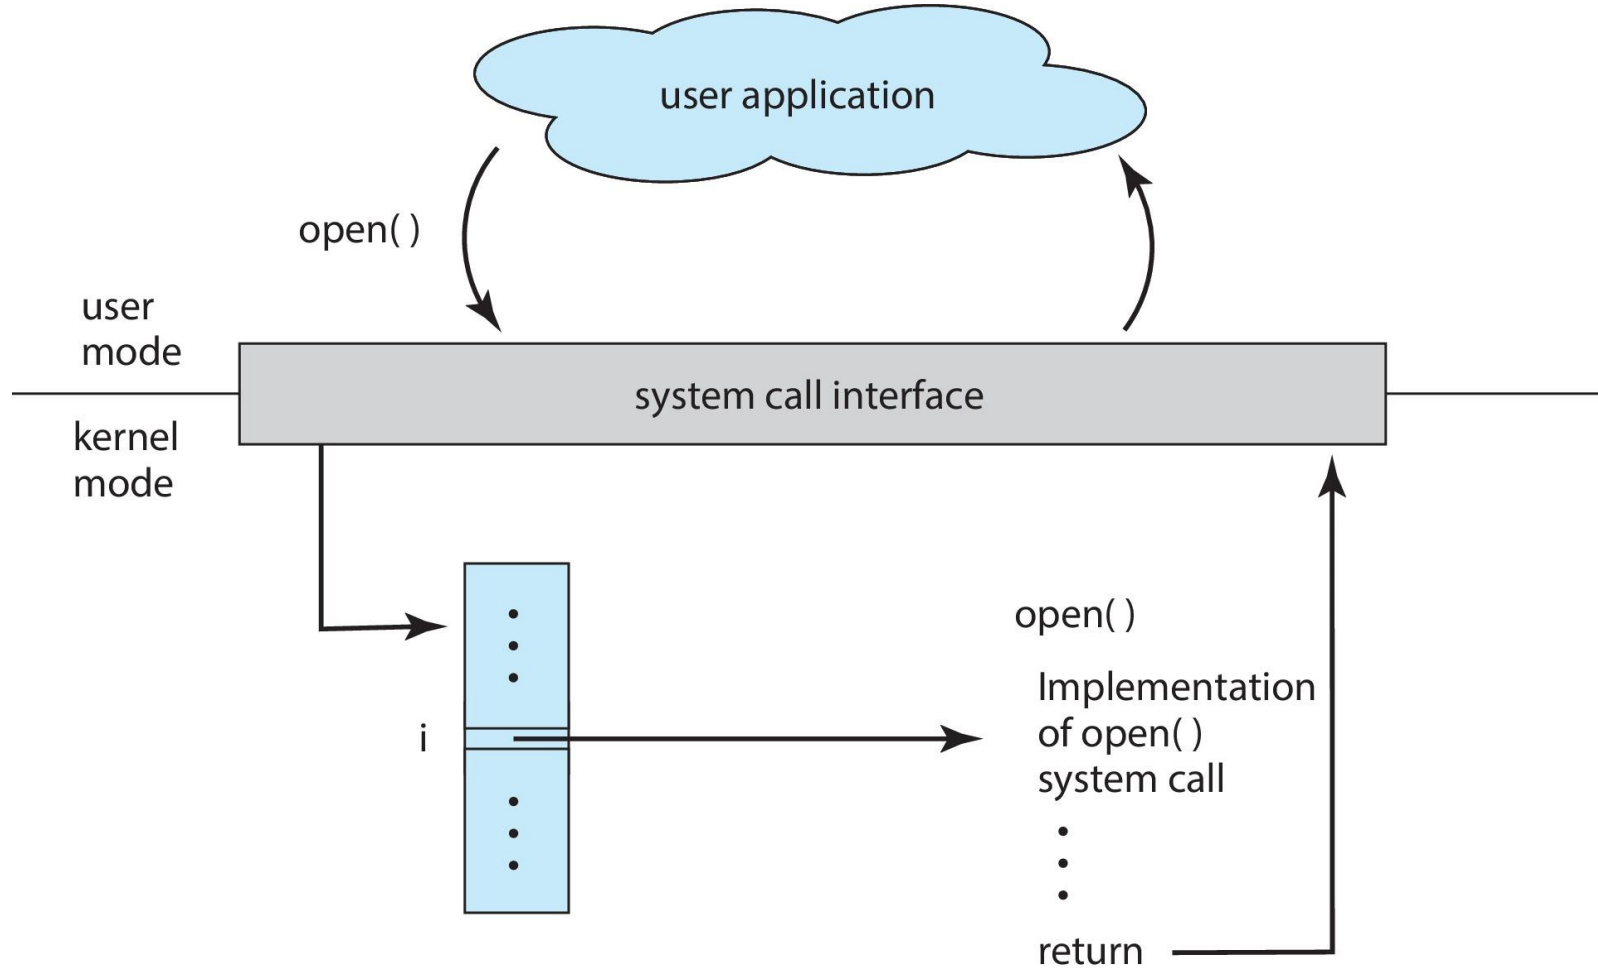




# System Call Parameter Passing

- Often, more information is required than simply identity of desired system call
  - Exact type and amount of information vary according to OS and call
- Three general methods used to pass parameters to the OS
  - Simplest: pass the parameters in registers
    - ▶ In some cases, may be more parameters than registers
  - Parameters stored in a block, or table, in memory, and address of block passed as a parameter in a register
    - ▶ This approach taken by Linux and Solaris
  - Parameters placed, or **pushed**, onto the **stack** by the program and **popped** off the stack by the OS
  - Block and stack methods do not limit the number or length of parameters being passed





# Parameter Passing via Table

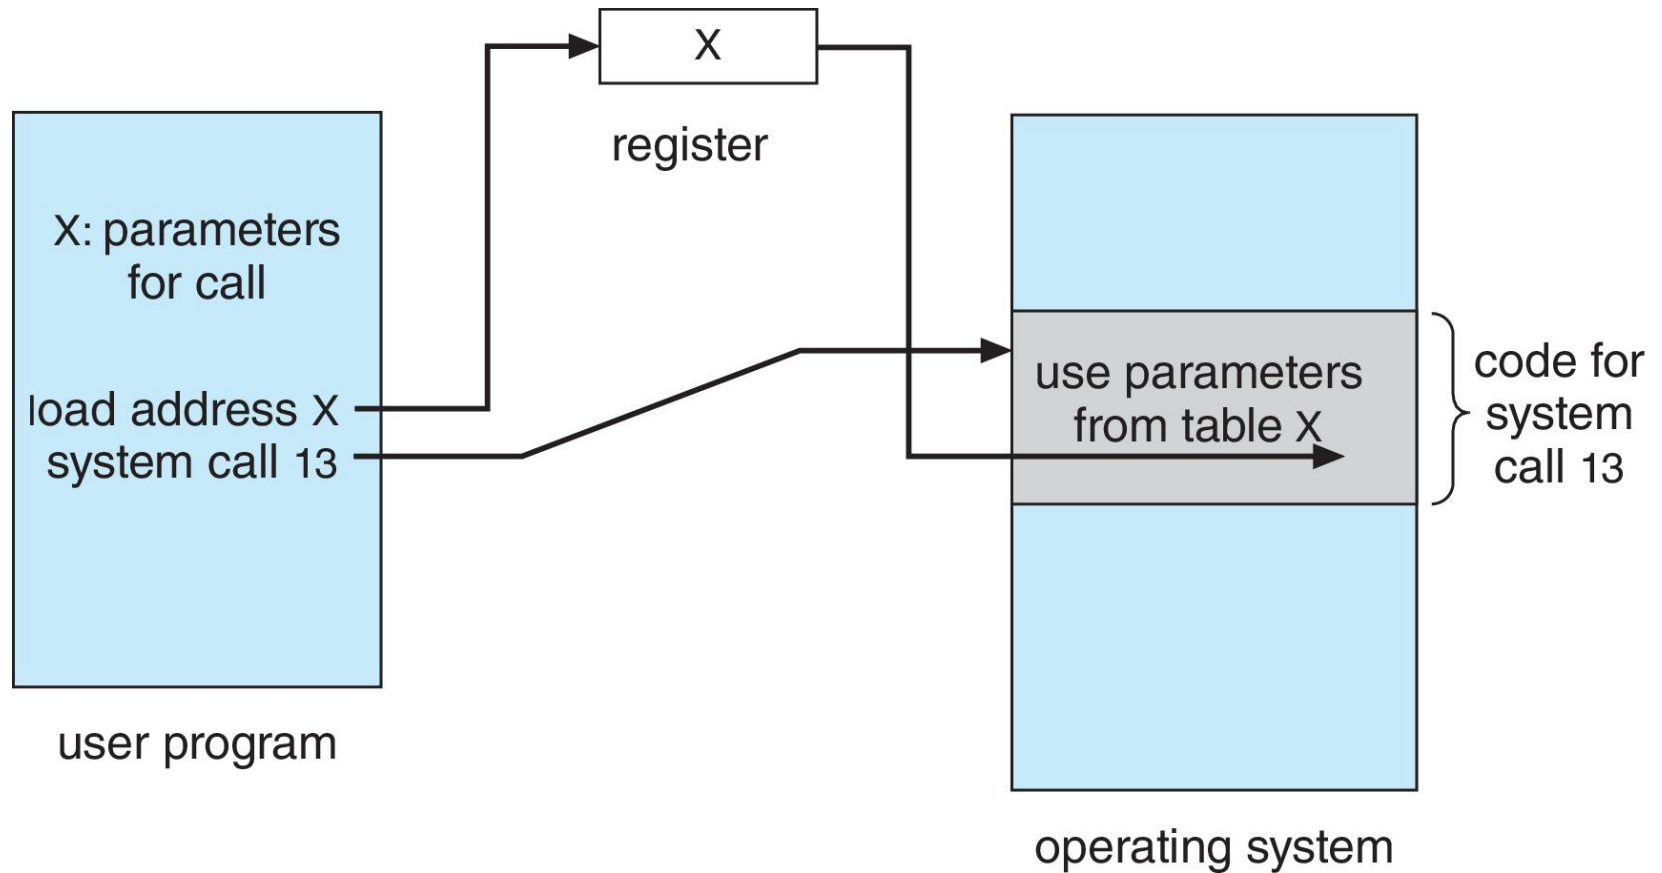



# Types of System Calls

---

- Process control
  - create process, terminate process
  - end, abort
  - load, execute
  - get process attributes, set process attributes
  - wait for time
  - wait event, signal event
  - allocate and free memory
  - Dump memory if error
  - **Debugger** for determining **bugs**, **single step** execution
  - **Locks** for managing access to shared data between processes





# Types of System Calls (Cont.)

---

- File management
  - create file, delete file
  - open, close file
  - read, write, reposition
  - get and set file attributes
- Device management
  - request device, release device
  - read, write, reposition
  - get device attributes, set device attributes
  - logically attach or detach devices





# Types of System Calls (Cont.)

---

- Information maintenance
  - get time or date, set time or date
  - get system data, set system data
  - get and set process, file, or device attributes
- Communications
  - create, delete communication connection
  - send, receive messages if **message passing model** to **host name** or **process name**
    - ▶ From **client** to **server**
  - **Shared-memory model** create and gain access to memory regions
  - transfer status information
  - attach and detach remote devices





# Types of System Calls (Cont.)

---

- Protection
  - Control access to resources
  - Get and set permissions
  - Allow and deny user access







# Examples of Windows and Unix System Calls

## EXAMPLES OF WINDOWS AND UNIX SYSTEM CALLS

The following illustrates various equivalent system calls for Windows and UNIX operating systems.


	Windows	Unix
<b>Process control</b>	CreateProcess() ExitProcess() WaitForSingleObject()	fork() exit() wait()
<b>File management</b>	CreateFile() ReadFile() WriteFile() CloseHandle()	open() read() write() close()
<b>Device management</b>	SetConsoleMode() ReadConsole() WriteConsole()	ioctl() read() write()
<b>Information maintenance</b>	GetCurrentProcessID() SetTimer() Sleep()	getpid() alarm() sleep()
<b>Communications</b>	CreatePipe() CreateFileMapping() MapViewOfFile()	pipe() shm_open() mmap()
<b>Protection</b>	SetFileSecurity() InitializeSecurityDescriptor() SetSecurityDescriptorGroup()	chmod() umask() chown()





# Standard C Library Example


- C program invoking printf() library call, which calls write() system call

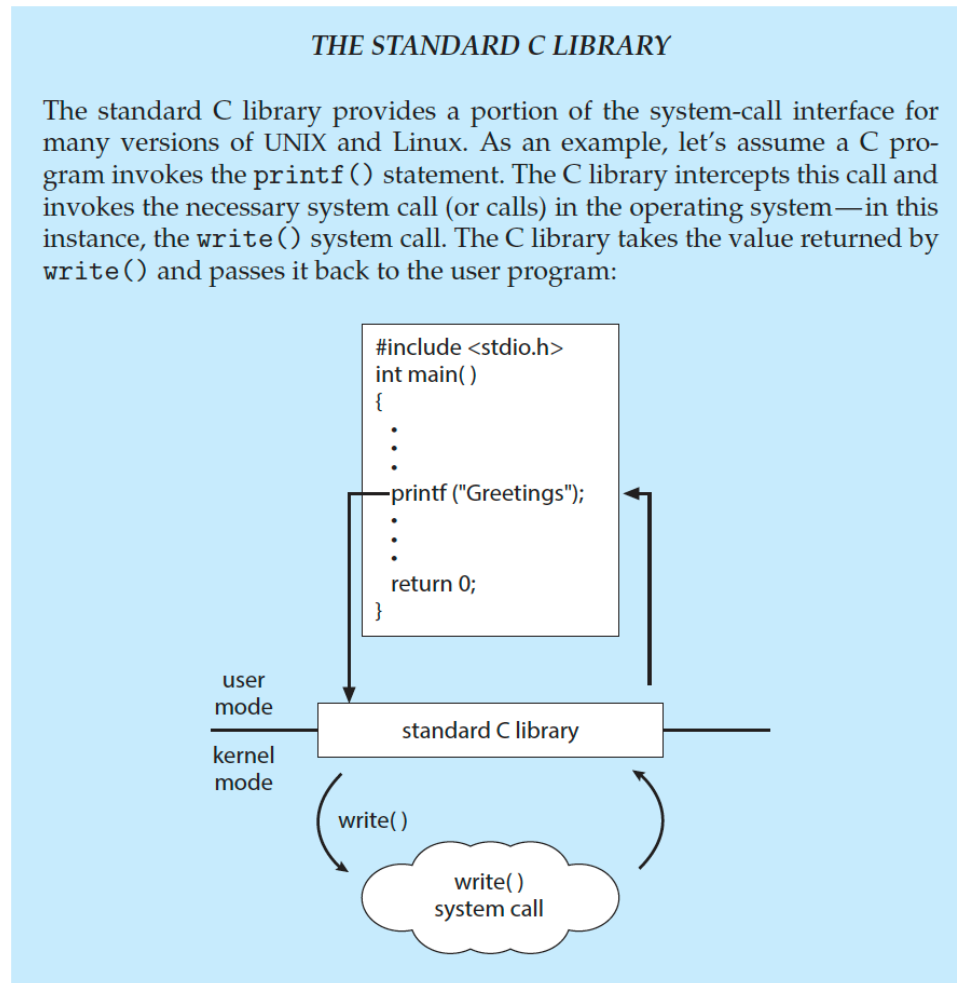




# Example: Arduino

- Single-tasking
- No operating system
- Programs (sketch) loaded via USB into flash memory
- Single memory space
- Boot loader loads program
- Program exit -> shell reloaded

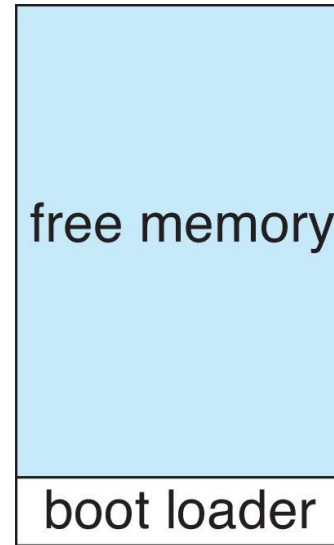

(a)

At system startup

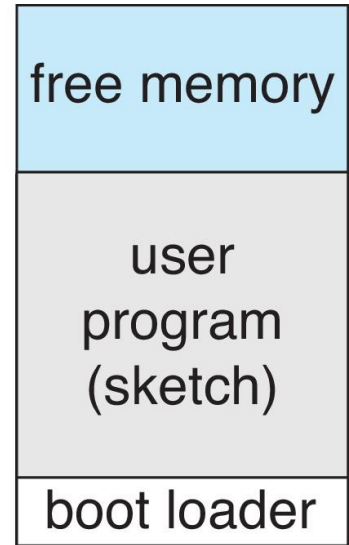

(b)


running a program





# Example: FreeBSD

- Unix variant
- Multitasking
- User login -> invoke user's choice of shell
- Shell executes `fork()` system call to create process
  - Executes `exec()` to load program into process
  - Shell waits for process to terminate or continues with user commands
- Process exits with:
  - `code = 0` – no error
  - `code > 0` – error code

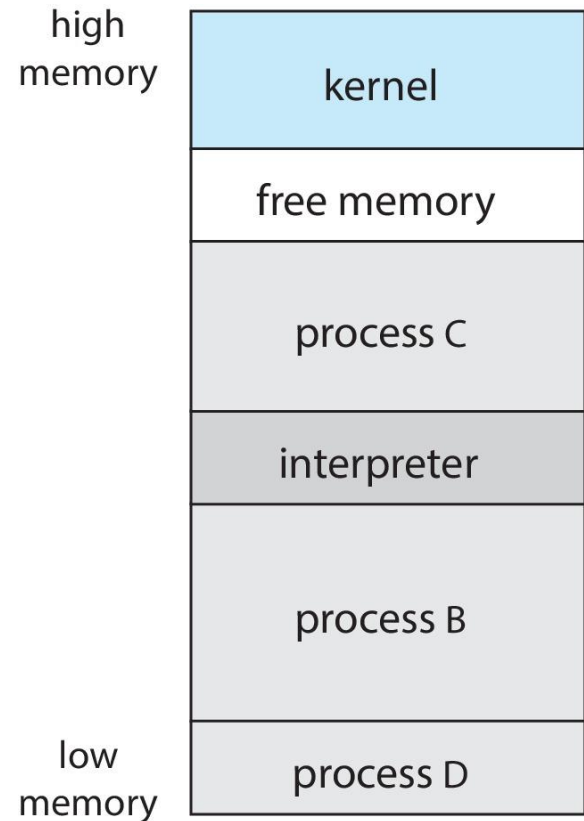



# System Services

---

- **System programs** provide a convenient environment for program development and execution
  - File manipulation
  - Status information sometimes stored in a file
  - Programming language support
  - Program loading and execution
  - Communications
  - Background services
  - Application programs
- Most users' view of the operation system is defined by system programs, not the actual system calls





# System Services (Cont.)

---

- Provide a convenient environment for program development and execution
  - Some of them are simply user interfaces to system calls; others are considerably more complex
- **File management** - Create, delete, copy, rename, print, dump, list, and generally manipulate files and directories
- **Status information**
  - Some ask the system for info - date, time, amount of available memory, disk space, number of users
  - Others provide detailed performance, logging, and debugging information
  - Typically, these programs format and print the output to the terminal or other output devices
  - Some systems implement a **registry** - used to store and retrieve configuration information





# System Services (Cont.)

---

- **File modification**
  - Text editors to create and modify files
  - Special commands to search contents of files or perform transformations of the text
- **Programming-language support** - Compilers, assemblers, debuggers and interpreters sometimes provided
- **Program loading and execution**- Absolute loaders, relocatable loaders, linkage editors, and overlay-loaders, debugging systems for higher-level and machine language
- **Communications** - Provide the mechanism for creating virtual connections among processes, users, and computer systems
  - Allow users to send messages to one another's screens, browse web pages, send electronic-mail messages, log in remotely, transfer files from one machine to another





# System Services (Cont.)

---

## ■ Background Services

- Launch at boot time
  - ▶ Some for system startup, then terminate
  - ▶ Some from system boot to shutdown
- Provide facilities like disk checking, process scheduling, error logging, printing
- Run in user context not kernel context
- Known as **services**, **subsystems**, **daemons**

## ■ Application programs

- Don't pertain to system
- Run by users
- Not typically considered part of OS
- Launched by command line, mouse click, finger poke








# Linkers and Loaders

- Source code compiled into object files designed to be loaded into any physical memory location – **relocatable object file**
- **Linker** combines these into single binary **executable** file
  - Also brings in libraries
- Program resides on secondary storage as binary executable
- Must be brought into memory by **loader** to be executed
  - **Relocation** assigns final addresses to program parts and adjusts code and data in program to match those addresses
- Modern general purpose systems don't link libraries into executables
  - Rather, **dynamically linked libraries** (in Windows, **DLLs**) are loaded as needed, shared by all that use the same version of that same library (loaded once)
- Object, executable files have standard formats, so OS knows how to load and start them





# The Role of the Linker and Loader

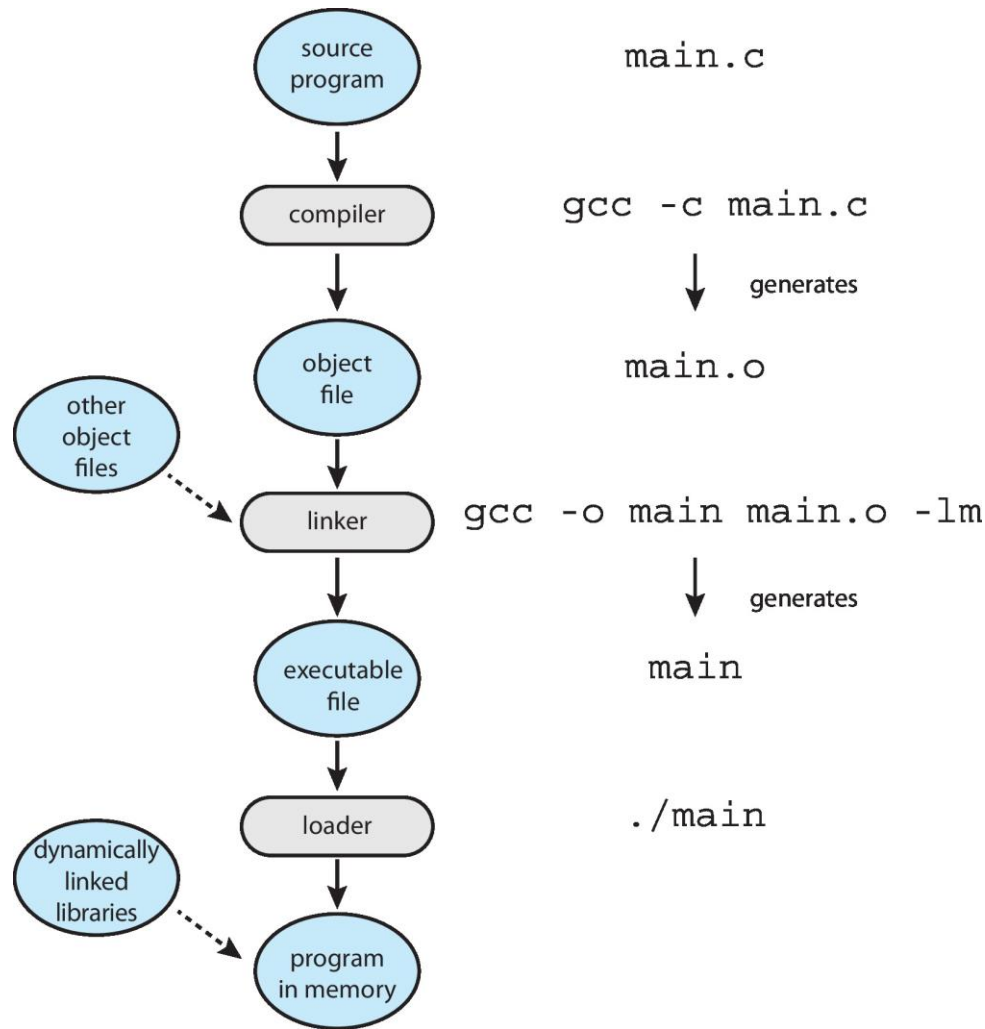



# Why Applications are Operating System Specific

---

- Apps compiled on one system usually not executable on other OS
- Each OS provides its own unique system calls
  - Own file formats, etc.
- Apps can be multi-operating system
  - Written in interpreted language like Python, Ruby, and interpreter available on multiple OS
  - App written in language that includes a VM containing the running app (like Java)
  - Use standard language (like C), compile separately on each OS to run on each
- **Application Binary Interface (ABI)** is architecture equivalent of API, defines how different components of binary code can interface for a given OS on a given architecture, CPU, etc.





# Design and Implementation

---

- Design and Implementation of OS is not “solvable”, but some approaches have proven successful
- Internal structure of different OS can vary widely
- Start the design by defining goals and specifications
- Affected by choice of hardware, type of system
- **User** goals and **System** goals
  - User goals – OS should be convenient to use, easy to learn, reliable, safe, and fast
  - System goals – OS should be easy to design, implement, and maintain, as well as flexible, reliable, error-free, and efficient
- Specifying and designing an OS is highly creative task of **software engineering**





# Policy and Mechanism

---

- **Policy:** **What** needs to be done?
  - Example: Interrupt after every 100 seconds
- **Mechanism:** **How** to do something?
  - Example: timer
- Important principle: separate policy from mechanism
- The separation of policy from mechanism is a very important principle, it allows maximum flexibility if policy decisions are to be changed later
  - Example: change 100 to 200





# Implementation

---

- Much variation
  - Early OSes in assembly language
  - Then system programming languages like Algol, PL/1
  - Now C, C++
- Actually usually a mix of languages
  - Lowest level in assembly
  - Main body in C
  - Systems programs in C, C++, scripting languages like PERL, Python, shell scripts
- More high-level language easier to **port** to other hardware
  - But slower
- **Emulation** can allow an OS to run on non-native hardware





# Operating System Structure

---

- General-purpose OS is very large program
- Various ways to structure OS
  - Simple structure – MS-DOS
  - More complex – UNIX
  - Layered – an abstraction
  - Microkernel – Mach





# Monolithic Structure – Original UNIX

---

- UNIX – limited by hardware functionality, the original UNIX OS had limited structuring.
- The UNIX OS consists of two separable parts
  - Systems programs
  - The kernel
    - ▶ Consists of everything below the system-call interface and above the physical hardware
    - ▶ Provides the file system, CPU scheduling, memory management, and other OS functions; a large number of functions for one level









# Traditional UNIX System Structure


Beyond simple but not fully layered

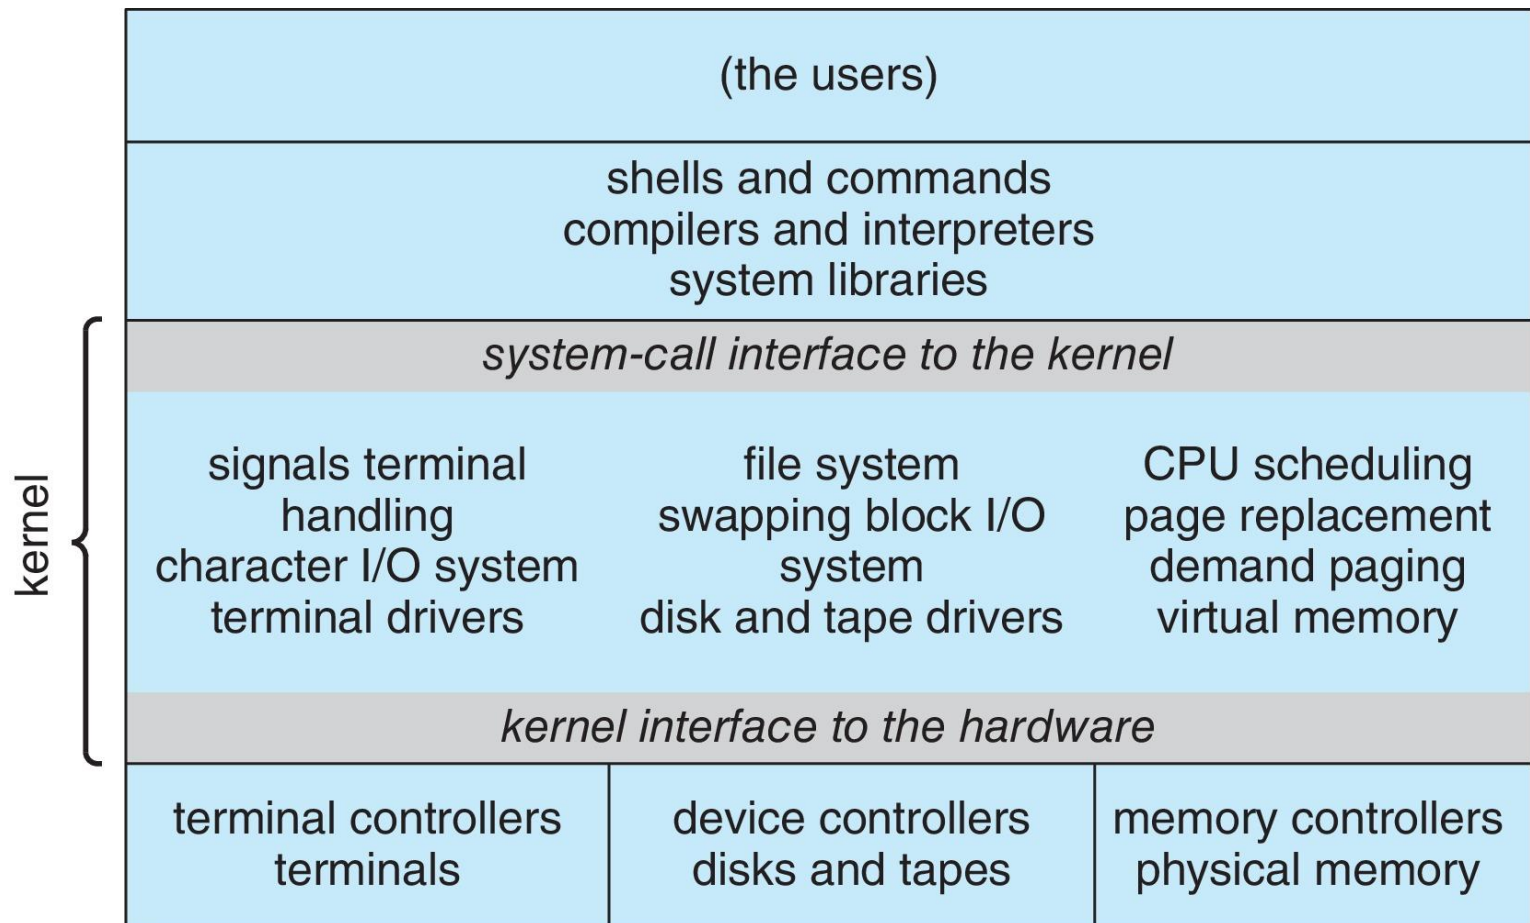



# Linux System Structure


## Monolithic plus modular design

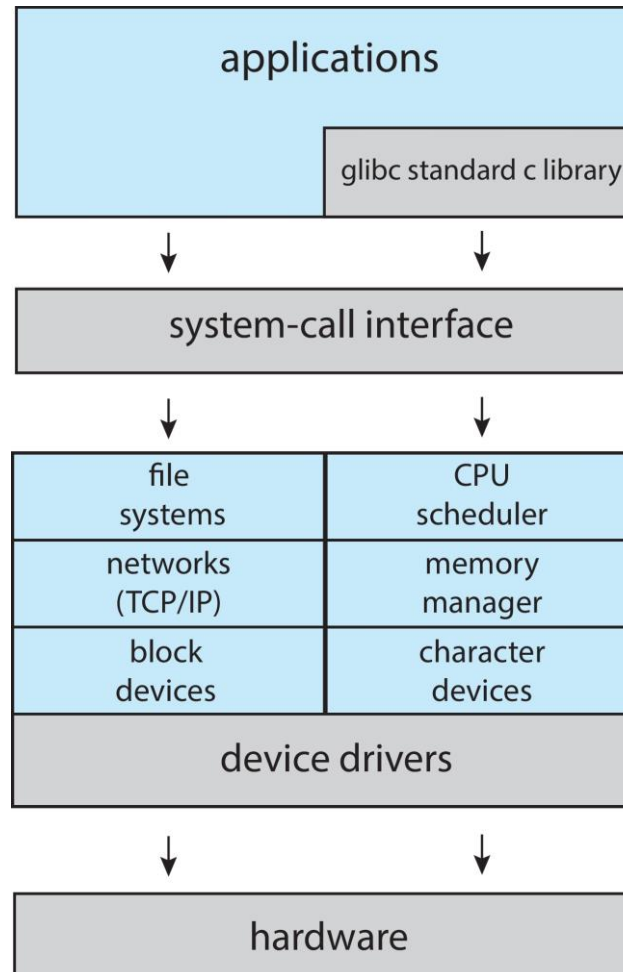



# Layered Approach

- The OS is divided into a number of layers (levels), each built on top of lower layers.
  - The bottom layer (layer 0), is the hardware
  - the highest (layer N) is the user interface
- With modularity, layers are selected such that each uses functions (operations) and services of only lower-level layers

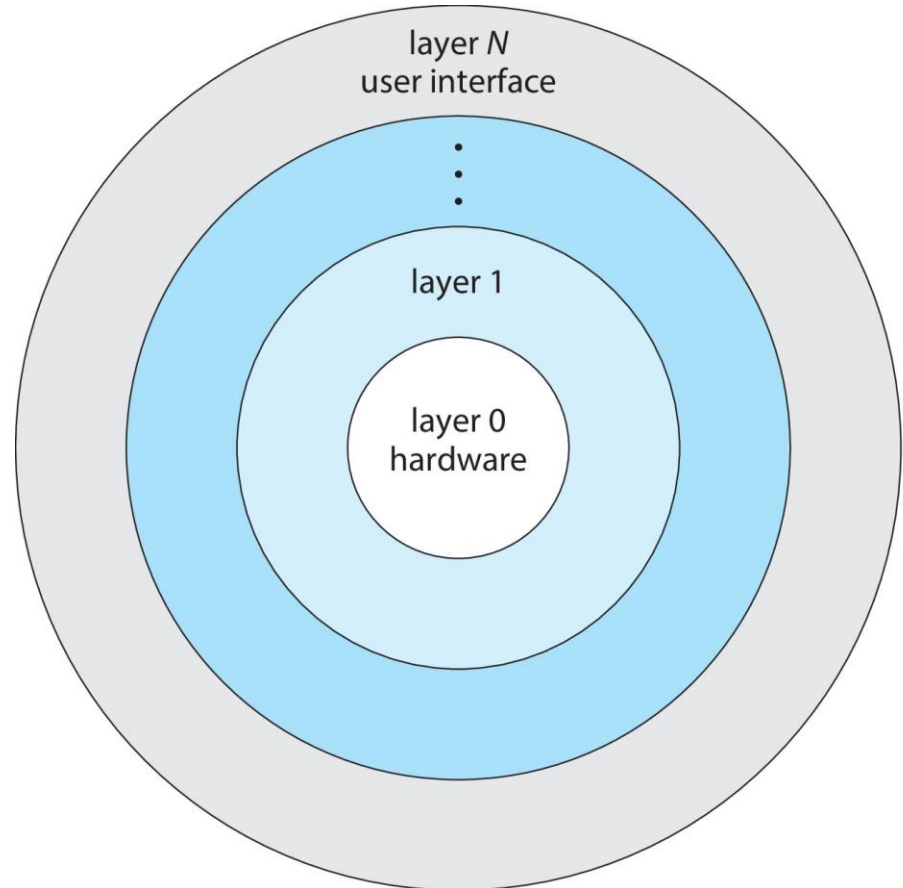



# Microkernels


---

- Moves as much from the kernel into user space
- **Mach** is an example of **microkernel**
  - Mac OS X kernel (**Darwin**) partly based on Mach
- Communication takes place between user modules using **message passing**
- Benefits:
  - Easier to extend a microkernel
  - Easier to port the OS to new architectures
  - More reliable (less code is running in kernel mode)
  - More secure
- Detriments:
  - Performance overhead of user space to kernel space communication





# Microkernel System Structure

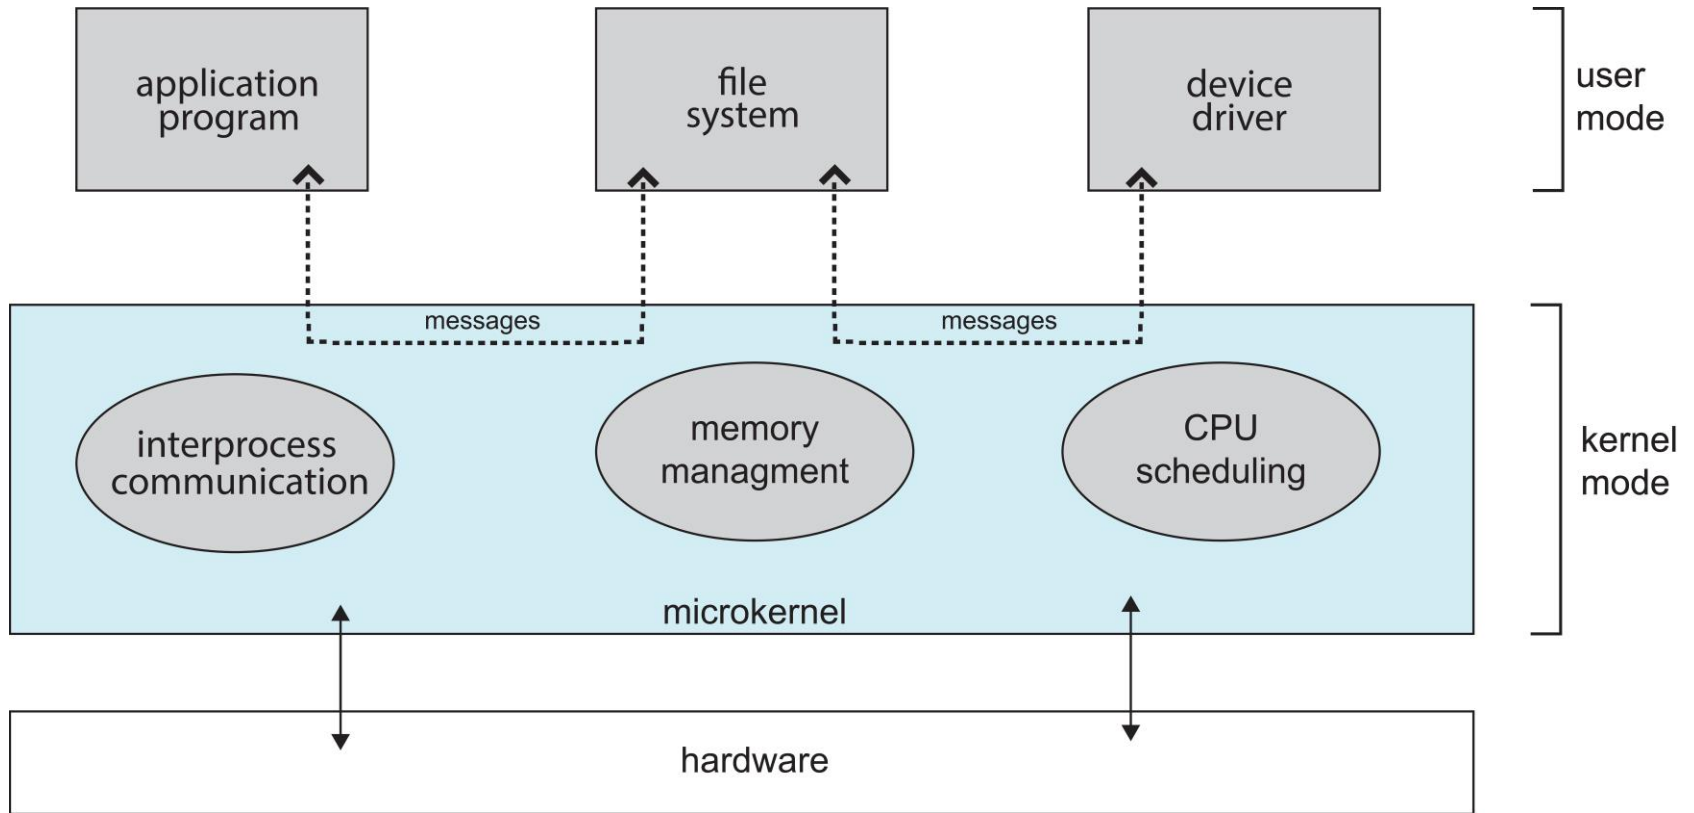



# Modules

---

- Many modern OS implement **loadable kernel modules (LKMs)**
  - Uses object-oriented approach
  - Each core component is separate
  - Each talks to the others over known interfaces
  - Each is loadable as needed within the kernel
- Overall, similar to layers but more flexible
  - Linux, Solaris, etc.





# Hybrid Systems


---

- Most modern OS are not one pure model
  - Hybrid combines multiple approaches to address performance, security, usability needs
  - Linux and Solaris kernels in kernel address space, so monolithic, plus modular for dynamic loading of functionality
  - Windows mostly monolithic, plus microkernel for different subsystem **personalities**
- Apple Mac OS X hybrid, layered, **Aqua** UI plus **Cocoa** programming environment
  - Below is kernel consisting of Mach microkernel and BSD Unix parts, plus I/O kit and dynamically loadable modules (called **kernel extensions**)






# macOS and iOS Structure

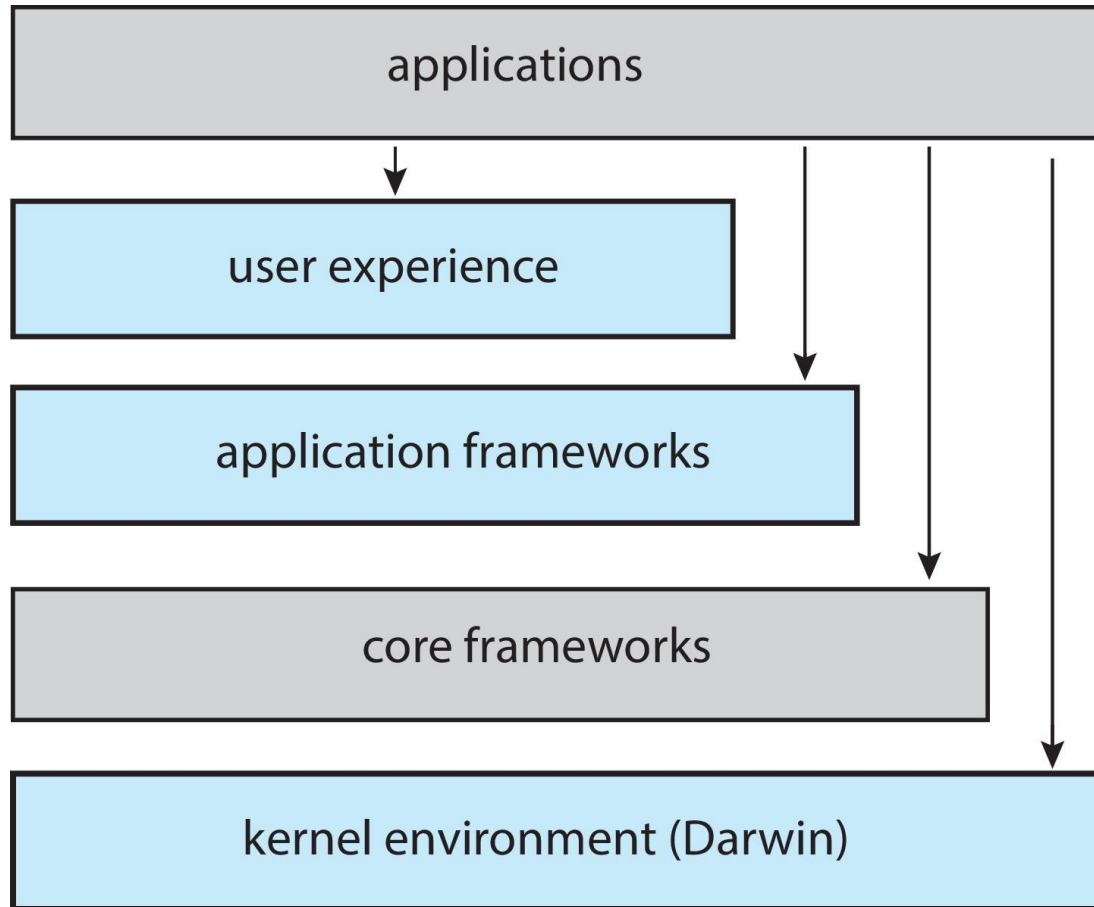





# Darwin

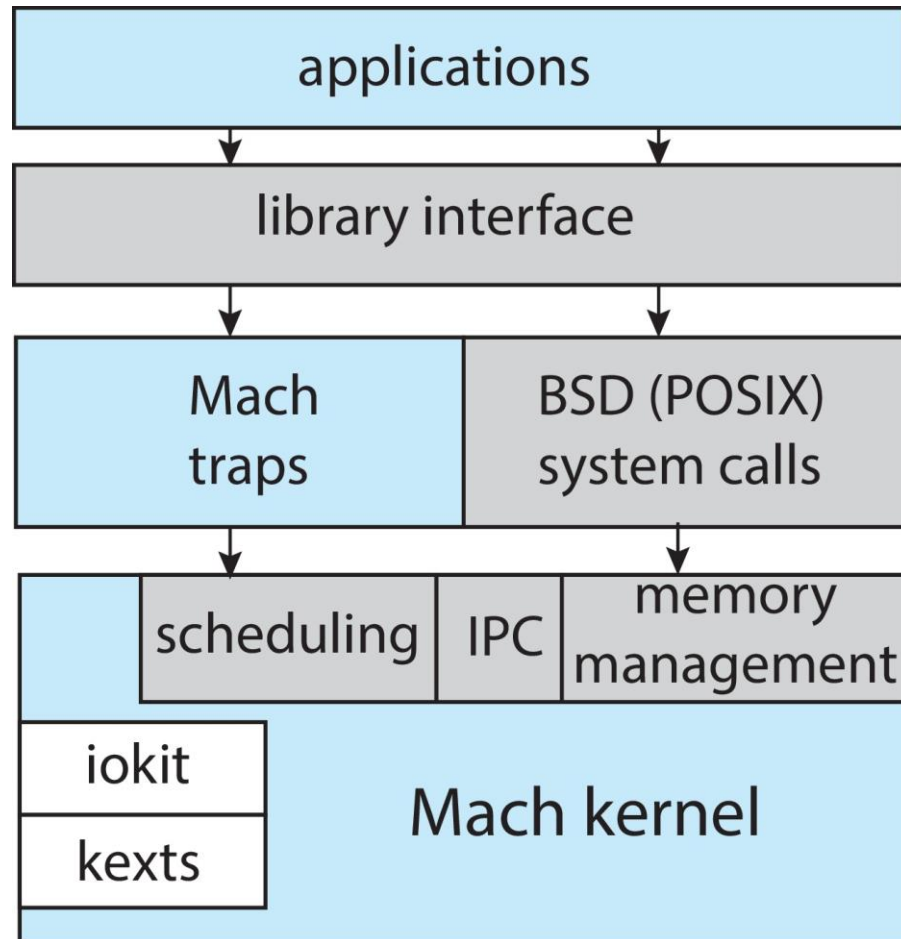



# Android


---

- Developed by Open Handset Alliance (mostly Google)
  - Open Source
- Similar stack to iOS
- Based on Linux kernel but modified
  - Provides process, memory, device-driver management
  - Adds power management
- Runtime environment includes core set of libraries and Dalvik virtual machine
  - Apps developed in Java plus Android API
    - ▶ Java class files compiled to Java bytecode then translated to executable then runs in Dalvik VM
- Libraries include frameworks for web browser (webkit), database (SQLite), multimedia, smaller libc





# Android Architecture

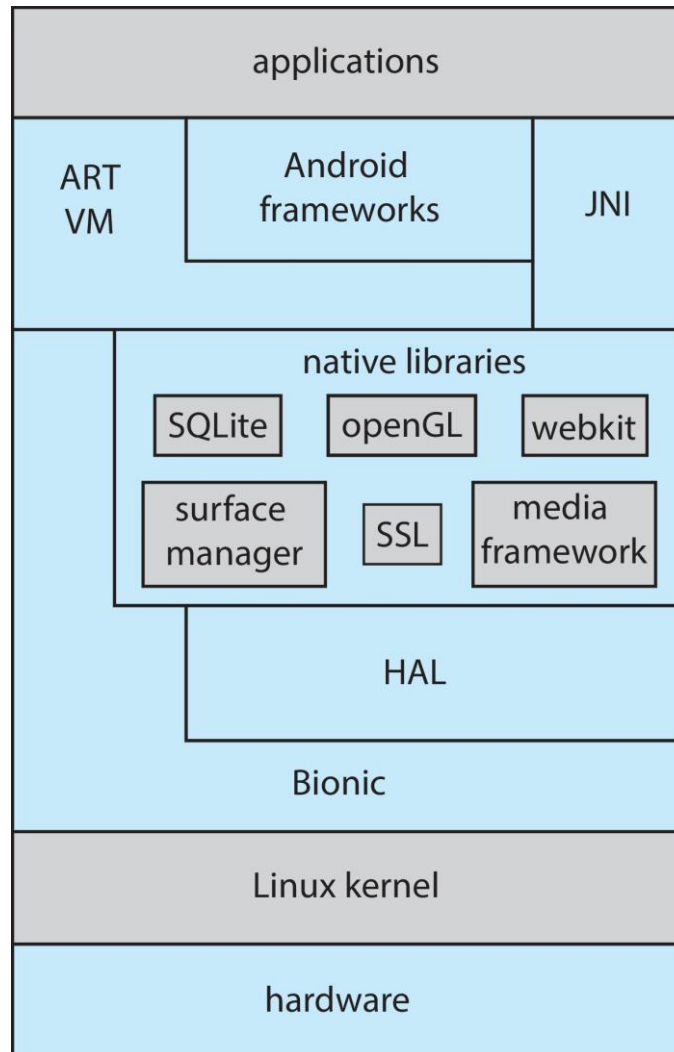



# Building and Booting an Operating System

---

- OS generally designed to run on a class of systems with variety of peripherals
- Commonly, OS already installed on purchased computer
  - But can build and install some other OS
  - If generating an OS from scratch
    - ▶ Write the OS source code
    - ▶ Configure the OS for the system on which it will run
    - ▶ Compile the OS
    - ▶ Install the OS
    - ▶ Boot the computer and its new OS





# Building and Booting Linux

---

- Download Linux source code (<http://www.kernel.org>)
- Configure kernel via “make menuconfig”
- Compile the kernel using “make”
  - Produces `vmlinuz`, the kernel image
  - Compile kernel modules via “make modules”
  - Install kernel modules into `vmlinuz` via “make modules\_install”
  - Install new kernel on the system via “make install”





# System Boot

- When power initialized on system, execution starts at a fixed memory location
- OS must be made available to hardware so hardware can start it
  - Small piece of code – **bootstrap loader**, **BIOS**, stored in **ROM** or **EEPROM** locates the kernel, loads it into memory, and starts it
  - Sometimes two-step process where **boot block** at fixed location loaded by ROM code, which loads bootstrap loader from disk
  - Modern systems replace BIOS with **Unified Extensible Firmware Interface (UEFI)**
- Common bootstrap loader, **GRUB**, allows selection of kernel from multiple disks, versions, kernel options
- Kernel loads and system is then **running**
- Boot loaders frequently allow various boot states, such as single user mode





# Operating-System Debugging

- **Debugging** is finding and fixing errors, or **bugs**
- Also **performance tuning**
- OS generate **log files** containing error information
- Failure of an application can generate **core dump** file capturing memory of the process
- OS can generate **crash dump** file containing kernel memory
- Beyond crashes, performance tuning can optimize system performance
  - Sometimes using **trace listings** of activities, recorded for analysis
  - **Profiling** is periodic sampling of instruction pointer to look for statistical trends


Kernighan's Law: "Debugging is twice as hard as writing the code in the first place. Therefore, if you write the code as cleverly as possible, you are, by definition, not smart enough to debug it."





# Performance Tuning

- Improve performance by removing bottlenecks
- OS must provide means of computing and displaying measures of system behavior
- For example, “top” program or Windows Task Manager

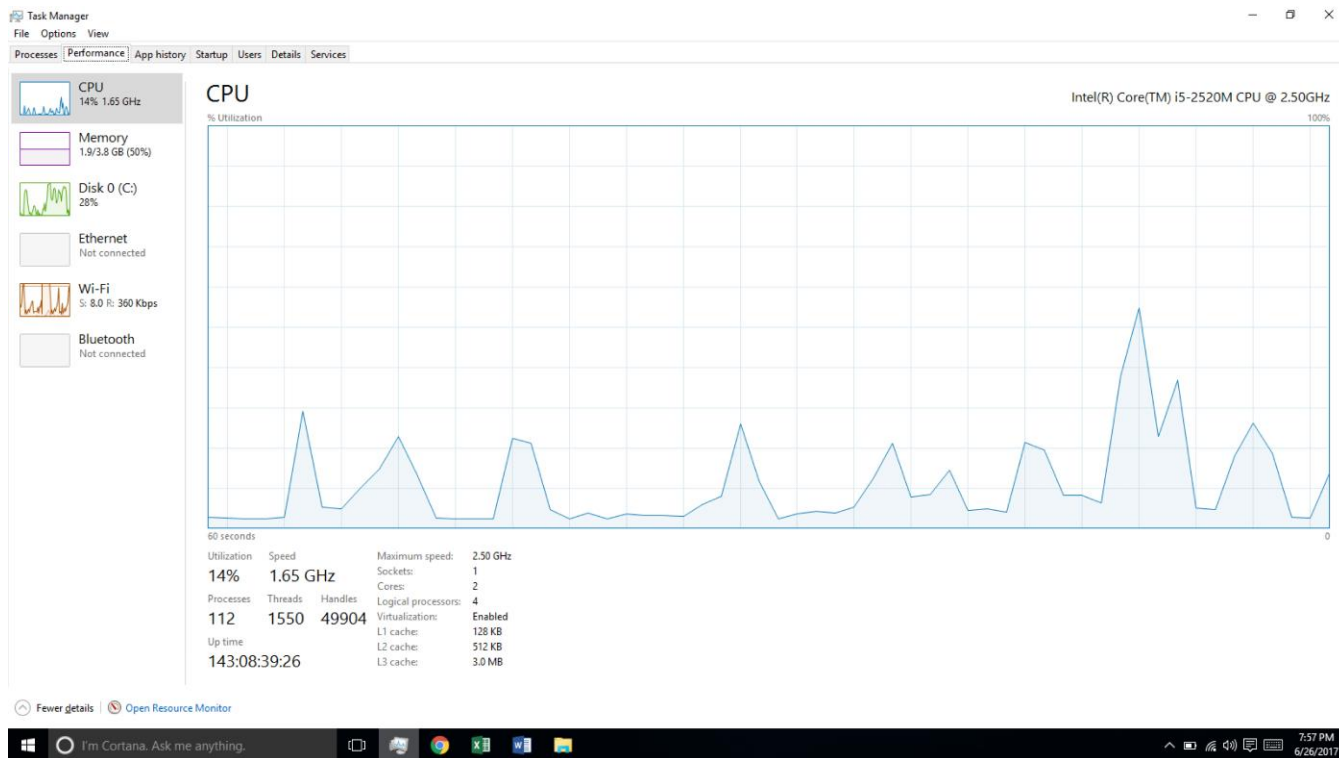





# Tracing

---

- Collects data for a specific event, such as steps involved in a system call invocation
- Tools include
  - strace – trace system calls invoked by a process
  - gdb – source-level debugger
  - perf – collection of Linux performance tools
  - tcpdump – collects network packets





# BCC

- Debugging interactions between user-level and kernel code nearly impossible without toolset that understands both and an instrument their actions
- BCC (BPF Compiler Collection) is a rich toolkit providing tracing features for Linux
  - See also the original DTrace
- For example, disksnoop.py traces disk I/O activity

TIME(s)	T	BYTES	LAT(ms)
1946.29186700	R	8	0.27
1946.33965000	R	8	0.26
1948.34585000	W	8192	0.96
1950.43251000	R	4096	0.56
1951.74121000	R	4096	0.35

- Many other tools (next slide)






The diagram illustrates the Linux kernel architecture and the tools used to monitor it. The architecture is divided into several layers, each with associated tools:

- Applications:** c\*, java\*, node\*, php\*, python\*, ruby\*, mysql, bash, readline, memleak, sslsniff, syscount, killsnoop, execsnoop, pidpersec.
- System Libraries:** ucalls, uflow, ugc, uobjnew, ustat, uthreads.
- System Call Interface:** cachestat, cachetop, dcstat, dcnoop, mountsnoop, opensnoop, statsnoop, syncsnoop.
- VFS:** btrfsdist, btrfsslower, ext4dist, ext4slower, xfsdist, xfsslower, zfsdist, zfsslower.
- File Systems:** mdflush.
- Volume Manager:** hardirqs, ttysnoop.
- Block Device Interface:** biotop, biosnoop, biolatency, bitesize.
- Sockets:** tcptop, tcplife, tcptracer, tcpconnect, tcpaccept, tcpconnlst, tcpretrans.
- TCP/UDP:** llcstat, profile.
- IP:** cpudist, runqlat, runqlen, deadlock\_detector, cpunclained.
- Ethernet:** offcputime, wakeuptime, offwaketime.
- Scheduler:** softirqs.
- Virtual Memory:** oomkill, memleak, slabratetop.
- Device Drivers:** btrfsslower, ext4slower, xfsslower, zfsslower.

A vertical double-headed arrow on the left indicates the flow of data between the top and bottom layers. A box on the right shows the connection between DRAM and CPU.

<https://github.com/iovisor/bcc#tools> 2017



# End of Chapter 2

---

