

CCCN 312 Computer Networks

Chapter 5

Network Layer: Control Plane

A note on the use of these PowerPoint slides:


We're making these slides freely available to all (faculty, students, readers). They're in PowerPoint form so you see the animations; and can add, modify, and delete slides (including this one) and slide content to suit your needs. They obviously represent a *lot* of work on our part. In return for use, we only ask the following:

- If you use these slides (e.g., in a class) that you mention their source (after all, we'd like people to use our book!)
- If you post any slides on a www site, that you note that they are adapted from (or perhaps identical to) our slides, and note our copyright of this material.

For a revision history, see the slide note for this page.

Thanks and enjoy! JFK/KWR

All material copyright 1996-2020
J.F Kurose and K.W. Ross, All Rights Reserved

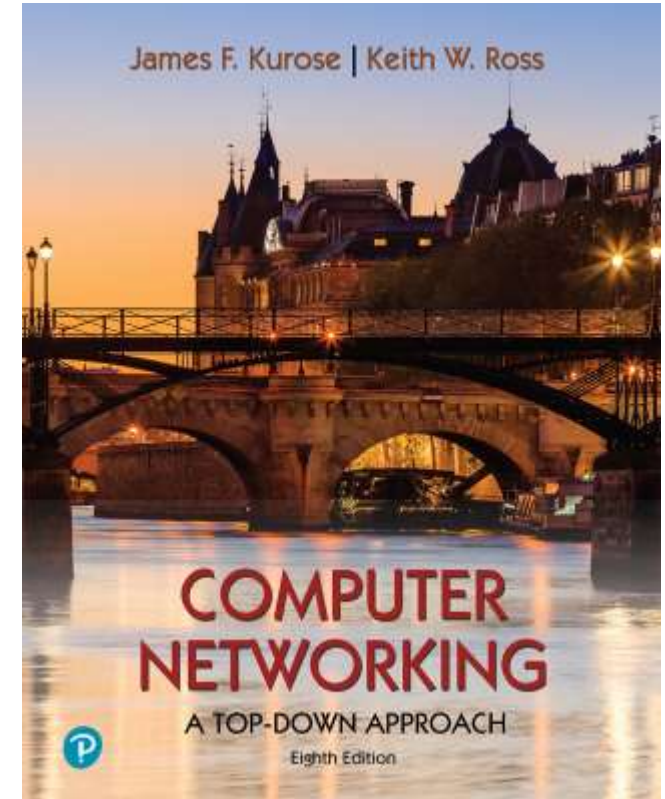

*Computer Networking: A
Top-Down Approach*

8th edition

Jim Kurose, Keith Ross
Pearson, 2020

Network layer: “control plane” roadmap

- introduction
- routing protocols
 - link state
 - distance vector
- intra-ISP routing: OSPF
- routing among ISPs: BGP
- Internet Control Message Protocol



Recall Network-layer functions

- **forwarding**: move packets from router's input to appropriate router output *data plane*
- **routing**: determine route taken by packets from source to destination *control plane*

Two approaches to structuring network control plane:

- per-router control (traditional)
- logically centralized control (software defined networking)

Network layer: “control plane” roadmap


- introduction
- routing protocols
 - link state
 - distance vector
- intra-ISP routing: OSPF
- routing among ISPs: BGP
- Internet Control Message Protocol




Routing protocols

Routing protocol goal: determine “good” paths (equivalently, routes), from sending hosts to receiving host, through network of routers

- **path:** sequence of routers packets traverse from given initial source host to final destination host
- **“good”:** least “cost”, “fastest”, “least congested”

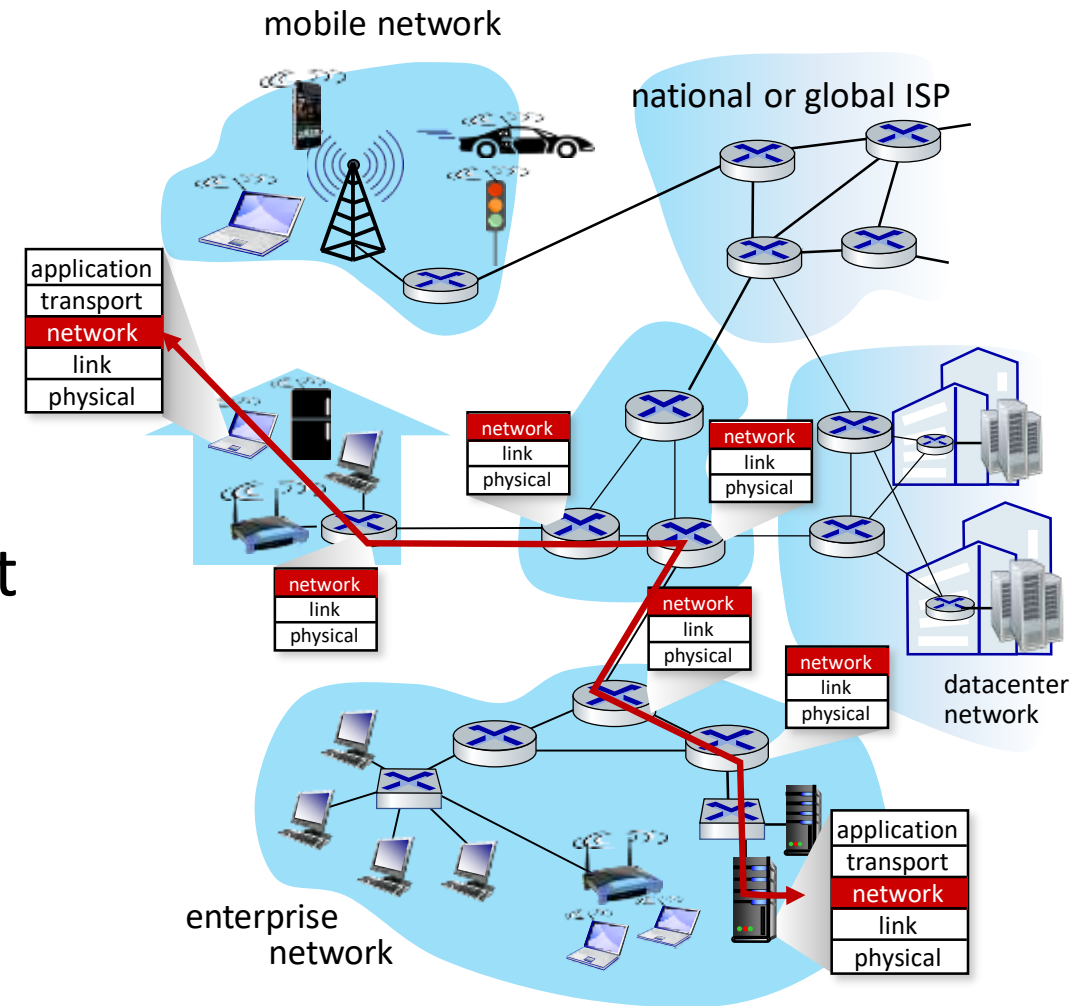

Graph abstraction: link costs

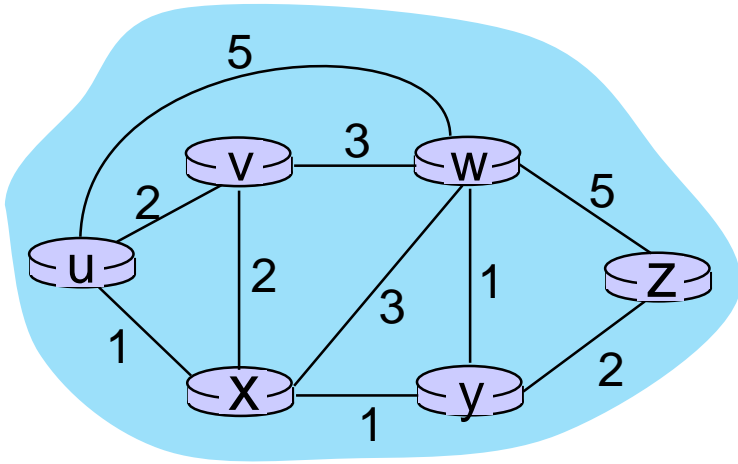

$c_{a,b}$: cost of *direct* link connecting a and b

e.g., $c_{w,z} = 5$, $c_{u,z} = \infty$

cost defined by network operator:
could always be 1, or inversely related
to bandwidth, or inversely related to
congestion

graph: $G = (N, E)$

N : set of routers = $\{ u, v, w, x, y, z \}$

E : set of links = $\{ (u,v), (u,x), (v,x), (v,w), (x,w), (x,y), (w,y), (w,z), (y,z) \}$

Routing algorithm classification

Q: global or decentralized information?

Global\centralized:

- computes the least-cost path between a source and destination using complete, global knowledge about the network (connectivity & link costs)
- all routers have complete topology & link cost info
- Called “**link state**” algorithms
- Ex: Dijkstra Algorithm

Local\Decentralized:

- No node has complete information about the costs of all network links.
- router knows physically-connected neighbors. “Neighbors link costs”
- iterative process of computation: exchange of info with neighbors and compute new least cost paths.
- Called “**distance vector**” algorithms

Comparison of LS and DV algorithms

LS algorithm

- Requires global information.
- each node needs to communicate with all other nodes (via broadcast),
- it tells them only the costs of its directly connected links.
- If n routers, $O(n^2)$ messages broadcast

DV algorithm

- each node talks to only its directly connected neighbors,
- it provides its neighbors with least cost estimates from *itself* to *all the nodes* (that it knows about) in the network
- Convergence time may be long

Network layer: “control plane” roadmap

- introduction
- routing protocols
- **intra-ISP routing: OSPF**
- routing among ISPs: BGP
- Internet Control Message Protocol



Making routing scalable

our routing study thus far - idealized

- all routers identical
- network “flat”

... not true in practice

scale: billions of destinations:

- can't store all destinations in routing tables!
- routing table exchange would swamp links!

administrative autonomy:

- Internet: a network of networks
- each network admin may want to control routing in its own network

Internet approach to scalable routing

aggregate routers into regions known as “autonomous systems” (AS) (a.k.a. “domains”)


intra-AS (aka “intra-domain”):
routing among *within same AS*
(“*network*”)

- all routers in AS must run same intra-domain protocol
- routers in different AS can run different intra-domain routing protocols
- **gateway router:** at “edge” of its own AS, has link(s) to router(s) in other AS'es

inter-AS (aka “inter-domain”):
routing *among* AS'es

- gateways perform inter-domain routing (as well as intra-domain routing)

Interconnected ASes

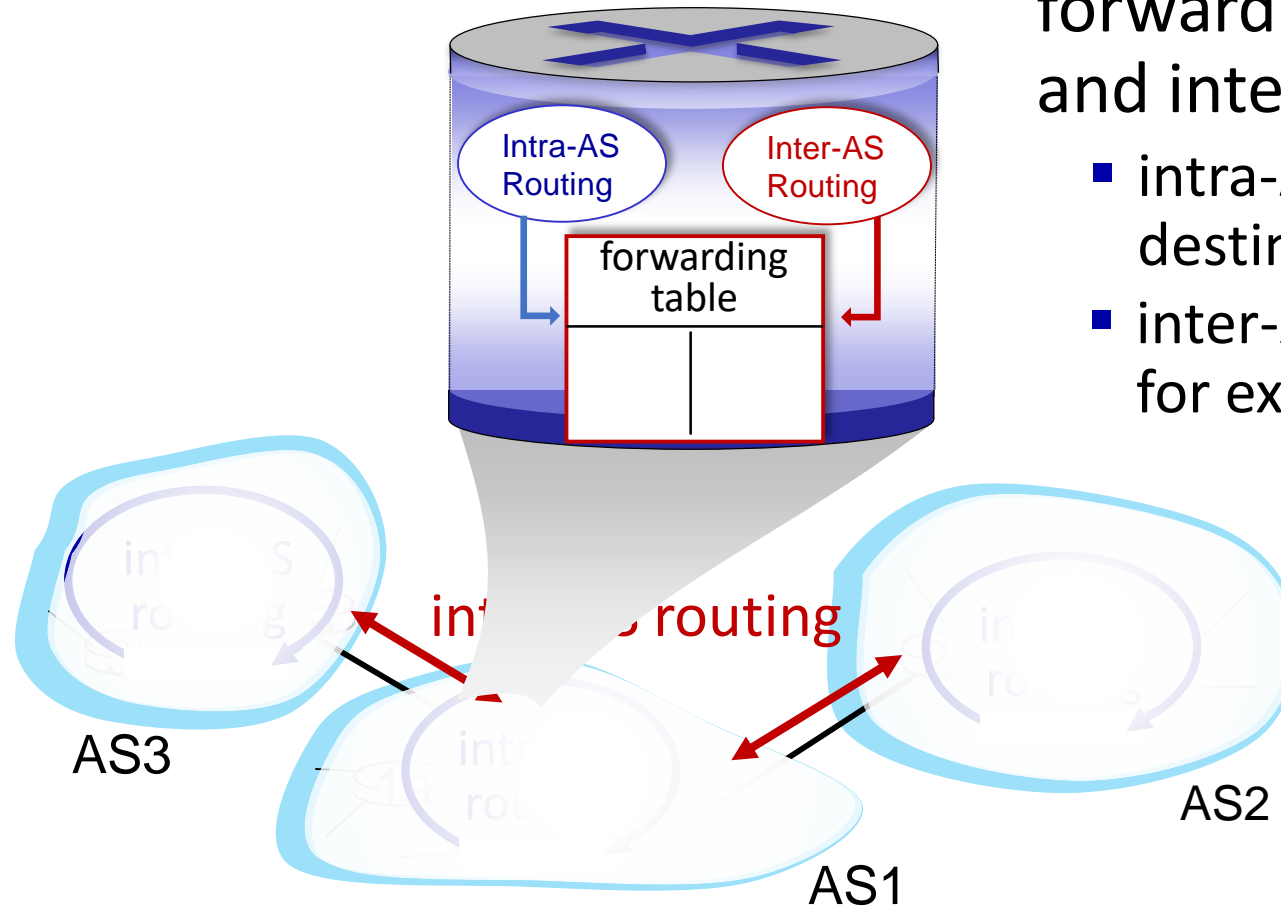

forwarding table configured by intra- and inter-AS routing algorithms

- intra-AS routing determine entries for destinations within AS
- inter-AS & intra-AS determine entries for external destinations

Inter-AS routing: routing within an AS

most common intra-AS routing protocols:

- **RIP: Routing Information Protocol** [RFC 1723]
 - classic DV: DVs exchanged every 30 secs
 - no longer widely used
- **EIGRP: Enhanced Interior Gateway Routing Protocol**
 - DV based
 - formerly Cisco-proprietary for decades (became open in 2013 [RFC 7868])
- **OSPF: Open Shortest Path First** [RFC 2328]
 - link-state routing
 - IS-IS protocol (ISO standard, not RFC standard) essentially same as OSPF

OSPF (Open Shortest Path First) routing

- “open”: publicly available
- classic link-state
 - each router floods OSPF link-state advertisements (directly over IP rather than using TCP/UDP) to all other routers in entire AS
 - multiple link costs metrics possible: bandwidth, delay
 - each router has full topology, uses Dijkstra’s algorithm to compute forwarding table
- *security*: all OSPF messages authenticated (to prevent malicious intrusion)

Network layer: “control plane” roadmap


- introduction
- routing protocols
- intra-ISP routing: OSPF
- **routing among ISPs: BGP**
- Internet Control Message Protocol



Internet inter-AS routing: BGP


- **BGP (Border Gateway Protocol):** *the* de facto inter-domain routing protocol
 - “glue that holds the Internet together”
- allows subnet to advertise its existence, and the destinations it can reach, to rest of Internet: *“I am here, here is who I can reach, and how”*
- BGP provides each AS a means to:
 - **eBGP:** obtain subnet reachability information from neighboring ASes
 - **iBGP:** propagate reachability information to all AS-internal routers.
 - determine “good” routes to other networks based on reachability information and *policy*

eBGP, iBGP connections

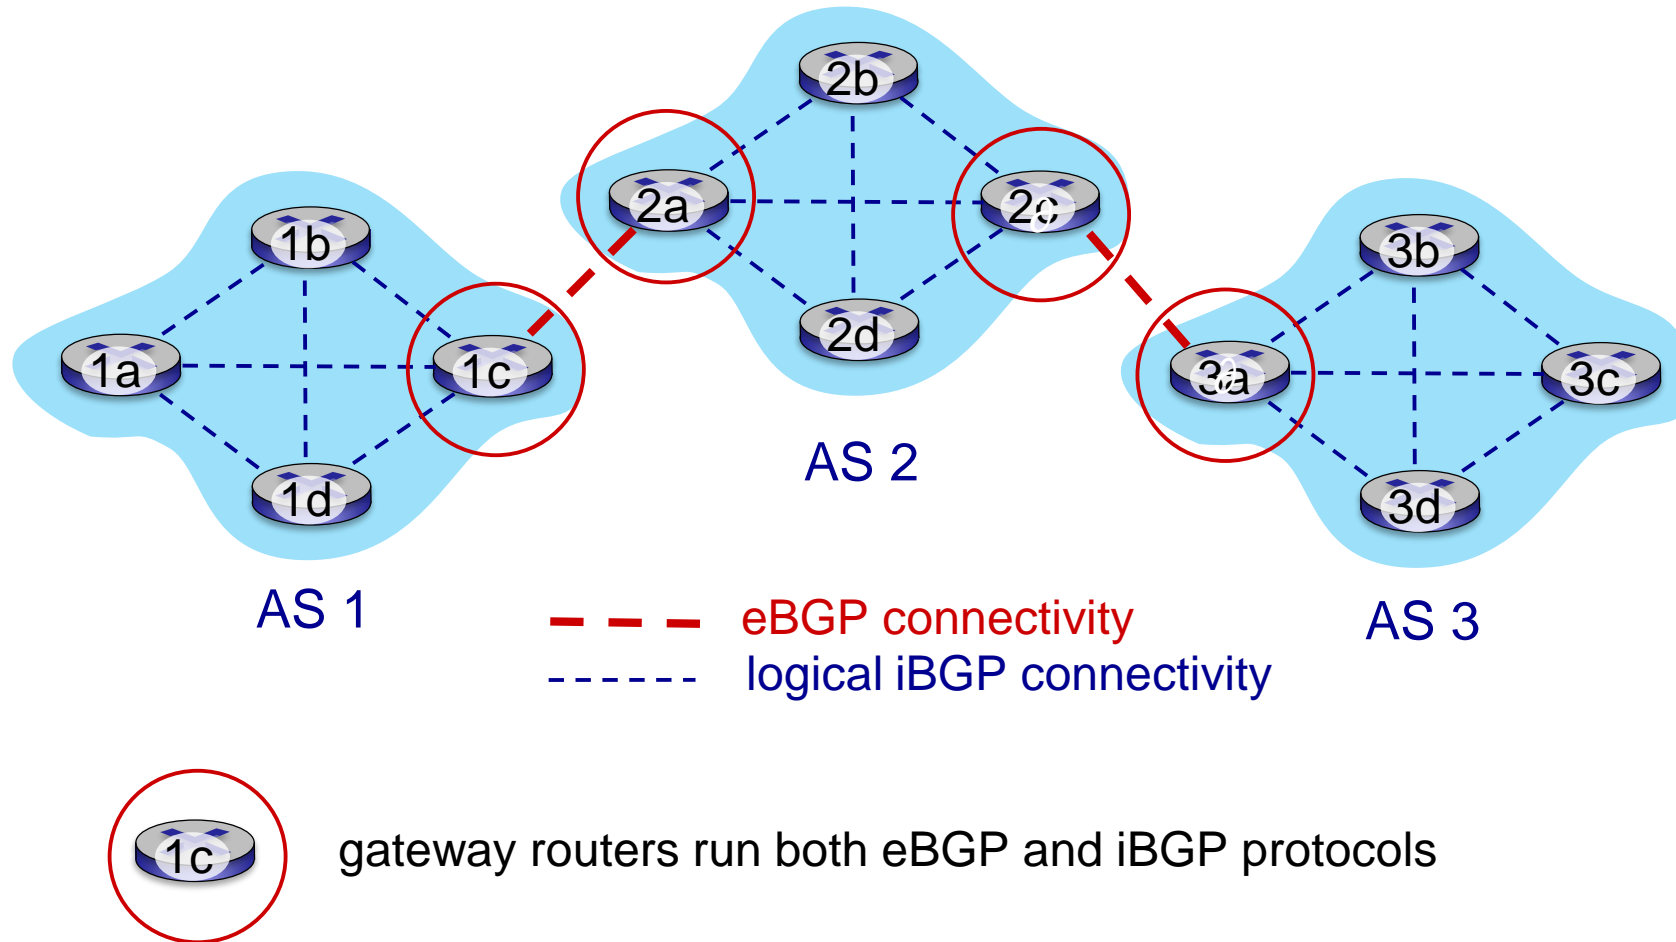

BGP basics


- **BGP session:** two BGP routers (“peers”) exchange BGP messages over TCP connection:
 - advertising *paths* to different destination network prefixes (BGP is a “path vector” protocol)
- when AS3 gateway 3a advertises *path AS3,X* to AS2 gateway 2c:
 - AS3 *promises* to AS2 it will forward datagrams towards X

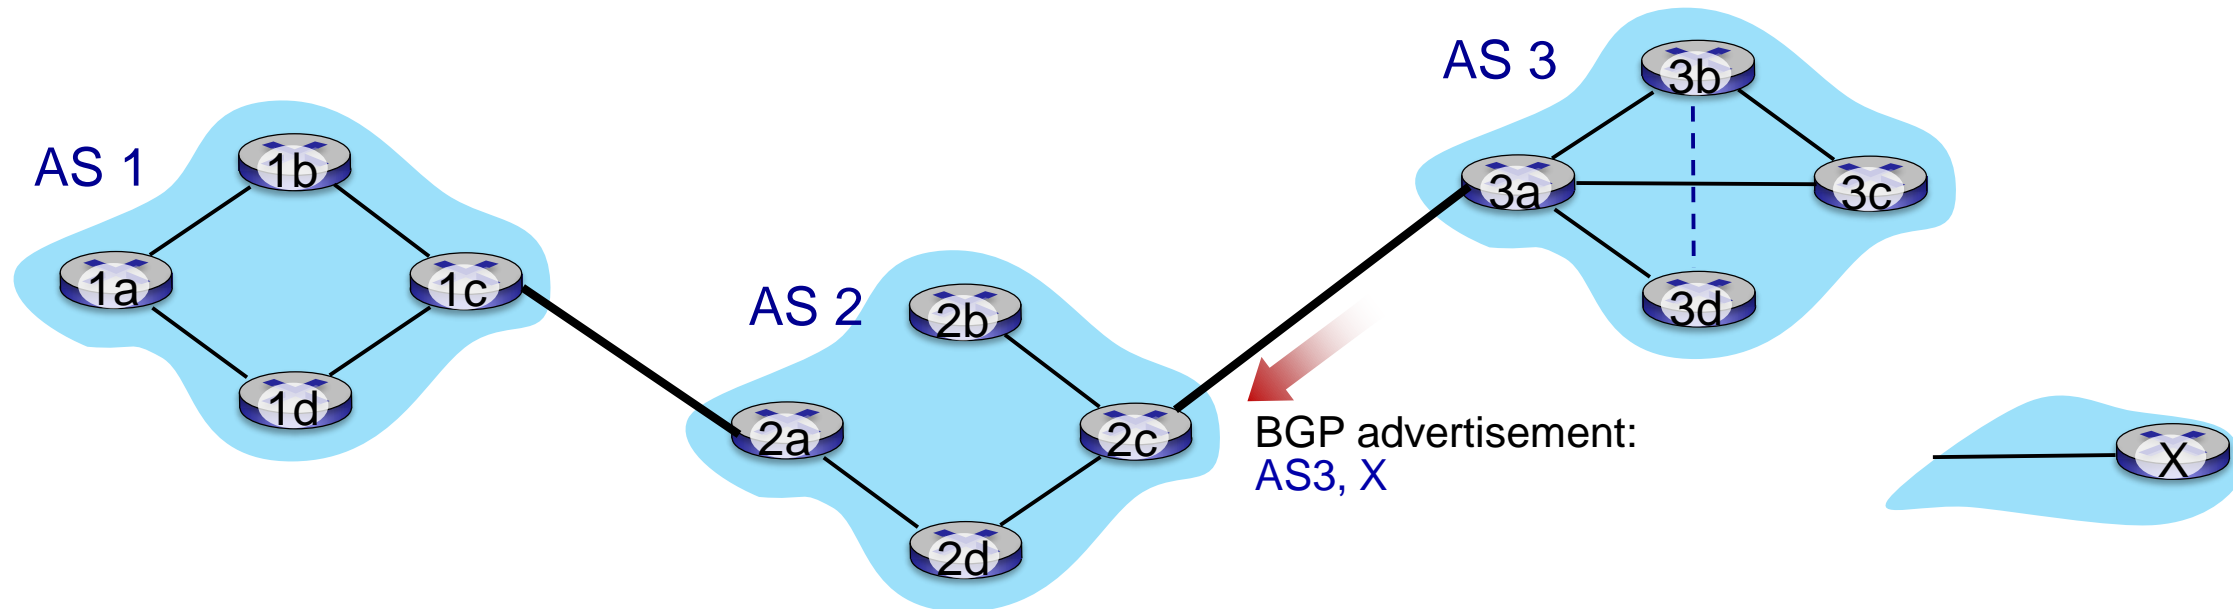

Path attributes and BGP routes


- BGP advertised route: prefix + attributes
 - prefix: destination being advertised
 - two important attributes:
 - **AS-PATH**: list of ASes through which prefix advertisement has passed
 - **NEXT-HOP**: indicates specific internal-AS router to next-hop AS
- **policy-based routing**:
 - gateway receiving route advertisement uses *import policy* to accept/decline path (e.g., never route through AS Y).
 - AS policy also determines whether to *advertise* path to other neighboring ASes

BGP path advertisement

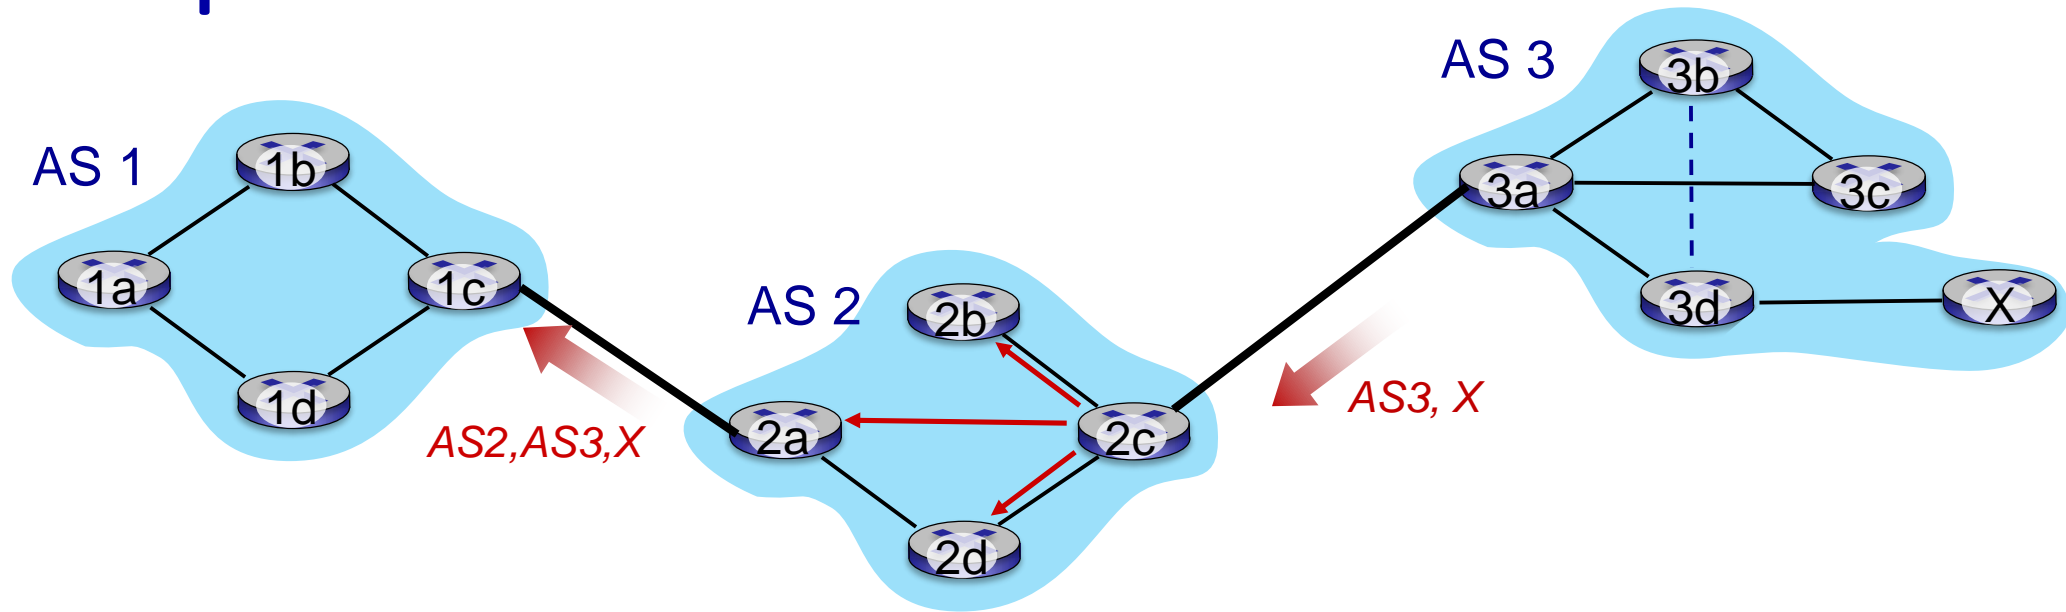

- AS2 router 2c receives path advertisement **AS3,X** (via eBGP) from AS3 router 3a
- based on AS2 policy, AS2 router 2c accepts path AS3,X, propagates (via iBGP) to all AS2 routers
- based on AS2 policy, AS2 router 2a advertises (via eBGP) path **AS2, AS3, X** to AS1 router 1c

BGP path advertisement (more)

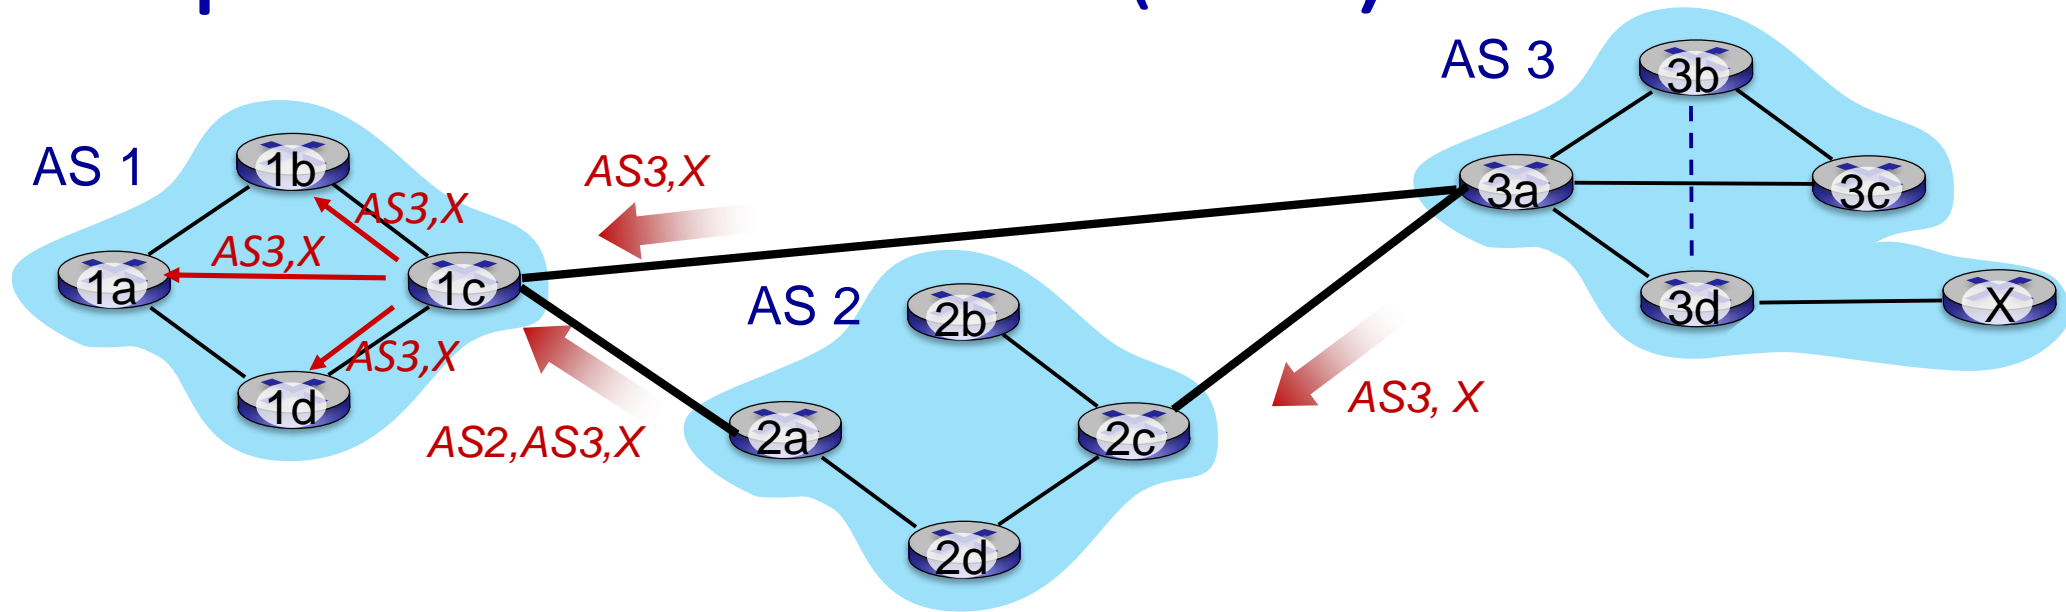

gateway router may learn about **multiple** paths to destination:

- AS1 gateway router 1c learns path **AS2,AS3,X** from 2a
- AS1 gateway router 1c learns path **AS3,X** from 3a
- based on **policy**, AS1 gateway router 1c chooses path **AS3,X** and advertises path within AS1 via iBGP

Why different Intra-, Inter-AS routing ?

policy:

- inter-AS: admin wants control over how its traffic routed, who routes through its network
- intra-AS: single admin, so policy less of an issue

scale:

- hierarchical routing saves table size, reduced update traffic

performance:

- intra-AS: can focus on performance
- inter-AS: policy dominates over performance

Network layer: “control plane” roadmap

- introduction
- routing protocols
- intra-ISP routing: OSPF
- routing among ISPs: BGP
- **Internet Control Message Protocol**




ICMP: internet control message protocol

- used by hosts and routers to communicate network-level information
 - error reporting: unreachable host, network, port, protocol
 - echo request/reply (used by ping)
- network-layer “above” IP:
 - ICMP messages carried in IP datagrams
- *ICMP message*: type, code plus first 8 bytes of IP datagram causing error

<u>Type</u>	<u>Code</u>	<u>description</u>
0	0	echo reply (ping)
3	0	dest. network unreachable
3	1	dest host unreachable
3	2	dest protocol unreachable
3	3	dest port unreachable
3	6	dest network unknown
3	7	dest host unknown
4	0	source quench (congestion control - not used)
8	0	echo request (ping)
9	0	route advertisement
10	0	router discovery
11	0	TTL expired
12	0	bad IP header

Traceroute and ICMP

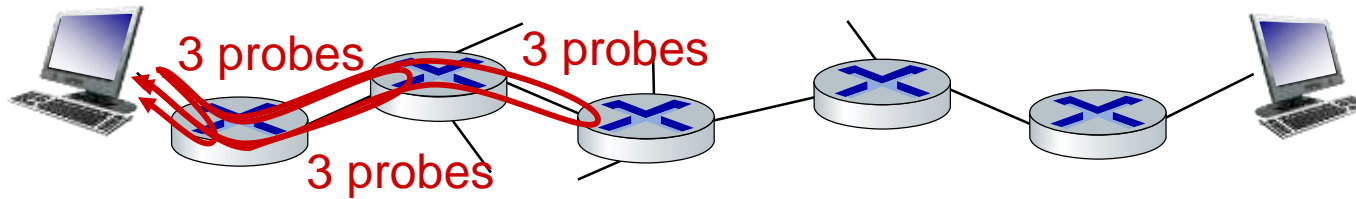

- source sends sets of UDP segments to destination

- 1st set has TTL =1, 2nd set has TTL=2, etc.

- datagram in n th set arrives to n th router:

- router discards datagram and sends source ICMP message (type 11, code 0)
 - ICMP message possibly includes name of router & IP address

- when ICMP message arrives at source: record RTTs

stopping criteria:

- UDP segment eventually arrives at destination host
- destination returns ICMP “port unreachable” message (type 3, code 3)
- source stops

Network layer: Summary

we've learned a lot!

- approaches to network control plane
 - per-router control (traditional)
 - logically centralized control (software defined networking)
- traditional routing algorithms
 - implementation in Internet: OSPF , BGP
- Internet Control Message Protocol

next stop: link layer!