Prediction accuracy vs. inference cost, by method

Both training conditions · ten-seed mean PCC · 208 peptides / 2,211 pairs

Shared time coordinates: accepted seed-123 medians; 20 repeats per method

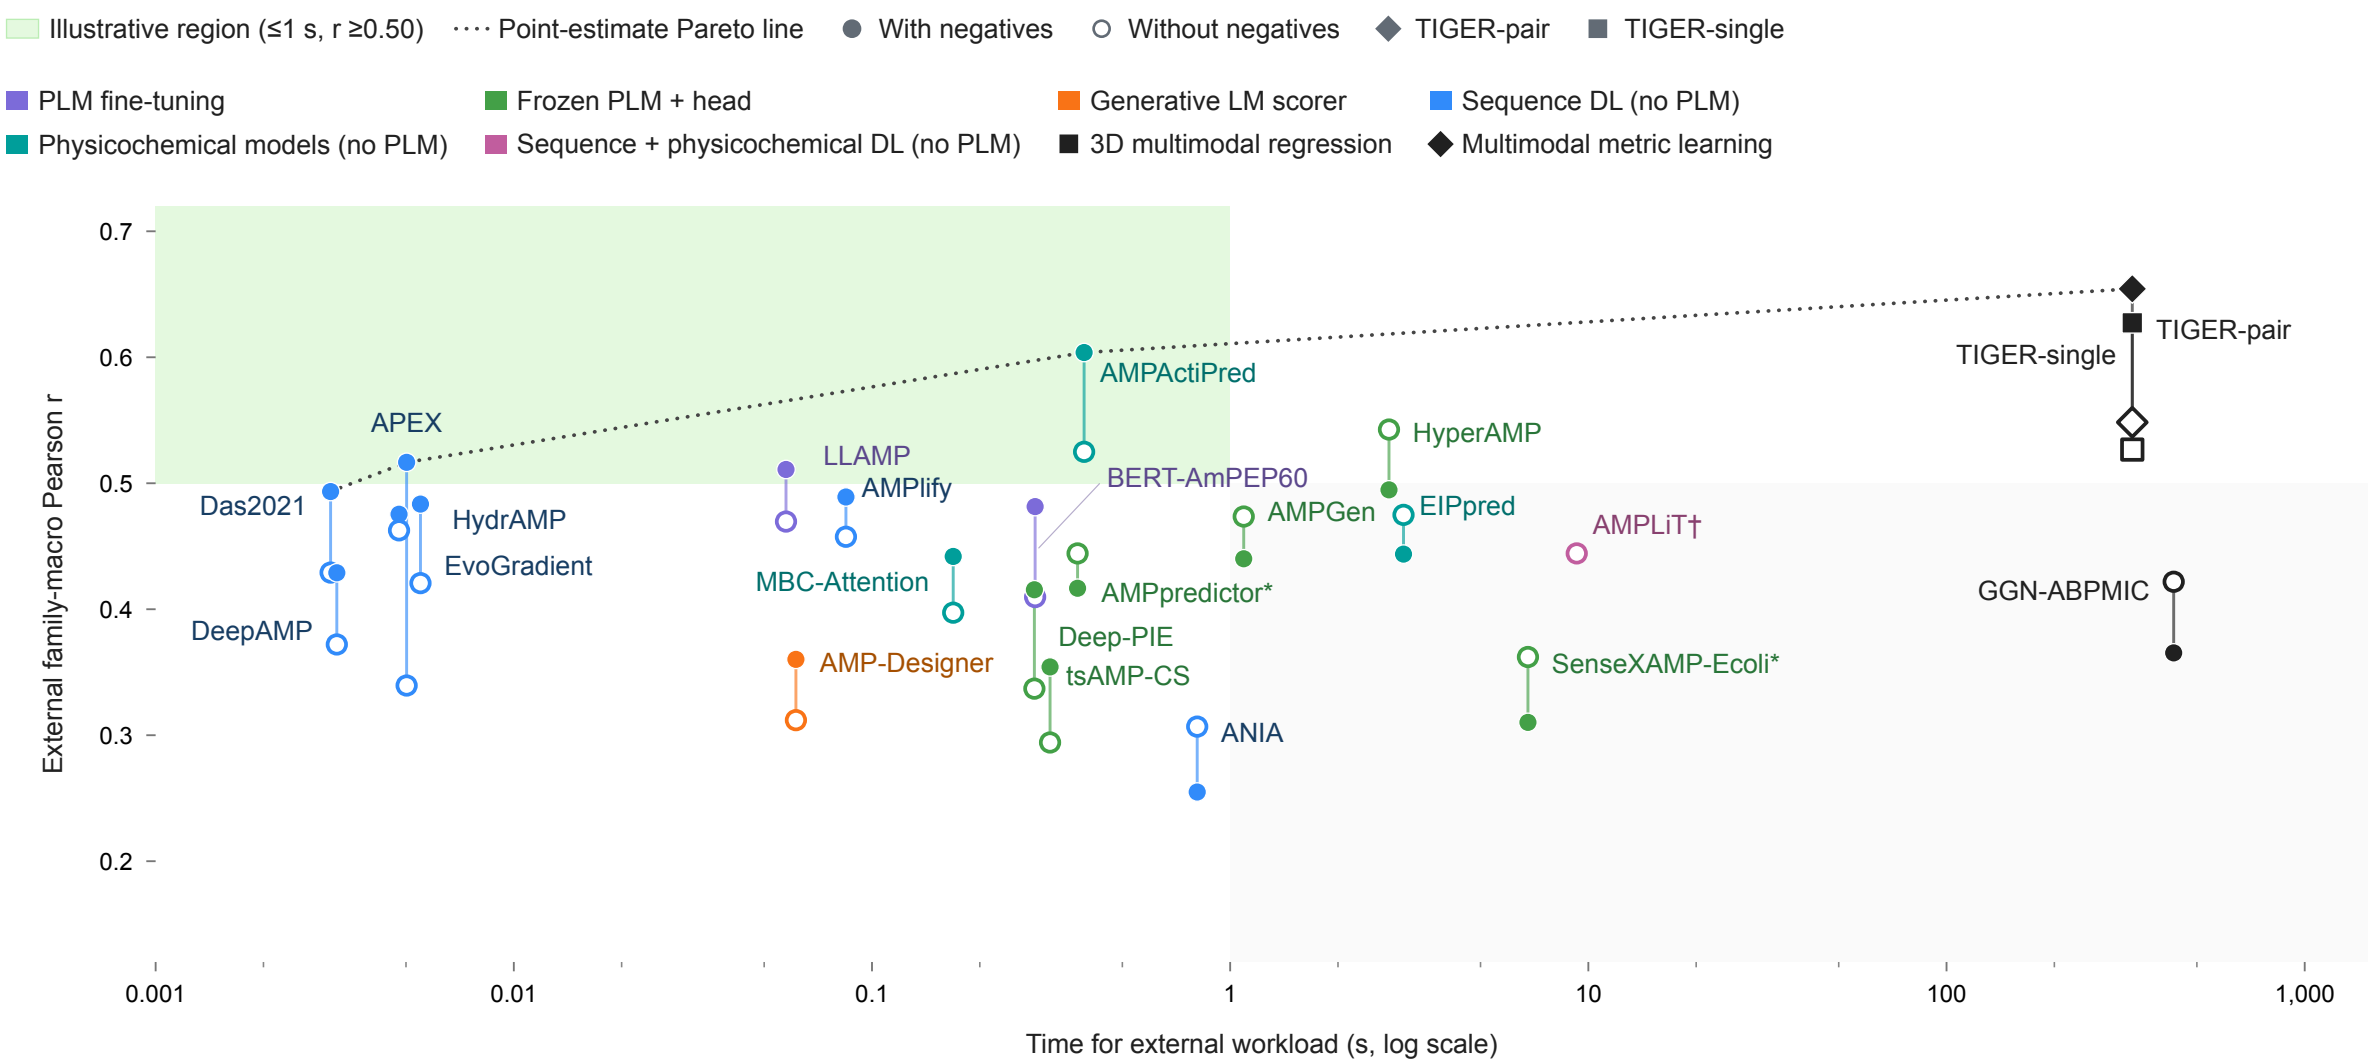

Vertical lines join conditions at the accepted with-negative timing coordinate; same architecture and parameter count.
Structural costs include generation. TIGER compares 00 / 11. †AMPLiT: with-negative PCC is undefined.
*SenseXAMP-Ecoli and AMPpredictor also use physicochemical inputs. Pareto segments are visual guides, not evaluated models.
Structure increment: 328.12 s for 208 peptides; Serial estimate from 30 measured peptides.