Prediction accuracy vs. inference cost, by method

Best training condition per backbone · ten-seed mean PCC · 208 peptides / 2,211 pairs

Shared time coordinates: accepted seed-123 medians; 20 repeats per method

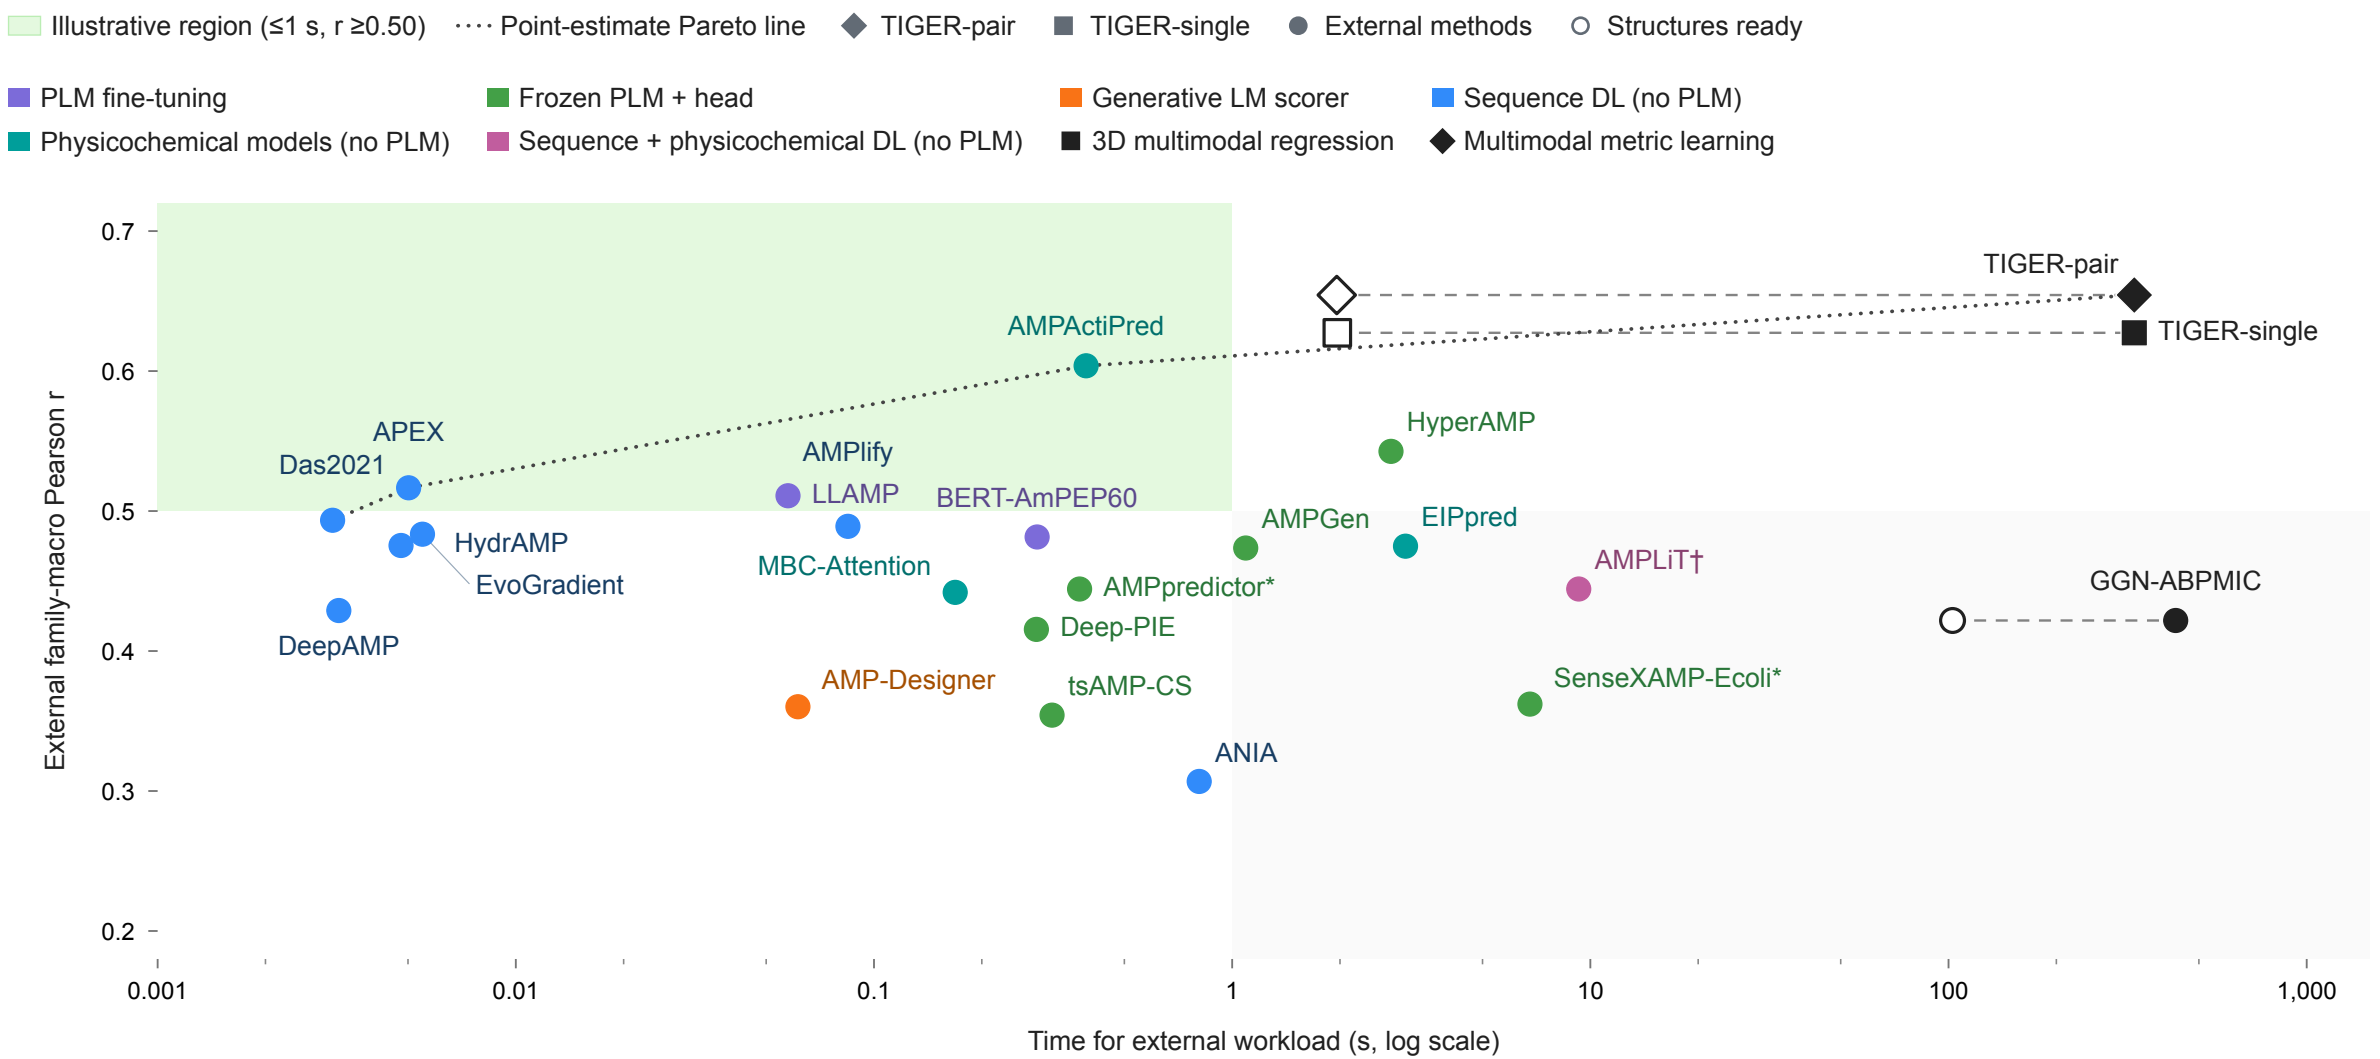

Condition selected by mean PCC; the RSE view uses the same condition. Test-set selection is descriptive. †AMPLiT: with-negative PCC is undefined.
For structural models, filled points include structure generation and hollow points assume structures are ready.
*SenseXAMP-Ecoli and AMPpredictor also use physicochemical inputs. Pareto segments are visual guides, not evaluated models.
Structure increment: 328.12 s for 208 peptides; Serial estimate from 30 measured peptides.