Prediction error vs. inference cost, by method

PCC-selected condition per backbone · ten-seed mean RSE · 208 peptides / 2,211 pairs

Shared time coordinates: accepted seed-123 medians; 20 repeats per method

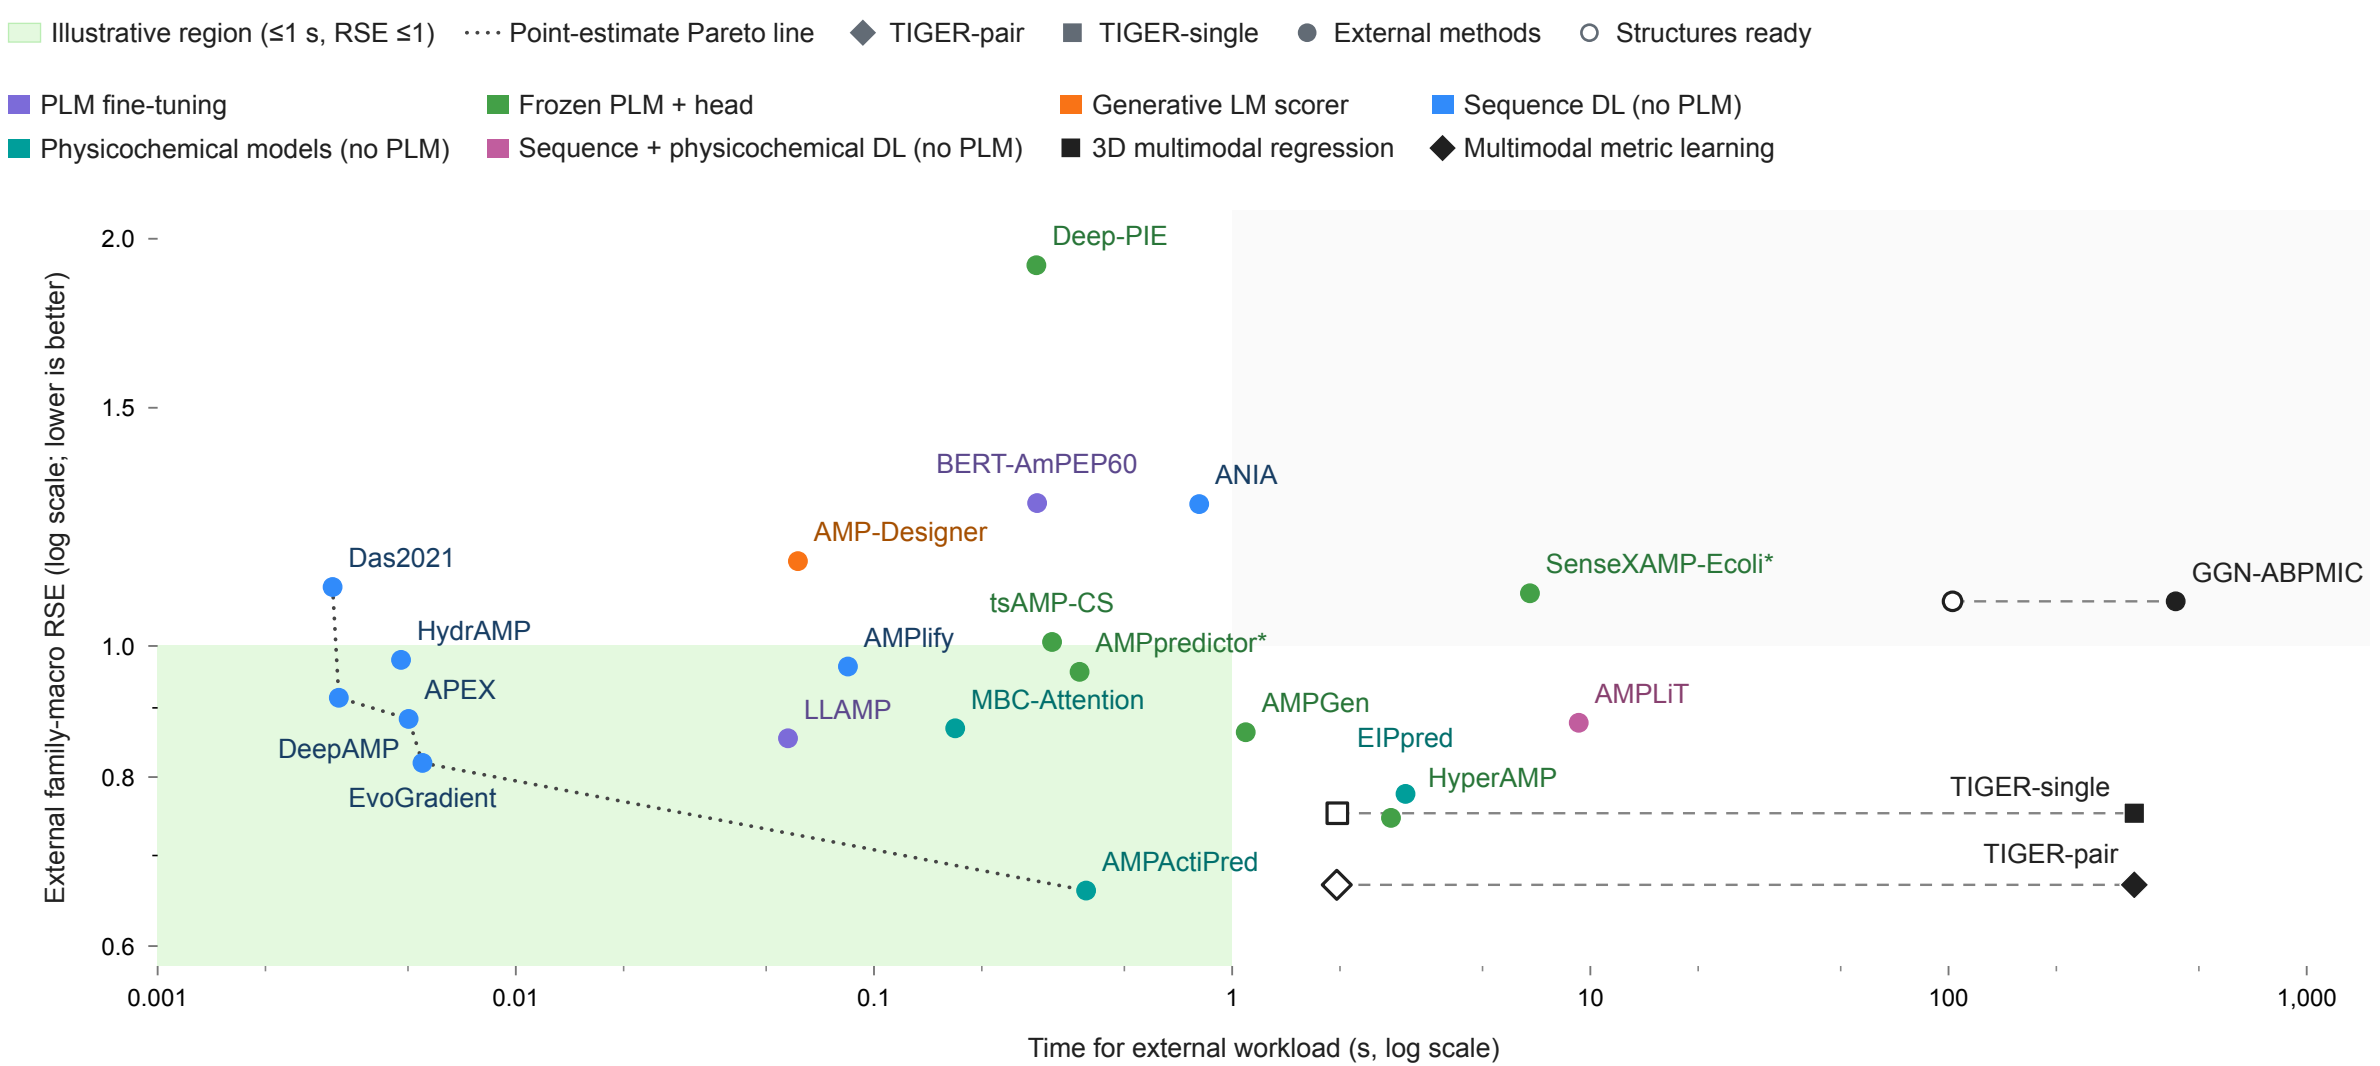

Condition selected by highest mean PCC; corresponding RSE shown; test-set selection is descriptive.

For structural models, filled points include structure generation and hollow points assume structures are ready.

*SenseXAMP-Ecoli and AMPpredictor also use physicochemical inputs. Pareto segments are visual guides, not evaluated models.

Structure increment: 328.12 s for 208 peptides; Serial estimate from 30 measured peptides.