NULL VALUES

IS NULL:

值為"null"的資料

網頁範例(Coutomers)中,部分欄位為"null"

CustomerID	CustomerName	ContactName	Address	City	PostalCode	Country
92	Cardinal	Tom B. Erichsen	Skagen 21	Stavanger	4006	Norway
93	Cardinal	Tom B. Erichsen	Skagen 21	Stavanger	4006	Norway
94	Cardinal	Tom B. Erichsen	Skagen 21	Stavanger	4006	Norway
95	Cardinal	null	null	Stavanger	null	Norway

SELECT CustomerName, ContactName, Address FROM Customers # 從Customers中選取CustomerName, ContactName, Address列

WHERE Address IS NULL;

找尋 Address列中,元素是"null"的資料




IS NOT NULL:

NULL VALUES 1

值不為"null"的資料

SELECT CustomerName, ContactName, Address FROM Customers # 從Customers中選取CustomerName, ContactName, Address列

WHERE Address IS NOT NULL; # 找尋 Address列中,元素不是"null"的資料

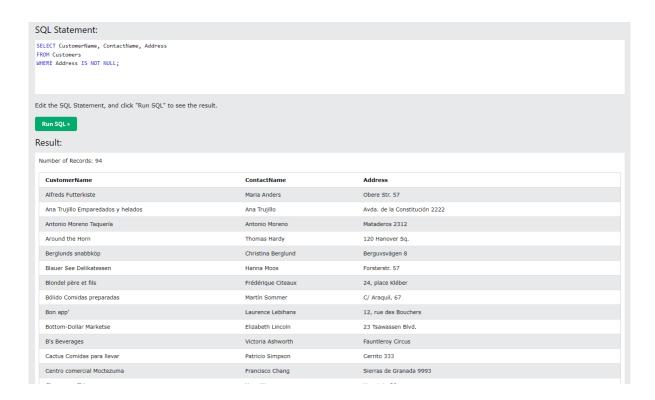

NULL VALUES 2