

C programming10

Yug Ribadiya

August 2025

1 example 10:dollars to pound

```
#include <stdio.h>

int main() {

    float dollars, pound, rupees;

    printf("Enter dollars :");
    scanf("%f",&dollars);
    rupees=dollars * 48;
    rupees=pound * 70;
    printf(" pound = %f\n", dollars * 48 / 70);
    return 0;
}
```

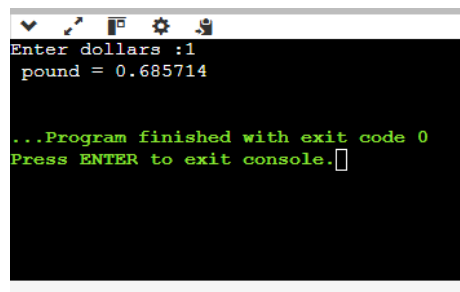


Figure 1: Enter Caption