

# C programming8

Yug Ribadiya

August 2025

## 1 example 8: Rupees to Dollars

```
#include <stdio.h>

int main() {

    float dollars, rupees;
    printf("Enter rupees :");
    scanf("%f",&rupees);
    printf("dollars = %.2f\n", rupees /48);
    return 0;
}
```

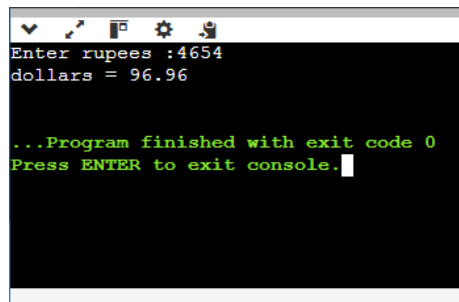


Figure 1: Enter Caption