

C programming6

Yug Ribadiya

August 2025

1 example 6:minutes to hours

```
#include <stdio.h>

int main() {

    float minutes, hours;
    printf("Enter minutes :");
    scanf("%f",&minutes);
    printf("hours = %.1f\n",minutes / 60);
    return 0;
}
```

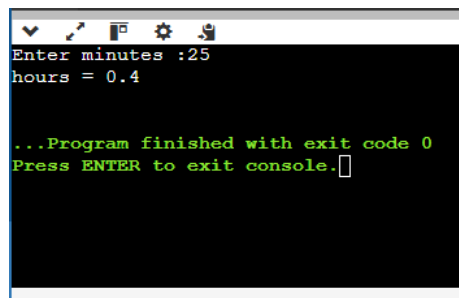


Figure 1: Enter Caption