



Philippines recruitment workflow

Follow the arrows from each START. Scheduled Power Automate work starts at a timer; candidate screening follows its separate business journey.

JOB REQUISITIONS | SCHEDULED DATA TRANSFER

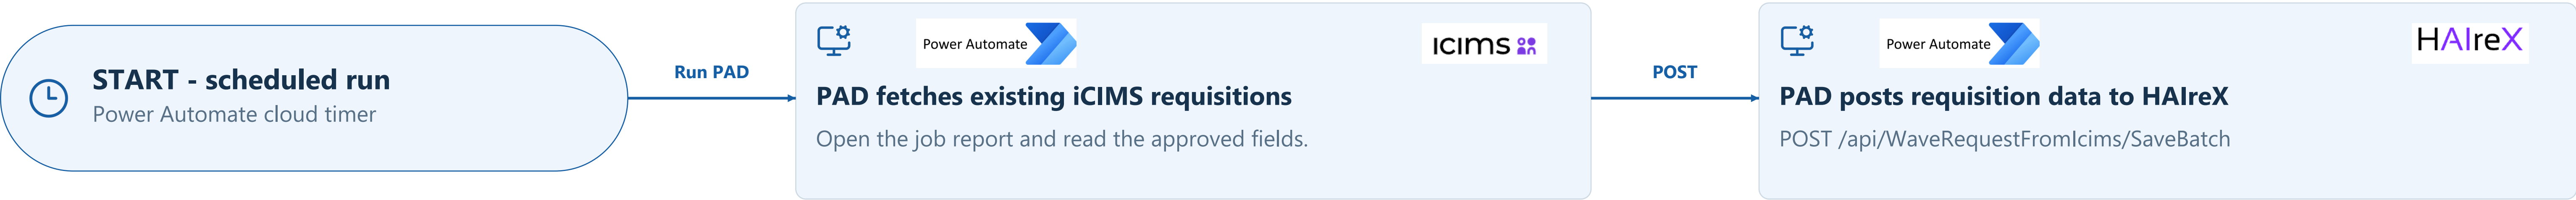


CANDIDATE INTAKE | TWO ENTRY ROUTES

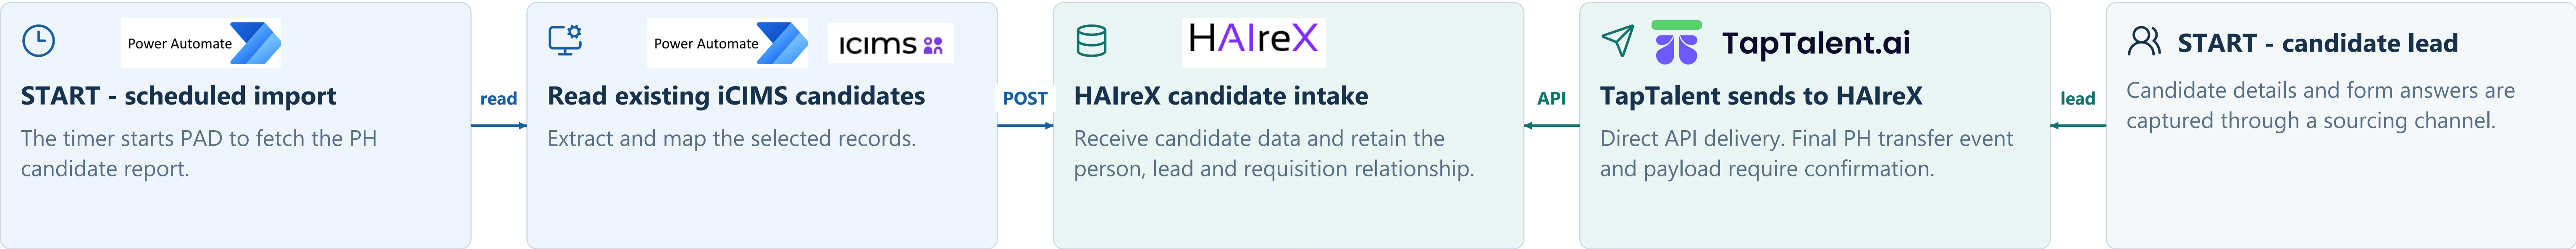

iCIMS import: POST /api/ManualCandidates | PH mapping: confirm


Continue when ready; Yellow launch mechanism to be agreed

CANDIDATE SCREENING | BUSINESS JOURNEY

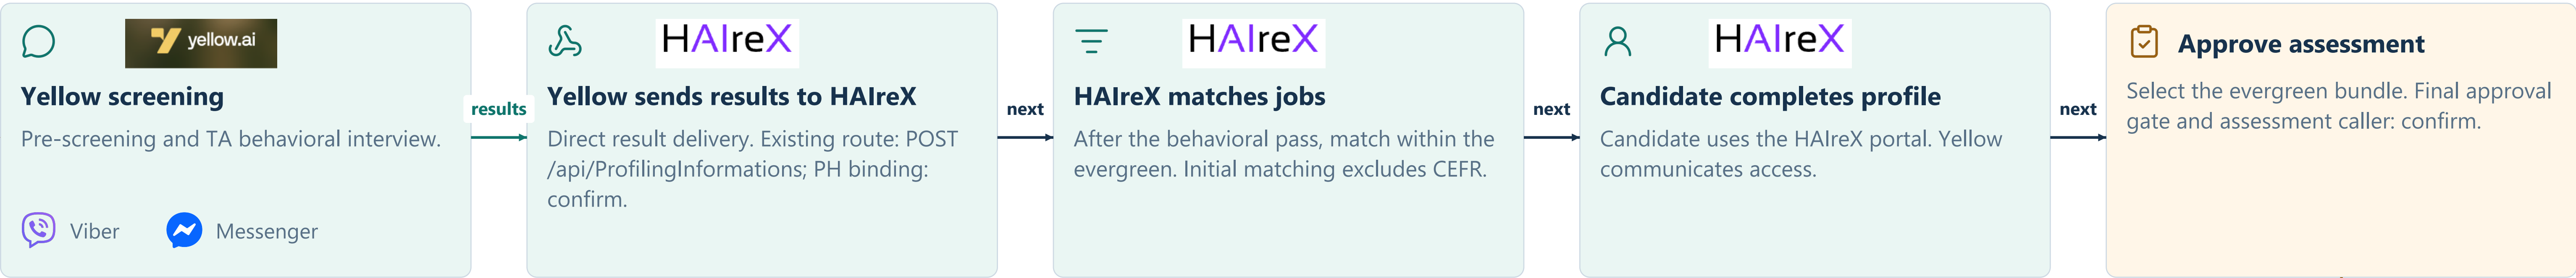

Create the selected assessment; HAireX / Yellow caller to be agreed


ASSESSMENT, SELECTION AND HIRING

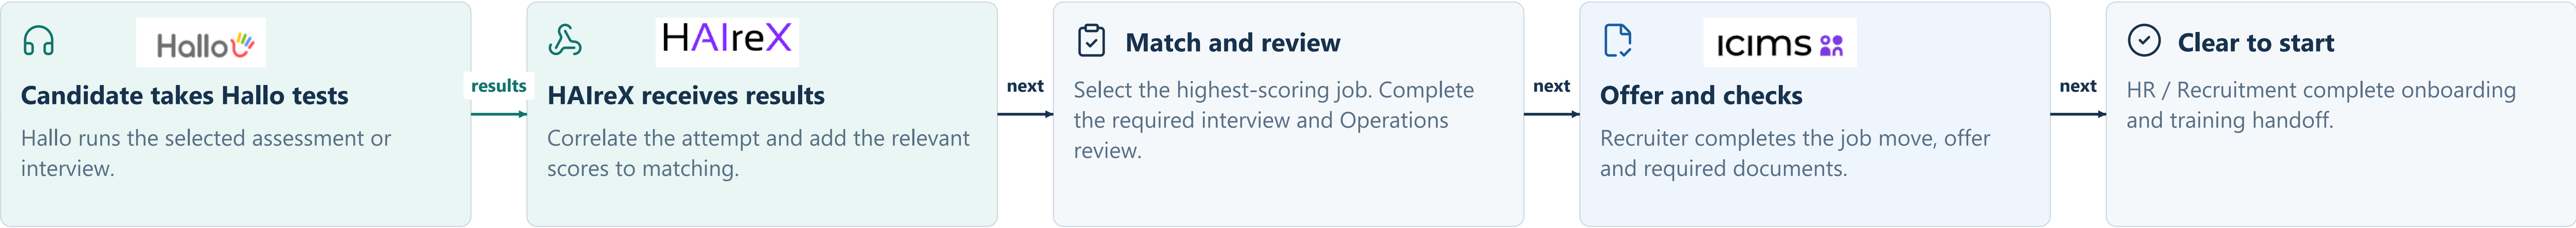

No matching job: try the next closest evergreen. Incomplete or failed stages follow the approved review path.

iCIMS CANDIDATE ACTIONS | SEPARATE SCHEDULED FLOW


HAireX supplies work at the assigned registration and update milestones.

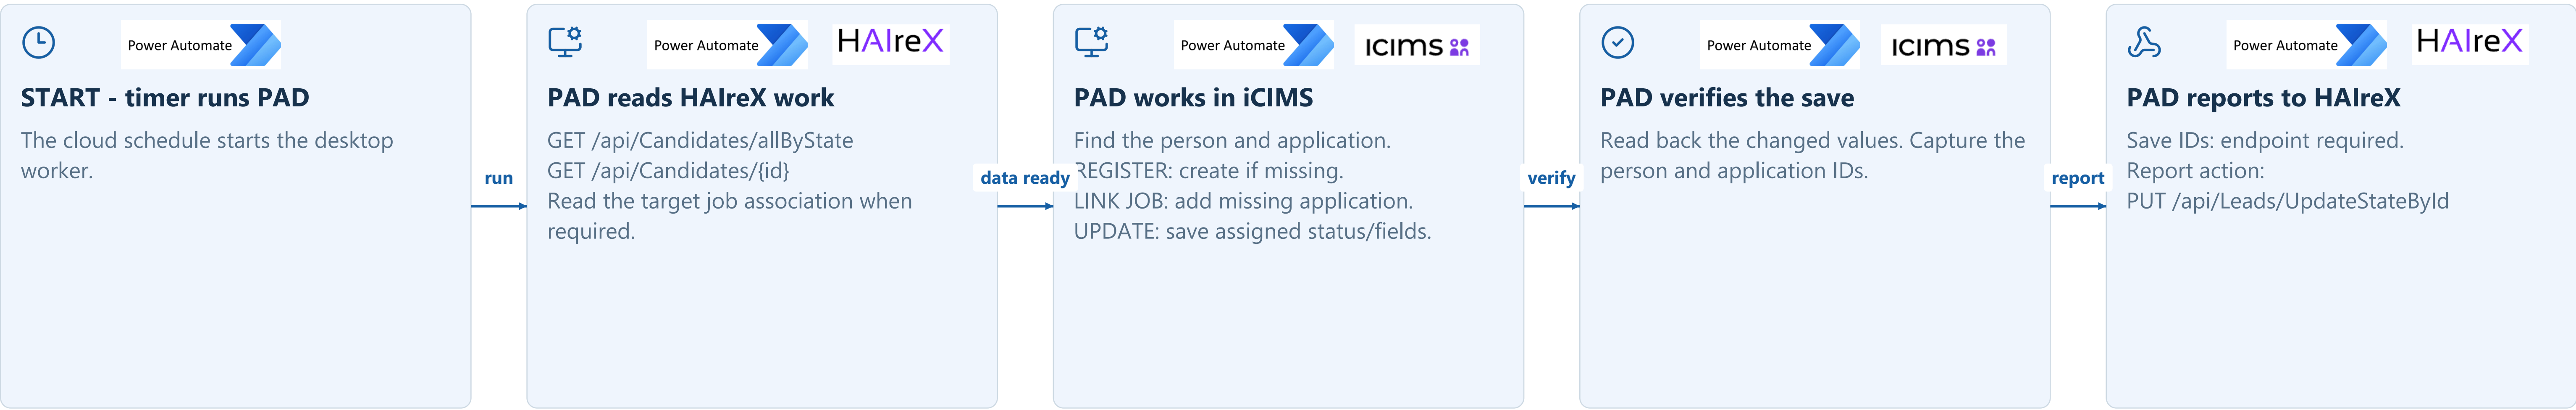

PAD fetches requisitions; Recruitment creates them. The candidate worker acts only on assigned iCIMS milestones. API field details and approval decisions are in the following views.

Scheduled PAD: create, link and update candidates in iCIMS


The Power Automate timer starts this workflow. Blue boxes are PAD actions; the small HAireX and iCIMS logos identify the connected system.

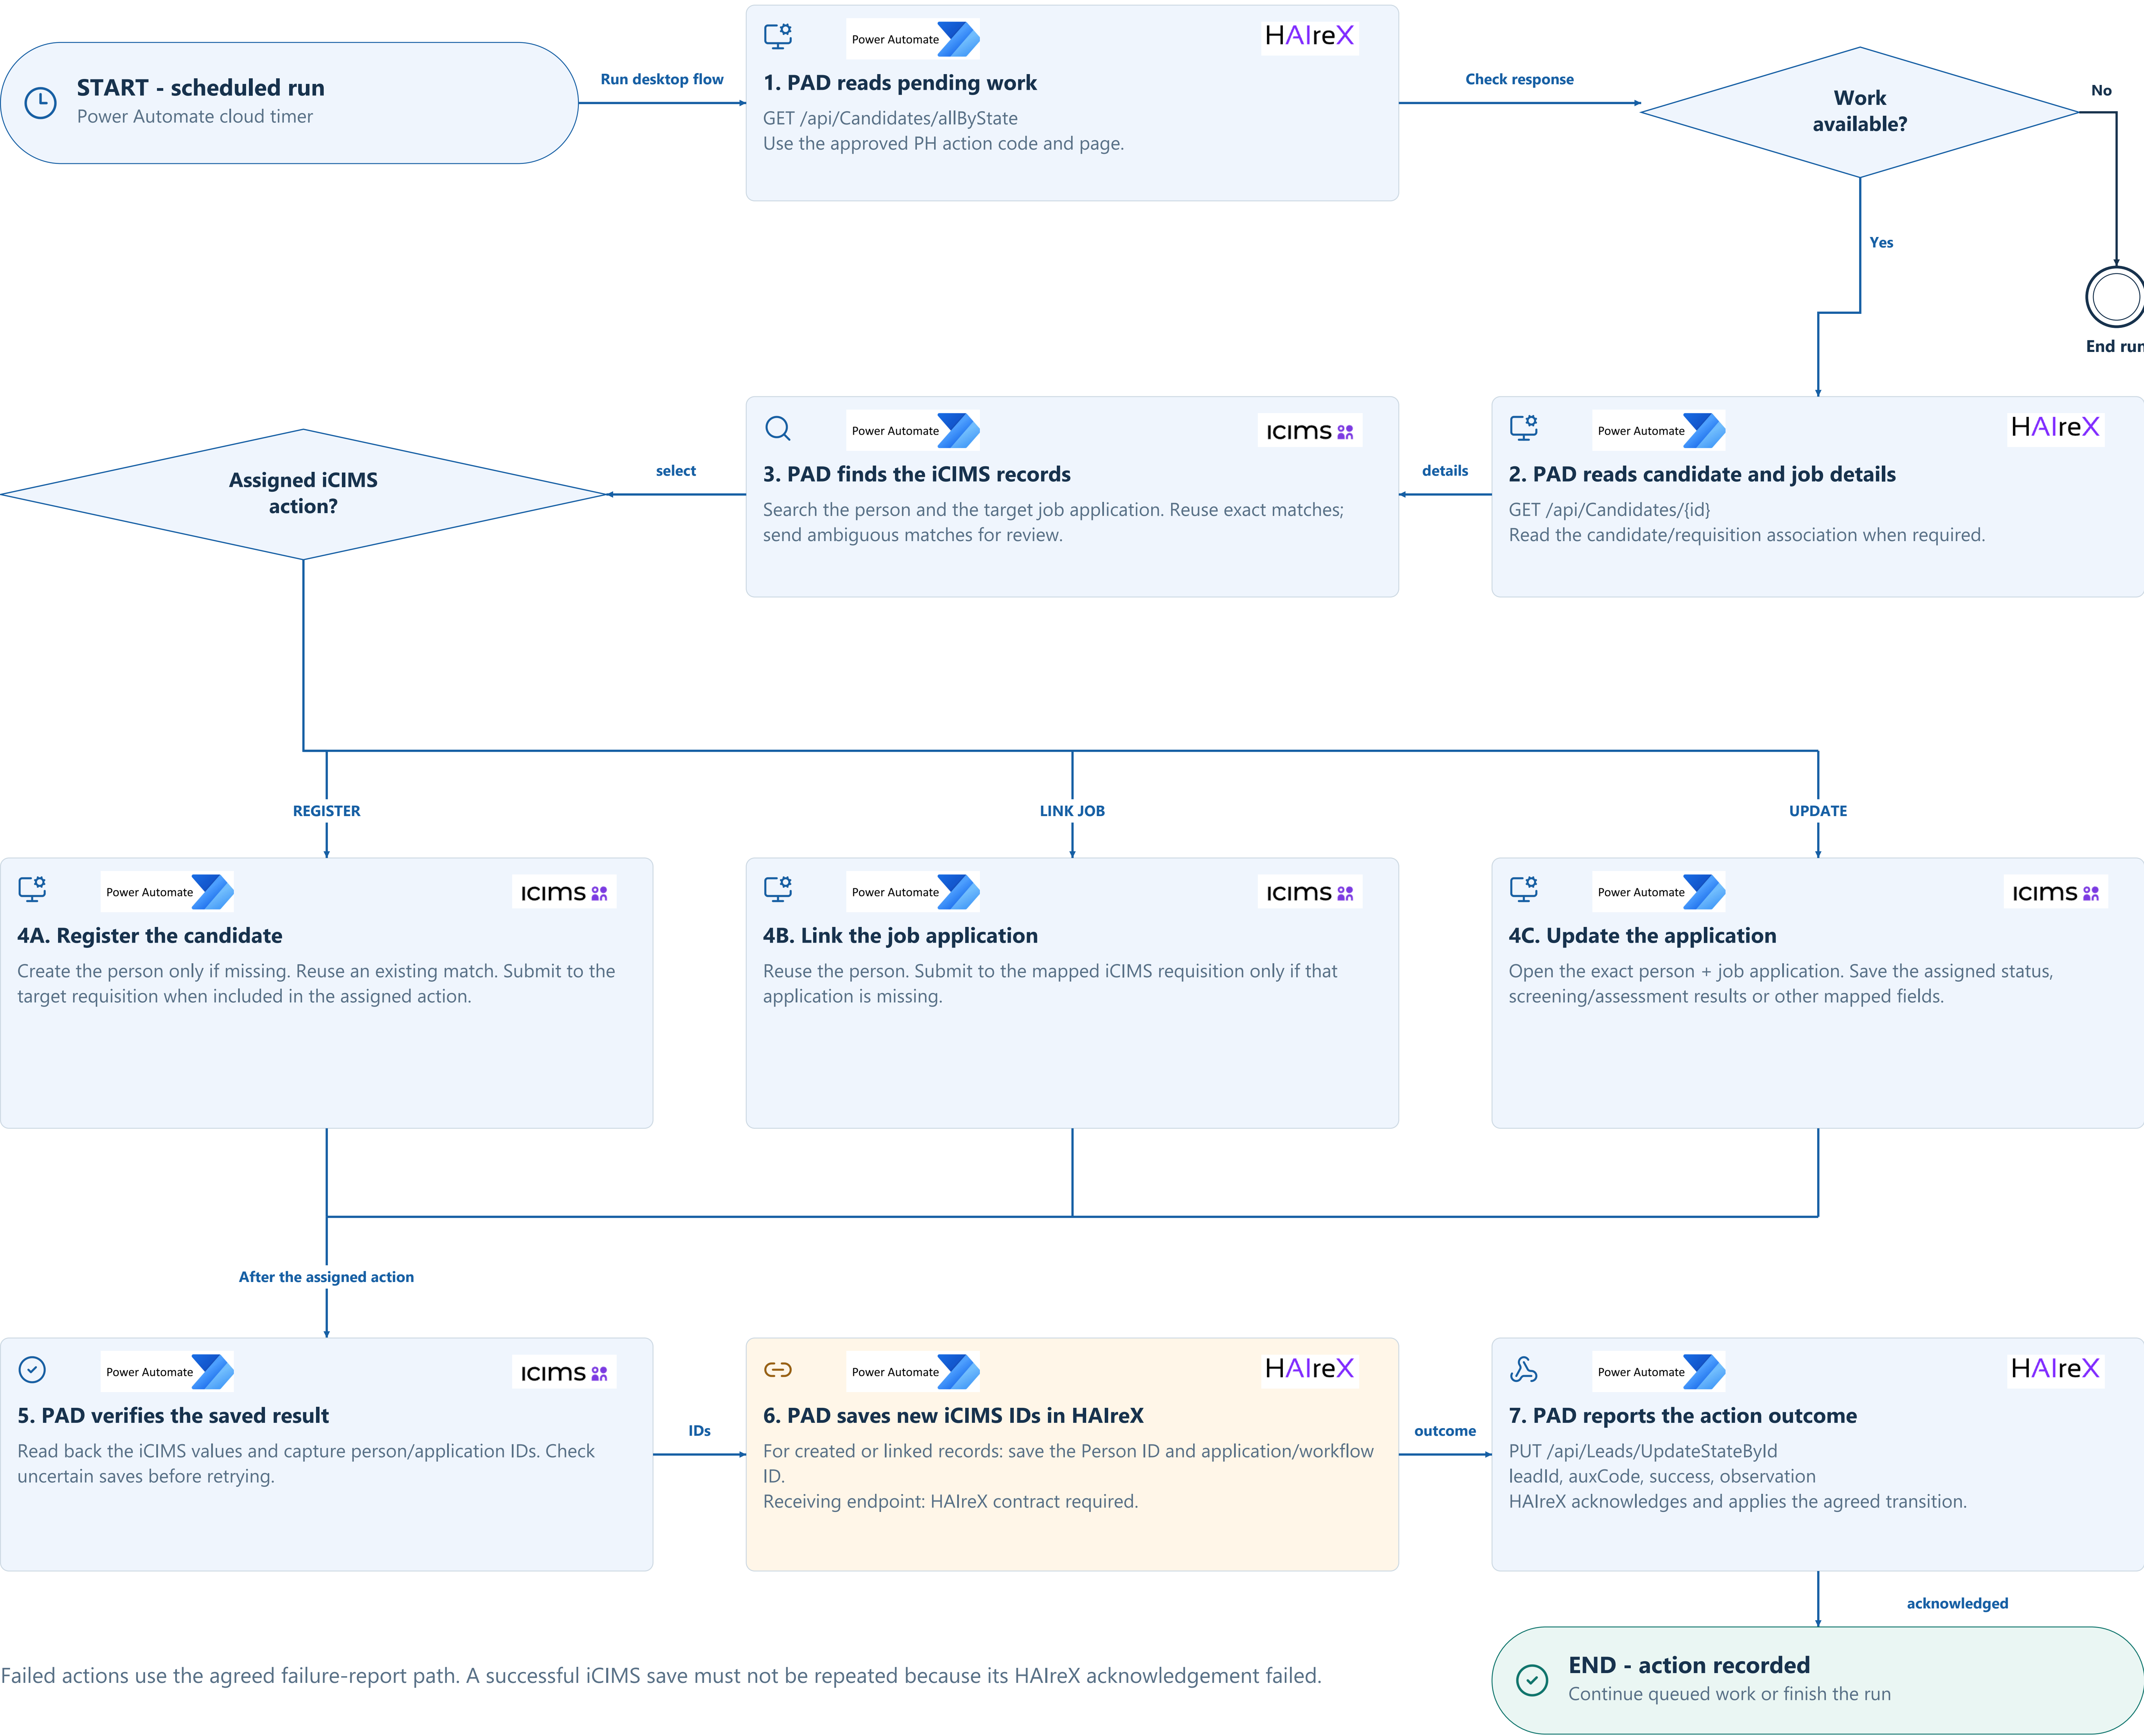

Failed actions use the agreed failure-report path. A successful iCIMS save must not be repeated because its HAireX acknowledgement failed.

Scheduled PAD: exact caller and response directions

A cloud recurrence starts PAD. Every blue request below originates from PAD or the cloud scheduler. HAIreX never starts the desktop run in this proposed model.

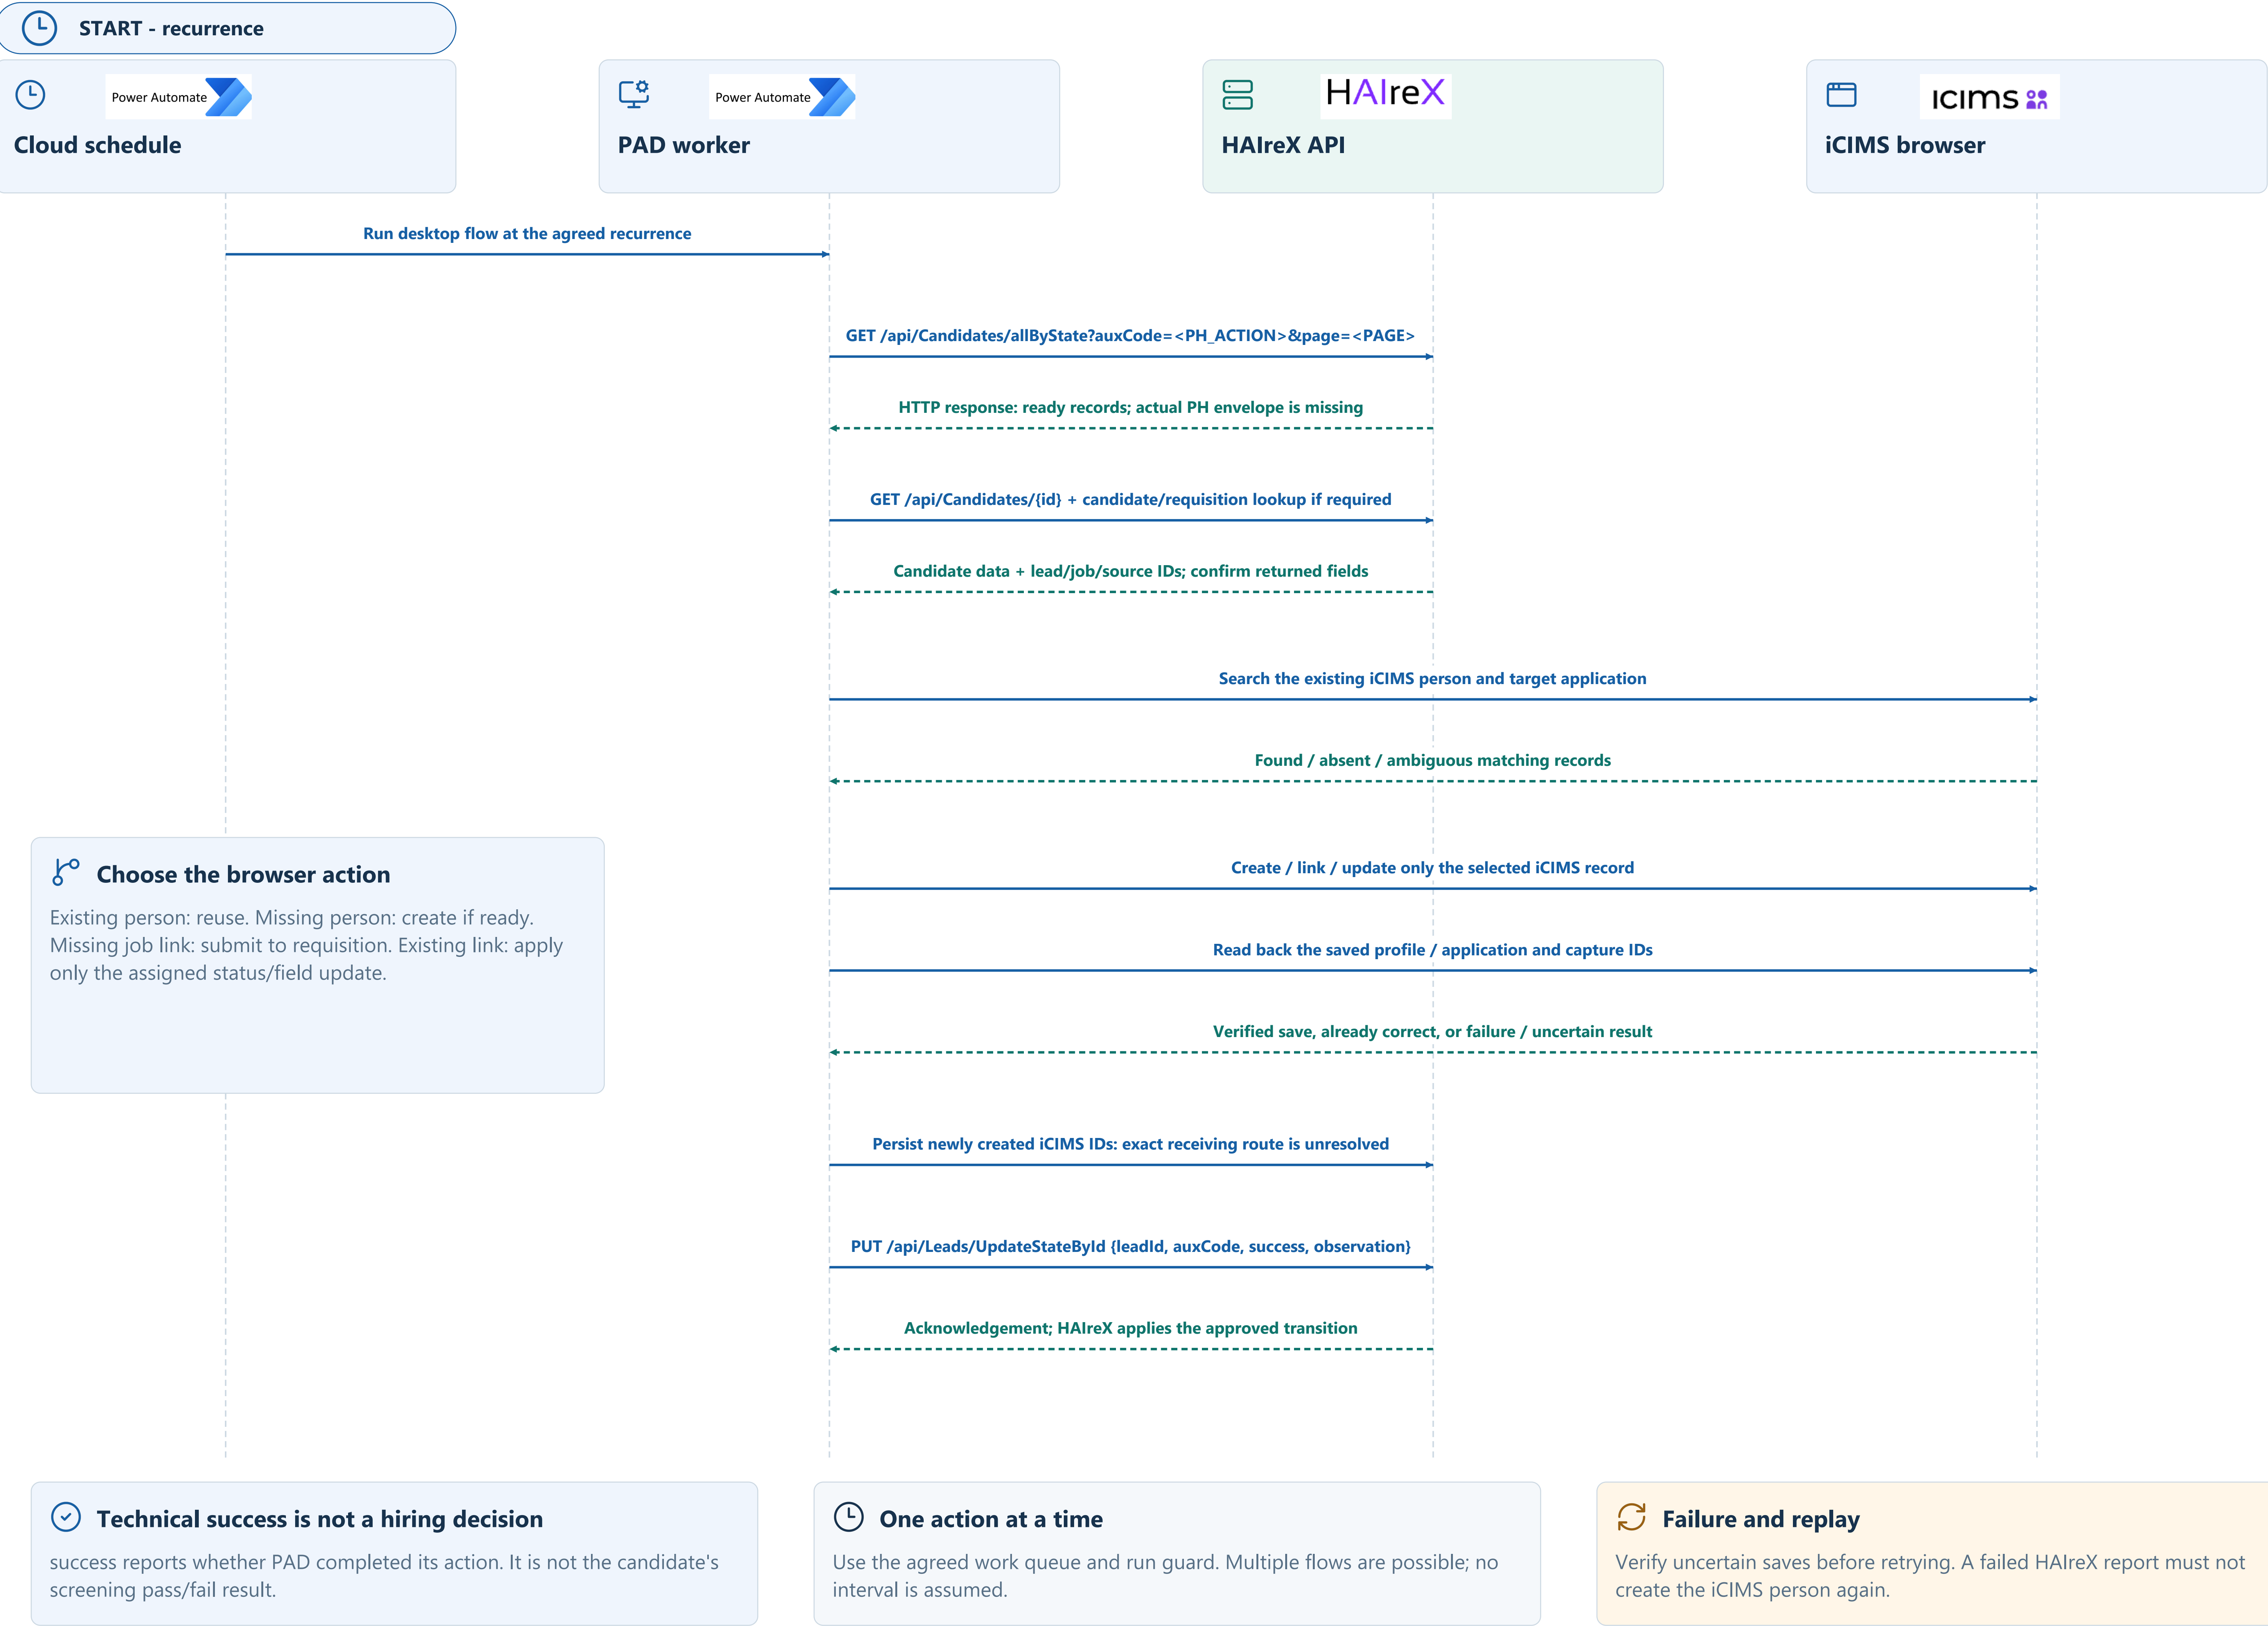

Run desktop flow at the agreed recurrence

GET /api/Candidates/allByState?auxCode=<PH_ACTION>&page=<PAGE>

HTTP response: ready records; actual PH envelope is missing

GET /api/Candidates/{id} + candidate/requisition lookup if required

Candidate data + lead/job/source IDs; confirm returned fields

Search the existing iCIMS person and target application

Found / absent / ambiguous matching records

Create / link / update only the selected iCIMS record

Read back the saved profile / application and capture IDs

Verified save, already correct, or failure / uncertain result

Persist newly created iCIMS IDs: exact receiving route is unresolved

PUT /api/Leads/UpdateStateById {leadId, auxCode, success, observation}

Acknowledgement; HAIreX applies the approved transition

Choose the browser action

Existing person: reuse. Missing person: create if ready.
Missing job link: submit to requisition. Existing link: apply only the assigned status/field update.

Technical success is not a hiring decision

success reports whether PAD completed its action. It is not the candidate's screening pass/fail result.

One action at a time


Use the agreed work queue and run guard. Multiple flows are possible; no interval is assumed.

Failure and replay

Verify uncertain saves before retrying. A failed HAIreX report must not create the iCIMS person again.


Power Automate delivery: workstreams and HAlreX requirements

Define what each automation will do, the existing APIs it will use, and the remaining HAlreX interface required to complete the browser work.

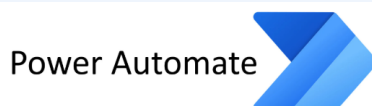

Import existing iCIMS candidates into HAlreX

PAD reads the selected PH candidate report and sends the mapped records to HAlreX.
Existing receiving route: POST /api/ManualCandidates.
HAlreX must provide the approved PH field mapping, required fields, duplicate/update behavior and a real per-record response with saved IDs. Preserve both entry routes without duplicating people or applications.

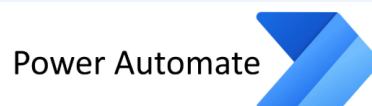

Create and maintain candidates in iCIMS

PAD reads HAlreX work, finds or creates the person, links the correct requisition and updates the assigned application fields/status.
Existing reads: GET /api/Candidates/allByState, GET /api/Candidates/{id}, GET /api/CandidateRequisition/candidate/{candidateId}.
HAlreX must supply the PH action codes and responses containing all data required by these browser steps.



Return each browser action outcome

After verifying the iCIMS save, PAD reports the action outcome to HAlreX.
Existing endpoint: PUT /api/Leads/UpdateStateById.
Required contract: valid leadId / auxCode values, whether auxCode means current action or next state, success/failure payloads, acknowledgement and retry rules.



Save the iCIMS person and application IDs

This prevents later jobs from creating the person again or updating the wrong application.
Required: a supported PH endpoint that persists the HAlreX candidate/lead to iCIMS person + requisition + application relationship.
No suitable PH write route is identified in the available definitions. HAlreX must provide its existing route or add/extend this capability.

DATA NEEDED FOR THE iCIMS BROWSER ACTIONS

Browser operation	HAlreX data needed	Verified output returned
Create person	Candidate/lead ID, agreed identity key and all mandatory PH person fields.	Existing or newly created iCIMS Person ID.
Submit to requisition	Person identity, target iCIMS requisition identifier and approved initial application values.	Application/workflow ID linked to that person and job.
Update application	Exact target person/application, permitted current/target status and mapped result or profile values.	Saved status/field values and action outcome.
Import iCIMS report	Approved report population and mapping into the HAlreX receiving request.	Per-record accepted/rejected result, saved IDs and duplicate/update outcome.



Requisition integration is already a separate workstream

The existing receiving contract is POST /api/WaveRequestFromIcims/SaveBatch. Candidate intake and iCIMS browser actions use their own contracts; the job endpoint is not a candidate endpoint.




TapTalent, Yellow and Hallo ownership

TapTalent and Yellow deliver directly to HAlreX under the agreed direction. HAlreX must expose the resulting candidate work to PAD. Confirm the remaining Hallo initiation owner separately; do not introduce a PA relay by default.

Agree the turnaround target for each assigned action, then size the schedule and queue. Multiple flows are possible; polling frequency alone does not determine completion time.

After pre-screening: the documented PH decision flow


Yellow performs the conversation and TA behavioral interview. HAireX evaluates the returned information and matches requisitions. PAD is not the scoring engine.

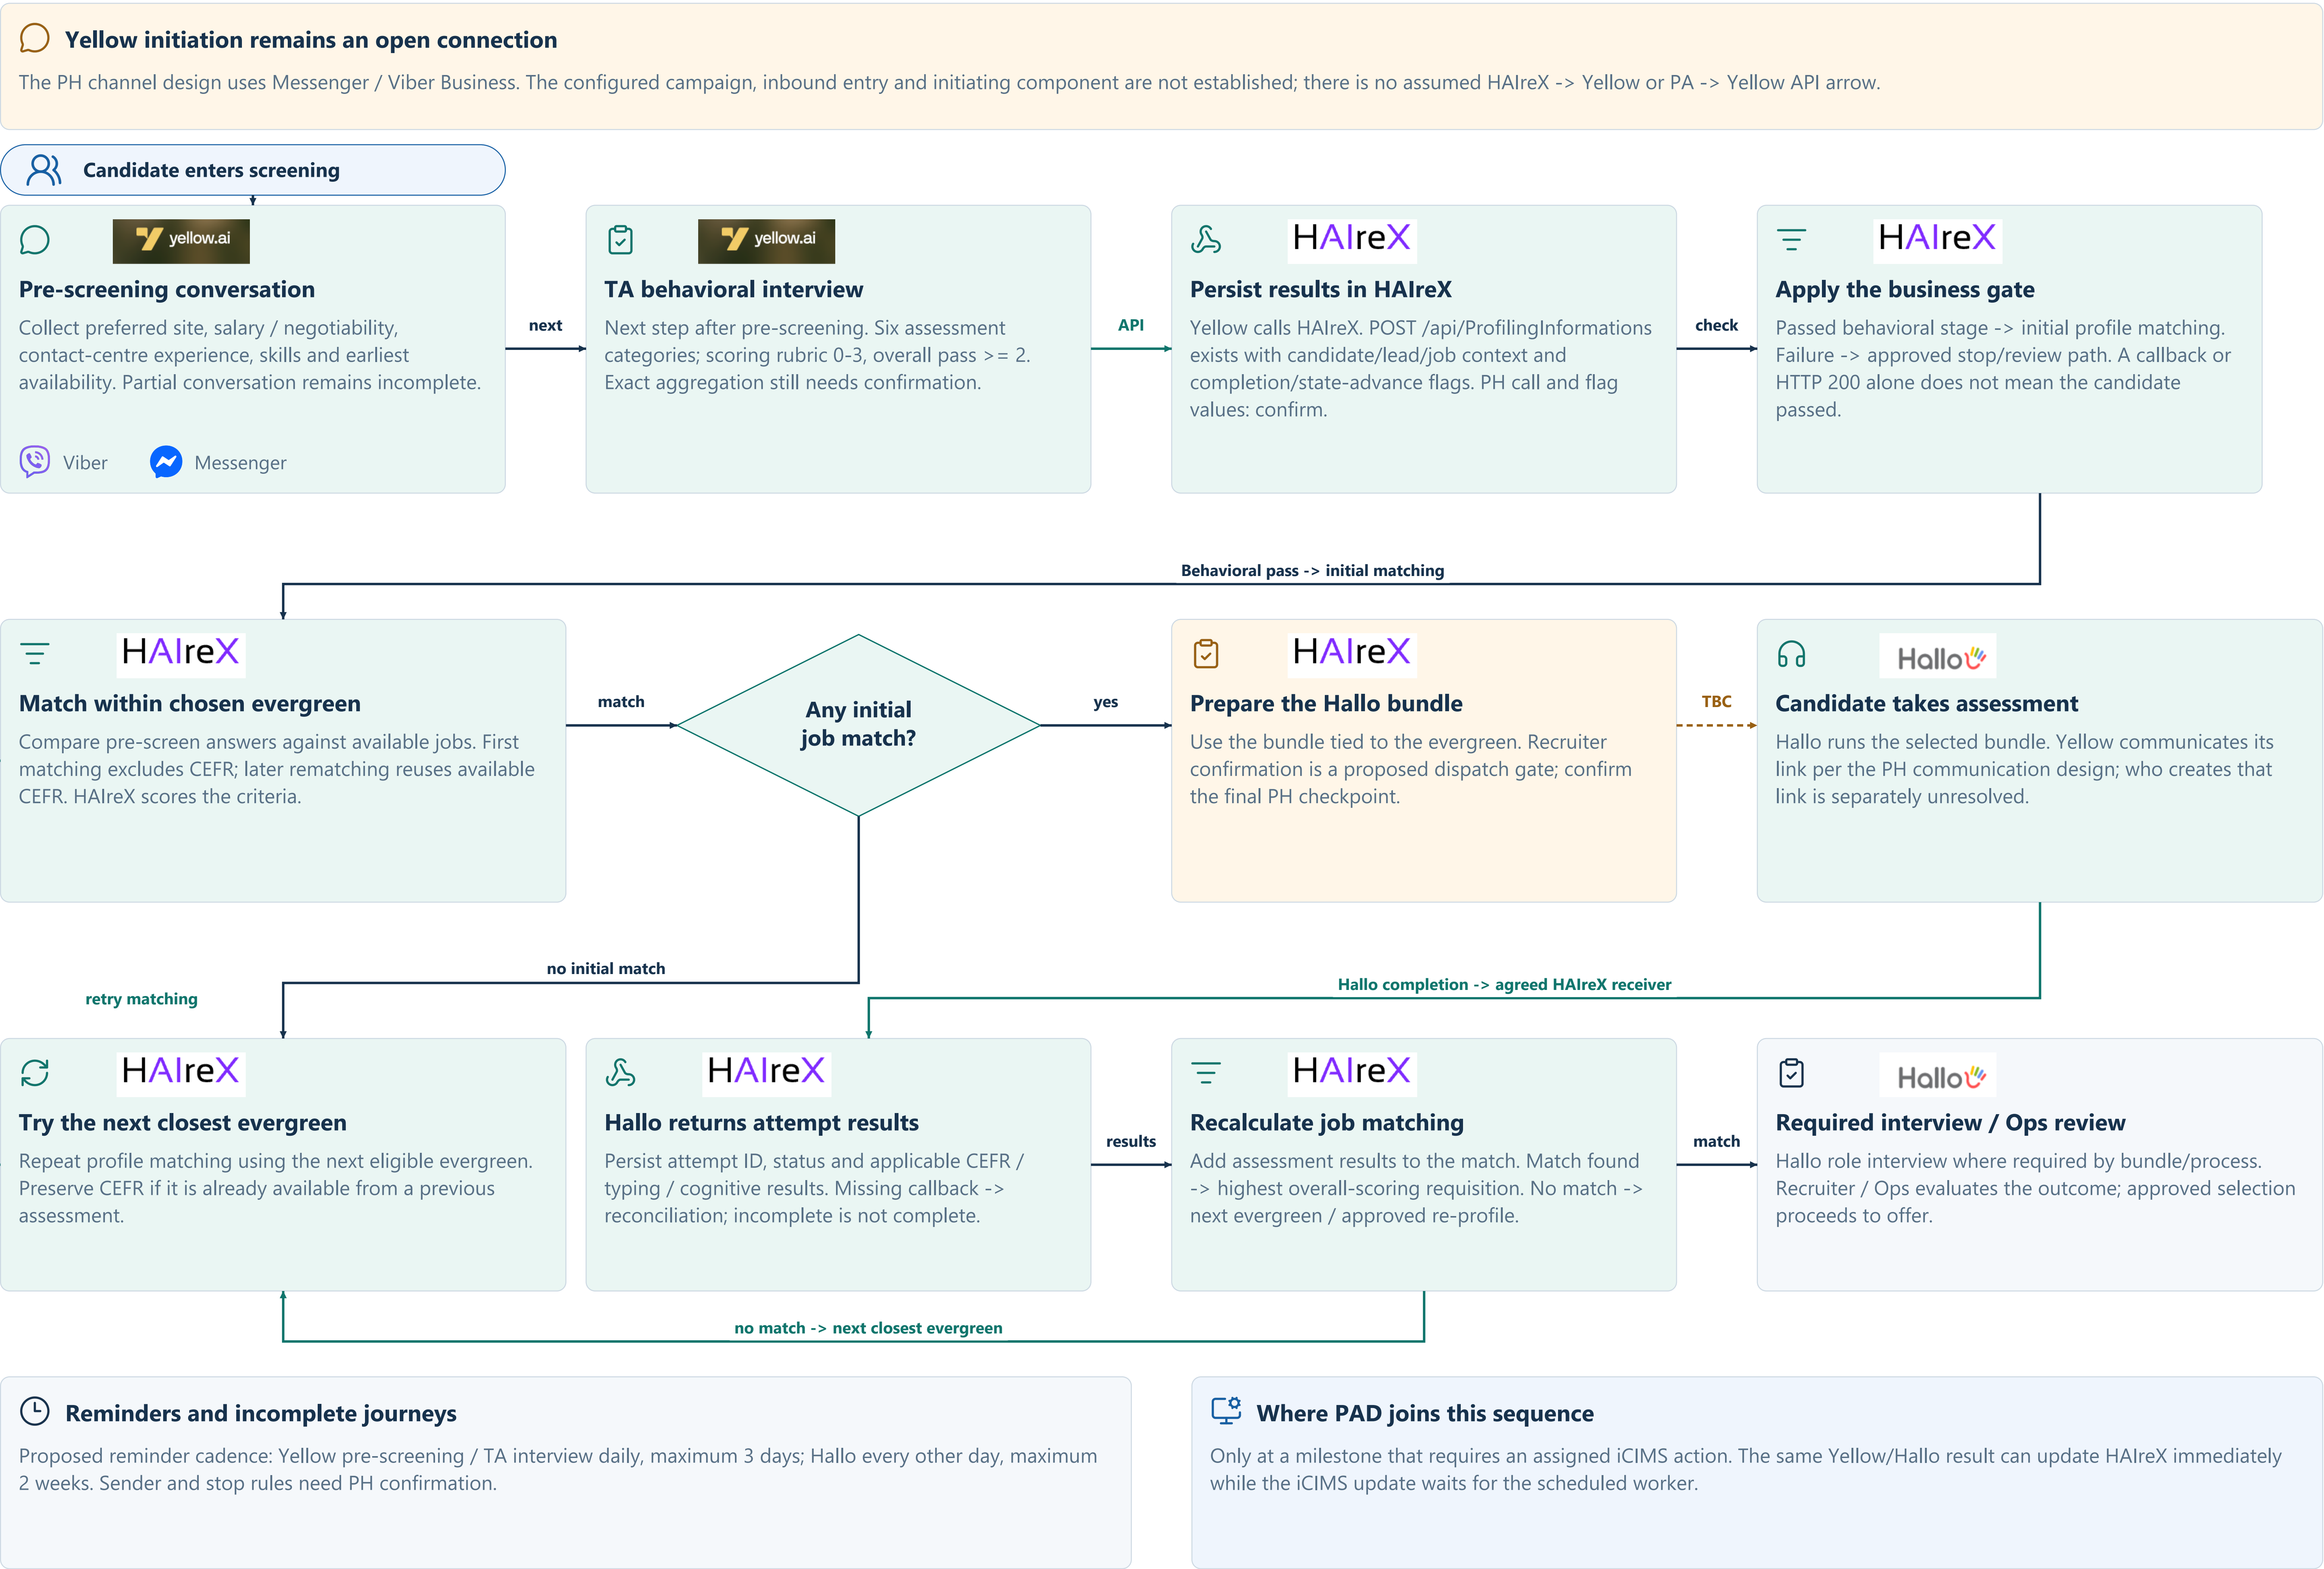


Hallo initiation: distinguish the three possible connections

The PH process identifies the assessment and the link messenger. It does not settle the API caller. These are alternatives to resolve, not three active integrations.


A EXISTING HAireX ASSESSMENT SERVICE

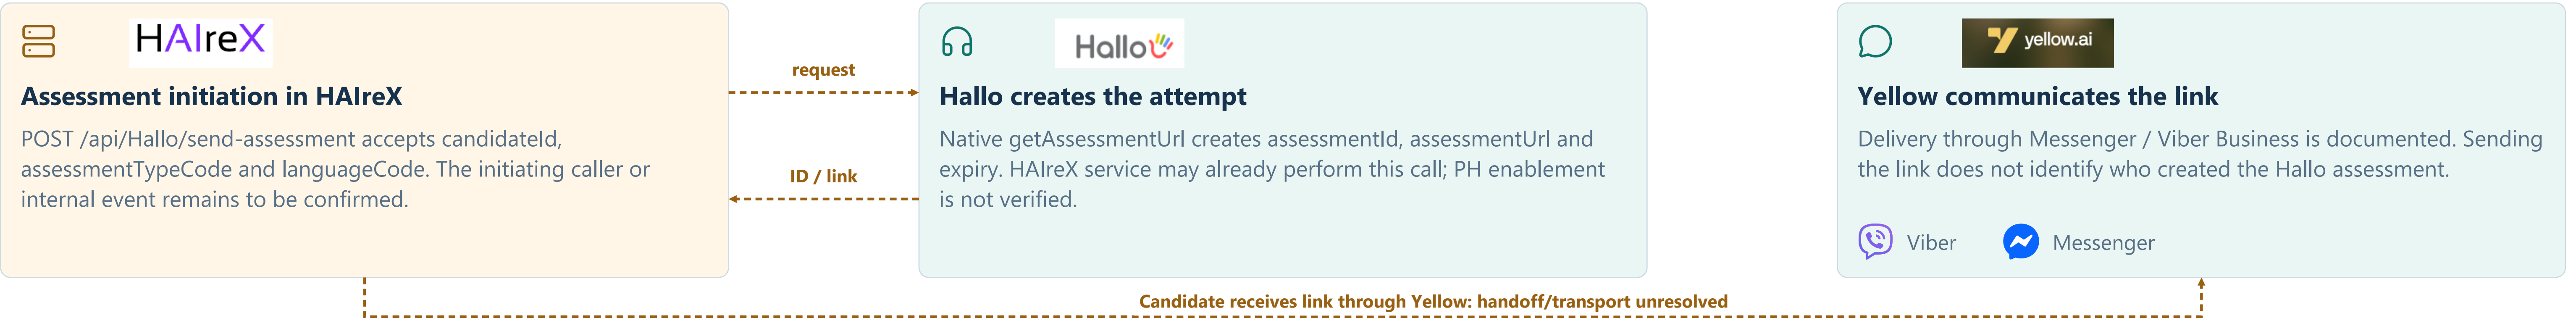


B YELLOW CALLS THE EXISTING HAireX ASSESSMENT API

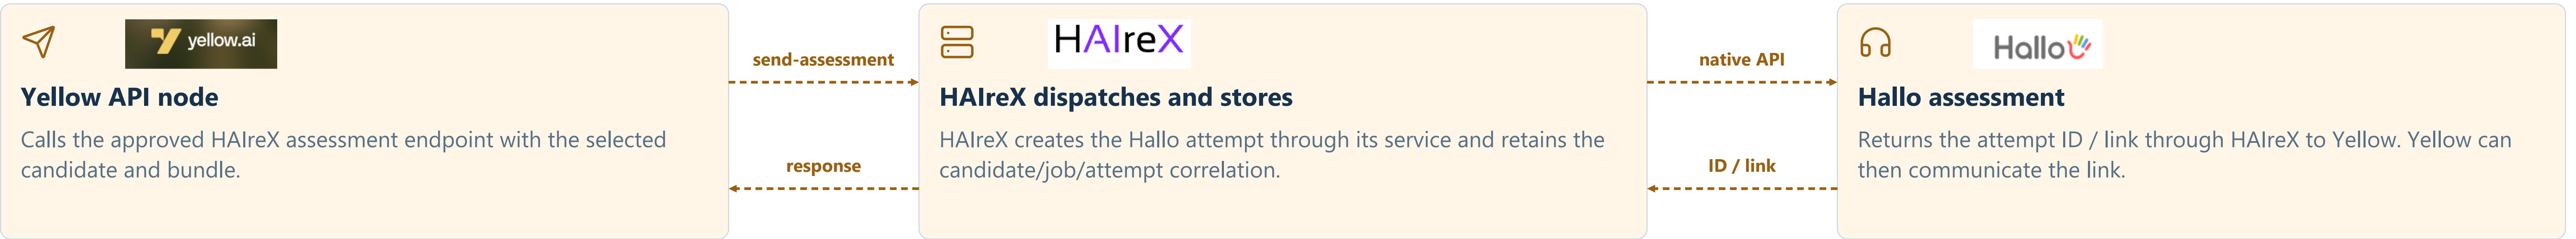

C YELLOW CALLS HALLO DIRECTLY

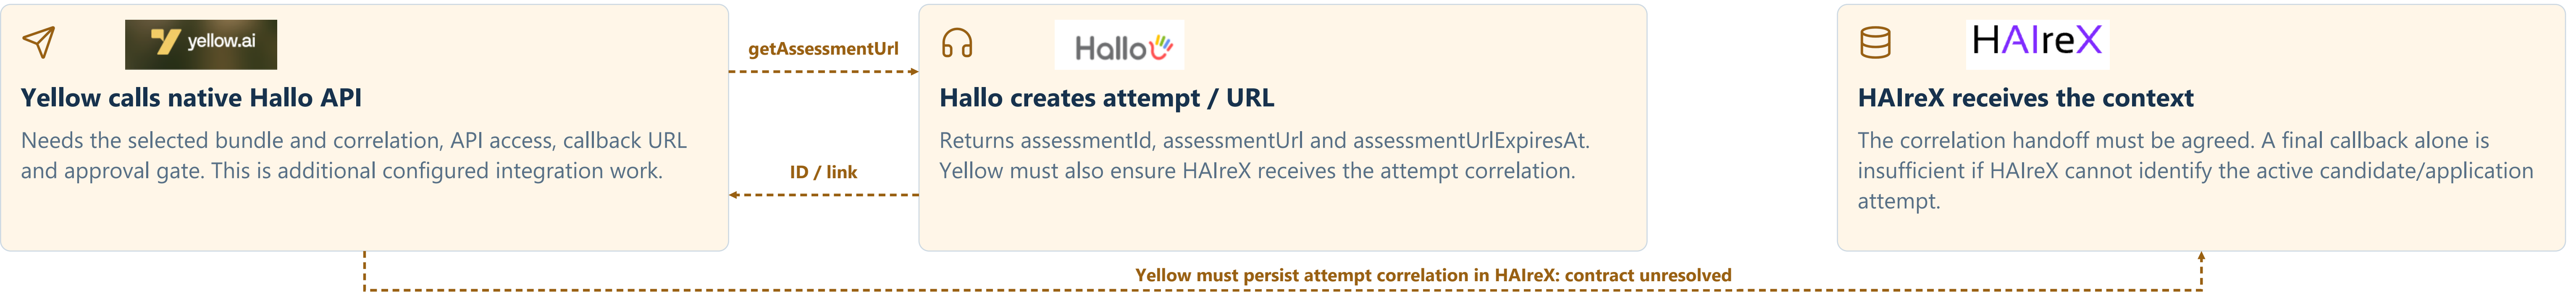

COMPLETION IS A SEPARATE CONNECTION

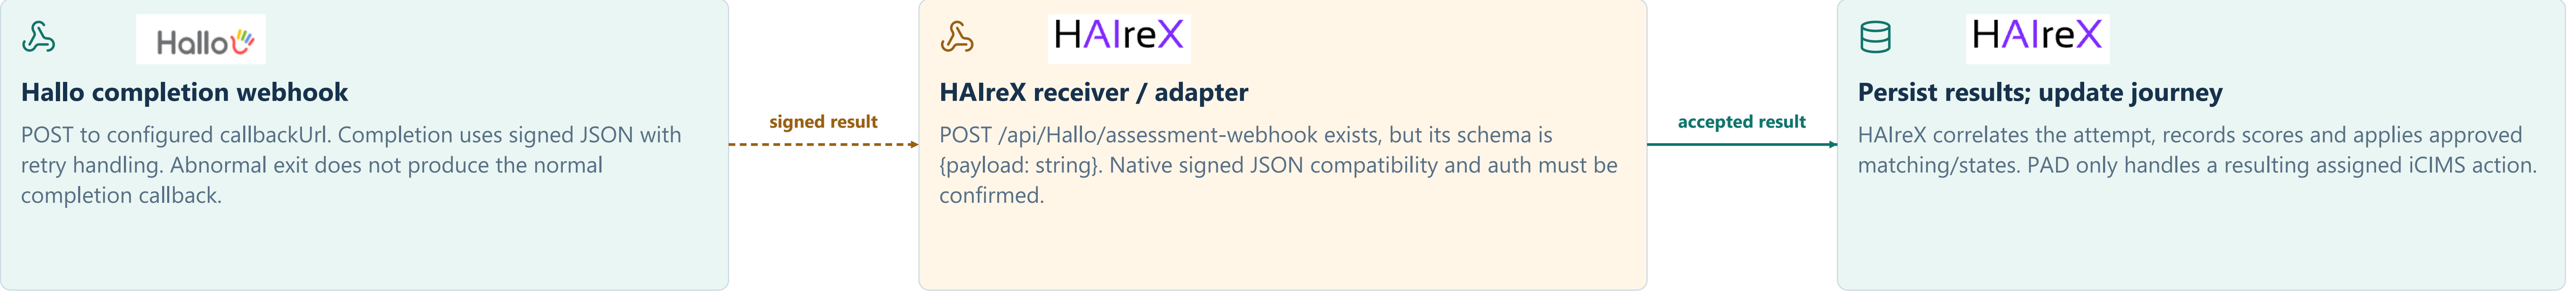

Power Automate is conditional here

Assign a Power Automate assessment call only if it remains part of the agreed PH design. Confirm the existing HAireX / Yellow assessment service ownership before adding a separate dispatcher.

Candidate status: who changes what, and where

There is no single status copied unchanged across all systems. An integration outcome can change HAIreX without immediately changing iCIMS.

Status	Changed by	Stored in	Meaning for our automation
TapTalent source status	TapTalent workflow / recruiter	TapTalent sourcing record	Direct intake does not prove bidirectional status synchronization.
Yellow session / profiling result	Yellow conversation / candidate answers	Yellow; results persisted in HAIreX	Completion, partial answer and message delivery are different events.
Hallo attempt status / scores	Hallo assessment service	Hallo; results persisted in HAIreX	Completed does not automatically mean passed or hired.
HAIreX lead / automation state	HAIreX transition rules after an accepted result, portal or recruiter action	HAIreX lead / state history	PA reports only its assigned action. Profiling flags may already advance state.
iCIMS application status	Recruiter, configured iCIMS process, or our assigned PAD action	The person + job recruiting workflow	The mapping must name exact PH iCIMS statuses and result fields.

PH STATE CATALOGUE

These labels do not prove the next-state transitions, bot assignment, retries or deployment.

Application / Creation	Profiling	Assessment	Interview
CRE001 TAP Talent Candidate Sourcing CRE002 TAP Talent Candidate Sourcing: Completed CRE003 Update ICIMS data CRE004 ICIMS data update: Completed CRE005 Candidate Portal Update	CI001 Start Viber/Messenger profiling CI002 Profiling attempt 1: Sent CI003 Profiling attempt 1: Received by candidate CI004 Profiling attempt 2: Sent CI005 Profiling attempt 2: Received by candidate CI006 Viber/Messenger profiling: Partially answered CI007 Viber/Messenger profiling: Completed CI008 Inbound Viber/Messenger profiling: Completed	HAL001 Send Hallo Assessment test HAL002 Hallo Assessment test: Sent HAL003 Send Hallo Assessment notice (attempt 1) HAL004 Hallo Assessment notice: Sent (attempt 1) HAL005 Send Hallo Assessment notice (attempt 2) HAL006 Hallo Assessment notice: Sent (attempt 2) HAL007 Send Hallo Assessment notice (attempt 3) HAL008 Hallo Assessment notice: Sent (attempt 3) HAL009 Assessment test - Completed HAL010 Hallo Assessment test: No results	HAL011 Send Hallo Interview test HAL012 Hallo Interview test: Sent HAL013 Send Hallo Interview notice (attempt 1) HAL014 Hallo Interview notice: Sent (attempt 1) HAL015 Send Hallo Interview notice (attempt 2) HAL016 Hallo Interview notice: Sent (attempt 2) HAL017 Send Hallo Interview notice (attempt 3) HAL018 Hallo Interview notice: Sent (attempt 3) HAL019 Interview test - Completed HAL020 Hallo Interview test: No results

 **Example of one approved iCIMS update**

Yellow result -> HAIreX state -> scheduled PAD reads assigned action -> updates the specific iCIMS application -> verifies -> reports action outcome to HAIreX.

 **Creation-stage responsibilities**

CRE001/002 represent TapTalent sourcing and completion. CRE003/004 represent iCIMS update and completion. The action mapping must distinguish person creation, job linking and later application updates.

HAIreX contracts: import and read candidate work

Existing endpoint definitions with illustrative request fields. Final PH payloads, response examples and acceptance rules require integration sign-off.

Candidate import - existing route

POST /api/ManualCandidates?country=<PH_COUNTRY_VALUE>
Content-Type: application/json

```
[
{
  "nombre": "<first name>",
  "apellidos": "<last name>",
  "email": "<email>",
  "telefono": "<phone>",
  "fuente": "<source>",
  "requisitionId": "<agreed requisition identifier>"
}
]
```

Illustrative subset of the 18-field DTO. The country value, required fields, identifier mapping and create-versus-update behavior need PH confirmation. HTTP 200 is listed; the response body/schema is not defined.

Pending work - existing route

GET /api/Candidates/allByState
?auxCode=<PH_ACTION_STATE>
&page=<CONFIRMED_PAGE_INDEX>
&isActive=true

No request body. Other documented filters: filter, processStatus, city, sortByLatestUpdated, requisition. No country query parameter is documented here; confirm PH environment/auth scope. HTTP 200 has no response schema.

Candidate and job details - existing routes

GET /api/Candidates/{id}

GET /api/CandidateRequisition/candidate/{candidateId}

Both use a candidate UUID and have no request body. HTTP 200 is documented, but neither response shape is defined. Obtain actual redacted PH responses and confirm the source person/job/application IDs.

 Candidate intake fields

identificacion, nombre, apellidos, telefono, email, ciudad, fuente, oferta, assessmentType, jobPostingTitle, clientLOB, address, requisitionId, location, additionalWorkLocation, language, assessmentToInclude, category.
All are optional/nullable in the schema; production validation may be stricter.

 What the PH worker must receive

Candidate details required by iCIMS; HAIreX candidateId and leadId; current action/state; target iCIMS requisition; existing person/workflow IDs where known; required outcome fields. These are data requirements, not claimed JSON response keys.

 Import gaps that cannot be guessed

The create DTO has no explicit iCIMS person/workflow ID fields and does not cover all 44 candidate-report columns. identificacion must not be assumed to be Person System ID. Confirm field mapping, per-item acceptance and state/application initialization.

 Duplicate check is available, not a complete solution

POST /api/ManualCandidates/duplicate-check has country + dni/email/phone inputs. It does not document a PH uniqueness rule, application-level deduplication or replay guarantee. Existing source IDs must survive both entry routes.

PHILIPPINES | RECRUITMENT INTEGRATION DESIGN

08 / 10

HAIreX contracts: report actions and retain identifiers

Report whether the browser action succeeded. Let the agreed HAIreX transition configuration determine the next state. Candidate IDs, lead IDs and iCIMS IDs are not interchangeable.

PAD outcome - existing route

```
PUT /api/Leads/UpdateStateById
Content-Type: application/json

{
  "leadId": "<HAIreX lead UUID>",
  "auxCode": "<approved PH action/state code>",
  "success": true,
  "observation": "<verified action outcome>"
}
```

Illustrative subset. Confirm whether auxCode names the current action or requested target, and how success/failure selects the next state. No response schema is provided; HTTP 200 alone is not proof of the intended transition.

Candidate/requisition association - conditional

```
POST /api/CandidateRequisition
Content-Type: application/json

{
  "candidateId": "<HAIreX candidate UUID>",
  "requisitionId": "<HAIreX requisition UUID>"
}
```

Illustrative subset; runtime-required fields need confirmation. This association should not be recreated if intake already established it. The documented HTTP 200 has no response schema and does not prove lead/state initialization.

Existing job-reference route

```
POST /api/CandidateRq
{
  "leadId": "<HAIreX lead UUID>",
  "requisitionId": "<HAIreX requisition UUID>",
  "rq": "<agreed requisition reference>"
}
```

A requisition reference is not an iCIMS person ID or application ID. Response schema is absent.

Other existing edit routes

```
PUT /api/Leads/Edit
leadId, rQ_ICIMS_Assigned, ...

PUT /api/Candidates/{id}
first_Name, last_Name, dni, phone, email, city, ...
```

These have limited documented DTOs. They do not establish where a newly created PH iCIMS person/workflow ID is stored. Do not overload a job-reference or identity field.

 **A specific missing contract: save newly created iCIMS identifiers**

UpdateStateById has leadId, auxCode, success, observation, type, informationWhatsApp and envelope fields, but no explicit iCIMS personId or workflowId. CandidateDTOEdit also lacks them. Ask HAIreX for the exact supported write path and response; this may be another existing route or an extension, not necessarily a new API.

 **Success case to demonstrate**

After PAD saves the iCIMS person/application, persist the identifiers and report the action. Read back HAIreX to verify the intended record/state. Use actual PH request/response examples.

 **Failure case to demonstrate**

If iCIMS saved but the HAIreX call timed out, the retry must recognize the saved record. Failure reporting and duplicate-safe replay need the PH transition/identifier contract.

HAIreX contracts: Yellow results and Hallo assessments

These are integration contracts to resolve with the platform teams. They do not all become Power Automate responsibilities merely because the endpoints exist.

Yellow result intake - existing route

POST /api/ProfilingInformations

```
{
  "candidateId": "<HAIreX candidate UUID>",
  "leadId": "<HAIreX lead UUID>",
  "waveRequisitionId": "<HAIreX requisition UUID>",
  "profilingStatus": "<approved PH value>"
}
```

Illustrative subset. The DTO also contains profilingJustCompleted, advanceToNextStateOnComplete and requestStateAdvance booleans plus screening/contact fields. Do not guess these flag values or separately advance the same state through PAD. Confirm which fields carry the PH behavioral results. Response: HTTP 200, no schema.

Assessment dispatch - existing HAIreX route

POST /api/Hallo/send-assessment

```
{
  "candidateId": "<HAIreX candidate UUID>",
  "assessmentTypeCode": "<approved PH bundle code>",
  "languageCode": "<approved language code>"
}
```

All three property names are documented. The request has no explicit leadId/requisitionId, so confirm how the correct application/attempt is resolved. Response: HTTP 200, no schema. Obtain the actual attempt/link response and confirm the caller before assigning a PA flow.

Link, result and bundle reads - existing routes

GET /api/Hallo/assessment-link?leadId=<lead UUID>

GET /api/Hallo/assessment-result/{halloAssessmentId}

GET /api/Hallo/assessments/{candidateId}

GET /api/Hallo/bundles

POST /api/Hallo/sync-results

Link lookup also accepts identification and phone. The sync route has no body in the API definition. Response schemas are absent. The native Hallo assessment ID and a HAIreX internal ID must be mapped explicitly.

Completion receiver - existing HAIreX route

POST /api/Hallo/assessment-webhook

```
{
  "payload": "<encoded payload under agreed contract>"
}
```

This string wrapper is documented. Native Hallo sends signed callback JSON. Confirm encoding, adapter, authentication and signature handling before connecting them. Do not assume these request shapes are identical.

 **Native Hallo assessment contract**

POST getAssessmentUrl: candidate identity/userId, assessment type, language and callback settings. Response includes assessmentId, assessmentUrl and assessmentUrlExpiresAt. This is the Hallo response, not a documented HAIreX response. PH production endpoint and account configuration require confirmation.

 **Integration decisions required**

The PH caller; approved bundle and recruiter gate; how HAIreX obtains attempt correlation; compatible callback receiver; which system advances HAIreX state; and any exact remaining PA action. Keep Yellow messaging, Hallo assessment creation and iCIMS status updates as separate activities.