


SHETH L.U.J AND SIR M.V COLLEGE

Aim: 7 Performing one-way ANOVA using aov() (R).

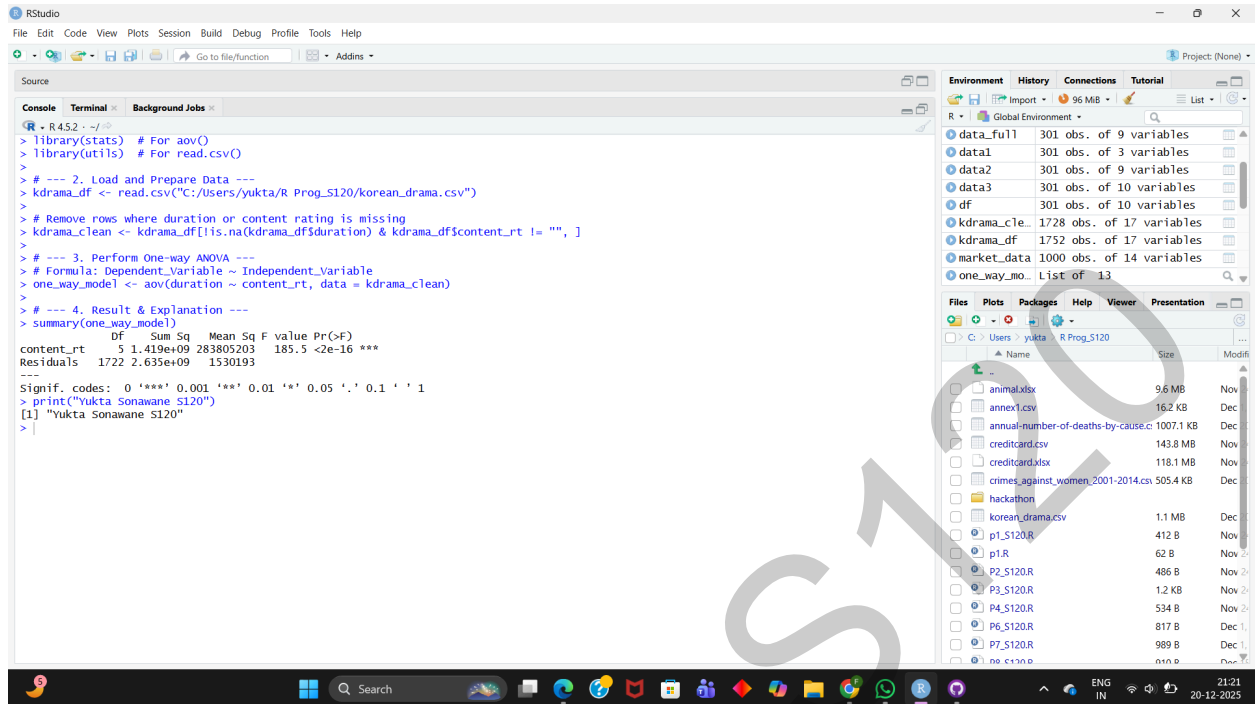

The screenshot shows the RStudio interface. The Console pane on the left displays the following R code and its output:

```
R - R 4.5.2 - ~/R
> library(stats) # For aov()
> library(utils) # For read.csv()
>
> # --- 2. Load and Prepare Data ---
> kdrama_df <- read.csv("C:/Users/yukta/R Prog_S120/korean_drama.csv")
>
> # Remove rows where duration or content rating is missing
> kdrama_clean <- kdrama_df[!is.na(kdrama_df$duration) & kdrama_df$content_rt != "", ]
>
> # --- 3. Perform One-way ANOVA ---
> # Formula: Dependent_Variable ~ Independent_Variable
> one_way_model <- aov(duration ~ content_rt, data = kdrama_clean)
>
> # --- 4. Result & Explanation ---
> summary(one_way_model)
          Df Sum Sq Mean Sq F value Pr(>F)
content_rt  5 1.419e+09 283805203  185.5 <2e-16 ***
Residuals 1722 2.635e+09 1530193
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
> print("Yukta Sonawane S120")
[1] "Yukta Sonawane S120"
> |
```

The Environment pane on the right shows the following objects:

- data_full1: 301 obs. of 9 variables
- data1: 301 obs. of 3 variables
- data2: 301 obs. of 9 variables
- data3: 301 obs. of 10 variables
- df: 301 obs. of 10 variables
- kdrama_clean: 1728 obs. of 17 variables
- kdrama_df: 1752 obs. of 17 variables
- market_data: 1000 obs. of 14 variables
- one_way_mo...: List of 13

The Files pane shows the project directory structure, including files like animal.xlsx, annex1.csv, annual-number-of-deaths-by-cause.csv, creditcard.xlsx, crimes_against_women_2001-2014.csv, hackathon, korean_drama.csv, p1_S120.R, p1.R, p2_S120.R, p3_S120.R, p4_S120.R, p6_S120.R, p7_S120.R, and p8_S120.R.