

Setting up 3 VMs using Oracle VirtualBox and Vagrant


Introduction to NoSQL databases

Instructor: Dr. Kim

1. Vagrantfile

```
Vagrant.configure("2") do |config|  
  config.vm.network "public_network", bridge: "Intel"  
  config.vm.box = "ubuntu/trusty64"  
end
```

2. Create three directories such as vm1, vm2, and vm3 and save the above Vagrantfile in each directory.

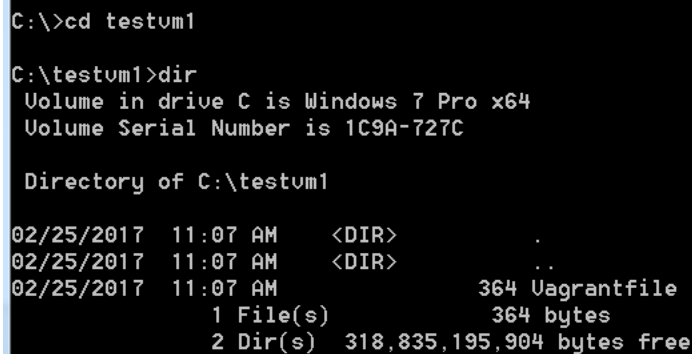

```
C:\>cd testvm1  
  
C:\testvm1>dir  
Volume in drive C is Windows 7 Pro x64  
Volume Serial Number is 1C9A-727C  
  
Directory of C:\testvm1  
  
02/25/2017  11:07 AM    <DIR>          .  
02/25/2017  11:07 AM    <DIR>          ..  
02/25/2017  11:07 AM                364 Vagrantfile  
           1 File(s)                364 bytes  
           2 Dir(s)  318,835,195,904 bytes free
```

3. In each directory, do vagrant up command.

4. Identify the ip address and the port number from the message from the vagrant up command.