Highlights

Two-scale stochastic simulation of epidemics on community networks with aggregate inter-community coupling

Yulian Kuryliak, Michael T. M. Emmerich

- Exact local Gillespie engines are coupled through aggregate inter-community hazards
- The ideal scheme is exact simulation of a surrogate all-to-all interface network
- Aggregate export clocks are stochastically early for randomly placed interfaces
- Accuracy is organised by internal timing spread relative to edge crossing time
- Close arrival times can coexist with physically impossible transmission routes

Highlights

Двомасштабне стохастичне моделювання епідемій у мережах спільнот з агрегованим міжспільнотним зв'язком

Yulian Kuryliak, Michael T. M. Emmerich

- Точні локальні рушії Gillespie зв'язані через агреговані міжспільнотні інтенсивності
- Ідеальна схема точно моделює сурогатну мережу з інтерфейсом «усі з усіма»
- Для випадкових інтерфейсів агрегований годинник експорту стохастично випереджає повномережевий
- Розбіжність упорядковується співвідношенням внутрішнього розкиду часу та часу переходу через ребро
- Близькі часи прибуття можуть супроводжуватися фізично неможливими маршрутами передавання

Two-scale stochastic simulation of epidemics on community networks with aggregate inter-community coupling

Yulian Kuryliak[a,*], Michael T. M. Emmerich[b]

[a]Institute of Computer Science and Information Technologies, Lviv Polytechnic National University, 12 Stepan Bandera Street, Lviv, 79000, Ukraine
[b]Faculty of Information Technology, University of Jyväskylä, P.O. Box 35 (Agora), Jyväskylä, FI-40014, Finland

ARTICLE INFO

Keywords:
Stochastic simulation
Multiscale simulation
Gillespie algorithm
Aggregate coupling
Model fidelity
Community networks

Abstract

Multiscale stochastic simulation often couples detailed subsystem dynamics through aggregate interfaces. We study this problem for epidemic spreading on community networks, where within-community contact structure is represented explicitly while inter-community coupling is available only in aggregate form. Each community is evolved by a Gillespie engine that is exact conditional on the imported events it receives; the macro layer generates imports from aggregate, state-dependent hazards and, in the default implementation, places them uniformly among susceptible nodes of the receiving community. We give a complete specification of the method, including its grid-based synchronisation, and show that its ideal continuous-time version is an exact simulation of a surrogate network in which each bundle of inter-community edges is replaced by uniform all-to-all coupling of equal total weight. This representation identifies four sources of discrepancy: loss of boundary-state information, uniform import placement, absence of interface-edge exhaustion, and synchronisation error. For uniformly random interfaces in the single-export setting, we further show that the ideal aggregate export clock is stochastically earlier than the full-network one. Controlled experiments on synthetic SI networks compare the method with full-network Gillespie simulation in single-export benchmarks and in 48 configurations of ten-community chains (50–1000 nodes per community, internal path lengths 1–6, one or five interface edges, 400 matched runs each). When the spread of infection times within a community was below a quarter of the mean single-edge crossing time, terminal arrival-time distributions were statistically indistinguishable in 15 of 18 configurations; beyond this regime, the two-scale simulator arrived early by an amount roughly proportional to that ratio, reaching 40%. Close timing did not imply admissible routes: up to 52% of aggregate crossings preceded infection of any true bridge node.

1. Introduction

Stochastic epidemic simulation in structured populations must account for dynamics occurring at different spatial and structural scales. Within communities, transmission can depend on detailed contact networks and local stochastic interactions (Keeling and Eames, 2005; Pastor-Satorras et al., 2015; Kiss et al., 2017), whereas transmission between communities is often represented through aggregate mobility flows or weighted coupling networks (Balcan et al., 2009; Barbosa et al., 2018). This mismatch in resolution creates a multiscale simulation problem in which fine-grained local dynamics must be coupled through a coarser inter-community representation.

In practice, such a mismatch is common because within-community contact networks may be observed, reconstructed or synthesised from partial information (Eubank et al., 2004; Danon et al., 2011), whereas interactions between communities may be available only as commuting volumes, mobility counts or other aggregate coupling measures (Barbosa et al., 2018; Chang et al., 2021). Importantly, an aggregate measure of connectivity between two communities does not uniquely determine the microscopic cross-community contacts that produced it. Consequently, the aggregate representation omits information about which

*Corresponding author
yulian.a.kuryliak@lpnu.ua (Y. Kuryliak); michael.t.m.emmerich@jyu.fi (M.T.M. Emmerich)
ORCID(s): 0000-0002-6600-2637 (Y. Kuryliak); 0000-0002-7342-2090 (M.T.M. Emmerich)

Двомасштабне стохастичне моделювання епідемій у мережах спільнот з агрегованим міжспільнотним зв'язком

Yulian Kuryliak[a,*], Michael T. M. Emmerich[b]

[a]Інститут комп'ютерних наук та інформаційних технологій, Національний університет "Львівська політехніка", вул. Степана Бандери, 12, Львів, 79000, Україна
[b]Факультет інформаційних технологій, Університет Ювяскюля, P.O. Box 35 (Agora), Ювяскюля, FI-40014, Фінляндія

ARTICLE INFO

Keywords:
Стохастичне моделювання
Багатомасштабне моделювання
Алгоритм Gillespie
Агреговані зв'язки
Точність моделі
Мережі спільнот

ABSTRACT

У багатомасштабному стохастичному моделюванні детальна динаміка підсистем часто поєднується через агреговані інтерфейси. Ми досліджуємо цю задачу для поширення епідемій у мережах спільнот, де контакти всередині спільнот подано явно, а зв'язки між ними доступні лише в агрегованій формі. Кожна спільнота моделюється рушієм Gillespie, точним умовно на отриманих імпортованих подіях; макрорівень генерує імпорти за агрегованими залежними від стану інтенсивностями, а в базовій реалізації розміщує їх рівномірно серед сприйнятливих вузлів спільноти-одержувача. Ми повністю специфікуємо метод, зокрема його сіткову синхронізацію, і показуємо, що ідеальна версія з неперервним часом точно моделює сурогатну мережу, у який кожен пучок міжспільнотних ребер замінено рівномірним зв'язком «усі з усіма» з такою самою сумарною вагою. Це подання виявляє чотири джерела розбіжностей: втрату інформації про стан граничних вузлів, рівномірне розміщення імпортів, відсутність вичерпання ребер інтерфейсу та похибку синхронізації. Для випадково розміщених інтерфейсів у задачі з одиничним експортом ми також доводимо, що ідеальний агрегований годинник експорту стохастично випереджає повномережевий. Контрольовані експерименти на синтетичних мережах SI порівнюють метод із повномережевим моделюванням Gillespie у тестах з одиничним експортом і в 48 конфігураціях ланцюгів із десяти спільнот (50–1000 вузлів у спільноті, внутрішні довжини шляхів 1–6, одне або п'ять ребер інтерфейсу, по 400 зіставлених запусків). Коли розкид часів зараження всередині спільноти був меншим за чверть середнього часу переходу через одне ребро, розподіли часу прибуття до кінцевої спільноти були статистично нерозрізненними у 15 із 18 конфігурацій; за більших значень двомасштабний симулятор прибував раніше на величину, приблизно пропорційну цьому відношенню, яка сягала 40%. Близькі часи не гарантували допустимих маршрутів: до 52% агрегованих переходів відбувалися до зараження будь-якого справжнього вузла-моста.

1. Вступ

Стохастичне моделювання епідемій у структурованих популяціях має враховувати динаміку на різних просторових і структурних масштабах. Усередині спільнот передавання залежить від докладної мережі контактів і локальних стохастичних взаємодій (Keeling and Eames, 2005; Pastor-Satorras et al., 2015; Kiss et al., 2017), тоді як між спільнотами його часто подають агрегованими потоками мобільності або зваженими мережами зв'язків (Balcan et al., 2009; Barbosa et al., 2018). Така невідповідність рівнів деталізації створює багатомасштабну задачу: локальну динаміку з високою деталізацією потрібно поєднати через грубіше міжспільнотне подання.

На практиці внутрішньоспільнотні мережі контактів можуть бути спостережені, реконструйовані або синтезовані за неповними даними (Eubank et al., 2004; Danon et al., 2011), тоді як взаємодії між спільнотами можуть бути доступні лише як обсяги маятникової міграції, показники мобільності чи інші агреговані величини (Barbosa et al., 2018; Chang et al., 2021). Агрегована зв'язність між двома спільнотами не визначає однозначно мікроскопічні контакти, що її утворюють. Тому агреговане подання не зберігає інформації про те, які саме люди формують інтерфейс і як їхні стани впливають на передавання між спільнотами.

Якщо повна мережа контактів відома, епідемічну динаміку можна задати як неперервний марковський ланцюг (CTMC) і точно моделювати подієвими методами типу Gillespie (Gillespie, 1977; Gibson and Bruck,

*Автор для листування
yulian.a.kuryliak@lpnu.ua (Y. Kuryliak); michael.t.m.emmerich@jyu.fi (M.T.M. Emmerich)
orcid(s): 0000-0002-6600-2637 (Y. Kuryliak); 0000-0002-7342-2090 (M.T.M. Emmerich)

individuals constitute the interface between communities and how their states affect inter-community transmission.

When the complete contact network is available, epidemic dynamics can be formulated as a continuous-time Markov chain (CTMC) and sampled exactly by Gillespie-type event-driven methods (Gillespie, 1977; Gibson and Bruck, 2000). Extensions for temporal, large and sparse networks can substantially improve computational efficiency (Vestergaard and Génois, 2015; Kuryliak et al., 2025), but they still require the relevant microscopic interaction channels to be explicitly represented. At the opposite end of the modelling spectrum, metapopulation approaches naturally describe interactions between communities through aggregate flows, but usually aggregate the within-community state as well (Colizza et al., 2007; Colizza and Vespignani, 2008; Balcan et al., 2010; Ajelli et al., 2010). This leaves an intermediate simulation problem: how to retain explicit stochastic dynamics within communities while coupling them through an inter-community interface that is available only in aggregate form.

A two-scale simulator for this intermediate regime was outlined in a short workshop paper (Kuryliak and Emmerich, 2025). Each community is evolved by an independent stochastic micro-simulator, while a macro layer generates cross-community imports from state-dependent aggregate hazards and places each import in the receiving community. This architecture preserves detailed stochastic dynamics within communities while aggregating only the coupling interface. The workshop paper motivated the architecture and sketched its layers, but did not quantify the fidelity loss caused by replacing microscopic cross-community channels by aggregate coupling or by the rule used to place imported events. We therefore present the method here in a self-contained, implementation-level form.

The central question of this article is whether an aggregate inter-community interface can reproduce the stochastic behaviour of the corresponding full-network CTMC with sufficient fidelity, for which observables and in which network regimes. The answer depends on information discarded by the interface: which nodes carry the inter-community channels and whether they are currently infected or susceptible, where imported infections are placed, and, for thin interfaces, how many distinct microscopic crossings are physically available. We address these effects analytically and through controlled experiments on synthetic networks in which the complete microscopic network is known to the experimenter but only its aggregate representation is passed to the two-scale simulator. The purpose is methodological rather than empirical calibration of a particular epidemic system.

The contributions are as follows.

1. A complete, implementation-level specification of the two-scale method, including the grid-synchronised hazard-integral scheduler used in practice (Section 3, Algorithm 1).
2. An exact characterisation of the ideal method as full-network simulation on a surrogate network with uniform all-to-all interface coupling (Proposition 1). It yields a taxonomy of discrepancies and a stochastic-ordering result for single exports (Proposition 2).
3. A controlled comparison with full-network Gillespie simulation on single-export benchmarks and on chains of communities, using permutation baselines that separate approximation error from sampling variability (Sections 5 and 6).
4. A practical criterion: the ratio of the within-community spread of infection times to the single-edge crossing time organises the observed discrepancies across community sizes, internal structures and interface widths (Section 6.6).

The study is restricted to susceptible–infected (SI) dynamics on static synthetic networks and a fixed synchronisation step. Section 2 relates the method to existing simulation approaches; Section 3 specifies it; Section 4 analyses what the aggregate interface preserves; Sections 5 and 6 describe the experiments and their results; Section 7 discusses practical use, cost and limitations.

2. Related work

Exact and approximate stochastic simulation. Gillespie's direct method samples a CTMC exactly from the current propensities (Gillespie, 1977); the next reaction method organises the same computation around per-channel clocks (Gibson and Bruck, 2000). When propensities vary in time, exact simulation can be expressed through the random-time-change representation of a counting process (Ethier and Kurtz, 1986):

2000). Розширення для часових, великих і розріджених мереж підвищують обчислювальну ефективність (Vestergaard and Génois, 2015; Kuryliak et al., 2025), але все одно потребують явного подання відповідних мікроскопічних каналів взаємодії. На протилежному полюсі метапопуляційні моделі описують взаємодії між спільнотами агрегованими потоками, але зазвичай агрегують і внутрішньоспільнотний стан (Colizza et al., 2007; Colizza and Vespignani, 2008; Balcan et al., 2010; Ajelli et al., 2010). Між цими крайнощами є проміжна задача: зберегти явну стохастичну динаміку мережі всередині спільнот, але зв'язувати їх через інтерфейс, доступний лише в агрегованій формі.

Двомасштабний симулятор для такого проміжного режиму стисло описано в матеріалах семінару (Kuryliak and Emmerich, 2025). Кожна спільнота моделюється незалежним мікросимулятором, а макрорівень генерує міжспільнотні імпорти за залежними від стану агрегованими інтенсивностями й розміщує кожне зараження у спільноті-одержувачі. Така архітектура зберігає докладну стохастичну динаміку всередині спільнот і агрегує лише інтерфейс зв'язку. У матеріалах семінару обґрунтовано архітектуру та описано її рівні, але не виміряно втрату точності через заміну мікроскопічних міжспільнотних каналів агрегованим зв'язком і правилом розміщення імпортів. Тому тут метод подано самодостатньо й на рівні реалізації.

Центральне питання статті: чи може агрегований міжспільнотний інтерфейс із достатньою точністю відтворити стохастичну поведінку відповідного повномережевого CTMC, для яких спостережуваних величин і в яких мережевих режимах? Відповідь залежить від інформації, яку інтерфейс відкидає: які вузли несуть міжспільнотні канали, куди потрапляє імпортоване зараження та скільки разів можна перетнути тонкий інтерфейс. Ми аналізуємо ці ефекти теоретично й у контрольованих експериментах на синтетичних мережах, де повна мікроскопічна мережа відома дослідникові, але двомасштабному симулятору передається лише її агреговане подання.

Основні внески цієї роботи такі.

1. Повна специфікація двомасштабного методу на рівні реалізації, зокрема застосованого на практиці сітково синхронізованого планувальника на основі інтеграла інтенсивності (Розділ 3, Алгоритм 1).
2. Точна характеристика ідеального методу як повномережевого моделювання на сурогатній мережі з рівномірним міжспільнотним зв'язком «усі з усіма» (Твердження 1). Вона дає таксономію розбіжностей і результат щодо стохастичного впорядкування одиничних експортів (Твердження 2).
3. Контрольоване порівняння з повномережевим моделюванням Gillespie у тестах з одиничним експортом і на ланцюгах спільнот із використанням перестановочних базових рівнів, що відокремлюють похибку апроксимації від вибіркової мінливості (Розділи 5 і 6).
4. Практичний критерій: відношення розкиду часів зараження всередині спільноти до часу переходу через одне ребро впорядковує спостережувані розбіжності для різних розмірів спільнот, внутрішніх структур і ширин інтерфейсу (Розділ 6.6).

Дослідження обмежене динамікою «сприйнятливий–інфікований» (SI) на статичних синтетичних мережах і фіксованим кроком синхронізації. У Розділі 2 метод зіставлено з наявними підходами до моделювання; у Розділі 3 його специфіковано; у Розділі 4 проаналізовано, що зберігає агрегований інтерфейс; у Розділах 5 і 6 описано експерименти та їхні результати; у Розділі 7 обговорено практичне застосування, обчислювальні витрати й обмеження.

2. Пов'язані праці

Точне та наближене стохастичне моделювання. Прямий метод Gillespie точно генерує траєкторії CTMC за поточними схильностями реакцій (Gillespie, 1977); метод наступної реакції організовує ті самі обчислення навколо окремих годинників каналів (Gibson and Bruck, 2000). Коли схильності змінюються з часом, точне моделювання можна виразити через подання процесу підрахунку випадковою заміною часу (Ethier and Kurtz, 1986): подія відбувається, коли її інтегрована інтенсивність досягає незалежного експоненційного порога. Anderson (2007) перетворив це подання на модифікований метод наступної реакції для залежних від часу схильностей. Макрогодинник двомасштабного симулятора є прикладом такої конструкції зі стохастичною, залежною від стану інтенсивністю. Орієнтовані на мережі реалізації оновлюють лише схильності, на які вплинула подія (Vestergaard and Génois, 2015; Kuryliak et al., 2025); використані тут локальні рушії відповідають Kuryliak et al. (2025).

an event fires when its integrated intensity reaches an independent exponential threshold. Anderson (2007) used this representation to derive the modified next reaction method for time-dependent propensities and delays. The macro clock of the two-scale simulator uses the same cumulative-hazard principle, but with an intensity driven by the evolving stochastic states of the local engines. Network-oriented implementations update only the propensities affected by an event (Vestergaard and Génois, 2015; Kuryliak et al., 2025); the local engines used here follow Kuryliak et al. (2025).

Hybrid and multiscale stochastic simulation algorithms accelerate systems with widely separated reaction rates by approximating fast channels (Haseltine and Rawlings, 2002; Cao et al., 2005). The two-scale method differs in what it approximates: it does not average fast reaction channels, but removes microscopic information about which inter-community channels are active. As shown later, its accuracy is nevertheless organised by a separation of time scales between internal spread and interface crossing.

Metapopulation and mobility models. Metapopulation models couple subpopulations through mobility flows and have been used to study invasion thresholds and global spread (Colizza et al., 2007; Colizza and Vespignani, 2008; Balcan et al., 2009, 2010); high-resolution mobility networks can likewise be combined with local transmission models (Chang et al., 2021). Agent-based models resolve individuals throughout (Eubank et al., 2004; Kerr et al., 2021), and Ajelli et al. (2010) compared the two paradigms. In contrast, the present method preserves explicit node-level stochastic dynamics within communities and applies coarse-graining only at the inter-community interface, where microscopic transmission channels are replaced by aggregate stochastic coupling.

Two levels of mixing and co-simulation. Epidemic models with two levels of mixing combine local contacts within small groups with uniform global mixing (Ball et al., 1997). The surrogate network of Proposition 1 has a related structure, with uniform mixing restricted to pairs of communities and weighted by their aggregate coupling. From a simulation-engineering perspective, the two-scale scheduler is also related to co-simulation: independently solved subsystems are advanced on a communication grid and exchange a limited set of coupling variables (Gomes et al., 2018). The distinction is that the interface here generates stochastic event times and target locations rather than merely exchanging state variables, and therefore directly determines part of the simulated event process.

3. The two-scale simulation method

This section defines the full-network microscopic reference process and the two-scale simulator used throughout the study. The reference model is a CTMC on the specified contact network. The two-scale simulator preserves its within-community transition channels but replaces explicit cross-community channels by an aggregate stochastic interface. We distinguish the ideal continuous-time two-scale process from the grid-synchronised implementation used in the experiments.

3.1. Full-network reference model

Let $G = (V, E)$ be a contact network whose node set is partitioned into M disjoint communities,

$$V = \bigsqcup_{i=1}^{M} V_i, \qquad N_i = |V_i|. \tag{1}$$

We treat E as a set of oriented transmission channels; an undirected contact contributes two channels. The channels are divided into within-community bundles E_{ii} and inter-community bundles

$$E_{ij} = \{(u, v) \in E : u \in V_i,\, v \in V_j\}, \qquad i \neq j.$$

Each node is susceptible (S), infected (I) or removed (R). The microscopic state is $X(t) \in \{S, I, R\}^V$, with $X_i(t) = X(t)|_{V_i}$ denoting its restriction to community V_i. We write

$$S_i(t) = \{v \in V_i : X_v(t) = S\}, \qquad I_i(t) = \{v \in V_i : X_v(t) = I\},$$

Гібридні та багатомасштабні алгоритми стохастичного моделювання пришвидшують системи з істотно розділеними швидкостями реакцій, наближено відтворюючи швидкі канали (Haseltine and Rawlings, 2002; Cao et al., 2005). Двомасштабний метод відрізняється об'єктом апроксимації: він не усереднює швидкі канали, а вилучає інформацію про те, які міжспільнотні канали активні. Проте, як показано в Розділі 6, його точність також упорядковується розділенням часових масштабів, а саме між внутрішнім поширенням і переходом через інтерфейс.

Метапопуляційні моделі та моделі мобільності. Метапопуляційні моделі зв'язують субпопуляції потоками мобільності; їх застосовували для дослідження порогів вторгнення та глобального поширення (Colizza et al., 2007; Colizza and Vespignani, 2008; Balcan et al., 2009, 2010); мережі мобільності високої роздільної здатності можна поєднувати з локальними моделями передавання (Chang et al., 2021). Агентні моделі описують окремих індивідів у всій системі (Eubank et al., 2004; Kerr et al., 2021), а Ajelli et al. (2010) порівняв ці дві парадигми. Двомасштабний метод зберігає окремі вузли та контакти всередині спільнот, а отже, локальну стохастичність і мережеву структуру, проте між спільнотами використовує лише інформацію метапопуляційного типу.

Два рівні перемішування та спільне моделювання. Епідемічні моделі з двома рівнями перемішування поєднують локальні контакти в малих групах із рівномірним глобальним перемішуванням (Ball et al., 1997). Сурогатна мережа з Твердження 1 має таку саму структуру, де глобальне перемішування обмежене парами спільнот і зважене агрегованим зв'язком. З погляду програмної організації моделювання двомасштабний планувальник є головним компонентом спільного моделювання, який просуває підсистеми як «чорні скриньки» по комунікаційній сітці й обмінюється невеликою кількістю змінних зв'язку (Gomes et al., 2018). На відміну від типових інтерфейсів спільного моделювання, тут інтерфейс не лише передає стан, а й визначає, коли і де у підсистемі-одержувачі відбуваються стохастичні події.

3. Метод двомасштабного моделювання

У цьому розділі визначено повномережевий мікроскопічний еталонний процес і двомасштабний симулятор, використані в роботі. Еталонна модель є CTMC на заданій мережі контактів. Двомасштабний симулятор зберігає внутрішньоспільнотні канали переходів, але замінює явні міжспільнотні канали агрегованим стохастичним інтерфейсом. Ми розрізняємо ідеальний двомасштабний процес із неперервним часом і використану в експериментах реалізацію із синхронізацією на часовій сітці.

3.1. Повномережева еталонна модель

Нехай $G = (V, E)$ — мережа контактів із множиною вузлів, розбитою на M неперетинних спільнот,

$$V = \bigsqcup_{i=1}^{M} V_i, \qquad N_i = |V_i|. \tag{1}$$

Множину E розглядаємо як набір орієнтованих каналів передавання; неорієнтований контакт утворює два канали. Канали поділено на внутрішньоспільнотні пучки E_{ii} і міжспільнотні пучки $E_{ij} = \{(u, v) \in E : u \in V_i,\, v \in V_j\}$, $i \neq j$. Кожен вузол є сприйнятливим (S), інфікованим (I) або видаленим (R). Мікроскопічний стан позначимо $X(t) \in \{S, I, R\}^V$, а його обмеження на спільноту V_i — $X_i(t) = X(t)|_{V_i}$. Визначимо множини сприйнятливих та інфікованих вузлів $S_i(t) = \{v \in V_i : X_v(t) = S\}$ і $I_i(t) = \{v \in V_i : X_v(t) = I\}$; кількості вузлів у них дорівнюють $s_i(t) = |S_i(t)|$ та $y_i(t) = |I_i(t)|$. Нормовані частки становлять $\bar{s}_i(t) = s_i(t)/N_i$ і $\bar{y}_i(t) = y_i(t)/N_i$.

Для конфігурації $x \in \{S, I, R\}^V$ позначимо через $x^{v:I}$ і $x^{u:R}$ конфігурації, у яких вузол v став інфікованим або вузол u став видаленим. Повномережевий процес є CTMC із генератором

$$(\mathcal{L}_G f)(x) = \sum_{(u,v)\in E} \beta_{uv}\, \mathbf{1}\{x_u = I,\, x_v = S\}\big[f(x^{v:I}) - f(x)\big] + \sum_{u\in V} \gamma\, \mathbf{1}\{x_u = I\}\big[f(x^{u:R}) - f(x)\big], \tag{2}$$

для обмежених тестових функцій f. Тут β_{uv} — інтенсивність передавання каналом (u, v), а γ — інтенсивність видалення. Міжспільнотні інтенсивності записуємо як $\beta_{uv} = \beta_{\text{out}} w_{uv}$, де w_{uv} — вага контакту. Точне моделювання (2) позначаємо Full. В усіх експериментах використано динаміку SI ($\gamma = 0$).

Item	Full	TwoScale
Within-community contacts and rates	yes	yes
Node states within communities	yes	yes (local engines)
Inter-community channels E_{ij} (bridge nodes and endpoints)	yes	no
Aggregate weight W_{ij}	implied by E_{ij}	yes
Rate of transmission from V_i to V_j	from states of channels in E_{ij}	from $\bar{y}_i$, $\bar{s}_j$ and W_{ij}
Receiving node of a transmission	endpoint of the firing channel	drawn from a placement rule
Maximum transmissions across a bundle (SI)	number of channels	limited only by s_j

Table 1: Information used by the full-network reference and by the two-scale simulator.

and use $s_i(t) = |S_i(t)|$ and $y_i(t) = |I_i(t)|$ for the corresponding susceptible and infected counts. Their normalized fractions are $\bar{s}_i(t) = s_i(t)/N_i$ and $\bar{y}_i(t) = y_i(t)/N_i$.

For a configuration $x \in \{S, I, R\}^V$, let $x^{v:I}$ and $x^{u:R}$ denote the configurations in which node v has become infected or node u has been removed. The full-network process is the CTMC with generator

$$(\mathcal{L}_G f)(x) = \sum_{(u,v)\in E} \beta_{uv}\, \mathbf{1}\{x_u = I,\, x_v = S\}\big[f(x^{v:I}) - f(x)\big] + \sum_{u\in V} \gamma\, \mathbf{1}\{x_u = I\}\big[f(x^{u:R}) - f(x)\big], \qquad (2)$$

for bounded test functions f, where β_{uv} is the transmission rate of channel (u, v) and γ the removal rate. Inter-community rates are written as $\beta_{uv} = \beta_{\text{out}} w_{uv}$ with contact weights w_{uv}. We call exact simulation of (2) Full. All experiments in this article use SI dynamics ($\gamma = 0$).

3.2. Aggregate interface

The two-scale simulator, denoted TwoScale, receives the within-community graphs $G_i = (V_i, E_{ii})$ with their rates, but not the microscopic inter-community bundles. Each bundle is represented only by its aggregate weight

$$W_{ij} = \sum_{(u,v)\in E_{ij}} w_{uv}, \qquad i \neq j, \qquad (3)$$

which for unit weights is the number of channels from V_i to V_j. In applications, W_{ij} may be estimated from mobility or contact data rather than computed from a known microscopic network. The macro layer observes the community summaries (s_i, y_i), or equivalently $(\bar{s}_i, \bar{y}_i)$, but not the identities and states of the nodes incident to the inter-community channels. Table 1 lists the information used by each model, and Figure 1(a,b) contrasts the two representations.

3.3. Local engines

Each community is simulated by a separate engine that samples the CTMC of its own graph G_i: infection along channels in E_{ii} and removal of infected nodes, with the propensities of (2) restricted to V_i. The engines use the incremental Gillespie implementation of Kuryliak et al. (2025), in which each node stores the weight of its contacts with infected neighbours and only the propensities affected by an event are updated. Each engine owns a private pseudorandom stream.

An engine supports two operations used by the macro layer: advancing its clock to a prescribed time, applying only events that occur before it, and an *import*, which sets a given susceptible node to I. An import changes the local state and propensities, so the engine discards its pending next event and samples a new one from the updated state. This restart is distributionally valid for the CTMC because the relevant waiting times are exponential. Equivalently, a random-time-change implementation may retain the unconsumed exponential hazard budget across the import. Conditional on the complete sequence of import times and target nodes, the local engine therefore has exactly the law of the within-community CTMC with those

а треба таблицю? там справді є корисна інфа?

Елемент	Full	TwoScale
Внутрішньоспільнотні контакти та інтенсивності	так	так
Стани вузлів усередині спільнот	так	так (локальні рушії)
Міжспільнотні канали E_{ij} (вузли-мости та кінцеві вузли)	так	ні
Агрегована вага W_{ij}	випливає з E_{ij}	так
Інтенсивність передавання з V_i до V_j	зі станів каналів у E_{ij}	з $\bar{y}_i$, $\bar{s}_j$ і W_{ij}
Вузол-одержувач передавання	кінцевий вузол каналу, що спрацював	вибирається за правилом розміщення
Максимальна кількість передавань через пучок (SI)	кількість каналів	обмежена лише s_j

якого розміщення?

Table 1: Інформація, яку використовують повномережева еталонна модель і двомасштабний симулятор.

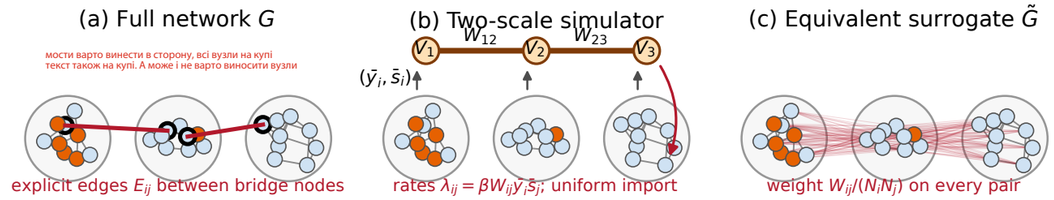


Figure 1: (a) Повна мережа: інфекція переходить між спільнотами лише явними ребрами, що з'єднують вузли-мости (чорні кільця). (b) Двомасштабний симулятор: кожна спільнота є точним локальним рушієм Gillespie; макрорівень бачить лише частки $(\bar{y}_i, \bar{s}_i)$ й агреговані ваги W_{ij}, генерує міжспільнотні зараження з інтенсивностями λ_{ij} і розміщує кожен імпорт на рівномірно вибраному сприйнятливому вузлі. (c) Еквівалентна сурогатна мережа з Твердження 1: кожна пара вузлів у сусідніх спільнотах з'єднана слабким ребром ваги $W_{ij}/(N_i N_j)$. Помаранчеві вузли — інфіковані; сині — сприйнятливі.

3.2. Агрегований інтерфейс

Двомасштабний симулятор, позначений TwoScale, отримує внутрішньоспільнотні графи $G_i = (V_i, E_{ii})$ з їхніми інтенсивностями, але не мікроскопічні міжспільнотні пучки. Кожен пучок подано лише його агрегованою вагою

$$W_{ij} = \sum_{(u,v)\in E_{ij}} w_{uv}, \qquad i \neq j, \qquad (3)$$

яка для одиничних ваг дорівнює кількості каналів із V_i до V_j. У прикладних задачах W_{ij} можна оцінити за даними мобільності або контактів, а не обчислювати з відомої мікроскопічної мережі. Макрорівень спостерігає зведення стану спільноти (s_i, y_i) і відповідні частки $\bar{s}_i = s_i/N_i$ та $\bar{y}_i = y_i/N_i$. У Таблиці 1 наведено інформацію, яку використовує кожна модель. На Рисунку 1(a,b) зіставлено два подання.

3.3. Локальні рушії

Кожна спільнота моделюється окремим рушієм, який генерує траєкторії CTMC її власного графа G_i: зараження вздовж каналів у E_{ii} та видалення інфікованих вузлів зі схильностями з (2), обмеженими на V_i. Рушії використовують інкрементну реалізацію Gillespie з Kuryliak et al. (2025), у якій кожен вузол зберігає сумарну вагу своїх контактів з інфікованими сусідами, а оновлюються лише схильності, на які вплинула подія. Кожен рушій має власний незалежний потік псевдовипадкових чисел.

Рушій підтримує дві операції для макрорівня: просування годинника до заданого часу із застосуванням лише подій, що відбулися раніше, та *імпорт* — переведення заданого сприйнятливого вузла у стан I. Імпорт змінює локальний стан та інтенсивності, тому рушій відкидає заплановану подію й генерує нову з оновленого

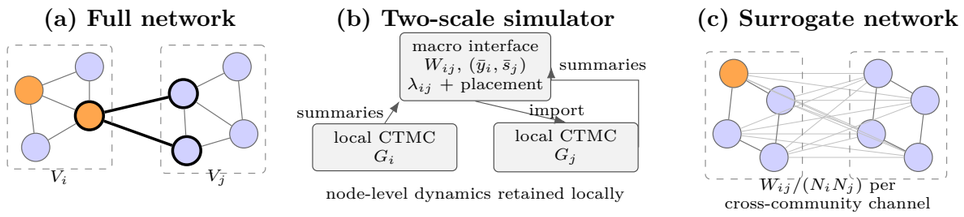


Figure 1: Conceptual comparison of the inter-community representation. (a) In the full network, infection can cross communities only along explicit channels incident to bridge nodes (thick black rings). (b) In the two-scale simulator, each community remains a local Gillespie/CTMC engine, while the macro interface uses community summaries and the aggregate weight W_{ij} to generate an import rate and target placement. (c) Under uniform placement, the ideal two-scale process is equivalent to the surrogate network of Proposition 1, in which every ordered cross-community node pair receives the weak rate $\beta_{\text{out}}W_{ij}/(N_iN_j)$. Orange denotes infected nodes and blue susceptible nodes.

imports applied as exogenous $S \to I$ jumps. The approximation enters through how the import process is generated, not through the local CTMC simulation itself.

3.4. Macro layer

The macro layer treats communities as nodes of a weighted graph with weights W_{ij}. Given the current summaries, it assigns to every ordered pair $i \neq j$ the hazard

$$\lambda_{ij}(t) = \beta_{\text{out}}\, W_{ij}\, \bar{y}_i(t)\, \bar{s}_j(t), \qquad \Theta(t) = \sum_{i \neq j} \lambda_{ij}(t). \tag{4}$$

A macro event represents one imported infection from some community into another. Conditional on a macro event at time t with $\Theta(t) > 0$, the pair (i, j) is selected with probability $\lambda_{ij}(t)/\Theta(t)$, and a target $v \in S_j(t)$ is drawn from a placement rule $\Pi_{ij}(\cdot \mid X(t))$. The default rule used throughout this article is uniform placement, $\Pi_{ij}(v \mid X(t)) = 1/s_j(t)$. Degree-weighted or boundary-aware rules are possible when such information is available. The implementation also contains a multiplicative calibration factor for (4), which is set to one in all experiments.

Equation (4) is an effective aggregate intensity rather than, in general, the exact rate of the realised microscopic bundle. Conditional on the community counts, it equals the expected bundle rate when the inter-community endpoints are assigned uniformly at random, before conditioning on their realised identities. It coincides with the actual rate when the interface is uniform all-to-all coupling (Corollary 1) and is otherwise an approximation (Section 4). The macro layer is not autonomous: Θ changes whenever a local event or import changes a community count. Because the summaries are piecewise constant between such events, so is Θ.

3.5. Hazard-integral timing and synchronisation

Let t_0 be the time of the previous macro event and $E \sim \text{Exp}(1)$ an independent threshold. In the ideal continuous-time construction, the next macro event occurs at

$$t^* = \inf\Big\{t > t_0 : \int_{t_0}^{t} \Theta(s)\, ds \geq E\Big\}. \tag{5}$$

Conditional on the realised micro-layer trajectories, $\Theta(t)$ is a predictable intensity path and (5) is the usual random-time-change or cumulative-hazard construction (Ethier and Kurtz, 1986; Anderson, 2007). Unconditionally, the macro-event process has a stochastic predictable intensity rather than the deterministic intensity of an ordinary non-homogeneous Poisson process. For constant Θ, (5) reduces to Gillespie's waiting time $(t^* - t_0) = -\ln U/\Theta$, $U \sim \mathcal{U}(0, 1)$. Combined with exact local engines, this construction defines the *ideal* two-scale process, whose transition rates are characterised in Section 4.1.

стану. Такий перезапуск статистично коректний для CTMC, оскільки відповідні часи очікування експоненційні. Еквівалентно, реалізація через випадкову заміну часу може зберегти невикористаний бюджет експоненційної інтенсивності після імпорту. За умови повної послідовності часів імпорту й цільових вузлів локальний рушій точно відтворює CTMC внутрішньоспільнотної мережі з цими імпортами як зовнішніми стрибками $S \to I$. Апроксимація виникає у способі генерування імпортів, а не в локальному моделюванні CTMC.

3.4. Макрорівень

Макрорівень розглядає спільноти як вузли зваженого графа з вагами W_{ij}. За поточними узагальненнями стану він призначає кожній упорядкованій парі $i \neq j$ інтенсивність

$$\lambda_{ij}(t) = \beta_{\text{out}}\, W_{ij}\, \bar{y}_i(t)\, \bar{s}_j(t), \qquad \Theta(t) = \sum_{i \neq j} \lambda_{ij}(t). \tag{4}$$

Макроподія означає один імпорт інфекції з однієї спільноти до іншої. За умови макроподії в час t, коли $\Theta(t) > 0$, пару (i, j) вибирають з імовірністю $\lambda_{ij}(t)/\Theta(t)$, а цільовий вузол $v \in S_j(t)$ — за правилом розміщення $\Pi_{ij}(\cdot \mid X(t))$. У всій статті використано рівномірне правило $\Pi_{ij}(v \mid X(t)) = 1/s_j(t)$. За наявності такої інформації можливі правила, зважені за степенем або з урахуванням межі. Реалізація також має мультиплікативний калібрувальний коефіцієнт для (4); в усіх експериментах його встановлено рівним одиниці.

Рівняння (4) задає ефективну агреговану інтенсивність, а не, загалом, точну інтенсивність реалізованого мікроскопічного пучка. За фіксованих кількостей вузлів у станах вона дорівнює математичному сподіванню інтенсивності пучка, якщо кінцеві вузли міжспільнотних ребер рівномірно розміщені випадково й ми ще не враховуємо їхні конкретні ідентичності. Інтенсивності збігаються для рівномірного зв'язку «усі з усіма» (Наслідок 1), а в інших випадках агрегована величина є наближенням (Розділ 4). Макрорівень не автономний: Θ змінюється після локальної події або імпорту, що змінює кількість вузлів у станах. Оскільки між такими подіями зведення стану кусково сталі, Θ також кусково стала.

3.5. Час за інтегралом інтенсивності та синхронізація

Нехай t_0 — час попередньої макроподії, а $E \sim \text{Exp}(1)$ — незалежний поріг. В ідеальній конструкції наступна макроподія відбувається в момент

$$t^* = \inf\Big\{t > t_0 : \int_{t_0}^{t} \Theta(s)\, ds \geq E\Big\}, \tag{5}$$

За фіксованих траєкторій мікрорівня $\Theta(t)$ є передбачуваною інтенсивністю, а конструкція (5) відповідає поданню через випадкову заміну часу, або накопичену інтенсивність, (Ethier and Kurtz, 1986; Anderson, 2007). Безумовно процес макроподій має стохастичну передбачувану інтенсивність, а не детерміновану інтенсивність звичайного неоднорідного пуассонівського процесу. Для сталої Θ рівняння (5) зводиться до часу очікування Gillespie $(t^* - t_0) = -\ln U/\Theta, U \sim \mathcal{U}(0, 1)$. У поєднанні з точними локальними рушіями ця побудова визначає *ідеальний* двомасштабний процес, характеристики переходів якого наведено в Розділі 4.1.

Реалізований планувальник (Алгоритм 1) трактує локальні рушії як «чорні скриньки», що відкривають свій стан лише після просування. Він ділить час на інтервали синхронізації довжини τ. Позначимо через A наближений накопичений макрорівневий hazard від попередньої макроподії. На кожному (під)інтервалі $[t, t_g)$, де $\Delta = t_g - t$, планувальник оцінює Θ пробою в середній точці: копії всіх рушіїв, разом зі станами їхніх генераторів випадкових чисел, просуваються до $t + \Delta/2$, де $\Delta = t_g - t$, після чого за копіями обчислюється Θ_{mid}. Якщо накопичена інтенсивність $A + \Theta_{\text{mid}}\Delta$ залишається нижчою за E, фактичні рушії просуваються до t_g. Інакше момент перетину інтерполюється як

$$t^* = t + \frac{E - A}{\Theta_{\text{mid}}}, \tag{6}$$

рушії просуваються до t^*, а пару та цільовий вузол вибирають за їхніми станами в момент t^*. Потім поріг поновлюється, й у такий самий спосіб обробляється решта інтервалу.

Для інтерпретації результатів важливі дві властивості планувальника. По-перше, оскільки проби копіюють стани генераторів випадкових чисел, проба відтворює траєкторію, якою відповідний рушій фактично просуватиметься до середньої точки, якщо не відбудеться імпорт. Тому проба в середній точці є квадратурою

Algorithm 1 Grid-synchronised two-scale simulation of one realisation.

Input: local graphs G_i, weights W_{ij}, rates, step τ, horizon T_{end}, initial state.

$t \leftarrow 0$; $A \leftarrow 0$; draw $E \sim \text{Exp}(1)$
while $t < T_{\text{end}}$ and infection can still spread **do**
  $t_g \leftarrow \min(t + \tau,\, T_{\text{end}})$
  while $t < t_g$ **do**
    $\Delta \leftarrow t_g - t$; copy every engine with its random-number state; advance the copies to $t + \Delta/2$
    $\Theta_{\text{mid}} \leftarrow \sum_{i \neq j} \lambda_{ij}$ evaluated on the copies, Eq. (4)
    if $A + \Theta_{\text{mid}}\Delta < E$ **then** // no macro event before t_g
      advance all engines to t_g; $A \leftarrow A + \Theta_{\text{mid}}\Delta$; $t \leftarrow t_g$
    else
      $t^* \leftarrow t + (E - A)/\Theta_{\text{mid}}$; advance all engines to t^*
      sample (i, j) with probability $\lambda_{ij}(t^*)/\Theta(t^*)$ from the engines' states
      draw v uniformly from $S_j(t^*)$; import v into engine j (its pending event is discarded)
      $t \leftarrow t^*$; $A \leftarrow 0$; draw a new $E \sim \text{Exp}(1)$

The implemented scheduler (Algorithm 1) treats the local engines as black boxes that expose their state only when they are advanced. It divides time into synchronisation intervals of length τ. Let A denote the approximate cumulative macro hazard accumulated since the previous macro event. On each (sub)interval $[t, t_g)$, with $\Delta = t_g - t$, the scheduler estimates Θ by a midpoint probe: copies of all engines, including their pseudorandom-number states, are advanced to $t + \Delta/2$, and Θ_{mid} is computed from those copies. If $A + \Theta_{\text{mid}}\Delta < E$, the actual engines are advanced to t_g. Otherwise, the crossing time is interpolated as

$$t^* = t + \frac{E - A}{\Theta_{\text{mid}}}, \tag{6}$$

the engines are advanced to t^*, and the pair and target are sampled from their states at t^*. The threshold is then renewed and the remainder of the interval is processed in the same way.

Two properties of the scheduler matter for interpreting the results. First, because the midpoint probes copy the pseudorandom-number states, a probe reproduces the trajectory that the corresponding engine will actually follow up to the midpoint unless an import intervenes. The midpoint rule is therefore a quadrature of the realised piecewise-constant hazard. It is exact on subintervals containing no local event in any community; its quadrature error and its look-ahead of at most $\tau/2$ vanish as $\tau \to 0$. Second, if local engines expose their next-event times, the black-box restriction is unnecessary. Since Θ is piecewise constant between local events, integral (5) can then be evaluated exactly by an event-driven scheduler that merges the next-event times of all engines. This removes the numerical synchronisation approximation. We evaluate the grid-based variant, which is the implemented method, with $\tau = 1$.

3.6. Computational structure and intended use

Full stores every channel, including all inter-community channels, and its cost per event grows with node degree (Kuryliak et al., 2025). TwoScale stores the within-community graphs and an $M \times M$ weight matrix. This is the saving emphasised in the workshop paper (Kuryliak and Emmerich, 2025): when inter-community contacts are numerous, for example when a mobility flow corresponds to many individual contacts, the interface reduces to $O(M^2)$ numbers. Local engines can also be modified independently, which makes community-specific interventions straightforward to represent. Against this, the grid-synchronised scheduler adds a cost proportional to $(T_{\text{end}}/\tau)\sum_i N_i$ for copying engine states, independent of the number of events. The method is therefore suited to settings in which the inter-community contacts are unknown or too numerous to represent, rather than to small networks whose full contact structure is available. Measured run times are reported in Section 7.2.

Алгоритм 1 Сітково синхронізоване двомасштабне моделювання однієї реалізації.

Вхід: локальні графи G_i, ваги W_{ij}, інтенсивності, крок τ, горизонт T_{end}, початковий стан.

$t \leftarrow 0$; $A \leftarrow 0$; згенерувати $E \sim \text{Exp}(1)$
while $t < T_{\text{end}}$ і інфекція ще може поширюватися **do**
  $t_g \leftarrow \min(t + \tau,\, T_{\text{end}})$
  while $t < t_g$ **do**
    $\Delta \leftarrow t_g - t$; скопіювати кожен рушій разом зі станом генератора випадкових чисел; просунути копії до $t + \Delta/2$
    $\Theta_{\text{mid}} \leftarrow \sum_{i \neq j} \lambda_{ij}$, обчислена за копіями, рівняння (4)
    if $A + \Theta_{\text{mid}}\Delta < E$ **then** // до t_g макроподій немає
      просунути всі рушії до t_g; $A \leftarrow A + \Theta_{\text{mid}}\Delta$; $t \leftarrow t_g$
    else
      $t^* \leftarrow t + (E - A)/\Theta_{\text{mid}}$; просунути всі рушії до t^*
      вибрати (i, j) з імовірністю $\lambda_{ij}(t^*)/\Theta(t^*)$ за станами рушіїв
      рівномірно вибрати v з $S_j(t^*)$; імпортувати v до рушія j (його заплановану подію відкинути)
      $t \leftarrow t^*$; $A \leftarrow 0$; згенерувати нове $E \sim \text{Exp}(1)$

реалізованої кусково сталої інтенсивності. Вона точна на підінтервалах без локальних подій у жодній спільноті; похибка квадратури та випереджувальний перегляд не більш як на $\tau/2$ зникають при $\tau \to 0$. По-друге, якщо локальні рушії повідомляють часи наступних подій, припущення «чорної скриньки» не потрібне. Оскільки Θ кусково стала між локальними подіями, інтеграл (5) тоді можна точно обчислювати подієво керованим планувальником, який об'єднує часи наступних подій усіх рушіїв. Це усуває чисельну похибку синхронізації. В експериментах оцінюємо сітковий варіант із кроком $\tau = 1$.

3.6. Обчислювальна структура та передбачене застосування

Full зберігає кожен канал, зокрема всі міжспільнотні канали, а його вартість на одну подію зростає зі степенем вузла (Kuryliak et al., 2025). TwoScale зберігає внутрішньоспільнотні графи та матрицю ваг розміру $M \times M$. Саме цю економію підкреслено в матеріалах семінару (Kuryliak and Emmerich, 2025): коли міжспільнотні контакти численні, наприклад коли потік мобільності відповідає багатьом індивідуальним контактам, інтерфейс зводиться до $O(M^2)$ чисел. Локальні рушії також можна змінювати незалежно, що спрощує подання втручань, специфічних для окремих спільнот. Водночас сітково синхронізований планувальник додає витрати, пропорційні $(T_{\text{end}}/\tau)\sum_i N_i$, на копіювання станів рушіїв, незалежно від кількості подій. Отже, метод призначений для умов, у яких міжспільнотні контакти невідомі або надто численні для явного подання, а не для малих мереж із доступною повною структурою контактів. Виміряний час виконання наведено в Розділі 7.2.

4. Що агрегований інтерфейс зберігає, а що втрачає

4.1. Представлення за допомогою сурогатної мережі

За точного обчислення часу (5) ідеальний двомасштабний процес є CTMC на $\{S, I, R\}^V$. Інтенсивність його переходу $x \to x^{v:I}$ унаслідок імпорту дорівнює $\sum_{i \neq j} \lambda_{ij}(x)\Pi_{ij}(v \mid x)$ для $v \in S_j(x)$; усі локальні переходи мають інтенсивності з (2), обмежені на E_{ii}. Наступне твердження ототожнює цей процес із процесом на повній мережі зі зміненим графом.

Твердження 1 (Сурогатна мережа). *Нехай $\tilde{G}$ — мережа з тими самими внутрішньоспільнотними каналами та інтенсивностями, що й G, у якій кожен міжспільнотний пучок E_{ij} замінено повною множиною каналів $V_i \times V_j$, кожен з інтенсивністю $\tilde{\beta}_{uv} = \beta_{\text{out}} W_{ij}/(N_i N_j)$. За рівномірного розміщення ідеальний двомасштабний процес має генератор $\mathcal{L}_{\tilde{G}}$; тобто він має закон процесу на повній мережі $\tilde{G}$, запущеного з тієї самої конфігурації.*

Доведення. Видалення та внутрішньоспільнотні зараження мають однакові інтенсивності в обох процесах. Розглянемо сприйнятливий вузол $v \in V_j$ у конфігурації x. За рівномірного розміщення двомасштабна

4. What the aggregate interface preserves and what it loses

4.1. Surrogate-network representation

With exact timing (5), the ideal two-scale process is a CTMC on $\{S, I, R\}^V$. Its rate of the transition $x \to x^{v:I}$ by an import is $\sum_{i\neq j} \lambda_{ij}(x)\Pi_{ij}(v \mid x)$ for $v \in S_j(x)$; all local transitions have the rates of (2) restricted to E_{ii}. The following proposition identifies this process with a full-network process on a modified graph.

Proposition 1 (Surrogate network). *Let $\tilde{G}$ be the network with the same within-community channels and rates as G, in which every inter-community bundle E_{ij} is replaced by the complete set of channels $V_i \times V_j$, each with rate $\tilde{\beta}_{uv} = \beta_{\text{out}} W_{ij}/(N_i N_j)$. Under uniform placement, the ideal two-scale process has generator $\mathcal{L}_{\tilde{G}}$; that is, it has the law of the full-network process on $\tilde{G}$ started from the same configuration.*

Proof. Removals and within-community infections have identical rates in both processes. Consider a susceptible node $v \in V_j$ in configuration x. Under uniform placement, the two-scale rate at which v is infected by an import is

$$\sum_{i\neq j} \lambda_{ij}(x)\,\frac{1}{s_j(x)} = \sum_{i\neq j} \beta_{\text{out}} W_{ij}\,\frac{y_i(x)}{N_i}\,\frac{s_j(x)}{N_j}\,\frac{1}{s_j(x)} = \sum_{i\neq j}\sum_{u\in V_i} \frac{\beta_{\text{out}} W_{ij}}{N_i N_j}\mathbf{1}\{x_u = I\},$$

which is the total rate of the inter-community channels of $\tilde{G}$ that point into v. When $s_j(x) = 0$ both rates vanish. Hence all transition rates coincide and the generators are equal. □

Corollary 1. *If every inter-community bundle of G is already complete, $E_{ij} = V_i \times V_j$, with a common rate per pair of communities, then $\tilde{G} = G$ and the ideal two-scale process is exact.*

The surrogate preserves the total weight of every bundle, $\sum_{(u,v)\in V_i\times V_j} \tilde{\beta}_{uv} = \beta_{\text{out}} W_{ij}$, but spreads it uniformly over all pairs (Figure 1c). The approximation error of the ideal method is therefore the difference between epidemics on G and on $\tilde{G}$, which differ only in their interfaces. The implemented method adds a numerical synchronisation error. Proposition 1 also provides a practical verification route: for small networks, the synchronisation error can be isolated by comparing the two-scale simulator with exact simulation on $\tilde{G}$.

4.2. Sources of discrepancy

Comparing G with $\tilde{G}$ gives four mechanisms by which the two-scale simulator can depart from the full-network process.

Boundary-state information (source side). In G, the rate of transmission from V_i to V_j is

$$a^{\star}_{ij}(x) = \beta_{\text{out}} \sum_{(u,v)\in E_{ij}} w_{uv}\,\mathbf{1}\{x_u = I,\, x_v = S\}, \tag{7}$$

which depends on whether the particular bridge nodes are infected. In $\tilde{G}$, every infected node of V_i contributes. Exports can therefore occur before any bridge node is infected. Such *bridge bypass* is impossible in G and provides a direct diagnostic (Section 4.3).

Placement (receiver side). In G, a transmission infects the target endpoint of the firing channel; in $\tilde{G}$, the target is uniform among susceptible nodes. The location of an import determines its distance to the next interface and hence later crossings.

Interface exhaustion (receiver side). Under SI dynamics, a channel of G transmits at most once: afterwards its target is infected. A bundle with $|E_{ij}|$ channels therefore carries at most $|E_{ij}|$ transmissions, and a single-edge interface exactly one. In $\tilde{G}$, imports from V_i into V_j continue at rate $\lambda_{ij} = \beta_{\text{out}} W_{ij} \bar{y}_i \bar{s}_j$ until V_j is exhausted; their expected number over a period $[t_1, t_2]$ is $\mathbb{E}\int_{t_1}^{t_2} \lambda_{ij}(s)\,ds$. When a receiving community remains largely susceptible for a long time, the two-scale simulator therefore keeps seeding it with additional infections that the full network cannot deliver.

інтенсивність, з якою v заражається внаслідок імпорту, дорівнює

$$\sum_{i\neq j} \lambda_{ij}(x)\,\frac{1}{s_j(x)} = \sum_{i\neq j} \beta_{\text{out}} W_{ij}\,\frac{y_i(x)}{N_i}\,\frac{s_j(x)}{N_j}\,\frac{1}{s_j(x)} = \sum_{i\neq j}\sum_{u\in V_i} \frac{\beta_{\text{out}} W_{ij}}{N_i N_j}\mathbf{1}\{x_u = I\},$$

що є сумарною інтенсивністю міжспільнотних каналів $\tilde{G}$, спрямованих у v. Коли $s_j(x) = 0$, обидві інтенсивності дорівнюють нулю. Отже, всі інтенсивності переходів збігаються, а генератори є однаковими. □

Наслідок 1. *Якщо кожен міжспільнотний пучок у G уже є повним, $E_{ij} = V_i \times V_j$, зі спільною інтенсивністю для кожної пари спільнот, тоді $\tilde{G} = G$, а ідеальний двомасштабний процес є точним.*

Сурогатна мережа зберігає сумарну вагу кожного пучка, $\sum_{(u,v)\in V_i\times V_j} \tilde{\beta}_{uv} = \beta_{\text{out}} W_{ij}$, але рівномірно розподіляє її між усіма парами (рисунок 1c). Тому похибка апроксимації ідеального методу є різницею між епідеміями на G та $\tilde{G}$, які відрізняються лише своїми інтерфейсами. Реалізований метод додає чисельну похибку синхронізації. Твердження 1 також дає практичний спосіб верифікації: для малих мереж похибку синхронізації можна виокремити, порівнюючи двомасштабний симулятор із точною симуляцією на $\tilde{G}$.

4.2. Джерела розбіжностей

Порівняння G із $\tilde{G}$ виявляє чотири механізми, через які двомасштабний симулятор може відхилятися від процесу на повній мережі.

Інформація про стан межі (з боку джерела). У G інтенсивність передавання з V_i до V_j дорівнює

$$a^{\star}_{ij}(x) = \beta_{\text{out}} \sum_{(u,v)\in E_{ij}} w_{uv}\,\mathbf{1}\{x_u = I,\, x_v = S\}, \tag{7}$$

і залежить від того, чи заражені конкретні мостові вузли. У $\tilde{G}$ свій внесок робить кожен заражений вузол V_i. Тому експорти можуть відбуватися до зараження будь-якого мостового вузла. Такий *обхід мостів* неможливий у G і дає безпосередній діагностичний показник (розділ 4.3).

Розміщення (з боку приймача). У G передавання заражає цільову кінцеву вершину каналу, що спрацював; у $\tilde{G}$ ціль рівномірно вибирається серед сприйнятливих вузлів. Місце імпорту визначає його відстань до наступного інтерфейсу, а отже, і час подальших переходів.

Вичерпання інтерфейсу (з боку приймача). За SI-динаміки канал G передає зараження не більш ніж один раз: після цього його ціль заражена. Тому пучок із $|E_{ij}|$ каналів переносить не більш ніж $|E_{ij}|$ заражень, а інтерфейс з одним ребром — рівно одне. У $\tilde{G}$ імпорти з V_i у V_j тривають з інтенсивністю $\lambda_{ij} = \beta_{\text{out}} W_{ij} \bar{y}_i \bar{s}_j$, доки V_j не буде вичерпано; їхня очікувана кількість за період $[t_1, t_2]$ дорівнює $\mathbb{E}\int_{t_1}^{t_2} \lambda_{ij}(s)\,ds$. Отже, коли приймальна спільнота тривалий час залишається переважно сприйнятливою, двомасштабний симулятор продовжує засівати її додатковими зараженнями, яких повна мережа передати не може.

Синхронізація. Квадратурна формула середньої точки та інтерполяція з розділу 3.5 апроксимують (5).

Зауваження 1 (Розміщення за рандомізованих інтерфейсів). Припустімо, що кінцеві вершини кожного пучка вибираються рівномірно й незалежно від внутрішніх графів та кінцевих вершин інших пучків, як у наведених нижче експериментах. Тоді ціль першого передавання до повністю сприйнятливої спільноти має рівномірний розподіл і в G, оскільки вона є кінцевою вершиною рівномірно розміщеного каналу, і в $\tilde{G}$. Тому розміщення може впливати на часи прибуття лише через передавання після першого. У таких схемах відмінності між першим і подальшими переходами виокремлюють ефекти з боку приймача (розділ 6.6).

4.3. Одиничний експорт: стохастичне впорядкування та обхід мостів

Розглянемо спільноту-джерело V_0 розміру n із довільним внутрішнім графом, SI-динамікою та єдиним сприйнятливим листковим вузлом ℓ, сполученим із множиною $B \subset V_0$ з k мостових вузлів каналами з інтенсивністю β_{out}. Тоді $W_{0\ell} = k$, а до експорту $\bar{s}_\ell = 1$, тому $\lambda_{0\ell} = \beta_{\text{out}} k\,\bar{y}_0$. Нехай τ_u — час зараження вузла u, $A_u(t) = (t - \tau_u)^+$ — тривалість його перебування в зараженому стані, а $T_B = \min_{u\in B} \tau_u$.

Synchronisation. The midpoint quadrature and interpolation of Section 3.5 approximate (5).

Remark 1 (Placement under randomised interfaces). Suppose that the endpoints of each bundle are sampled uniformly and independently of the internal graphs and of the endpoints of other bundles, as in the experiments below. Then the target of the first transmission into a fully susceptible community is uniformly distributed in G, because it is the endpoint of a uniformly placed channel, and also in $\tilde{G}$. Placement can therefore affect arrival times only through transmissions after the first. In such designs, differences between the first crossing and later crossings isolate receiver-side effects (Section 6.6).

4.3. Single export: stochastic ordering and bridge bypass

Consider a source community V_0 of size n with an arbitrary internal graph, SI dynamics, and a single susceptible leaf node ℓ joined to a set $B \subset V_0$ of k bridge nodes by channels of rate β_{out}. Then $W_{0\ell} = k$, and before the export $\bar{s}_\ell = 1$, so that $\lambda_{0\ell} = \beta_{\text{out}} k\, \bar{y}_0$. Let τ_u be the infection time of node u, $A_u(t) = (t - \tau_u)^+$ its infection age, and $T_B = \min_{u\in B} \tau_u$.

Proposition 2 (Aggregate export clocks are early). *Let B be uniformly distributed over the k-subsets of V_0, independently of the internal graph, the initial configuration and the event randomness. Let T^{Full} and T^{TwoScale} be the first infection times of ℓ in the full network and in the ideal two-scale process. Then*

$$\mathbb{P}(T^{\text{Full}} > t) \;\geq\; \mathbb{P}(T^{\text{TwoScale}} > t) \qquad \text{for all } t \geq 0,$$

so that T^{TwoScale} is stochastically smaller than T^{Full} (Shaked and Shanthikumar, 2007). In particular, the mean and every quantile of the ideal two-scale export time are no larger than those of the full-network export time.

Proof. Before ℓ is infected, it does not influence V_0: it transmits nothing, and the rates of source nodes depend only on their infected neighbours. Both export times can therefore be constructed on one probability space from an autonomous SI trajectory X_0 of the source community, continued beyond the export, and an independent threshold $E \sim \text{Exp}(1)$:

$$T^{\text{Full}} = \inf\Big\{t : \beta_{\text{out}} \sum_{u\in B} A_u(t) \geq E\Big\}, \qquad T^{\text{TwoScale}} = \inf\Big\{t : \beta_{\text{out}} \frac{k}{n} \sum_{u\in V_0} A_u(t) \geq E\Big\},$$

where the second integrand follows from $\int_0^t \bar{y}_0(s)\,ds = n^{-1}\sum_u A_u(t)$. Conditional on X_0, the survival probabilities are $\exp(-\beta_{\text{out}} \sum_{u\in B} A_u(t))$ and $\exp(-\beta_{\text{out}}(k/n)\sum_u A_u(t))$. Since B is uniform and independent of X_0, $\mathbb{E}[\sum_{u\in B} A_u(t) \mid X_0] = (k/n)\sum_u A_u(t)$, and Jensen's inequality for the convex function $z \mapsto e^{-\beta_{\text{out}} z}$ gives $\mathbb{P}(T^{\text{Full}} > t \mid X_0) \geq \mathbb{P}(T^{\text{TwoScale}} > t \mid X_0)$. Taking expectations completes the proof. □

The inequality is strict whenever, with positive probability, the infection ages differ between nodes at time t and $0 < k < n$. It also holds when B is uniform among the nodes other than the initially infected node, because excluding the oldest infected node can only lower the conditional mean of the bridge hazard. The size of the gap is controlled by the conditional variance of the bridge hazard, for which sampling without replacement gives

$$\text{Var}\Big(\beta_{\text{out}} \sum_{u\in B} A_u(t) \;\Big|\; X_0\Big) = \beta_{\text{out}}^2\, k\, \frac{n-k}{n-1}\, \text{Var}_u\big(A_u(t)\big), \tag{8}$$

where Var_u is the population variance over source nodes. Once the source is fully infected, $\text{Var}_u(A_u(t)) = \text{Var}_u(\tau_u)$. The aggregate clock is therefore close to exact when node infection times are concentrated relative to $1/\beta_{\text{out}}$, as in a rapidly saturating clique, and is early when infection spreads slowly and unevenly through the source.

The same construction yields the probability of bridge bypass. In G, no export can precede T_B. In the ideal two-scale process,

$$\mathbb{P}\big(T^{\text{TwoScale}} < T_B\big) = \mathbb{E}\Big[1 - \exp\Big(-\beta_{\text{out}} \frac{k}{n} \int_0^{T_B} y_0(s)\,ds\Big)\Big], \tag{9}$$

Твердження 2 (Агреговані годинники експорту спрацьовують раніше). *Нехай B має рівномірний розподіл на множині всіх k-елементних підмножин V_0 незалежно від внутрішнього графа, початкової конфігурації та випадковості подій. Нехай T^{Full} і T^{TwoScale} — часи першого зараження ℓ відповідно в повній мережі та в ідеальному двомасштабному процесі. Тоді*

$$\mathbb{P}(T^{\text{Full}} > t) \;\geq\; \mathbb{P}(T^{\text{TwoScale}} > t) \qquad \text{for all } t \geq 0,$$

отже, T^{TwoScale} є стохастично меншим за T^{Full} (Shaked and Shanthikumar, 2007). Зокрема, середнє та кожен квантиль часу експорту ідеального двомасштабного процесу не перевищують відповідних величин часу експорту в повній мережі.

Доведення. До зараження ℓ не впливає на V_0: він нічого не передає, а інтенсивності вузлів джерела залежать лише від їхніх заражених сусідів. Тому обидва часи експорту можна побудувати на одному ймовірнісному просторі з автономної SI-траєкторії X_0 спільноти-джерела, продовженої після експорту, та незалежного порога $E \sim \text{Exp}(1)$:

$$T^{\text{Full}} = \inf\Big\{t : \beta_{\text{out}} \sum_{u\in B} A_u(t) \geq E\Big\}, \qquad T^{\text{TwoScale}} = \inf\Big\{t : \beta_{\text{out}} \frac{k}{n} \sum_{u\in V_0} A_u(t) \geq E\Big\},$$

де другий підінтегральний вираз випливає з $\int_0^t \bar{y}_0(s)\,ds = n^{-1}\sum_u A_u(t)$. Умовні щодо X_0 ймовірності виживання дорівнюють $\exp(-\beta_{\text{out}} \sum_{u\in B} A_u(t))$ та $\exp(-\beta_{\text{out}}(k/n)\sum_u A_u(t))$. Оскільки B є рівномірною та незалежною від X_0, маємо $\mathbb{E}[\sum_{u\in B} A_u(t) \mid X_0] = (k/n)\sum_u A_u(t)$, а нерівність Єнсена для опуклої функції $z \mapsto e^{-\beta_{\text{out}} z}$ дає $\mathbb{P}(T^{\text{Full}} > t \mid X_0) \geq \mathbb{P}(T^{\text{TwoScale}} > t \mid X_0)$. Взяття математичного сподівання завершує доведення. □

Нерівність є строгою, якщо з додатною ймовірністю тривалості перебування вузлів у зараженому стані в момент t відрізняються та $0 < k < n$. Вона також виконується, коли B рівномірно розподілена серед вузлів, відмінних від початково зараженого, оскільки вилучення вузла, зараженого найдавніше, може лише зменшити умовне середнє мостової небезпеки. Величина розриву визначається умовною дисперсією мостової небезпеки, для якої вибірка без повернення дає

$$\text{Var}\Big(\beta_{\text{out}} \sum_{u\in B} A_u(t) \;\Big|\; X_0\Big) = \beta_{\text{out}}^2\, k\, \frac{n-k}{n-1}\, \text{Var}_u\big(A_u(t)\big), \tag{8}$$

де Var_u — генеральна дисперсія за вузлами джерела. Після повного зараження джерела $\text{Var}_u(A_u(t)) = \text{Var}_u(\tau_u)$. Отже, агрегований годинник є близьким до точного, коли часи зараження вузлів зосереджені порівняно з $1/\beta_{\text{out}}$, як у кліці, що швидко насичується, і спрацьовує раніше, коли зараження поширюється джерелом повільно й нерівномірно.

Та сама побудова дає ймовірність обходу мостів. У G експорт не може передувати T_B. В ідеальному двомасштабному процесі

$$\mathbb{P}\big(T^{\text{TwoScale}} < T_B\big) = \mathbb{E}\Big[1 - \exp\Big(-\beta_{\text{out}} \frac{k}{n} \int_0^{T_B} y_0(s)\,ds\Big)\Big], \tag{9}$$

що є ймовірністю того, що агрегована небезпека, накопичена до активації справжнього інтерфейсу, спричинить експорт. Вона зростає, коли зараження досягає мостів пізно та після багатьох інших вузлів, як це відбувається в розріджених спільнотах із довгими шляхами. Додаток A наводить $\mathbb{E}[T_B]$ для джерела-кліки.

4.4. Характеристика співвідношення часових масштабів

Механізми як з боку джерела, так і з боку приймача діють лише доти, доки зараження ще поширюється всередині спільноти. Згідно з (8), розрив з боку джерела визначається добутком β_{out} і розсіювання часів зараження. Очікувана кількість надлишкових імпортів до спільноти під час внутрішнього поширення має порядок $\beta_{\text{out}} W_{ij}$, помножений на тривалість цього поширення. Нехай σ_T позначає стандартне відхилення часів

Series	Structure	k	β	Runs per cell and model
Clique–leaf	source clique $n = 100$ + one leaf	2	0.005	10 000
Source–leaf sweep	source $n = 1000$, ASPL 1–6 in steps of 0.25, + one leaf	1, 5	0.003	400 (40 × 10)
Chain of cliques	$L = 10$ cliques of $n = 1000$	1	0.003	400 (40 × 10)
Chain size sweep	$L = 10$, $n \in \{50, 100, 250, 1000\}$, ASPL 1–6 in steps of 1	1, 5	0.003	400 (40 × 10)

Table 2: Experimental series. Each cell of a sweep uses 40 network realisations (blocks) with 10 interface and event replicates each. ASPL: target internal average shortest-path length (1 denotes the complete graph).

which is the probability that the aggregate hazard accumulated before the true interface becomes active triggers an export. It increases when the bridges are reached late and after many other nodes, which is the situation in sparse, long-path communities. Appendix A gives $\mathbb{E}[T_B]$ for a clique source.

4.4. A time-scale descriptor

Both source-side and receiver-side mechanisms act only while infection is still spreading inside a community. By (8), the source-side gap is governed by β_{out} times the dispersion of infection times. The expected number of surplus imports into a community during its internal spread is of order $\beta_{\text{out}} W_{ij}$ times the duration of that spread. Let σ_T denote the standard deviation of node infection times within a community, which measures this duration. We use the dimensionless ratio

$$\rho = \beta_{\text{out}}\, \sigma_T, \tag{10}$$

the internal timing spread in units of the mean single-edge crossing time $1/\beta_{\text{out}}$, as a descriptor of the expected accuracy. The two mechanisms scale differently with the interface width ($\sqrt{k}$ in (8) and k for surplus imports, partly offset because the full network itself admits up to k crossings). We therefore do not include k in ρ, and we test the descriptor empirically rather than derive an error law.

5. Experimental design

5.1. Benchmarks

Table 2 summarises the four experimental series. All use SI dynamics, unit contact weights, equal internal and external per-edge rates ($\beta_{\text{in}} = \beta_{\text{out}} = \beta$), and the scheduler of Algorithm 1 with $\tau = 1$. In the *clique–leaf* benchmark, a leaf is attached to $k = 2$ bridge nodes of a 100-node clique. The *source–leaf sweep* replaces the clique by connected random graphs of $n = 1000$ nodes with a prescribed average shortest-path length (ASPL). In the *chain* series, $L = 10$ communities are joined in a line by k edges between consecutive communities; infection starts in community 0. Connected random graphs are generated by adding uniformly random edges to a uniformly random labelled tree, with the number of added edges calibrated so that the ASPL lies within 0.1 of its target; ASPL 1 is the complete graph. Mean degree therefore decreases with the target ASPL. At a target ASPL of 6 it ranges from 2.08 for $n = 50$ to 3.4 for $n = 1000$. Interface endpoints are sampled uniformly, independently for each interface and replicate.[1] The initial infected node is pseudorandom and shared by both simulators, and it may be a bridge node; in the clique–leaf benchmark, the seed is a fixed node of the clique.

Full and TwoScale runs are matched: they share the graph, the interface and the initial node, but use independent event streams. All exports and arrivals entering the metrics were observed, so no censoring adjustment is needed. The horizon was 1000 for the clique–leaf benchmark and 30 000 otherwise. Two Full runs were extended to 40 000 to observe their terminal arrivals (Appendix C). The chain of cliques is the ASPL-1, $n = 1000$, $k = 1$ cell of the size sweep, reported separately because it is the most favourable case.

[1] In the source–leaf sweep, bridge sets are drawn from all nodes except one fixed label. Because the random graphs and the uniformly chosen seed are invariant in law under relabelling, this is equivalent to uniform placement, so the assumption of Proposition 2 holds.

Серія	Структура	k	β	Запусків на комірку та модель
Кліка–листок	кліка-джерело $n = 100$ + один листок	2	0.005	10 000
Перебір джерело–листок	джерело $n = 1000$, ASPL 1–6 із кроком 0.25, + один листок	1, 5	0.003	400 (40 × 10)
Ланцюг клік	$L = 10$ клік із $n = 1000$	1	0.003	400 (40 × 10)
Перебір розміру ланцюга	$L = 10$, $n \in \{50, 100, 250, 1000\}$, ASPL 1–6 із кроком 1	1, 5	0.003	400 (40 × 10)

Table 2: Серії експериментів. Кожна комірка перебору використовує 40 реалізацій мережі (блоків) із 10 повторами інтерфейсу та подій у кожній. ASPL: цільова внутрішня середня довжина найкоротшого шляху (1 позначає повний граф).

зараження вузлів усередині спільноти, яке вимірює цю тривалість. Як характеристику очікуваної точності ми використовуємо безрозмірне співвідношення

$$\rho = \beta_{\text{out}}\, \sigma_T, \tag{10}$$

тобто внутрішній розкид часу в одиницях середнього часу переходу через одне ребро $1/\beta_{\text{out}}$. Ці два механізми по-різному масштабуються із шириною інтерфейсу ($\sqrt{k}$ у (8) та k для надлишкових імпортів, що частково компенсується тим, що сама повна мережа допускає до k переходів). Тому ми не включаємо k до ρ та перевіряємо цю характеристику емпірично, а не виводимо закон похибки.

5. Дизайн експерименту

5.1. Тестові задачі

У таблиці 2 підсумовано чотири серії експериментів. Усі вони використовують SI-динаміку, одиничні ваги контактів, однакові внутрішні й зовнішні інтенсивності на ребро ($\beta_{\text{in}} = \beta_{\text{out}} = \beta$) та планувальник з алгоритму 1 з $\tau = 1$. У тестовій задачі *кліка–листок* листок приєднано до $k = 2$ мостових вузлів кліки зі 100 вузлів. У *переборі джерело–листок* кліку замінено зв'язними випадковими графами з $n = 1000$ вузлів із заданою середньою довжиною найкоротшого шляху (ASPL). У серії *ланцюг* $L = 10$ спільнот з'єднано в лінію за допомогою k ребер між послідовними спільнотами; зараження починається у спільноті 0. Зв'язні випадкові графи генеруються додаванням рівномірно випадкових ребер до рівномірно випадкового дерева з міченими вершинами; кількість доданих ребер калібрується так, щоб ASPL лежала в межах 0.1 від цільового значення; ASPL 1 відповідає повному графу. Тому середній степінь зменшується зі зростанням цільової ASPL. За цільової ASPL 6 він змінюється від 2.08 для $n = 50$ до 3.4 для $n = 1000$. Кінцеві вершини інтерфейсів вибираються рівномірно й незалежно для кожного інтерфейсу та повтору.[1] Початковий заражений вузол є псевдовипадковим і спільним для обох симуляторів; він може бути мостовим вузлом. У тестовій задачі кліка–листок початковим є фіксований вузол кліки.

Запуски Full та TwoScale є зіставленими: вони мають спільні граф, інтерфейс і початковий вузол, але використовують незалежні потоки подій. Усі експорти та прибуття, що входять до метрик, було спостережено, тому поправка на цензурування не потрібна. Горизонт становив 1000 для тестової задачі кліка–листок та 30 000 для решти. Два запуски Full було продовжено до 40 000, щоб спостерегти їхні термінальні прибуття (додаток C). Ланцюг клік є коміркою ASPL-1, $n = 1000$, $k = 1$ перебору розміру, поданою окремо, оскільки це найсприятливіший випадок.

5.2. Спостережувані величини та метрики

Для тестових задач із листком ми реєструємо час експорту T_{export} (перше зараження листка) та час активації мосту T_B. Для ланцюгів T_c — час першого зараження спільноти c, відрахований від початкового зараження; термінальне прибуття — це T_9. Ми подаємо три підсумкові показники:

[1] У переборі джерело–листок множини мостів вибираються з усіх вузлів, крім одного вузла з фіксованою міткою. Оскільки випадкові графи та рівномірно вибране початкове зараження є інваріантними за законом відносно перемічування міток, це еквівалентно рівномірному розміщенню, тож припущення твердження 2 виконується.

5.2. Observables and metrics

For leaf benchmarks, we record the export time T_{export} (first infection of the leaf) and the bridge-activation time T_B. For chains, T_c is the first infection time of community c, measured from the initial infection; the terminal arrival is T_9. We report three summaries:

- the relative median shift $b_c = 100\,[\text{med}(T_c^{\text{TwoScale}}) - \text{med}(T_c^{\text{Full}})]/\text{med}(T_c^{\text{Full}})$, where negative values mean earlier arrival in TwoScale;
- the relative Wasserstein-1 distance $e_W = 100\,W_1/\overline{T}^{\text{Full}}$, where $W_1 = R^{-1}\sum_r |T_{(r)}^{\text{TwoScale}} - T_{(r)}^{\text{Full}}|$ is computed from the order statistics of the R times of each model;
- the bridge-bypass fraction, i.e. the percentage of TwoScale crossings that occur before any bridge node of the source community is infected.

For chains, the *local* shift of crossing c compares the mean of $T_c - T_{c-1}$ between models. We contrast the first crossing with the pooled crossings 2–9, using $T_9 - T_1$.

5.3. Statistical procedures

Confidence intervals are 95% percentile intervals from a bootstrap that resamples whole network blocks, keeping their ten replicates together, with 2000 resamples for chain summaries. Because e_W is positive even when two samples come from the same law, we calibrate it by a within-pair permutation test: the labels of the two runs in each matched pair are swapped with probability $1/2$, and e_W is recomputed 2000 times. Under the null hypothesis that matched runs are exchangeable, this yields a sampling floor, which we summarise by its 95th percentile, and a p-value for the observed e_W. Appendix B gives an analytical approximation of the floor that applies when per-run data are not available.

The event seeds of a replicate depend on the target ASPL, the network block and the replicate index, but not on n or k; seeds are therefore shared across community sizes and interface widths (common random numbers). This reduces the variance of comparisons between such cells, but it also correlates their sampling errors. We therefore do not count agreement between cells as independent replication.

5.4. Verification of the reference

For a clique source with uniformly placed bridges, the expected bridge-activation time is known in closed form (Appendix A). Across the four clique-chain sizes and both interface widths, the mean T_B in Full agreed with the formula to within 2.3 standard errors. For $k = 1$, the mean waiting time after bridge activation (326.5–354.0) agreed with its exact value $1/\beta = 333.3$ to within sampling error (Table 3).

6. Results

6.1. Single export from a clique

Export times from a rapidly saturating source agree closely, but the aggregate interface admits impossible transmission orders. In the clique–leaf benchmark (Figure 2), mean export times were 110.18 (Full) and 112.62 (TwoScale); the matched difference of +2.43 had a bootstrap interval of $[-0.35, 5.27]$. The empirical CDFs nearly coincide ($W_1 = 3.25$, i.e. $e_W = 2.95\%$; Kolmogorov–Smirnov distance 0.0142, asymptotic $p \approx 0.27$). Of the mean export time of about 110, only $\mathbb{E}[T_B] = 8.36$ is needed on average to infect the first bridge node (11); the remainder is the wait for transmission across the interface, at a rate of at most $k\beta = 0.01$. The period in which boundary and community-wide states differ is therefore short, and the aggregate clock is close to the exact one, as Proposition 2 and (8) suggest.

The ordering diagnostic nevertheless separates the models: in 98 of 10 000 TwoScale runs (0.98%), the leaf was infected before either bridge node, which never happens in Full (Figure 2b,c). The middle panel shows $T_{\text{export}} - T_B$, a physical waiting time in Full but a signed ordering diagnostic in TwoScale.

6.2. Single export from connected random sources

As internal paths lengthen, bridge bypass becomes common and the aggregate export becomes early, as predicted by Proposition 2. Figure 3 shows the source–leaf sweep. Mean bridge activation times were similar in the two models, within 7% at every ASPL (e.g. 1165 and 1136 at ASPL 6, $k = 1$), as expected from identical

- відносний зсув медіани $b_c = 100\,[\text{med}(T_c^{\text{TwoScale}}) - \text{med}(T_c^{\text{Full}})]/\text{med}(T_c^{\text{Full}})$, де від'ємні значення означають раніше прибуття в TwoScale;
- відносну відстань Вассерштайна-1 $e_W = 100\,W_1/\overline{T}^{\text{Full}}$, де $W_1 = R^{-1}\sum_r |T_{(r)}^{\text{TwoScale}} - T_{(r)}^{\text{Full}}|$ обчислюється за порядковими статистиками R часів кожної моделі;
- частку обходу мостів, тобто відсоток переходів у TwoScale, що відбуваються до зараження будь-якого мостового вузла спільноти-джерела.

Для ланцюгів *локальний* зсув переходу c порівнює середні значення $T_c - T_{c-1}$ між моделями. Ми зіставляємо перший перехід з об'єднаними переходами 2–9, використовуючи $T_9 - T_1$.

5.3. Статистичні процедури

Довірчі інтервали є 95% процентильними інтервалами з бутстрепу, який повторно вибирає цілі мережеві блоки, зберігаючи разом їхні десять повторів; для підсумкових показників ланцюга використовуються 2000 бутстреп-вибірок. Оскільки e_W є додатною навіть тоді, коли дві вибірки походять з одного закону розподілу, ми калібруємо її за допомогою перестановочного тесту всередині пар: мітки двох запусків у кожній зіставленій парі міняються місцями з імовірністю $1/2$, після чого e_W повторно обчислюється 2000 разів. За нульової гіпотези про обмінність зіставлених запусків це дає вибірковий нижній поріг, який ми підсумовуємо його 95-м процентилем, а також p-значення для спостережуваної e_W. Додаток B наводить аналітичне наближення цього порога, застосовне, коли дані окремих запусків недоступні.

Початкові значення генератора подій для повтору залежать від цільової ASPL, мережевого блоку та індексу повтору, але не від n або k; отже, початкові значення є спільними для різних розмірів спільноти та ширин інтерфейсу (спільні випадкові числа). Це зменшує дисперсію порівнянь між такими комірками, але також корелює їхні похибки вибірки. Тому ми не вважаємо узгодженість між комірками незалежним повторенням.

5.4. Верифікація еталонної моделі

Для джерела-кліки з рівномірно розміщеними мостами очікуваний час активації мосту відомий у замкненій формі (додаток A). Для чотирьох розмірів ланцюга клік і обох ширин інтерфейсу середнє T_B у Full узгоджувалося з формулою в межах 2.3 стандартної похибки. Для $k = 1$ середній час очікування після активації мосту (326.5–354.0) узгоджувався з точним значенням $1/\beta = 333.3$ у межах похибки вибірки (таблиця 3).

6. Результати

6.1. Одиничний експорт із кліки

Часи експорту з джерела, яке швидко насичується, добре узгоджуються, але агрегований інтерфейс допускає неможливі порядки передачі. У тесті «кліка–листок» (рисунок 2) середні часи експорту становили 110.18 (Full) і 112.62 (TwoScale); парна різниця +2.43 мала бутстреп-інтервал $[-0.35, 5.27]$. Емпіричні функції розподілу майже збігаються ($W_1 = 3.25$, тобто $e_W = 2.95\%$; відстань Колмогорова–Смирнова 0.0142, асимптотичне $p \approx 0.27$). Із середнього часу експорту близько 110 лише $\mathbb{E}[T_B] = 8.36$ у середньому потрібно, щоб заразити перший вузол-мост (11); решта припадає на очікування передачі через інтерфейс з інтенсивністю не більшою за $k\beta = 0.01$. Отже, період, протягом якого стани межі й усієї спільноти відрізняються, короткий, а агрегований годинник близький до точного, як випливає з твердження 2 та (8).

Водночас діагностика порядку розрізняє моделі: у 98 із 10 000 запусків TwoScale (0.98%) листок було заражено раніше за обидва вузли-мости, чого ніколи не трапляється у Full (рисунок 2b,c). На середній панелі показано $T_{\text{export}} - T_B$: фізичний час очікування у Full, але знаковий діагностичний показник порядку у TwoScale.

6.2. Одиничний експорт зі зв'язних випадкових джерел

Зі збільшенням довжини внутрішніх шляхів обхід мостів стає поширеним, а агрегований експорт відбувається раніше, як передбачає твердження 2. На рисунку 3 показано серію експериментів «джерело–листок». Середні часи активації мостів у двох моделях були подібними: різниця не перевищувала 7% для кожного ASPL (наприклад, 1165 і 1136 за ASPL 6, $k = 1$), як і очікувалося через однакову локальну динаміку до експорту. У Full за $k = 1$ очікування після активації моста залишалося в межах 322–359 за кожного ASPL, що

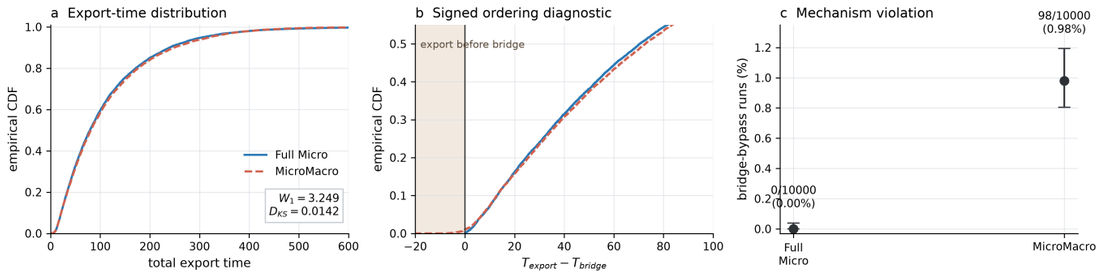


Figure 2: Clique–leaf benchmark ($n = 100$, $k = 2$, $\beta = 0.005$, 10 000 runs per model). (a) Empirical CDFs of the export time. (b) Empirical CDFs of $T_{\text{export}} - T_B$; negative values (shaded) are exports before any bridge node is infected. (c) Percentage of such bridge-bypass runs with 95% intervals. "Full Micro" denotes FULL and "MicroMacro" denotes TWOSCALE.

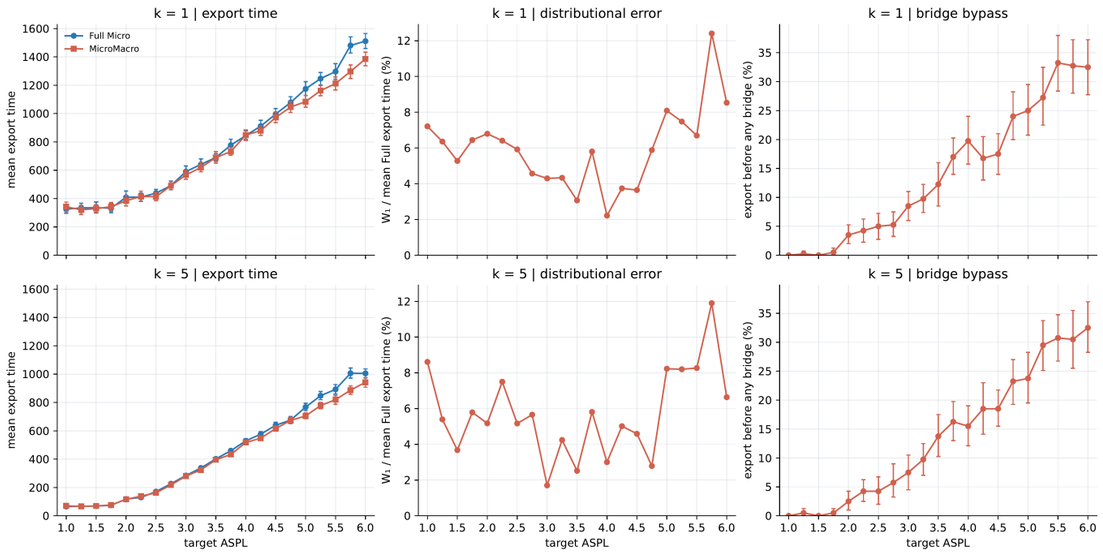


Figure 3: Source–leaf sweep: $n = 1000$, $\beta = 0.003$, $k = 1$ (top) and $k = 5$ (bottom), 400 matched runs per point. Left: mean export time. Centre: relative Wasserstein distance e_W of the export-time distributions. Right: percentage of TWOSCALE exports that precede the first bridge infection; FULL had none. Whiskers are 95% block-bootstrap intervals. "Full Micro" denotes FULL and "Production MicroMacro" denotes TWOSCALE.

local dynamics before the export. In FULL with $k = 1$, the wait after bridge activation stayed at 322–359 at every ASPL, consistent with Exp(β) with mean 333. In TWOSCALE, the signed interval $T_{\text{export}} - T_B$ ($k = 1$) shrank from about 340 in dense sources to 207–295 at ASPL ≥ 5, because aggregate hazard accumulated before the true bridge became infectious.

The bypass fraction rose from at most 0.5% for ASPL ≤ 1.75 to 19.75% (95% interval 15.8–24.0%) at ASPL 4 with $k = 1$, and to 32.5% for both widths at ASPL 6. The mean export shift was resolved, with intervals excluding zero, for both widths at every ASPL ≥ 5. Its values ranged from -6.2% to -12.4%; at

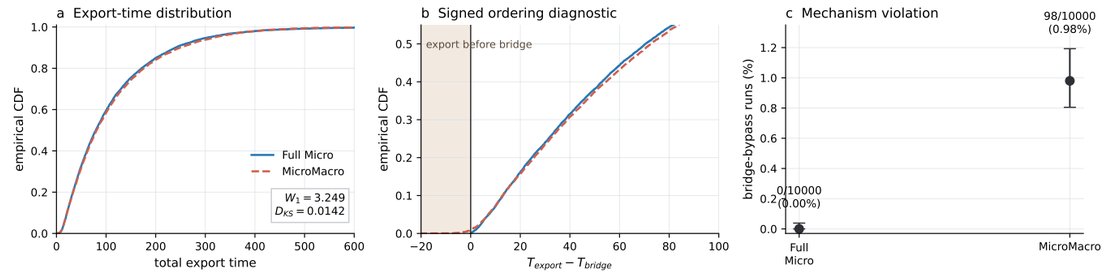


Figure 2: Тест «кліка–листок» ($n = 100$, $k = 2$, $\beta = 0.005$, 10 000 запусків для кожної моделі). (a) Емпіричні функції розподілу часу експорту. (b) Емпіричні функції розподілу $T_{\text{export}} - T_B$; від'ємні значення (заштрихована область) відповідають експорту до зараження будь-якого вузла-моста. (c) Частка таких запусків з обходом мостів із 95% інтервалами. "Full Micro" позначає Full, а "MicroMacro" — TwoScale.

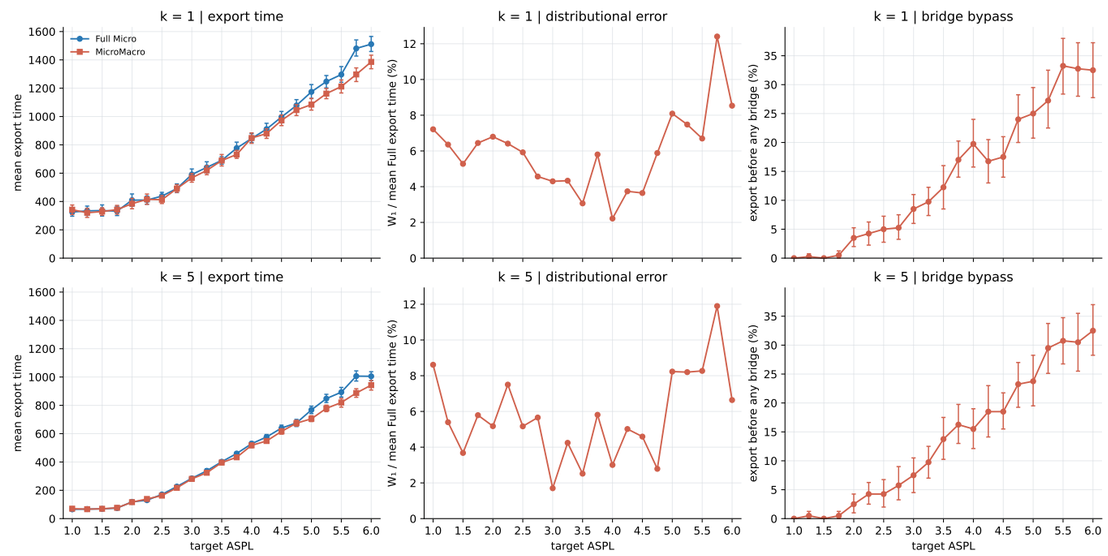


Figure 3: Серія експериментів «джерело–листок»: $n = 1000$, $\beta = 0.003$, $k = 1$ (угорі) та $k = 5$ (унизу), 400 парних запусків для кожної точки. Ліворуч: середній час експорту. У центрі: відносна відстань Васерштайна e_W між розподілами часу експорту. Праворуч: частка експортів TwoScale, що передували зараженню першого моста; у Full таких випадків не було. Відрізки похибок — 95% інтервали блокового бутстрепу. "Full Micro" позначає Full, а "Production MicroMacro" — TwoScale.

узгоджується з Exp(β) із середнім 333. У TwoScale знаковий інтервал $T_{\text{export}} - T_B$ ($k = 1$) зменшився приблизно з 340 у щільних джерелах до 207–295 за ASPL ≥ 5, оскільки агрегована інтенсивність накопичувалася ще до того, як справжній міст ставав інфекційним.

Частка обходів зросла від не більш як 0.5% за ASPL ≤ 1.75 до 19.75% (95% інтервал 15.8–24.0%) за ASPL 4 і $k = 1$, а за ASPL 6 — до 32.5% для обох ширин інтерфейсу. Зсув середнього часу експорту був статистично відмінним від нуля, з інтервалами, що не містили нуль, для обох ширин за кожного ASPL ≥ 5. Його значення були в межах від -6.2% до -12.4%; за ASPL 6 вони становили -8.3% ($[-13.1, -3.5]$) для $k = 1$ і -6.2%

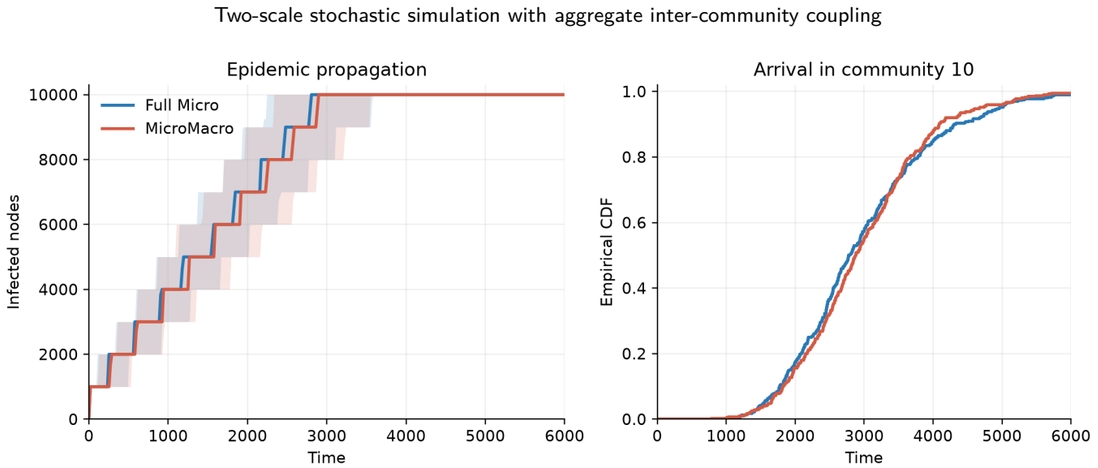


Figure 4: Chain of ten 1000-node cliques with one edge between consecutive cliques ($k = 1$, $\beta = 0.003$, 400 runs per model). Left: pointwise median number of infected nodes with interquartile bands. Right: empirical CDF of the arrival time in the tenth community (T_9). Four Full and two TwoScale arrivals lie beyond the displayed range; all were observed.

ASPL 6 they were -8.3% ($[-13.1, -3.5]$) for $k = 1$ and -6.2% ($[-10.3, -2.3]$) for $k = 5$. Below ASPL 5, a shift was resolved only for $k = 5$ at ASPL 3.75, 4.25 and 4.5 (between -3.7% and -5.8%). No positive shift was resolved anywhere in the sweep, in agreement with the direction predicted by Proposition 2.

The irregular centre panel requires care. For nearly exponential export times and $R = 400$ runs per model, the expected e_W of two samples from the same law is about $\sqrt{\pi/R} \approx 9\%$ (Appendix B). The values of 3.7–8.6% observed for ASPL ≤ 1.75 are therefore consistent with pure sampling variability. Single-export distances should thus be read together with the mean shift and its interval. Bypass, by contrast, is zero in Full by construction, so any observed bypass is a genuine discrepancy. At ASPL 4 it affects one fifth of the exports while the export-time distributions remain close.

6.3. Repeated crossings through a chain of cliques

When internal spread is fast, close agreement survives nine successive aggregate crossings. In the chain of ten 1000-node cliques with $k = 1$, the median terminal arrival was 2785 in Full and 2877 in TwoScale, and $e_W = 3.34\%$ (Figure 4). The permutation floor of this cell was 5.1% ($p = 0.32$), so the two terminal distributions are statistically indistinguishable. The CDFs cross, so the difference is not a fixed delay. A 1000-node clique saturates on average within $2H_{999}/(\beta n) \approx 5$ time units, compared with a mean edge-crossing time of 333 ($\rho = 0.002$). The aggregate rate therefore differs from the exact one only during a negligible fraction of each crossing.

6.4. Chains of random communities

Sparse, long-path communities produce systematically early arrivals whose relative size is stable along the chain while the absolute lead accumulates. Figure 5 shows the cumulative arrival times in chains of 1000-node communities. For target ASPL 2–3, terminal e_W was 1.4–2.5%, close to its sampling floor. At ASPL 6, TwoScale reached the last community earlier by 13.9% in median for $k = 1$ and by 10.7% for $k = 5$ ($e_W = 13.6\%$ and 10.9%). Along the ASPL-5 row with $k = 1$, the relative median lead was about 10% at both the first and the last community, while its absolute size grew from about 107 to 1018 time units. A constant relative error along a chain therefore means a growing absolute error at distant communities. The positive first-column values in the clique row (+12.6% and +11.5%) are not resolved: for $k = 1$, the first-crossing mean shift is +4.9% with a 95% interval of $[-8.0, 18.3]\%$. Single-crossing distances also have a larger sampling floor than cumulative ones.

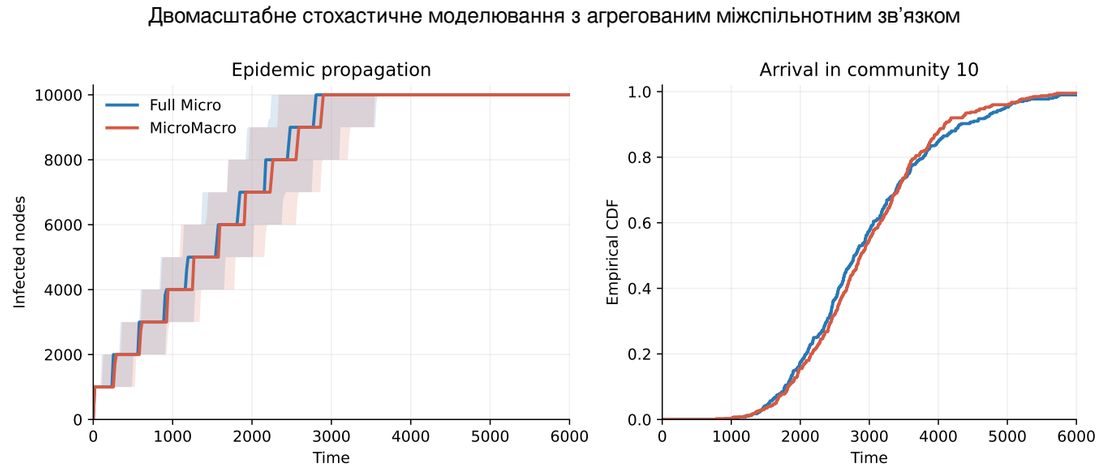


Figure 4: Ланцюг із десяти клік по 1000 вузлів з одним ребром між послідовними кліками ($k = 1$, $\beta = 0.003$, 400 запусків для кожної моделі). Ліворуч: поточкова медіана кількості інфікованих вузлів із міжквартильними смугами. Праворуч: емпірична функція розподілу часу прибуття до десятої спільноти (T_9). Чотири значення прибуття Full і два TwoScale лежать поза показаним діапазоном; усі вони спостережені.

($[-10.3, -2.3]$) для $k = 5$. Нижче ASPL 5 статистично відмінний від нуля зсув виявлено лише для $k = 5$ за ASPL 3.75, 4.25 і 4.5 (від -3.7% до -5.8%). У жодній точці серії не виявлено додатного зсуву, що узгоджується з напрямом, передбаченим твердженням 2.

Нерегулярну центральну панель слід тлумачити обережно. Для майже експоненційних часів експорту та $R = 400$ запусків для кожної моделі очікуване e_W двох вибірок з одного розподілу становить приблизно $\sqrt{\pi/R} \approx 9\%$ (додаток B). Отже, значення 3.7–8.6%, спостережені за ASPL ≤ 1.75, узгоджуються із суто вибірковою мінливістю. Тому відстані для одиничного експорту слід розглядати разом зі зсувом середнього та його інтервалом. Натомість обхід у Full за побудовою дорівнює нулю, тому кожен спостережений обхід є справжньою розбіжністю. За ASPL 4 він стосується однієї п'ятої експортів, хоча розподіли часу експорту залишаються близькими.

6.3. Повторні переходи через ланцюг клік

Коли внутрішнє поширення швидке, близьке узгодження зберігається після дев'яти послідовних агрегованих переходів. У ланцюзі з десяти клік по 1000 вузлів із $k = 1$ медіанний час прибуття до останньої спільноти становив 2785 у Full і 2877 у TwoScale, а $e_W = 3.34\%$ (рисунок 4). Пермутаційний поріг для цієї комірки становив 5.1% ($p = 0.32$), тому два термінальні розподіли статистично нерозрізнювані. Функції розподілу перетинаються, отже різниця не є сталим запізненням. Кліка з 1000 вузлів у середньому насичується за $2H_{999}/(\beta n) \approx 5$ одиниць часу, тоді як середній час переходу через ребро дорівнює 333 ($\rho = 0.002$). Тому агрегована інтенсивність відрізняється від точної лише протягом незначної частини кожного переходу.

6.4. Ланцюги випадкових спільнот

Розріджені спільноти з довгими шляхами дають систематично ранні прибуття, відносна величина яких залишається сталою вздовж ланцюга, тоді як абсолютне випередження накопичується. На рисунку 5 показано кумулятивні часи прибуття у ланцюгах спільнот із 1000 вузлів. Для цільового ASPL 2–3 термінальне e_W становило 1.4–2.5%, що близько до його вибіркового порога. За ASPL 6 модель TwoScale досягала останньої спільноти раніше на 13.9% за медіаною для $k = 1$ і на 10.7% для $k = 5$ ($e_W = 13.6\%$ і 10.9%). У рядку ASPL 5 за $k = 1$ відносне медіанне випередження становило близько 10% як у першій, так і в останній спільноті, тоді як його абсолютна величина зросла приблизно зі 107 до 1018 одиниць часу. Отже, стала відносна похибка вздовж ланцюга означає зростання абсолютної похибки у віддалених спільнотах. Додатні значення у першому стовпці рядка клік (+12.6% і +11.5%) не є статистично відмінними від нуля: для $k = 1$ зсув

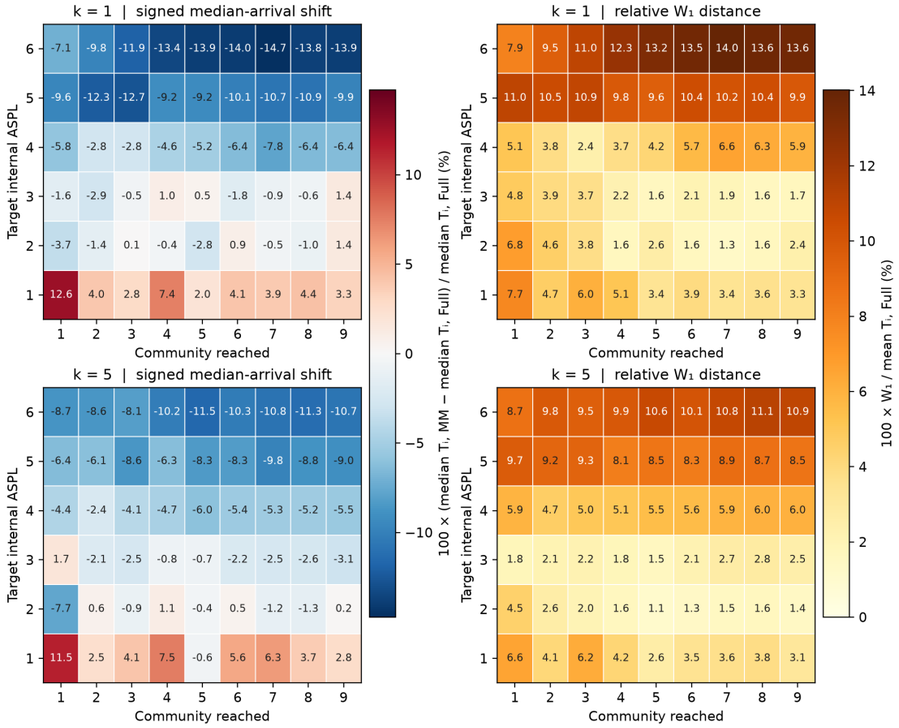


Figure 5: Cumulative arrival accuracy in ten-community chains with $n = 1000$, by target ASPL (rows) and community reached ($c = 1, \ldots, 9$, columns), for $k = 1$ (top) and $k = 5$ (bottom). Left: relative median shift b_c (negative: TwoScale earlier). Right: relative Wasserstein distance. Each cell uses 400 matched runs; no uncertainty is shown (see Figure 6 for the terminal arrivals).

6.5. Community size and interface width

The same internal path length is much less favourable in small communities. Figure 6 reports the terminal discrepancy for all 48 configurations of the size sweep. The permutation floor ranged from 1.6% to 5.9%. In the 16 configurations with ASPL ≤ 2, e_W was 1.1–4.4%, and in 14 of them it was not distinguishable from the floor at the 5% level. In 31 of the 32 configurations with ASPL ≥ 3, e_W exceeded the floor ($p < 0.01$), and the median shift was negative with a block-bootstrap interval excluding zero. The exception was $n = 1000$, ASPL 3, $k = 1$, with $e_W = 1.7\%$. At a fixed ASPL ≥ 3, the discrepancy decreased monotonically with community size for both interface widths. At ASPL 6, e_W fell from 41.3% for $n = 50$ to 13.6% for $n = 1000$ with $k = 1$, and from 32.4% to 10.9% with $k = 5$. Wider interfaces reduced the discrepancy in sparse communities but did not remove it. The fraction of TwoScale crossings that preceded infection of any bridge node of the source community rose from 0.1–2.3% at ASPL 1 to 30–52% at ASPL 6.

6.6. A single time-scale ratio organises the discrepancy

Expressed through $\rho = \beta\sigma_T$, the results of all sizes, structures and interface widths collapse onto one curve. We computed σ_T in each configuration as the standard deviation of node infection times within each source community of the Full runs, averaged over communities and runs. Figure 7(a,b) plots the terminal e_W and b_9 against ρ. The rank correlation between e_W and ρ was 0.92 over all 48 configurations and 0.98 over the 32 configurations with ASPL ≥ 3; the corresponding values for target ASPL were 0.82 and 0.67. In the 18 configurations with $\rho < 0.25$, $e_W \leq 4.4\%$, and 15 were indistinguishable from the permutation floor. All 30 configurations with $\rho \geq 0.25$ were resolved. For $\rho \geq 0.3$, a log–log fit gave $e_W \approx 15\rho\,\%$ (slope 1.03; median relative deviation 8%, maximum 41%), and $b_9 \approx -e_W$, i.e. the discrepancy was almost entirely an

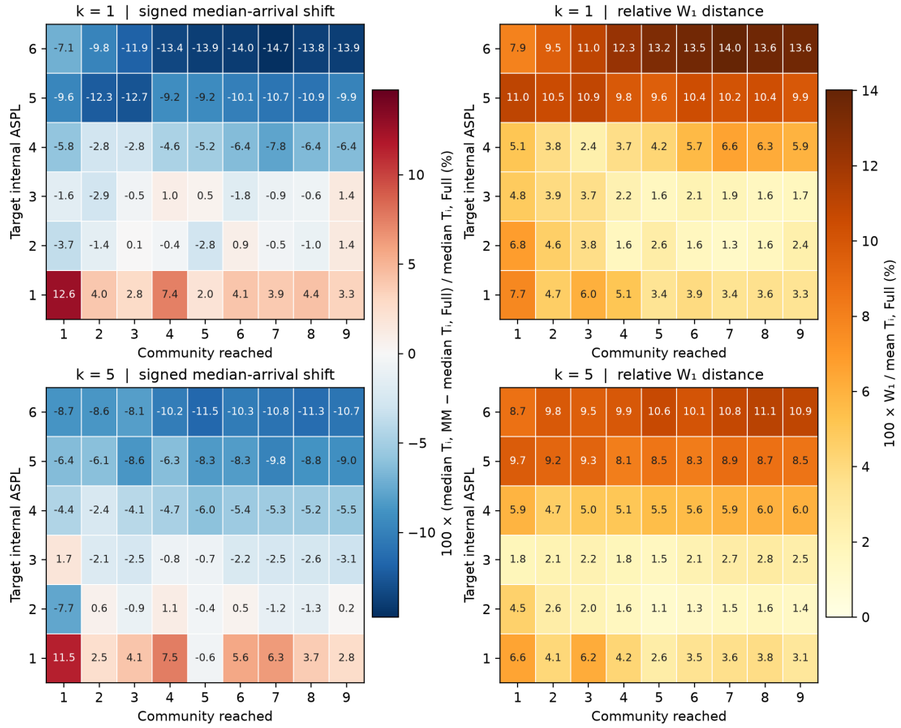


Figure 5: Точність кумулятивних часів прибуття у ланцюгах із десяти спільнот, кожна з яких має $n = 1000$ вузлів, залежно від цільового ASPL (рядки) та досягнутої спільноти ($c = 1, \ldots, 9$, стовпці), для $k = 1$ (угорі) та $k = 5$ (унизу). Ліворуч: відносний зсув медіани b_c (від'ємний: TwoScale прибуває раніше). Праворуч: відносна відстань Васерштайна. Для кожної комірки використано 400 парних запусків; невизначеність не показано (термінальні прибуття див. на рисунку 6).

середнього першого переходу дорівнює $+4.9\%$ із 95% інтервалом $[-8.0, 18.3]\%$. Для одиничних переходів також характерний вищий вибірковий поріг відстаней, ніж для кумулятивних.

6.5. Розмір спільноти та ширина інтерфейсу

Та сама довжина внутрішнього шляху є значно менш сприятливою в малих спільнотах. На рисунку 6 наведено термінальну розбіжність для всіх 48 конфігурацій серії за розміром. Пермутаційний поріг був у межах від 1.6% до 5.9%. У 16 конфігураціях з ASPL ≤ 2 значення e_W становило 1.1–4.4%, а в 14 із них воно не відрізнялося від порога на рівні значущості 5%. У 31 із 32 конфігурацій з ASPL ≥ 3 значення e_W перевищувало поріг ($p < 0.01$), а зсув медіани був від'ємним із блоковим бутстреп-інтервалом, що не містив нуль. Винятком була конфігурація $n = 1000$, ASPL 3, $k = 1$, для якої $e_W = 1.7\%$. За фіксованого ASPL ≥ 3 розбіжність монотонно зменшувалася зі збільшенням розміру спільноти для обох ширин інтерфейсу. За ASPL 6 значення e_W зменшилося з 41.3% для $n = 50$ до 13.6% для $n = 1000$ за $k = 1$, а за $k = 5$ — з 32.4% до 10.9%. Ширші інтерфейси зменшували розбіжність у розріджених спільнотах, але не усували її. Частка переходів TwoScale, що передували зараженню будь-якого вузла-моста у спільноті-джерелі, зросла з 0.1–2.3% за ASPL 1 до 30–52% за ASPL 6.

6.6. Єдине співвідношення часових масштабів упорядковує розбіжність

Якщо виразити результати через $\rho = \beta\sigma_T$, дані для всіх розмірів, структур і ширин інтерфейсу лягають на одну криву. Для кожної конфігурації ми обчислювали σ_T як стандартне відхилення часів зараження вузлів у кожній спільноті-джерелі запусків Full, усереднене за спільнотами й запусками. На рисунку 7(a,b) термінальні

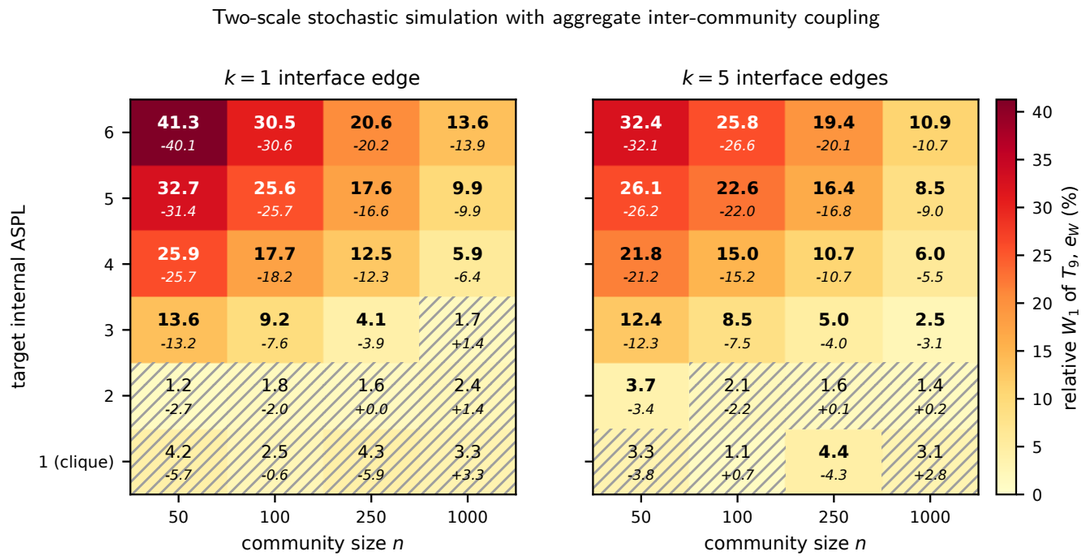


Figure 6: Terminal-arrival accuracy in ten-community chains for all 48 configurations of the size sweep. Colour and bold numbers: relative Wasserstein distance e_W of T_9 (%). Italic numbers: relative median shift b_9 (%; negative means TwoScale earlier). Hatched cells: e_W not distinguishable from its within-pair permutation floor ($p \geq 0.05$). Each cell: 400 matched runs.

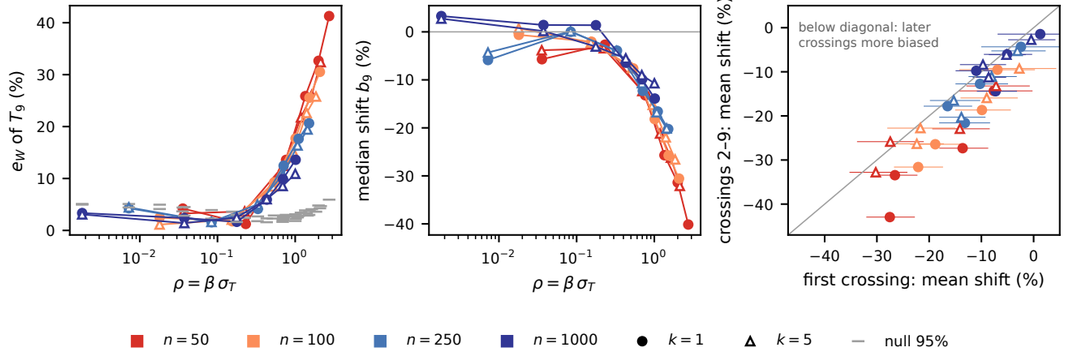


Figure 7: (a) Relative Wasserstein distance and (b) relative median shift of the terminal arrival against $\rho = \beta\sigma_T$, for all 48 chain configurations (colours: community size; filled circles: $k = 1$; open triangles: $k = 5$; lines connect ASPL 1–6 at fixed n and k). Grey ticks in (a): 95th percentile of the within-pair permutation floor of each configuration. (c) Local mean shift of the first crossing against that of crossings 2–9, for configurations with ASPL ≥ 3, with 95% block-bootstrap intervals of the first-crossing shift.

early shift. We also examined two alternative scalings: $\beta\sqrt{k}\sigma_T$, suggested by (8), and the mean time from a community's first infection to infection of its first bridge node, multiplied by βk. Both separated the two interface widths more than ρ did.

Figure 7(c) separates the crossings. By Remark 1, the first crossing in our design is subject only to source-side and numerical mechanisms, whereas later crossings are also subject to placement after the first

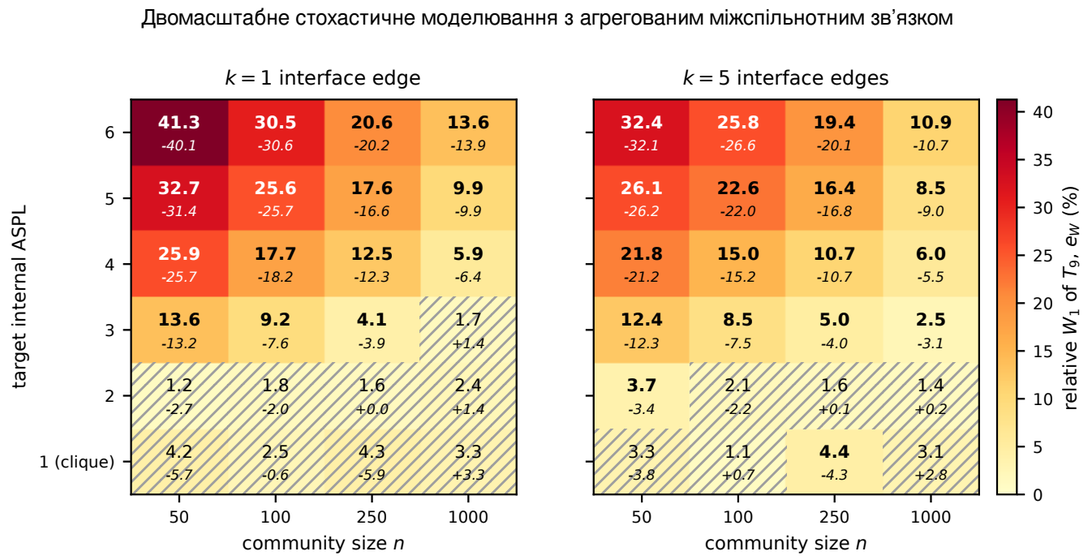


Figure 6: Точність термінального прибуття у ланцюгах із десяти спільнот для всіх 48 конфігурацій серії за розміром. Колір і напівжирні числа: відносна відстань Васерштайна e_W для T_9 (%). Числа курсивом: відносний зсув медіани b_9 (%; від'ємне значення означає, що TwoScale прибуває раніше). Заштриховані комірки: e_W не відрізняється від внутрішньопарного пермутаційного порога ($p \geq 0.05$). Для кожної комірки використано 400 парних запусків.

e_W і b_9 зображено залежно від ρ. Рангова кореляція між e_W і ρ становила 0.92 для всіх 48 конфігурацій і 0.98 для 32 конфігурацій з ASPL ≥ 3; відповідні значення для цільового ASPL становили 0.82 і 0.67. У 18 конфігураціях із $\rho < 0.25$ виконувалося $e_W \leq 4.4\%$, а 15 із них були нерозрізнюваними з пермутаційним порогом. Усі 30 конфігурацій із $\rho \geq 0.25$ були статистично відмінними від порога. Для $\rho \geq 0.3$ апроксимація в логарифмічних координатах дала $e_W \approx 15\rho\,\%$ (нахил 1.03; медіанне відносне відхилення 8%, максимальне 41%) і $b_9 \approx -e_W$, тобто розбіжність майже повністю була раннім зсувом. Ми також розглянули два альтернативні масштабування: $\beta\sqrt{k}\sigma_T$, запропоноване виразом (8), і середній час від першого зараження спільноти до зараження її першого вузла-моста, помножений на βk. Обидва розділяли дві ширини інтерфейсу сильніше, ніж ρ.

Рисунок 7(c) розділяє окремі переходи. Згідно із зауваженням 1, у нашому дизайні перший перехід залежить лише від механізмів на боці джерела та чисельних механізмів, тоді як наступні переходи також залежать від розміщення після першого імпорту й надлишкових імпортів. Для $k = 1$ наступні переходи мали сильніше зміщення, ніж перший, у 15 із 16 конфігурацій з ASPL ≥ 3. Різниця була статистично відмінною від нуля у 9 з них, зокрема для всіх чотирьох розмірів за ASPL 6; наприклад, -27.5% для першого переходу порівняно з -42.9% для переходів 2–9 за $n = 50$. Для $k = 5$ різниця була меншою (14 із 16 точкових оцінок від'ємні, 3 статистично відмінні від нуля). Така залежність від k відповідає передбаченню механізму вичерпання інтерфейсу: одне фізичне ребро допускає один перехід, тоді як п'ять ребер допускають до п'яти, тому надлишкові агреговані імпорти мають менший вплив. Оскільки між конфігураціями використано спільне випадкове засівання, ми вважаємо цю закономірність підтверджувальним, але не остаточним свідченням. Безпосередній підрахунок надлишкових імпортів потребував би журналів типів подій, які не зберігалися.

7. Обговорення

7.1. Практичні рекомендації

Результати дають змогу запропонувати просту процедуру для визначення того, чи є агреговане зв'язування достатнім.

import and to surplus imports. For $k = 1$, later crossings were more strongly biased than the first in 15 of the 16 configurations with ASPL ≥ 3. The difference was resolved in 9 of them, including all four sizes at ASPL 6; for example, -27.5% for the first crossing against -42.9% for crossings 2–9 at $n = 50$. For $k = 5$, the difference was smaller (14 of 16 point estimates negative, 3 resolved). This dependence on k is what interface exhaustion predicts: a single physical edge permits one crossing, whereas five edges permit up to five, so surplus aggregate imports matter less. Because seeds are shared between configurations, we regard this pattern as supporting rather than conclusive evidence. A direct count of surplus imports would require event-type logs that were not stored.

7. Discussion

7.1. Practical guidance

The results suggest a simple procedure for deciding whether aggregate coupling is adequate.

Decide which observable matters. For the timing of spread between communities, the two-scale simulator can be accurate. For transmission routes, it cannot be trusted. Up to half of its crossings in sparse communities, and a fifth of exports even where export-time distributions agreed, occurred before any true bridge node was infected. Questions that depend on bridge nodes, such as targeting interventions at the individuals who connect communities or attributing an outbreak to a source, require boundary information that the aggregate interface does not contain.

Estimate the time-scale ratio. Compute $\rho = \beta_{\text{out}}\sigma_T$. Since σ_T describes spread within a single community, it can in principle be estimated from the local engines alone, by simulating an isolated community from a uniformly placed seed. We computed it from the reference runs and have not tested this local estimate. In our benchmarks, terminal arrivals were statistically indistinguishable for $\rho \lesssim 0.25$. For $0.3 \lesssim \rho \lesssim 3$, TwoScale arrived early by roughly $15\rho\%$. This rule is an empirical summary of one family of synthetic networks and parameters, not a general error law.

Check absolute as well as relative errors. Along a chain, the relative discrepancy was nearly constant, so the absolute lead at distant communities grew in proportion to the travel time. For intervention timing at a specific destination, the absolute discrepancy at that destination is the relevant quantity.

Calibrate distances against sampling variability. With a few hundred runs per model, distances of a few percent between arrival-time distributions are expected even between identical models (Appendix B). Permutation baselines or analytical floors should accompany such comparisons.

7.2. Computational cost

The benchmarks were designed for accuracy assessment, so their explicit interfaces contain at most five edges and the full reference is cheap. In this regime, aggregation removes almost no work, and the cost of grid synchronisation dominates. The median wall-clock time per replicate of the Python implementations ranged from 0.04–0.07 s (Full) and 0.6–31 s (TwoScale) for $n = 50$ to 8.6–18 s and 6.7–124 s for $n = 1000$. For $n = 1000$, the ratio of the two medians ranged from 0.76 (ASPL 2, $k = 5$) to 6.9 (ASPL 6, $k = 1$). Two conclusions follow. First, in settings where the full network is known and small, Full should be preferred. Second, the overhead of the two-scale method stems from the black-box scheduler rather than from aggregation. An event-driven scheduler that integrates the piecewise-constant hazard exactly (Section 3.5) would remove both this overhead and the synchronisation error. Computational gains are expected when inter-community contacts are numerous or unavailable, which is the setting the method is intended for (Kuryliak and Emmerich, 2025); quantifying them is left to future work.

7.3. Limitations

The experiments use SI dynamics. With recovery, bridge nodes can stop transmitting while the community-wide fraction remains positive, and the aggregate rate may then also overestimate exports late in a local outbreak. All networks are synthetic, the macro-topology is a chain, and internal and external per-edge rates are equal. Interfaces were placed at random, which by Remark 1 neutralises placement error for

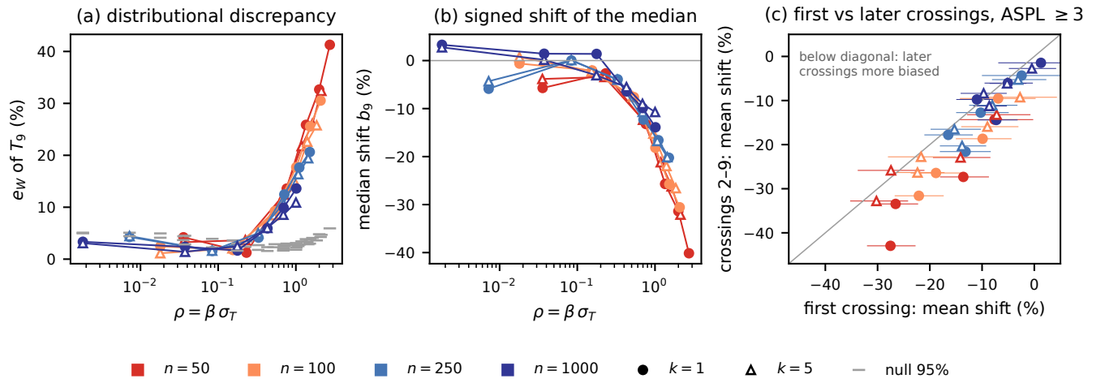


Figure 7: (a) Відносна відстань Васерштайна та (b) відносний зсув медіани термінального прибуття залежно від $\rho = \beta\sigma_T$ для всіх 48 конфігурацій ланцюга (кольори: розмір спільноти; зафарбовані кола: $k = 1$; порожні трикутники: $k = 5$; лінії сполучають ASPL 1–6 за фіксованих n і k). Сірі позначки в (a): 95-й процентиль внутрішньопарного пермутаційного порога кожної конфігурації. (c) Локальний середній зсув першого переходу порівняно зі зсувом переходів 2–9 для конфігурацій з ASPL ≥ 3, із 95% блоковими бутстреп-інтервалами зсуву першого переходу.

Визначте, яка спостережувана величина має значення. Для часу поширення між спільнотами двомасштабний симулятор може бути точним. Для маршрутів передачі йому довіряти не можна. До половини переходів у розріджених спільнотах і п'ята частина експортів навіть там, де розподіли часу експорту узгоджувалися, відбувалися до зараження будь-якого справжнього вузла-моста. Питання, що залежать від вузлів-мостів, як-от спрямування втручань на осіб, які з'єднують спільноти, або встановлення джерела спалаху, потребують інформації про межу, якої агрегований інтерфейс не містить.

Оцініть співвідношення часових масштабів. Обчисліть $\rho = \beta_{\text{out}}\sigma_T$. Оскільки σ_T описує поширення в межах однієї спільноти, його в принципі можна оцінити лише за локальними рушіями, моделюючи ізольовану спільноту з рівномірно розміщеним початковим інфікованим вузлом. Ми обчислювали його за еталонними запусками й не перевіряли таку локальну оцінку. У наших тестах термінальні часи прибуття були статистично нерозрізнюваними за $\rho \lesssim 0.25$. Для $0.3 \lesssim \rho \lesssim 3$ модель TwoScale прибувала раніше приблизно на $15\rho\%$. Це правило є емпіричним узагальненням для одного сімейства синтетичних мереж і параметрів, а не загальним законом похибки.

Перевіряйте абсолютні та відносні похибки. Уздовж ланцюга відносна розбіжність була майже сталою, тому абсолютне випередження у віддалених спільнотах зростало пропорційно часу поширення. Для визначення часу втручання в конкретній цільовій спільноті релевантною величиною є абсолютна розбіжність у цій спільноті.

Калібруйте відстані відносно вибіркової мінливості. За кількох сотень запусків для кожної моделі відстані в кілька відсотків між розподілами часу прибуття очікуються навіть для ідентичних моделей (додаток B). Такі порівняння слід доповнювати пермутаційними базовими рівнями або аналітичними порогами.

7.2. Обчислювальна вартість

Тести було розроблено для оцінювання точності, тому їхні явні інтерфейси містять не більше п'яти ребер, а повна еталонна модель є обчислювально недорогою. У цьому режимі агрегація майже не усуває обчислювальної роботи, а домінує вартість синхронізації на часовій сітці. Медіанний час виконання одного повтору Python-реалізацій був у межах 0.04–0.07 с (Full) і 0.6–31 с (TwoScale) для $n = 50$ та 8.6–18 с і 6.7–124 с

first imports. Structured interfaces, for example with bridges at hubs or with incoming and outgoing bridges far apart, may behave differently. The synchronisation step was not varied, so the numerical component of the discrepancy was not isolated; Proposition 1 provides a direct way to do so. Finally, ρ was evaluated with reference runs and chosen among a small number of candidate scalings; its predictive value for other network families remains to be tested.

7.4. Possible extensions

The analysis points to modifications that use only aggregate information. Interface exhaustion can be represented by limiting the number of imports per bundle to its number of channels, which is known whenever W_{ij} counts edges, or by reducing λ_{ij} as this capacity is consumed. When partial boundary information is available, $\bar{y}_i$ in (4) can be replaced by the infected fraction among known bridge nodes. Placement can then be restricted to known receiving endpoints. Each such variant can be evaluated against FULL and against exact simulation on $\tilde{G}$, which separates modelling from numerical error.

8. Conclusions

The two-scale method couples exact local Gillespie engines through aggregate inter-community hazards. In its ideal form, it is exact simulation on a surrogate network in which every interface is smeared uniformly over all pairs of nodes. This identifies what the method loses: the state of the actual bridge nodes, the location of imports and the finite capacity of thin interfaces. For randomly placed interfaces, it also implies that aggregate export clocks are stochastically early. In controlled comparisons with full-network Gillespie simulation, terminal arrival-time distributions were statistically indistinguishable when infection spread through communities quickly relative to the time needed to cross an interface edge. As the internal timing spread approached and exceeded that crossing time, the two-scale simulator arrived systematically early, by up to 40% in small sparse communities. The ratio $\rho = \beta\sigma_T$ organised these results across community sizes, internal structures and interface widths. Close timing never guaranteed admissible transmission routes. The method is therefore a reasonable tool for propagation-time questions when ρ is small. It is not suited to questions about individual transmission routes, or to sparse communities with long internal paths unless the interface is refined.

A. Clique formulas and verification

Consider an n-node clique with SI dynamics, per-edge rate β, a uniformly placed seed and a uniformly placed set of k bridge nodes. When m nodes are infected, the next internal infection occurs at rate $\beta m(n-m)$, independently of which nodes are infected, and the infected set is a uniform m-subset. The probability that none of the first m infected nodes is a bridge is $\binom{n-k}{m}/\binom{n}{m}$, hence

$$\mathbb{E}[T_B] = \sum_{m=1}^{n-k} \frac{\binom{n-k}{m}}{\binom{n}{m}} \frac{1}{\beta m(n-m)}, \qquad \mathbb{E}[T_B] = \frac{H_{n-1}}{\beta n} \quad (k=1), \tag{11}$$

where H_{n-1} is the harmonic number; the case of a bridge seed ($T_B = 0$) is included. For $k = 1$, the export time in FULL is T_B plus an independent $\mathrm{Exp}(\beta)$ waiting time. The expected time to infect the whole clique is $2H_{n-1}/(\beta n)$. Table 3 compares (11) with the first community of the clique chains.

B. Sampling floor of the Wasserstein distance

Let F_R and G_R be empirical CDFs of two independent samples of size R from the same continuous law F. Then $W_1 = \int |F_R - G_R|\,dx$, and $\sqrt{R}\,(F_R - G_R)$ is approximately $\sqrt{2}$ times a Brownian bridge evaluated at $F(x)$ (del Barrio et al., 1999). Since $\mathbb{E}|B(u)| = \sqrt{2u(1-u)/\pi}$ for a Brownian bridge B,

$$\mathbb{E}[W_1] \approx \frac{2}{\sqrt{\pi R}} \int \sqrt{F(x)\big(1-F(x)\big)}\,dx.$$

For an exponential law with mean μ, the integral equals $\mu\pi/2$, so that $\mathbb{E}[W_1]/\mu \approx \sqrt{\pi/R}$, which is 8.9% for $R = 400$ and 1.8% for $R = 10\,000$. Arrival times that are sums of several crossings are less dispersed relative

відповідно для $n = 1000$. Для $n = 1000$ відношення двох медіан було в межах від 0.76 (ASPL 2, $k = 5$) до 6.9 (ASPL 6, $k = 1$). Із цього випливають два висновки. По-перше, коли повна мережа відома й невелика, слід віддавати перевагу Full. По-друге, накладні витрати двомасштабного методу зумовлені планувальником типу «чорна скринька», а не агрегацією. Подієвий планувальник, який точно інтегрує кусково-сталу інтенсивність (розділ 3.5), усунув би як ці накладні витрати, так і похибку синхронізації. Обчислювальний виграш очікується, коли міжспільнотні контакти численні або недоступні, тобто в умовах, для яких метод і призначено (Kuryliak and Emmerich, 2025); його кількісне оцінювання залишено для майбутніх досліджень.

7.3. Обмеження

В експериментах використано SI-динаміку. За наявності одужання вузли-мости можуть припинити передачу, тоді як частка інфікованих у всій спільноті залишається додатною; у такому разі агрегована інтенсивність також може переоцінювати експорт на пізній стадії локального спалаху. Усі мережі синтетичні, макротопологія є ланцюгом, а внутрішні й зовнішні інтенсивності на ребро однакові. Інтерфейси розміщувалися випадково, що згідно із зауваженням 1 нейтралізує похибку розміщення для перших імпортів. Структуровані інтерфейси, наприклад із мостами у вузлах-концентраторах або з віддаленими один від одного вхідними й вихідними мостами, можуть поводитися інакше. Крок синхронізації не варіювали, тому чисельну складову розбіжності не було виокремлено; твердження 1 дає прямий спосіб зробити це. Нарешті, ρ оцінювали за еталонними запусками й обрали з невеликої кількості можливих масштабувань; його прогностичну цінність для інших сімейств мереж ще потрібно перевірити.

7.4. Можливі розширення

Аналіз указує на модифікації, що використовують лише агреговану інформацію. Вичерпання інтерфейсу можна представити, обмеживши кількість імпортів через кожен пучок кількістю його каналів, яка відома, якщо W_{ij} підраховує ребра, або зменшуючи λ_{ij} у міру вичерпання цієї місткості. Якщо доступна часткова інформація про межу, $\bar{y}_i$ у (4) можна замінити часткою інфікованих серед відомих вузлів-мостів. Тоді розміщення можна обмежити відомими кінцевими вузлами-отримувачами. Кожен такий варіант можна порівняти з Full і з точним моделюванням на $\tilde{G}$, що дає змогу відокремити модельну похибку від чисельної.

8. Висновки

Двомасштабний метод зв'язує точні локальні рушії Gillespie через агреговані інтенсивності між спільнотами. В ідеальній формі він є точним моделюванням на сурогатній мережі, у якій кожен інтерфейс рівномірно розподілено між усіма парами вузлів. Це визначає, яку інформацію метод втрачає: стан справжніх вузлів-мостів, розташування імпортів і скінченну пропускну здатність тонких інтерфейсів. Для випадково розміщених інтерфейсів звідси також випливає, що агреговані годинники експорту стохастично випереджають точні. У контрольованих порівняннях із Gillespie-моделюванням повної мережі розподіли часу термінального прибуття були статистично нерозрізнюваними, коли інфекція поширювалася спільнотами швидко порівняно з часом, потрібним для переходу через ребро інтерфейсу. Коли внутрішній розкид часу наближався до часу такого переходу або перевищував його, двомасштабний симулятор систематично прибував раніше; похибка сягала 40% у малих розріджених спільнотах. Співвідношення $\rho = \beta\sigma_T$ упорядкувало ці результати для різних розмірів спільнот, внутрішніх структур і ширин інтерфейсу. Близькі часи ніколи не гарантували допустимих маршрутів передачі. Отже, метод є обґрунтованим інструментом для питань про час поширення за малого ρ. Він не придатний для питань про індивідуальні маршрути передачі або для розріджених спільнот із довгими внутрішніми шляхами без уточнення інтерфейсу.

A. Формули для кліки та перевірка

Розглянемо кліку з n вузлів із SI-динамікою, інтенсивністю β на ребро, рівномірно розміщеним початковим інфікованим вузлом і рівномірно вибраною множиною з k вузлів-мостів. Коли заражено m вузлів, наступне внутрішнє зараження відбувається з інтенсивністю $\beta m(n-m)$ незалежно від того, які саме вузли заражені, а множина заражених є рівномірною m-підмножиною. Імовірність того, що серед перших m заражених вузлів

n	k	$\mathbb{E}[T_B]$, Eq. (11)	FULL mean T_B	FULL wait after T_B
50	1	29.86	29.72 ± 0.71	354.0 ± 16.9
100	1	17.26	17.05 ± 0.38	326.5 ± 17.0
250	1	8.13	7.84 ± 0.15	347.4 ± 16.6
1000	1	2.49	2.51 ± 0.04	353.8 ± 17.9
50	5	15.97	15.96 ± 0.55	–
100	5	10.31	9.64 ± 0.29	–
250	5	5.35	5.16 ± 0.12	–
1000	5	1.80	1.77 ± 0.03	–

Table 3: Verification of the reference simulator on the first community of the clique chains ($\beta = 0.003$, 400 runs per cell): mean bridge-activation time and, for $k = 1$, mean wait after activation (exact value $1/\beta = 333.3$). Values are mean ± standard error.

to their mean, and their floor is correspondingly lower; the permutation floors of the chain configurations ranged from 1.6% to 5.9%.

C. Reproducibility details

Seeds are derived deterministically from the experiment parameters. Each TWOSCALE engine draws from a private pseudorandom stream; midpoint probes copy the stream state of their engine and do not advance it. Two FULL runs ($n = 50$, ASPL 6, $k = 1$) had not reached the tenth community by $T = 30\,000$. They were rerun to $T = 40\,000$ with the same graphs, initial nodes and event seeds. Their event histories up to 30 000 were verified to match the saved runs, and their terminal arrivals occurred at about 31 059 and 31 007. No horizon value was substituted for an unobserved event. The permutation and bootstrap analyses of the chain configurations, the descriptor σ_T and Figures 6–7 were computed from the saved runs by the scripts `extrascripts/analysis/smpt_twoscale_paper_metrics.py` and `extrascripts/visualization/smpt_twoscale_paper_figures.py`.

CRediT authorship contribution statement

Yulian Kuryliak: Conceptualization, Methodology, Software, Investigation, Formal analysis, Visualization, Writing – original draft. **Michael T. M. Emmerich:** Conceptualization, Methodology, Supervision, Writing – review & editing. [Authors to confirm.]

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Funding

[Funding information to be added by the authors.]

Data availability

The simulation code, saved simulation outputs and analysis scripts are available from the corresponding author on reasonable request. [Replace with a repository DOI if the data are deposited.]

n	k	$\mathbb{E}[T_B]$, рівн. (11)	середнє T_B у Full	очікування у Full після T_B
50	1	29.86	29.72 ± 0.71	354.0 ± 16.9
100	1	17.26	17.05 ± 0.38	326.5 ± 17.0
250	1	8.13	7.84 ± 0.15	347.4 ± 16.6
1000	1	2.49	2.51 ± 0.04	353.8 ± 17.9
50	5	15.97	15.96 ± 0.55	–
100	5	10.31	9.64 ± 0.29	–
250	5	5.35	5.16 ± 0.12	–
1000	5	1.80	1.77 ± 0.03	–

Table 3: Перевірка еталонного симулятора на першій спільноті ланцюгів клік ($\beta = 0.003$, 400 запусків для кожної комірки): середній час активації моста та, для $k = 1$, середній час очікування після активації (точне значення $1/\beta = 333.3$). Наведено середнє ± стандартна похибка.

немає жодного моста, дорівнює $\binom{n-k}{m}/\binom{n}{m}$, отже

$$\mathbb{E}[T_B] = \sum_{m=1}^{n-k} \frac{\binom{n-k}{m}}{\binom{n}{m}} \frac{1}{\beta m(n-m)}, \qquad \mathbb{E}[T_B] = \frac{H_{n-1}}{\beta n} \;\; (k=1), \tag{11}$$

де H_{n-1} — гармонічне число; випадок, коли початковий інфікований вузол є мостом ($T_B = 0$), також ураховано. Для $k = 1$ час експорту у Full дорівнює T_B плюс незалежний час очікування $\mathrm{Exp}(\beta)$. Очікуваний час зараження всієї кліки дорівнює $2H_{n-1}/(\beta n)$. У таблиці 3 вираз (11) порівняно з першою спільнотою ланцюгів клік.

B. Вибірковий поріг відстані Васерштайна

Нехай F_R і G_R — емпіричні функції розподілу двох незалежних вибірок розміру R з одного неперервного розподілу F. Тоді $W_1 = \int |F_R - G_R|\, dx$, а $\sqrt{R}\,(F_R - G_R)$ наближено дорівнює $\sqrt{2}$, помноженому на броунівський міст, обчислений у $F(x)$ (del Barrio et al., 1999). Оскільки $\mathbb{E}|B(u)| = \sqrt{2u(1-u)/\pi}$ для броунівського мосту B,

$$\mathbb{E}[W_1] \approx \frac{2}{\sqrt{\pi R}} \int \sqrt{F(x)\big(1-F(x)\big)}\, dx.$$

Для експоненційного розподілу із середнім μ інтеграл дорівнює $\mu\pi/2$, тому $\mathbb{E}[W_1]/\mu \approx \sqrt{\pi/R}$, що становить 8.9% для $R = 400$ і 1.8% для $R = 10\,000$. Часи прибуття, що є сумами кількох переходів, мають менший розкид відносно свого середнього, а тому й нижчий поріг; пермутаційні пороги конфігурацій ланцюга були в межах від 1.6% до 5.9%.

C. Відомості про відтворюваність

Значення seed детерміновано отримано з параметрів експерименту. Кожен рушій TwoScale використовує власний потік псевдовипадкових чисел; зондування в середині кроку копіюють стан потоку свого рушія й не просувають його. Два запуски Full ($n = 50$, ASPL 6, $k = 1$) не досягли десятої спільноти до $T = 30\,000$. Їх було повторно запущено до $T = 40\,000$ з тими самими графами, початковими вузлами та seed подій. Було перевірено, що їхні історії подій до 30 000 збігаються зі збереженими запусками, а термінальні прибуття відбулися приблизно в моменти 31 059 і 31 007. Значення горизонту не підставляли замість неспостереженої події. Пермутаційний і бутстреп-аналіз конфігурацій ланцюга, дескриптор σ_T і рисунки 6–7 було обчислено зі збережених запусків скриптами `extrascripts/analysis/smpt_twoscale_paper_metrics.py` і `extrascripts/visualization/smpt_twoscale_paper_figures.py`.

Declaration of generative AI and AI-assisted technologies in the manuscript preparation process

During the preparation of this work the authors used [name of tool or service] in order to [reason]. After using this tool or service, the authors reviewed and edited the content as needed and take full responsibility for the content of the published article. [Authors to complete.]

References

Ajelli, M., Gonçalves, B., Balcan, D., Colizza, V., Hu, H., Ramasco, J.J., Merler, S., Vespignani, A., 2010. Comparing large-scale computational approaches to epidemic modeling: Agent-based versus structured metapopulation models. BMC Infectious Diseases 10, 190. doi:10.1186/1471-2334-10-190.

Anderson, D.F., 2007. A modified next reaction method for simulating chemical systems with time dependent propensities and delays. The Journal of Chemical Physics 127, 214107. doi:10.1063/1.2799998.

Balcan, D., Colizza, V., Gonçalves, B., Hu, H., Ramasco, J.J., Vespignani, A., 2009. Multiscale mobility networks and the spatial spreading of infectious diseases. Proceedings of the National Academy of Sciences 106, 21484–21489. doi:10.1073/pnas.0906910106.

Balcan, D., Colizza, V., Gonçalves, B., Hu, H., Ramasco, J.J., Vespignani, A., 2010. Modeling the spatial spread of infectious diseases: The global epidemic and mobility computational model. Journal of Computational Science 1, 132–145. doi:10.1016/j.jocs.2010.07.002.

Ball, F., Mollison, D., Scalia-Tomba, G., 1997. Epidemics with two levels of mixing. The Annals of Applied Probability 7, 46–89.

Barbosa, H., Barthelemy, M., Ghoshal, G., James, C.R., Lenormand, M., Louail, T., Menezes, R., Ramasco, J.J., Simini, F., Tomasini, M., 2018. Human mobility: Models and applications. Physics Reports 734, 1–74. doi:10.1016/j.physrep.2018.01.001.

del Barrio, E., Giné, E., Matrán, C., 1999. Central limit theorems for the Wasserstein distance between the empirical and the true distributions. The Annals of Probability 27, 1009–1071.

Cao, Y., Gillespie, D.T., Petzold, L.R., 2005. The slow-scale stochastic simulation algorithm. The Journal of Chemical Physics 122, 014116.

Chang, S., Pierson, E., Koh, P.W., Gerardin, J., Redbird, B., Grusky, D., Leskovec, J., 2021. Mobility network models of COVID-19 explain inequities and inform reopening. Nature 589, 82–87. doi:10.1038/s41586-020-2923-3.

Colizza, V., Pastor-Satorras, R., Vespignani, A., 2007. Reaction–diffusion processes and metapopulation models in heterogeneous networks. Nature Physics 3, 276–282. doi:10.1038/nphys560.

Colizza, V., Vespignani, A., 2008. Epidemic modeling in metapopulation systems with heterogeneous coupling pattern: Theory and simulations. Journal of Theoretical Biology 251, 450–467. doi:10.1016/j.jtbi.2007.11.028.

Danon, L., Ford, A.P., House, T., Jewell, C.P., Keeling, M.J., Roberts, G.O., Ross, J.V., Vernon, M.C., 2011. Networks and the epidemiology of infectious disease. Interdisciplinary Perspectives on Infectious Diseases 2011, 284909. doi:10.1155/2011/284909.

Ethier, S.N., Kurtz, T.G., 1986. Markov Processes: Characterization and Convergence. Wiley, New York.

Eubank, S., Guclu, H., Kumar, V.S.A., Marathe, M.V., Srinivasan, A., Toroczkai, Z., Wang, N., 2004. Modelling disease outbreaks in realistic urban social networks. Nature 429, 180–184. doi:10.1038/nature02541.

Gibson, M.A., Bruck, J., 2000. Efficient exact stochastic simulation of chemical systems with many species and many channels. The Journal of Physical Chemistry A 104, 1876–1889.

Gillespie, D.T., 1977. Exact stochastic simulation of coupled chemical reactions. The Journal of Physical Chemistry 81, 2340–2361. doi:10.1021/j100540a008.

Gomes, C., Thule, C., Broman, D., Larsen, P.G., Vangheluwe, H., 2018. Co-simulation: A survey. ACM Computing Surveys 51, 49:1–49:33.

Haseltine, E.L., Rawlings, J.B., 2002. Approximate simulation of coupled fast and slow reactions for stochastic chemical kinetics. The Journal of Chemical Physics 117, 6959–6969.

Keeling, M.J., Eames, K.T.D., 2005. Networks and epidemic models. Journal of The Royal Society Interface 2, 295–307. doi:10.1098/rsif.2005.0051.

Kerr, C.C., Stuart, R.M., Mistry, D., Abeysuriya, R.G., Rosenfeld, K., Hart, G.R., Núñez, R.C., Cohen, J.A., Selvaraj, P., Hagedorn, B., George, L., Jastrzebski, M., Izzo, A.S., Fowler, G., Palmer, A., Delport, D., Scott, N., Kelly, S.L., Bennette, C.S., Wagner, B.G., Chang, S.T., Oron, A.P., Wenger, E.A., Panovska-Griffiths, J., Famulare, M., Klein, D.J., 2021. Covasim: An agent-based model of COVID-19 dynamics and interventions. PLoS Computational Biology 17, e1009149. doi:10.1371/journal.pcbi.1009149.

Kiss, I.Z., Miller, J.C., Simon, P.L., 2017. Mathematics of Epidemics on Networks: From Exact to Approximate Models. Springer, Cham. doi:10.1007/978-3-319-50806-1.

Kuryliak, Y., Emmerich, M., 2025. Towards complexity reduction of large-scale epidemic simulation in two-scale networks, in: Proceedings of the Modern Machine Learning Technologies Workshop (MoMLeT 2025), pp. 327–336. URL: https://ceur-ws.org/Vol-4004/.

Заява про внесок авторів за CRediT

Yulian Kuryliak: Концептуалізація, методологія, програмне забезпечення, дослідження, формальний аналіз, візуалізація, написання — початкова версія. **Michael T. M. Emmerich:** Концептуалізація, методологія, наукове керівництво, написання — рецензування та редагування. [Автори мають підтвердити.]

Декларація про конфлікт інтересів

Автори заявляють, що їм не відомо про будь-які конкуруючі фінансові інтереси або особисті відносини, які могли б вплинути на роботу, описану в цій статті.

Фінансування

[Інформацію про фінансування мають додати автори.]

Доступність даних

Код симуляції, збережені результати симуляцій і скрипти аналізу доступні у відповідального автора за обґрунтованим запитом. [Замінити на DOI репозиторію, якщо дані буде депоновано.]

Декларація про використання генеративного штучного інтелекту та технологій на основі ШІ під час підготовки рукопису

Під час підготовки цієї роботи автори використовували [назва інструмента або сервісу] з метою [причина]. Після використання цього інструмента або сервісу автори перевірили й за потреби відредагували вміст та беруть на себе повну відповідальність за зміст опублікованої статті. [Автори мають заповнити.]

References

Ajelli, M., Gonçalves, B., Balcan, D., Colizza, V., Hu, H., Ramasco, J.J., Merler, S., Vespignani, A., 2010. Comparing large-scale computational approaches to epidemic modeling: Agent-based versus structured metapopulation models. BMC Infectious Diseases 10, 190. doi:10.1186/1471-2334-10-190.

Anderson, D.F., 2007. A modified next reaction method for simulating chemical systems with time dependent propensities and delays. The Journal of Chemical Physics 127, 214107. doi:10.1063/1.2799998.

Balcan, D., Colizza, V., Gonçalves, B., Hu, H., Ramasco, J.J., Vespignani, A., 2009. Multiscale mobility networks and the spatial spreading of infectious diseases. Proceedings of the National Academy of Sciences 106, 21484–21489. doi:10.1073/pnas.0906910106.

Balcan, D., Colizza, V., Gonçalves, B., Hu, H., Ramasco, J.J., Vespignani, A., 2010. Modeling the spatial spread of infectious diseases: The global epidemic and mobility computational model. Journal of Computational Science 1, 132–145. doi:10.1016/j.jocs.2010.07.002.

Ball, F., Mollison, D., Scalia-Tomba, G., 1997. Epidemics with two levels of mixing. The Annals of Applied Probability 7, 46–89.

Barbosa, H., Barthelemy, M., Ghoshal, G., James, C.R., Lenormand, M., Louail, T., Menezes, R., Ramasco, J.J., Simini, F., Tomasini, M., 2018. Human mobility: Models and applications. Physics Reports 734, 1–74. doi:10.1016/j.physrep.2018.01.001.

del Barrio, E., Giné, E., Matrán, C., 1999. Central limit theorems for the Wasserstein distance between the empirical and the true distributions. The Annals of Probability 27, 1009–1071.

Cao, Y., Gillespie, D.T., Petzold, L.R., 2005. The slow-scale stochastic simulation algorithm. The Journal of Chemical Physics 122, 014116.

Chang, S., Pierson, E., Koh, P.W., Gerardin, J., Redbird, B., Grusky, D., Leskovec, J., 2021. Mobility network models of COVID-19 explain inequities and inform reopening. Nature 589, 82–87. doi:10.1038/s41586-020-2923-3.

Colizza, V., Pastor-Satorras, R., Vespignani, A., 2007. Reaction–diffusion processes and metapopulation models in heterogeneous networks. Nature Physics 3, 276–282. doi:10.1038/nphys560.

Colizza, V., Vespignani, A., 2008. Epidemic modeling in metapopulation systems with heterogeneous coupling pattern: Theory and simulations. Journal of Theoretical Biology 251, 450–467. doi:10.1016/j.jtbi.2007.11.028.

Danon, L., Ford, A.P., House, T., Jewell, C.P., Keeling, M.J., Roberts, G.O., Ross, J.V., Vernon, M.C., 2011. Networks and the epidemiology of infectious disease. Interdisciplinary Perspectives on Infectious Diseases 2011, 284909. doi:10.1155/2011/284909.

Ethier, S.N., Kurtz, T.G., 1986. Markov Processes: Characterization and Convergence. Wiley, New York.

Eubank, S., Guclu, H., Kumar, V.S.A., Marathe, M.V., Srinivasan, A., Toroczkai, Z., Wang, N., 2004. Modelling disease outbreaks in realistic urban social networks. Nature 429, 180–184. doi:10.1038/nature02541.

Gibson, M.A., Bruck, J., 2000. Efficient exact stochastic simulation of chemical systems with many species and many channels. The Journal of Physical Chemistry A 104, 1876–1889.

Gillespie, D.T., 1977. Exact stochastic simulation of coupled chemical reactions. The Journal of Physical Chemistry 81, 2340–2361. doi:10.1021/j100540a008.

Kuryliak, Y., Emmerich, M.T.M., Dosyn, D., 2025. Simulating epidemic peak dynamics on complex networks using efficient gillespie algorithms. Infection, Genetics and Evolution 132, 105768. doi:10.1016/j.meegid.2025.105768.
Pastor-Satorras, R., Castellano, C., Van Mieghem, P., Vespignani, A., 2015. Epidemic processes in complex networks. Reviews of Modern Physics 87, 925–979. doi:10.1103/RevModPhys.87.925.
Shaked, M., Shanthikumar, J.G., 2007. Stochastic Orders. Springer, New York.
Vestergaard, C.L., Génois, M., 2015. Temporal gillespie algorithm: Fast simulation of contagion processes on time-varying networks. PLoS Computational Biology 11, e1004579. doi:10.1371/journal.pcbi.1004579.

Gomes, C., Thule, C., Broman, D., Larsen, P.G., Vangheluwe, H., 2018. Co-simulation: A survey. ACM Computing Surveys 51, 49:1–49:33.
Haseltine, E.L., Rawlings, J.B., 2002. Approximate simulation of coupled fast and slow reactions for stochastic chemical kinetics. The Journal of Chemical Physics 117, 6959–6969.
Keeling, M.J., Eames, K.T.D., 2005. Networks and epidemic models. Journal of The Royal Society Interface 2, 295–307. doi:10.1098/rsif.2005.0051.
Kerr, C.C., Stuart, R.M., Mistry, D., Abeysuriya, R.G., Rosenfeld, K., Hart, G.R., Núñez, R.C., Cohen, J.A., Selvaraj, P., Hagedorn, B., George, L., Jastrzebski, M., Izzo, A.S., Fowler, G., Palmer, A., Delport, D., Scott, N., Kelly, S.L., Bennette, C.S., Wagner, B.G., Chang, S.T., Oron, A.P., Wenger, E.A., Panovska-Griffiths, J., Famulare, M., Klein, D.J., 2021. Covasim: An agent-based model of COVID-19 dynamics and interventions. PLoS Computational Biology 17, e1009149. doi:10.1371/journal.pcbi.1009149.
Kiss, I.Z., Miller, J.C., Simon, P.L., 2017. Mathematics of Epidemics on Networks: From Exact to Approximate Models. Springer, Cham. doi:10.1007/978-3-319-50806-1.
Kuryliak, Y., Emmerich, M., 2025. Towards complexity reduction of large-scale epidemic simulation in two-scale networks, in: Proceedings of the Modern Machine Learning Technologies Workshop (MoMLeT 2025), pp. 327–336. URL: https://ceur-ws.org/Vol-4004/.
Kuryliak, Y., Emmerich, M.T.M., Dosyn, D., 2025. Simulating epidemic peak dynamics on complex networks using efficient gillespie algorithms. Infection, Genetics and Evolution 132, 105768. doi:10.1016/j.meegid.2025.105768.
Pastor-Satorras, R., Castellano, C., Van Mieghem, P., Vespignani, A., 2015. Epidemic processes in complex networks. Reviews of Modern Physics 87, 925–979. doi:10.1103/RevModPhys.87.925.
Shaked, M., Shanthikumar, J.G., 2007. Stochastic Orders. Springer, New York.
Vestergaard, C.L., Génois, M., 2015. Temporal gillespie algorithm: Fast simulation of contagion processes on time-varying networks. PLoS Computational Biology 11, e1004579. doi:10.1371/journal.pcbi.1004579.