Dynamic Cloud-Edge-End Collaboration Reconfiguration for Federated Learning under Resource and Privacy Constraints

Tingting Yang[a,b,c], Wenbo Zhang[a,b,c], Shaohua Liu[a,b,c], Lihua Zhang[a,b,c], Xinyuan Lin[a,b,c], Qian Liu[a,b,c]

[a] *School of Mathematical Sciences, Beijing University of Posts and Telecommunications, Beijing, China*
[b] *State Key Laboratory of Information Photonics and Optical Communications (Beijing University of Posts and Telecommunications), Beijing, China*
[c] *Key Laboratory of Mathematics and Information Networks (Beijing University of Posts and Telecommunications), Ministry of Education, Beijing, China*

Abstract

Hierarchical federated learning enables cloud-edge-end collaborative training, but fixed execution and aggregation schemes are insufficient to adapt to heterogeneous and dynamic conditions. To address this challenge, a dynamic collaboration reconfiguration framework is proposed. The framework selects collaboration modes according to the current system state and considers execution paths and aggregation strategies. Moreover, a pre-decision online certificate bound on the joint learning error is composed from client- and mode-specific certificates, accounting for incomplete global fusion and update perturbation. The certified upper bound and system latency are jointly considered as optimization objectives; if a valid pre-decision certificate is unavailable, the formal decision fails closed. Feasible collaboration profiles are filtered by Pareto dominance and selected using the Chebyshev ideal point criterion. An evaluation protocol on CIFAR-10 with ResNet-18 and Fashion-MNIST with LeNet-5 is specified under heterogeneous resource and data conditions; formal runs require valid pre-decision certificates.

Keywords: Internet of Things, hierarchical federated learning, cloud-edge-end collaboration, dynamic collaboration reconfiguration, differential privacy, device heterogeneity, dynamic privacy calibration

1. Introduction

Federated learning (FL) enables multiple end devices to collaboratively train a shared model without transferring raw data to a central server [1, 2]. In AIoT systems, however, participating devices differ substantially in computational capability, memory capacity, communication quality, and local data distribution. Cloud-edge-end hierarchical federated learning (HFL) introduces edge servers between end devices and the cloud, providing intermediate aggregation and computation capabilities while reducing direct communication with the cloud [3, 4, 5].

Data and system heterogeneity can limit the effectiveness of fixed cloud-edge-end collaboration schemes across clients and training rounds. First, non-IID data can cause local updates to drift in different directions and can degrade simple weighted aggregation [6, 7, 8, 9, 10]. Second, system capabilities are heterogeneous. A weak end device may be unable to handle the same workload or meet the same deadline as a stronger device, whereas an edge or cloud server can undertake more computation [11, 12]. A mode that suits one client in one round may be inefficient or infeasible for the same client in another round, or for another client.

Existing work on HFL and cloud-edge-end collaboration has covered personalization, resource allocation, wireless scheduling, heterogeneous models, and split training [13, 14, 15, 16, 17, 18, 19, 20]. These studies address different aspects of collaborative training. However, dynamically selecting execution and aggregation configurations according to individual client capabilities and changing system conditions remains an important problem.

Different collaboration modes may expose different intermediate information, which affects the choice of protection mechanisms. In this work, differential privacy (DP) [21, 22, 23] is considered for visible updates, while homomorphic encryption (HE) [24, 25] is considered for encrypted aggregation.

Changing a collaboration mode affects computation placement, communication paths, aggregation, and the resulting global update. These changes influence system latency and learning behavior. To evaluate their effects, system latency and a pre-decision upper bound on the joint learning error are considered. The bound accounts for reference-update deviation, aggregation deviation, and privacy perturbation, and is evaluated from certificates available before training. Resource and protection requirements are treated as feasibility constraints.

This paper studies reconfiguration of cloud-edge-end federated learning at each selection round under heterogeneous resources and changing system conditions. For each client, the system evaluates feasible collaboration and protection profiles under current conditions rather than using one fixed workflow for all clients. The main contributions are as follows.

- A dynamic collaboration configuration space for cloud-edge-end federated learning is formulated, which enables execution and aggregation configurations to be selected according to current system conditions.
- A pre-decision online certificate bound on the joint learning error is formulated for each collaboration profile. The bound composes certified ideal-reference and mode radii

with aggregate-noise second moments, requires no offline paired clean/private calibration, and is fail-closed when the required evidence is missing. Together with system latency, it forms an optimization problem with two objectives under resource and protection constraints. Feasible configurations are compared using Pareto dominance, and the final configuration is selected using the Chebyshev ideal point criterion.

The remainder of this paper is organized as follows. Section 2 reviews related studies on hierarchical federated learning and cloud-edge-end collaboration. Section 3 introduces the system model and formulates the latency and learning error objectives under resource and privacy constraints. Section 4 presents the proposed dynamic collaboration selection algorithm. Section 5 evaluates its performance through experiments. Finally, Section 6 concludes the paper.

2. Related Work

2.1. HFL Under Heterogeneous Environments

Existing HFL studies use edge servers for intermediate aggregation between end devices and the cloud [3]. Research on resource management in FL has investigated model pruning under bandwidth and device constraints [26], adaptive local update frequency and model compression [27, 11], and wireless resource allocation [15]. Personalized FL and HFL studies have addressed data heterogeneity through client clustering, shared representations, and personalized model components [28, 29, 13]. These studies address different aspects of heterogeneous federated training, including resource management, communication efficiency, and model personalization.

Beyond these aspects, heterogeneous device capabilities and changing system conditions can also affect how computation and aggregation are organized across the cloud, edge, and end layers. In this work, a collaboration configuration specifies where model computation is performed, how updates are transmitted, and where aggregation takes place. Different clients may use different configurations, and their configurations may be reconsidered as system conditions change. Since frequent reevaluation incurs computational overhead, we use a configurable selection period to determine when configurations are reevaluated. Related studies have also considered the cost of frequent changes in FL scheduling decisions and reduced such overhead by maintaining selected client sets over multiple rounds [30, 31].

2.2. Cloud-Edge-End Collaborative Federated Learning

Cloud-edge-end collaborative FL distributes computation, communication, and aggregation tasks across end devices, edge servers, and the cloud. Different studies have explored how these tasks can be organized. FedAgg [16] employs bridge samples and online distillation to support collaboration among models of different sizes across the three layers. SFETEC [18] investigates split federated learning in Thing Edge Cloud environments, allowing model computation to be distributed across layers. Related task offloading research has also considered federated learning, privacy protection, and task efficiency in cloud-edge-end systems [32]. While these studies investigate different collaborative mechanisms, this work focuses on selecting feasible execution and aggregation configurations for individual clients under changing system conditions.

Task migration in mobile edge computing provides a related perspective on adapting execution placement to changing system conditions. Zhang and Zheng [33] investigate task migration decisions under user mobility, while Zhu et al. [34] study load aware task migration for balancing workloads across edge nodes. Although task migration differs from federated learning collaboration reconfiguration, these studies illustrate the importance of adapting execution placement to system conditions.

2.3. Privacy Preserving HFL

Model parameters, gradients, and intermediate representations in federated training may leak information about private data [35]. Differential privacy (DP) and homomorphic encryption (HE) are widely used privacy protection techniques in FL [21, 24]. For HFL, group local DP provides personalized privacy through sampling, randomized response, and shuffling [36]. Adaptive DP FL studies have explored dynamic privacy budget allocation, adaptive clipping, and client selection for adjusting privacy protection during training [37]. Other HFL studies combine DP based protection and CKKS based HE for privacy preserved data sharing scenarios [38]. Related fog FL studies combine hierarchical aggregation, personalization, and DP for IoT intrusion detection [39]. These studies mainly focus on the security guarantee, budget allocation, or accuracy degradation of a particular privacy mechanism. These studies mainly focus on the design, analysis, or adaptation of individual privacy mechanisms. In this work, privacy requirements are considered jointly with execution and aggregation configuration selection in cloud-edge-end federated learning.

This paper jointly considers execution, aggregation, and protection configuration in federated learning. Existing categories optimize selected resources, training steps, or privacy parameters within a prescribed collaboration structure. The proposed collaboration space enables different execution locations, aggregation paths, transmitted objects, and privacy mechanisms to be compared within one feasible decision model.

3. Model Construction

3.1. Collaborative Mode and Transmission Modeling

We consider a three-tier federated learning system consisting of N clients, a set of edge servers, and a central cloud server. Each client i is associated with an edge server $e(i)$. At round t, the system assigns a collaboration mode $h_i^t \in \mathcal{H}$ to each participating client, allowing training and aggregation to be organized across different tiers.

Collaboration interfaces. As shown in Fig. 1, based on the information of where communication occurs across tiers in

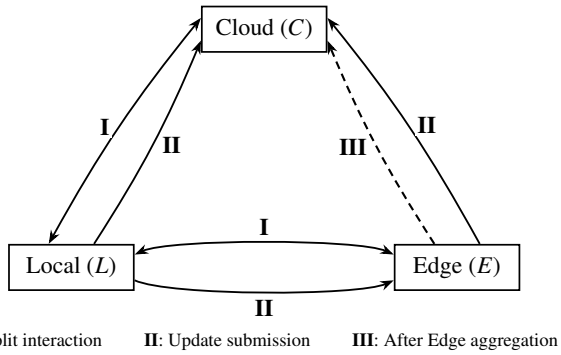


Figure 1: Collaboration interfaces and their physical positions in the cloud-edge-end architecture.

training process, three collaboration interfaces are defined. Interface I supports split training, where the Local tier exchanges intermediate information with the Edge or Cloud tier during training. Interface II submits a model update to the Edge or Cloud for aggregation after local training. Interface III submits an aggregated Edge update to the Cloud after Edge aggregation. Let L, E and C denote the Local, Edge and Cloud, respectively. Let I, II and III indicate three interfaces. Seven client-level collaboration models are considered in this study and they are collected in the set $\mathcal{H}$:

$$\mathcal{H} = \{\text{LIE}, \text{LIIE}, \text{LIC}, \text{LIIC}, \text{LIEIIC}, \text{LIEIIIC}, \text{LIIEIIIC}\}. \quad (1)$$

For instance, LIE (L-I-E) enables split training between the Local and Edge tiers, whereas LIEIIC (L-I-E-II-C) additionally forwards the resulting update from the Edge to the Cloud through Interface II. In LIEIIIC (L-I-E-III-C), split training and Edge aggregation are repeated before the aggregated Edge update is transmitted to the Cloud through Interface III.

Under split training modes, the model is partitioned across the participating tiers, with $M_L^{h_i^t}$, $M_E^{h_i^t}$, and $M_C^{h_i^t}$ denoting the sets of model parameters assigned to the Local, Edge, and Cloud tiers, respectively. Here, $|M_k^{h_i^t}|$ represents the number of model parameters deployed at tier $k \in \{L, E, C\}$. The relative parameter counts characterize the model placement distribution, whose variation across consecutive rounds is used to approximate the redistribution overhead caused by collaboration mode switching.

In contrast, local training modes perform model training on the client before transmitting the resulting update for aggregation. Split execution is admitted only when the participating remote training tier is trusted and satisfies the required resource constraints. Under this trust assumption, intermediate activations and backward gradients exchanged with that tier do not require additional DP perturbation. In all seven modes, raw training data remain on the client.

3.1.1. Collaborative Link Blocks and Mode Flows

We characterize each collaboration mode using two basic training blocks. Let L_B be the number of training steps in each block. The split training block $S_{Lr}(L_B)$, where $r \in \{E, C\}$, represents L_B training steps performed jointly by the Local tier and the Edge or Cloud tier through split learning. The local training block $T_L(L_B)$ represents L_B training steps performed entirely at the Local tier, followed by the generation of a model update for aggregation.

The collaboration flow of each mode specifies the sequence of training, update transmission, and aggregation. Let A_E and A_C denote Edge and Cloud aggregation, respectively. For hierarchical modes, E_B denotes the number of Edge-level training and aggregation stages performed before the aggregated update is forwarded to the Cloud.

With these definitions, seven mode flows can be represented by the following procedures, where "$\rightarrow$" is used to denote direction of data transmition, "upd" means the data updating process is involved in data transmition:

$$\begin{aligned}
\text{LIE}: &\ S_{LE}(L_B) \rightarrow A_E, \\
\text{LIIE}: &\ T_L(L_B) \xrightarrow{\text{upd}} A_E, \\
\text{LIC}: &\ S_{LC}(L_B) \rightarrow A_C, \\
\text{LIIC}: &\ T_L(L_B) \xrightarrow{\text{upd}} A_C, \\
\text{LIEIIC}: &\ S_{LE}(L_B) \xrightarrow{\text{upd}} A_C, \\
\text{LIEIIIC}: &\ \left[S_{LE}(L_B) \rightarrow A_E\right]^{E_B} \xrightarrow{\text{upd}} A_C, \\
\text{LIIEIIIC}: &\ \left[T_L(L_B) \xrightarrow{\text{upd}} A_E\right]^{E_B} \xrightarrow{\text{upd}} A_C.
\end{aligned} \quad (2)$$

Figure 2 illustrates the training and aggregation processes of the seven collaboration modes. Filled circles, hollow circles, and hollow diamonds represent the Local, Edge, and Cloud tiers, respectively. Solid arrows and hatched regions indicate training interactions under split training modes, while dashed arrows represent the transmission of model updates and the return of model parameters. Circular arrows represent aggregation operations. The notation L_B denotes the number of training steps in each training block, while E_B denotes the number of repeated training and aggregation stages at the Edge in LIEIIIC and LIIEIIIC. These processes are used to define the transmission set $\mathcal{X}_i^t(h)$ introduced below.

3.2. Lifetime Privacy Accounting

Sample-level differential privacy [40] is enforced through Gaussian mechanisms [41] during private training and on protected cross-tier releases, as required by the selected collaboration mode. For each client, Rényi differential privacy (RDP) [42] is used to accumulate privacy loss across training rounds. Let $\mathcal{A}$ denote the set of Rényi orders [43]. For a Gaussian mechanism with noise multiplier σ, the RDP cost at order $\alpha \in \mathcal{A}$ is $\rho(\alpha, \sigma) = \alpha/(2\sigma^2)$.

Let m_i^t denote the number of Gaussian mechanisms applied to client i in round t, with corresponding noise multipliers $\sigma_{i,k}^t$. The accumulated RDP cost can be calculated as

$$\Phi_i^{t+1}(\alpha) = \Phi_i^t(\alpha) + \sum_{k=1}^{m_i^t} \rho(\alpha, \sigma_{i,k}^t). \quad (3)$$

For a given privacy parameter δ, the corresponding privacy loss is

$$\epsilon_i^t = \min_{\alpha \in \mathcal{A}} \left[\Phi_i^t(\alpha) + \frac{\log(1/\delta)}{\alpha - 1} \right]. \quad (4)$$

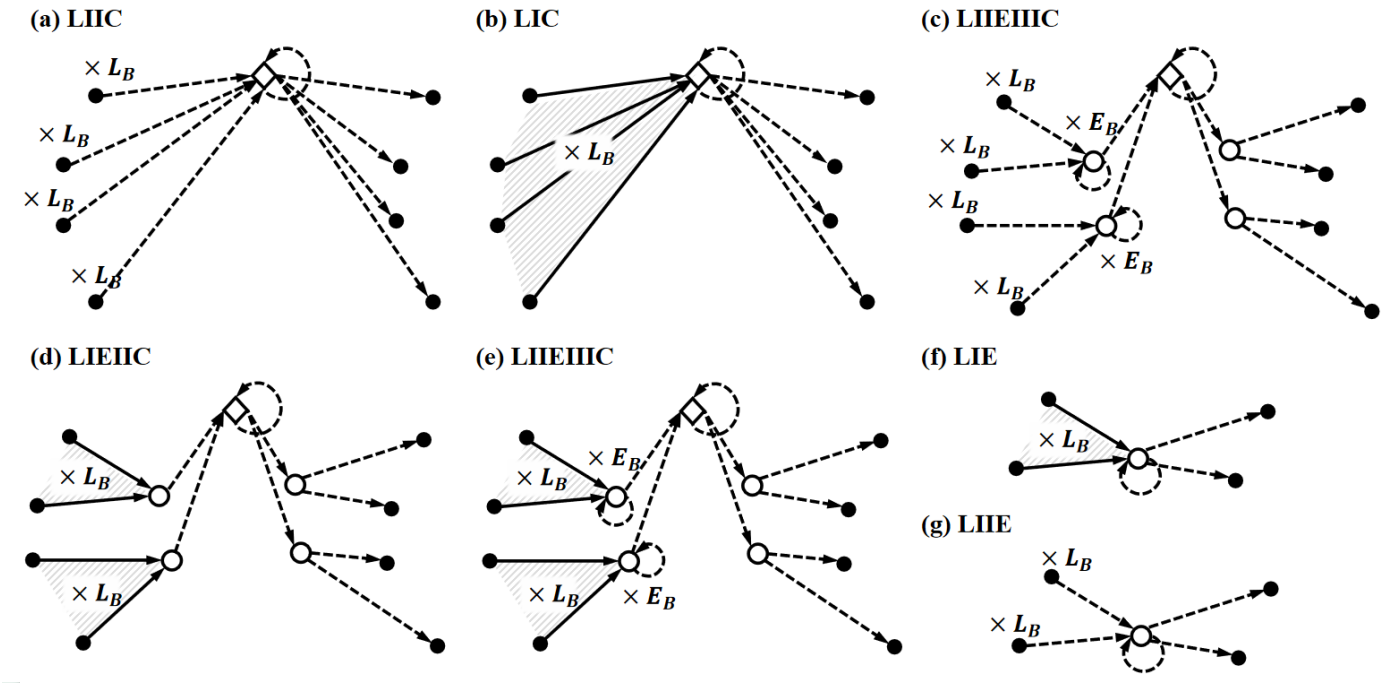


Figure 2: Execution structures of the seven collaboration modes in the cloud-edge-end architecture.

Let $\bar{\epsilon}$ denote the lifetime privacy budget of each client. The accumulated privacy loss must satisfy $\epsilon_i^t \le \bar{\epsilon}$ throughout training process.

For client i and candidate mode h, let $N_i^t(h)$ denote the approximate number of Gaussian mechanisms over the remaining training rounds, based on the selected mode flow and the planned Gaussian operations in its minibatch training schedule. Let R denote the total number of training rounds. For example, in LIIEIIIC mode, with one DP-SGD mechanism per training step.

For $N_i^t(h) > 0$, the noise multiplier $\sigma_i^t(h)$ is calibrated to satisfy

$$\min_{\alpha \in \mathcal{A}} \left[\Phi_i^t(\alpha) + \frac{N_i^t(h)\alpha}{2[\sigma_i^t(h)]^2} + \frac{\log(1/\delta)}{\alpha - 1} \right] \le \bar{\epsilon}. \tag{5}$$

The smallest feasible multiplier is selected. If calibration is infeasible, the candidate mode is excluded. No calibration is required when $N_i^t(h) = 0$.

For Edge group g, the noise multiplier is defined as

$$\sigma_g^t = \max_{i \in \mathcal{G}_g} \sigma_i^t(h_i^t) \tag{6}$$

Before execution, the planned privacy cost is checked against the remaining budget. The privacy ledger is updated using the executed Gaussian mechanisms, and the resulting RDP state is used for mode selection in the next round.

3.3. Joint Cost and Utility Modeling

Each collaboration mode is evaluated in terms of resource feasibility, round latency, and learning error, subject to the lifetime privacy budget in Sec. 3.2.

3.3.1. End Side Resource Feasibility

Let $W_{i,L}^{\text{comp}}(h_i)$ and $M_{i,L}^{\text{mem}}(h_i)$ denote the computation and memory requirements of device i under mode h_i, and let $Q_{\text{comp},i}$ and $Q_{\text{mem},i}$ denote its available capacities. The resource feasible mode set is

$$\mathcal{H}_i^{\text{res}} = \left\{ h_i \in \mathcal{H} \mid W_{i,L}^{\text{comp}}(h_i) \le Q_{\text{comp},i},\ M_{i,L}^{\text{mem}}(h_i) \le Q_{\text{mem},i} \right\}. \tag{7}$$

If any full local update mode is feasible under the resource constraints, the candidate set is restricted to such modes. Otherwise, split modes are considered only when the participating remote training tier is trusted and has sufficient resources. All candidate modes must also satisfy the lifetime privacy constraint.

3.3.2. Path and Round Latency on a Common Timeline

As in Fig 3, the execution, transmission, and aggregation events of the selected collaboration modes on a common timeline are used to determine their arrival times and the resulting round latency.

Transmission latency. For a payload b transmitted from tier u to tier v, let $S_{u,v,b}^t(h_i)$ denote the original payload size under collaboration mode h_i. Let $B_{i,u,v}^t$ denote the transmission rate of the link between tiers u and v for client i in round t, and let $D_{u,v}^0$ denote the fixed transmission delay of this link.

$$T_{u,v,b}^{\text{link},t}(h_i) = \frac{\kappa\left(\pi_i^{t,h_i}(u,v,b)\right) S_{u,v,b}^t(h_i)}{B_{i,u,v}^t} + D_{u,v}^0 + T_{u,v,b}^{\text{priv},t}\left(\pi_i^{t,h_i}(u,v,b)\right). \tag{8}$$

Here, $\kappa(\cdot)$ denotes the payload expansion factor, and $T_{u,v,b}^{\text{priv},t}(\cdot)$ denotes the protection processing time. For unprotected transmissions, $\kappa(\text{none}) = 1$ and $T_{u,v,b}^{\text{priv},t}(\text{none}) = 0$.

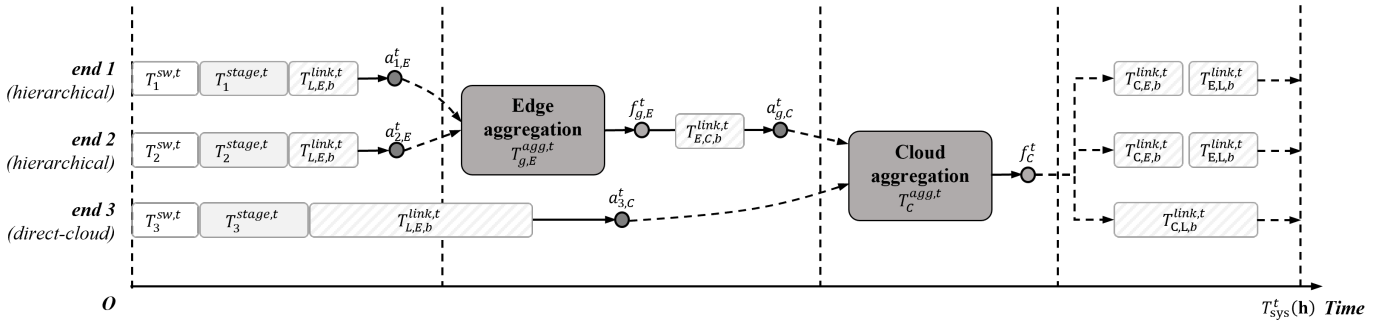


Figure 3: Illustrative common timeline for hierarchical and direct-cloud collaboration paths. The Cloud round latency includes Cloud aggregation and its required return transmissions.

Execution latency. Let $\tau^t_{i,L}(h_i)$ and $\tau^t_{i,E}(h_i)$ denote the estimated execution times per training step at the Local and Edge tiers, respectively. For Local–Edge split modes, the latency model assumes pipelined execution across L_B training steps, giving

$$T_i^{\text{stage},t}(h_i) = L_B \max\left\{\tau^t_{i,L}(h_i), \tau^t_{i,E}(h_i)\right\} + \min\left\{\tau^t_{i,L}(h_i), \tau^t_{i,E}(h_i)\right\}. \tag{9}$$

For full local training, $T_i^{\text{stage},t}(h_i) = L_B \tau^t_{i,L}(h_i)$. For modes with repeated training stages, the corresponding stage duration is multiplied by E_B.

Reconfiguration latency. Changing the collaboration mode may require redistributing model components across the Local, Edge, and Cloud tiers. We model the resulting reconfiguration delay as

$$T_i^{\text{sw},t} = \eta_h \mathbb{I}(h_i^t \neq h_i^{t-1}) + \eta_p \frac{\|\mathbf{p}(h_i^t) - \mathbf{p}(h_i^{t-1})\|_1}{2}, \tag{10}$$

where η_h and η_p are the coefficients for the mode change cost and the placement change cost, respectively [30, 44], and $\mathbb{I}(\cdot)$ denotes the indicator function. The normalized model placement is

$$\mathbf{p}(h) = \frac{\left[|M_L^h|, |M_E^h|, |M_C^h|\right]}{|M_L^h| + |M_E^h| + |M_C^h|}. \tag{11}$$

Path arrival and aggregation. For each candidate mode h_i, the mode flow determines the sequence of execution stages and payload transmissions leading to the relevant aggregation point. We calculate update arrival times by following this sequence and accounting for execution, transmission, and reconfiguration delays in their order of occurrence. Let $a^t_{i,E}$ and $a^t_{i,C}$ denote the arrival times of client i's update at the Edge and Cloud, respectively, when the corresponding aggregation point is involved in the selected mode.

Given a selected mode profile $\mathbf{h}^t = (h_1^t, \ldots, h_N^t)$, for an Edge aggregation group g, let $\mathcal{G}_g$ denote its participating clients. Edge aggregation begins after all required client updates have arrived. Its completion time is

$$f^t_{g,E} = \max_{i \in \mathcal{G}_g} a^t_{i,E} + T^{\text{agg},t}_{g,E}, \tag{12}$$

where $T^{\text{agg},t}_{g,E}$ is the Edge aggregation duration. Updates arriving earlier remain buffered until aggregation starts.

For modes that forward an Edge aggregation result to the Cloud, transmission begins after the Edge aggregation completes at time $f^t_{g,E}$. Let $a^t_{g,C}$ denote the arrival time of this result at the Cloud, including the Edge to Cloud transmission latency. Modes that transmit updates directly to the Cloud instead produce client arrival times $a^t_{i,C}$. Cloud aggregation waits for all required updates from the applicable paths. Its completion time is

$$f^t_C = \max\left\{\max_i a^t_{i,C}, \max_g a^t_{g,C}\right\} + T^{\text{agg},t}_C, \tag{13}$$

where the two maxima are taken over the direct Cloud clients and the Edge groups participating in the current Cloud aggregation, respectively.

As illustrated in Fig. 3, the system round latency is measured with respect to the Cloud aggregation round. Edge-only paths do not introduce Cloud synchronization dependencies. When required, return transmissions begin after Cloud aggregation completes. The system round latency is therefore

$$T_{\text{sys}}(\mathbf{h}^t) = f^t_C + \max\left\{\max_{i \in \mathcal{H}^t}\left(T^{\text{link},t}_{C,E,b_i}(h_i^t) + T^{\text{link},t}_{E,L,b_i}(h_i^t)\right), \max_{i \in \mathcal{D}^t} T^{\text{link},t}_{C,L,b_i}(h_i^t)\right\}. \tag{14}$$

Here, $\mathcal{H}^t$ and $\mathcal{D}^t$ denote the hierarchical and direct-cloud client sets participating in Cloud aggregation, respectively. Return delays are evaluated using (8), with absent return paths excluded from the maximum.

3.3.3. Joint Learning Error Modeling

The learning objective measures the deviation of the actual Cloud update from an ideal gradient step update, accounting for errors arising from training, aggregation, and privacy mechanisms.

The mean and covariance of training perturbation. For client i under mode h_i^t, let $u^t_{i,0}$ and $u^t_{i,s}$ denote the updates obtained without and with privacy protection, respectively, under the same training configuration. The difference between these updates is

$$D_i^t = u^t_{i,s} - u^t_{i,0}. \tag{15}$$

By using D_i, the perturbation mean and covariance are calculated by

$$b_i^t = \mathbb{E}_t[D_i^t] \tag{16}$$

and

$$V_{ij}^t = \mathrm{Cov}_t(D_i^t, D_j^t). \tag{17}$$

The mean and covariance of aggregation perturbation. Let n_i denote the number of training samples at client i. The reference aggregation weight is defined by

$$p_i = \frac{n_i}{\sum_{j=1}^N n_j}. \tag{18}$$

For a mode profile $\mathbf{h}^t = \left(h_1^t, \ldots, h_N^t\right)$, let C^t denote the clients contributing to the Cloud update. In case that C^t is nonempty, their effective aggregation weights can be defined by

$$a_i^t = \begin{cases} \dfrac{n_i}{\sum_{j\in C^t} n_j}, & i \in C^t, \\ 0, & \text{otherwise.} \end{cases}$$

In case that C^t is empty, $a_i^t = 0$.

Let $\Delta_{F,0}^t = \sum_i p_i u_{i,0}^t$ and $\Delta_{P,0}^t = \sum_i a_i^t u_{i,0}^t$ respectively be full-participation reference and profile-specific update without privacy protection. The aggregation error can be defined by

$$e_{\mathrm{agg}}^t = \sum_i (a_i^t - p_i) u_{i,0}^t. \tag{19}$$

Let $\Delta_*^t = -\eta_t \nabla F(w^t)$ be the ideal gradient step. The clean algorithmic error is $e_{\mathrm{alg}}^t = \Delta_{F,0}^t - \Delta_*^t$. The actual Cloud update satisfies

$$\Delta_s^t = \sum_i a_i^t u_{i,s}^t = \Delta_*^t + e_{\mathrm{alg}}^t + e_{\mathrm{agg}}^t + \sum_i a_i^t D_i^t. \tag{20}$$

The aggregated perturbation mean and covariance are

$$b_s^t = \sum_i a_i^t b_i^t \tag{21}$$

and

$$V_s^t = \sum_{i,j} a_i^t a_j^t V_{ij}^t. \tag{22}$$

Therefore, the total update error as $e_{\mathrm{upd}}^t = \Delta_s^t - \Delta_*^t$.

The mean and covariance of total update.

The conditional expected squared error is

$$J_{\mathrm{learn}}^t(\mathbf{h}^t) = \mathbb{E}_t \|e_{\mathrm{upd}}^t\|_2^2 = \left\| e_{\mathrm{alg}}^t + e_{\mathrm{agg}}^t + b_s^t \right\|_2^2 + \mathrm{Tr}(V_s^t). \tag{23}$$

For mode selection, the exact quantity in (23) is not estimated from offline paired clean/private runs. Instead, a pre-decision conditional upper bound $\overline{J}^t(\mathbf{h}^t) \geq J_{\mathrm{learn}}^t(\mathbf{h}^t)$ is evaluated from certificates that are available before any client trains in round t. Let γ be the Cloud step scale and let $\hat{v}_i^t$ be a certified pre-decision reference for the ideal client contribution $v_i^t = -\eta_* \nabla F_i(w^t)$. Each certificate supplies a reference radius r_i^{ref} with $\|v_i^t - \hat{v}_i^t\|_2 \leq r_i^{\mathrm{ref}}$, a mode radius $r_i^{\mathrm{mode}}(h_i)$ with $\|u_{i,0}^t(h_i) - v_i^t\|_2 \leq r_i^{\mathrm{mode}}(h_i)$, and an aggregate-share standard deviation σ_i^t.

Define

$$C^t(\mathbf{h}^t) = \left\| \sum_i (\gamma a_i^t - p_i) \hat{v}_i^t \right\|_2, \tag{24}$$

$$R_{\mathrm{ref}}^t(\mathbf{h}^t) = \sum_i |\gamma a_i^t - p_i| r_i^{\mathrm{ref}}, \tag{25}$$

$$R_{\mathrm{mode}}^t(\mathbf{h}^t) = \gamma \sum_{i\in C^t} a_i^t r_i^{\mathrm{mode}}(h_i), \tag{26}$$

$$R^t(\mathbf{h}^t) = R_{\mathrm{ref}}^t(\mathbf{h}^t) + R_{\mathrm{mode}}^t(\mathbf{h}^t), \tag{27}$$

$$Q^t(\mathbf{h}^t) = d \sum_{i\in C^t} (\gamma a_i^t \sigma_i^t)^2, \tag{28}$$

where d is the parameter dimension and the aggregate shares are conditionally zero-mean and conditionally uncorrelated before secure aggregation. If a numerical RMS error r_{num} is also certified, then

$$\boxed{J_{\mathrm{learn}}^t(\mathbf{h}^t) \leq \overline{J}^t(\mathbf{h}^t) := \left(\sqrt{(C^t + R^t)^2 + Q^t} + r_{\mathrm{num}} \right)^2.} \tag{29}$$

The bound is conditional on the certificates and on the assumptions declared with them. In particular, the global objective must be population-sample-weighted, the per-client linear decomposition of the Cloud update must match the executed path, the reference and mode radii must be independently proved, the privacy shares must be drawn before secure aggregation with fixed weights, and the aggregate second moment must be certified. A per-round manifest entry must exist before the decision round, carry a nonempty evidence record, and match the exact candidate identity, including its mode, link mechanisms, and DP execution plan. If any required entry, assumption, or bound is missing or inconsistent, the formal path stops before client training; there is no fallback to offline calibration, a legacy fusion surrogate, or a central oracle. A lower bound is reported only when the aggregate noise variance and its orthogonality to the clean update are separately proved; otherwise it is set to zero. Candidate selection uses $\overline{J}^t$, the certified upper bound, and not the exact unknown J_{learn}^t. Therefore, ranking by $\overline{J}^t$ is a decision rule; it is not a certificate that the selected profile has strictly smaller true joint error than every other profile.

3.4. Global Multiobjective Collaborative Optimization

For each client, the decision variable is the collaboration mode $h_i^t \in \mathcal{F}_i^t$, where $\mathcal{F}_i^t \subseteq \mathcal{H}_i^{\mathrm{res}} \subseteq \mathcal{H}$ contains the modes satisfying the resource constraints in (7), the activation rule in Sec. 3.3.1, the exposure protection requirements, and the lifetime privacy constraint. The protection mechanisms and DP noise multipliers are determined by the candidate mode and current privacy ledger.

A complete mode profile is $\mathbf{h}^t = (h_1^t, \ldots, h_N^t)$. The shared Edge and Cloud aggregation and admission rules define the system feasible set $\mathcal{F}_{\mathrm{sys}}^t \subseteq \prod_{i=1}^N \mathcal{F}_i^t$. An execution that is not admitted is reported as SKIP.

For each feasible profile, the flow model evaluates the round duration $T_{\mathrm{sys}}(\mathbf{h}^t)$, while the pre-decision online certificate yields

Table 1: Notation Used in Algorithm 1

Symbol	Description
R	Total number of training rounds.
N	Number of clients.
S_P	Strategy update period.
$\Phi_i^t(\alpha)$	Accumulated RDP cost of client i at order α.
$Q_{\text{comp},i}$	Available computing capacity of client i.
$Q_{\text{mem},i}$	Available memory capacity of client i.
$\mathcal{H}_i^{\text{res}}$	Modes satisfying the resource constraints of client i.
$\mathcal{F}_i^t$	Feasible collaboration modes of client i.
$\mathcal{F}_{\text{sys}}^t$	Feasible system profiles.
$\mathbf{h}^{t-1,\star}$	Selected profile from the previous round.
$\mathbf{h}^{t,\star}$	Selected profile for the current round.
$\widehat{\mathcal{H}}_{\text{P}}^t$	Pareto archive in round t.
D_∞	Normalized Tchebycheff score.

the upper bound $\overline{J}^t(\mathbf{h}^t)$. The multiobjective optimization problem is

$$\underset{\mathbf{h}^t \in \mathcal{F}_{\text{sys}}^t}{\text{minimize}} \quad \begin{bmatrix} T_{\text{sys}}(\mathbf{h}^t) \\ \overline{J}^t(\mathbf{h}^t) \end{bmatrix}. \tag{30}$$

A bounded Pareto search maintains a nondominated archive $\widehat{\mathcal{H}}_{\text{P}}^t$. Let $T_{\min}^t, T_{\max}^t$ and $\overline{J}_{\min}^t, \overline{J}_{\max}^t$ denote the minimum and maximum objective values within this archive. The normalized objectives are

$$\bar{T}(\mathbf{h}^t) = \frac{T_{\text{sys}}(\mathbf{h}^t) - T_{\min}^t}{T_{\max}^t - T_{\min}^t + \gamma_n}, \qquad \bar{J}(\mathbf{h}^t) = \frac{\overline{J}^t(\mathbf{h}^t) - \overline{J}_{\min}^t}{\overline{J}_{\max}^t - \overline{J}_{\min}^t + \gamma_n}, \tag{31}$$

where $\gamma_n > 0$ is a small normalization constant.

The Tchebycheff criterion selects the profile minimizing the largest normalized deviation:

$$\begin{aligned} D_\infty(\mathbf{h}^t) &= \max\{\bar{T}(\mathbf{h}^t), \bar{J}(\mathbf{h}^t)\}, \\ \mathbf{h}^{t\star} &\in \arg\min_{\mathbf{h}^t \in \widehat{\mathcal{H}}_{\text{P}}^t} D_\infty(\mathbf{h}^t). \end{aligned} \tag{32}$$

Equal distances are resolved using system latency, learning error, and a stable profile identity, in that order. Real test accuracy is used only for experimental evaluation.

4. Algorithm

Algorithm 1 presents the dynamic collaborative mode selection procedure using the feasibility, privacy, and multiobjective models developed in the preceding sections.

Algorithm 1 Dynamic Collaborative Mode Selection

Require: R, N, S_P, $\{Q_{\text{comp},i}, Q_{\text{mem},i}\}_{i=1}^N$, $\{\Phi_i^1(\alpha)\}_{i=1}^N$, and a pre-decision online-J certificate manifest
Ensure: $\mathbf{h}^{t,\star}$ and admission decisions for each round
for $t = 1, \ldots, R$ **do**
  Feasible Mode Construction
  Determine $\mathcal{H}_i^{\text{res}}$ using (7)
  Calibrate $\sigma_i^t(h_i)$ using (5)
  Construct $\mathcal{F}_i^t$ using the privacy and activation constraints
  Construct $\mathcal{F}_{\text{sys}}^t$ using the system constraints
  Reconfiguration Decision
  if $\mathcal{F}_{\text{sys}}^t = \emptyset$ **then**
    Assign SKIP to all clients
  else if $t > 1$, $\text{mod}(t-1, S_P) \neq 0$, and the previous configuration remains feasible **then**
    $\mathbf{h}^{t,\star} \leftarrow \mathbf{h}^{t-1,\star}$
  else
    Objective Evaluation
    Generate initial profiles from previous choices, latency, coverage, and learning cost
    Apply required coverage repair
    Evaluate $T_{\text{sys}}(\mathbf{h}^t)$ using (14)
    Verify the round-t pre-decision online-J certificate; fail closed if it is missing or inconsistent
    Evaluate $\overline{J}^t(\mathbf{h}^t)$ using (29)
    Multiobjective Selection
    Initialize $\widehat{\mathcal{H}}_{\text{P}}^t$ from evaluated profiles using (30)
    Explore new profiles by changing one client's mode and protection settings
    Evaluate new profiles using (30) and update $\widehat{\mathcal{H}}_{\text{P}}^t$ by Pareto dominance
    Select $\mathbf{h}^{t,\star}$ using (31) and (32)
  end if
  Training Execution
  Apply admission adjustments according to tier capacity
  Reserve authorized Sample DP costs before execution
  Execute admitted clients and update the global model
  Update $\{\Phi_i^{t+1}(\alpha)\}_{i=1}^N$ using (3)
  Refresh the system state
end for

5. Experiments

We specify the evaluation protocol for the accuracy–time trade-off of dynamic collaboration under heterogeneous computing resources, communication conditions, and privacy budgets. The formal online-J path requires real pre-decision certificates for every training round, and these certificates are not yet available. Accordingly, this version reports the protocol and baseline definitions but no numerical results. Results from the removed legacy objectives, offline calibration tables, and oracle diagnostics are not reported. Once real certificates are supplied, all methods will be run under the same `online_upper_bound` objective, certificate manifest, model initialization, data split, budgets, and system settings.

5.1. Experimental Setup

The CIFAR-10 experiments adopt a pretrained ResNet-18 and freeze its feature-extraction backbone; only the 5,130 parameters in the final classification head are updated. We select 24,000 training images and 2,000 test images. The edge-label-skew partition creates non-IID label distributions across edge groups, with 20% of each client's assigned data reserved for local validation. The current 100-client, 10-edge topology assigns ten clients to each edge.

Heterogeneous resources and links. Each client has an individual compute factor and memory-capacity factor, and each edge server has its own compute factor. The heterogeneity parameters in Table 2 control the dispersion of these capacities.

Table 2: Experimental configurations for model training and cloud–edge–end collaboration. A dash denotes a pending Fashion-MNIST / LeNet-5 configuration.

Parameter	**CIFAR-10 / ResNet-18**		**Fashion-MNIST / LeNet-5**
	Main / S1 / S2	**Mode ablation**	**Second dataset**
Learning and privacy configuration			
Dataset / model	CIFAR-10 / pretrained ResNet-18		Fashion-MNIST / LeNet-5
Trainable parameters	5,130 (classification head only)		–
Train / test subset size	24,000 / 2,000		–
Clients / edge servers	100 / 10		–
Data partition / local validation	Edge-label skew / 20% per client		–
Local epochs / learning rate	3 / 0.01		–
Split workload batch size	128		–
Privacy budget (ϵ, δ)	$(8, 10^{-5})$, sample-level RDP		–
HE cost model / seed	CKKS-profiled / 42		–
Client, edge, and network configuration			
Clients per edge (current topology)	10		–
Client / edge heterogeneity factors	Main/S2: 2 / 1.5; S1: 4 / 3	2 / 1.5	–
Resource / memory limits	1.35 / 1.35	100 / 100	–
Edge / cloud CPU caps	Main: 100 / 200; S1/S2: 15 / 20	10,000 / 20,000	–
Link rates (C–E / C–Cloud / E–Cloud)	5 / 2.2 / 8 MB/s		–
Base link delays (same order)	15 / 40 / 10 ms		–
Jitter strength	Main: 0.25; S1: 0.50; S2: 0.45	0.25	–
Periodic network amp. / period	Main/S1: 0.20 / 3; S2: 0.55 / 12	0.20 / 3	–
Pareto archive / beam size	16 / 4	8 / 2	–
Max search iters / neighbor top-k	50 / 16	20 / 16	–
Mode reconfiguration period	$P = 1$ (Ours)	$P = 1, 5, 10$; fixed mode	–

S1 increases both client- and edge-level heterogeneity; S2 introduces more pronounced temporal variation in network connectivity. Client–edge, client–cloud, and edge–cloud links have distinct throughput and propagation delays; network jitter and a periodic variation component change their communication conditions across training rounds.

Evaluation criteria and baselines. Our primary measure is *test accuracy as a function of cumulative logical time*, reflecting the accuracy–time trade-off under resource and privacy constraints. We additionally report final accuracy, late-stage mean accuracy, total logical time, participation rate, and selection cost.

The baselines include Fixed FedAvg, Fixed SplitFed, Fixed HFL, Random, Individual Optimal, and NSGA-II. Individual Optimal selects client modes independently, while NSGA-II uses a multiobjective population search. Within each scenario, all methods use matched model initialization, data splits, budgets, and system settings. The mode ablation changes only the reconfiguration policy.

5.2. Search Space Reduction and Selection Cost

Objective. This experiment measures the reduction in candidate collaboration profiles and the computation required to select one profile under the coupled client, edge, and cloud constraints.

Procedure. For a scenario, we compare the combinatorial profile count with the feasible-mode search space and the number of complete profiles evaluated by bounded Pareto search. With seven supported collaboration modes and N clients, the unconstrained mode space contains 7^N profiles. Client-level filtering removes modes that violate resource, memory, activation, or privacy constraints. The Cartesian product of the remaining per-client modes is further restricted by shared edge/cloud admission, coverage, and secure-aggregation rules. The bounded search then evaluates a limited set of complete profiles and updates a nondominated archive.

Results. Results are pending valid pre-decision certificates. No profile evaluation count or selection-time measurement from the removed objective is reported.

5.3. Ablation Study

5.3.1. Mode Selection and Reconfiguration Period

We evaluate the effect of periodically reassigning collaboration modes under the same dynamic privacy policy. Dynamic Mode updates mode assignments every P training rounds; Fixed Mode keeps its initial assignments at every P. The paired configurations use the settings in Table 2 with the same number of active updates, optimizer steps, and certificate requirements. Periods $P = 1, 5, 10$ are compared with fixed assignment. The reported metrics are final accuracy, last-ten-active-round mean accuracy, cumulative logical time, and active rounds.

Results are pending valid pre-decision certificates. No accuracy or logical-time comparison from the removed objective is reported.

5.4. Comparison with Baselines

We compare Ours with Individual Optimal, Random, Fixed FedAvg, Fixed SplitFed, Fixed HFL, and NSGA-II under the

same constrained experimental profile. The fixed-mode baselines represent the corresponding modes in our implementation rather than full external reimplementations. All methods must use the same pre-decision certificate manifest and the same online upper-bound objective; a method that cannot obtain a valid certificate is reported as unavailable rather than being run with a legacy objective.

Results are pending valid pre-decision certificates. No baseline accuracy, loss, logical-time, or participation comparison from the removed objective is reported.

5.5. Discussion

The constrained baseline comparison and mode-selection ablation are designed to examine complementary aspects of system efficiency. They cannot be executed under the formal online-J objective until real pre-decision certificates are supplied for every round and candidate identity. This version therefore does not report numerical comparisons. The evaluation protocol instead fixes the common initialization, data split, baseline definitions, certificate manifest, and metric set so that results can be regenerated without mixing the removed legacy objectives. The certification boundary is also part of the evaluation: a missing or invalid certificate stops the formal run before training, and no diagnostic surrogate is relabeled as certified.

6. Conclusion

This paper presented a dynamic cloud-edge-end collaboration reconfiguration framework for federated learning under resource and privacy constraints. The unified collaboration space represents execution placement, aggregation topology, transmitted objects, and return paths as the dynamic decision, while a mode-specific exposure contract determines where DP and HE are required. The pre-decision certificate model evaluates latency, communication, candidate-specific DP distortion, encrypted aggregation overhead, and a certified upper bound on the joint learning error. Missing or invalid certificates stop the formal decision; there is no fallback to removed legacy objectives, offline calibration tables, or oracle diagnostics. The constrained multiobjective formulation is solved by bounded Pareto search and ideal point Tchebycheff selection.

The current framework uses profiled computation and link rates in its logical latency model, while the training process and CKKS aggregation are executed on one host. Future work will combine online profiling with physical cloud-edge-end deployment and will further reduce reconfiguration overhead through parallel profile evaluation, distributed search, and warm starts.

Appendix A. Analysis of Joint Learning Error

This appendix establishes the relationship between the joint learning error in Sec. 3.3.3 and the convergence of the global model.

Appendix A.1. Aggregation Error Bound

For a fixed mode profile, the aggregation error is given by (19). The clean updates and aggregation weights are treated as fixed when evaluating the conditional privacy perturbation moments.

Lemma 1. *Suppose that* $\|u_{i,0}^t\|_2 \le U_i^t$ *for every client i. Then*

$$\|e_{\text{agg}}^t\|_2 \le \sum_{i=1}^{N} |a_i^t - p_i| U_i^t. \tag{A.1}$$

If $U_i^t \le U^t$ *for all clients, then* $\|e_{\text{agg}}^t\|_2 \le U^t \|\mathbf{a}^t - \mathbf{p}\|_1$.

Proof. From (19) and the triangle inequality,

$$\begin{aligned} \|e_{\text{agg}}^t\|_2 &= \left\| \sum_i (a_i^t - p_i) u_{i,0}^t \right\|_2 \\ &\le \sum_i |a_i^t - p_i| \|u_{i,0}^t\|_2 \\ &\le \sum_i |a_i^t - p_i| U_i^t. \end{aligned} \tag{A.2}$$

Applying the common bound U^t gives the second result. □

Appendix A.2. Joint Update Error

Let $\mathbb{E}_t$ denote conditional expectation given the round information, selected mode profile, and common training schedule. Under this conditioning, the clean reference updates and aggregation weights are fixed.

Define the aggregated trajectory difference as $D_s^t = \sum_i a_i^t D_i^t$. Using (20), the total update error satisfies

$$e_{\text{upd}}^t = e_{\text{alg}}^t + e_{\text{agg}}^t + D_s^t. \tag{A.3}$$

Proposition 2. *Let* $b_s^t = \mathbb{E}_t[D_s^t]$ *and* $V_s^t = \text{Cov}_t(D_s^t)$. *Then*

$$\mathbb{E}_t \|e_{\text{upd}}^t\|_2^2 = \left\| e_{\text{alg}}^t + e_{\text{agg}}^t + b_s^t \right\|_2^2 + \text{Tr}(V_s^t). \tag{A.4}$$

Proof. Write $D_s^t = b_s^t + \zeta_s^t$, where $\mathbb{E}_t[\zeta_s^t] = 0$ and $\text{Cov}_t(\zeta_s^t) = V_s^t$. From (A.3),

$$e_{\text{upd}}^t = e_{\text{alg}}^t + e_{\text{agg}}^t + b_s^t + \zeta_s^t. \tag{A.5}$$

Expanding its squared norm and taking conditional expectation eliminates the cross term involving ζ_s^t. Furthermore, $\mathbb{E}_t \|\zeta_s^t\|_2^2 = \text{Tr}(V_s^t)$. The stated identity follows. □

The covariance satisfies $V_s^t = \sum_{i,j} a_i^t a_j^t V_{ij}^t$. When the client perturbations are conditionally independent, $V_s^t = \sum_i (a_i^t)^2 V_{ii}^t$. This exact identity is retained as the definition of the learning error. The formal selection objective does not estimate the covariance from offline data; it uses the certified upper bound derived below.

Appendix A.3. Expected Loss and Convergence

Assume that the global objective F is β-smooth, so that

$$F(y) \le F(x) + \langle \nabla F(x), y - x \rangle + \frac{\beta}{2}\|y - x\|_2^2. \tag{A.6}$$

Proposition 3. *Suppose that F is β-smooth and $0 < \eta_t \le 1/\beta$. For the model update $w^{t+1} = w^t + \Delta_s^t$, the conditional expected loss satisfies*

$$\mathbb{E}_t[F(w^{t+1})] \le F(w^t) - \frac{\eta_t}{2}\|\nabla F(w^t)\|_2^2 + \frac{J^t_{\text{learn}}(\mathbf{h}^t)}{2\eta_t}. \tag{A.7}$$

Proof. By the definition of the total update error,

$$w^{t+1} = w^t - \eta_t \nabla F(w^t) + e^t_{\text{upd}}. \tag{A.8}$$

Let $g^t = \nabla F(w^t)$. Applying (A.6) gives

$$\begin{aligned} F(w^{t+1}) \le F(w^t) &+ \langle g^t, -\eta_t g^t + e^t_{\text{upd}} \rangle \\ &+ \frac{\beta}{2}\| - \eta_t g^t + e^t_{\text{upd}}\|_2^2. \end{aligned} \tag{A.9}$$

Since $\beta \le 1/\eta_t$, the quadratic term is bounded by

$$\begin{aligned} \frac{\beta}{2}\| - \eta_t g^t + e^t_{\text{upd}}\|_2^2 \le \frac{\eta_t}{2}\|g^t\|_2^2 &\\ - \langle g^t, e^t_{\text{upd}} \rangle &\\ + \frac{1}{2\eta_t}\|e^t_{\text{upd}}\|_2^2. & \end{aligned} \tag{A.10}$$

Substitution cancels the inner products involving e^t_{upd}, yielding

$$F(w^{t+1}) \le F(w^t) - \frac{\eta_t}{2}\|g^t\|_2^2 + \frac{1}{2\eta_t}\|e^t_{\text{upd}}\|_2^2. \tag{A.11}$$

Taking conditional expectation and applying (23) completes the proof. □

The bound holds for a biased update error and does not require $\mathbb{E}_t[e^t_{\text{upd}}] = 0$.

For the convergence result, assume that F satisfies the Polyak–Lojasiewicz (PL) condition with parameter $\mu > 0$:

$$\|\nabla F(w)\|_2^2 \ge 2\mu(F(w) - F^*), \tag{A.12}$$

where $F^* = \inf_w F(w)$.

Corollary 4. *Under the assumptions of Proposition 3 and the PL condition,*

$$\begin{aligned} \mathbb{E}_t[F(w^{t+1}) - F^*] \le (1 - \mu\eta_t)(F(w^t) - F^*) &\\ + \frac{J^t_{\text{learn}}(\mathbf{h}^t)}{2\eta_t}. & \end{aligned} \tag{A.13}$$

Proof. Applying (A.12) to the gradient term in (A.7) gives the stated recursion. □

For a constant step size $\eta_t = \eta$ satisfying $0 < \mu\eta \le 1$, suppose that $J^t_{\text{learn}}(\mathbf{h}^t) \le \overline{J}$ for all rounds. Setting $q = 1 - \mu\eta$ and taking successive expectations yields

$$\begin{aligned} \mathbb{E}[F(w^T) - F^*] \le q^T (F(w^0) - F^*) &\\ + \frac{\overline{J}}{2\eta}\sum_{t=0}^{T-1} q^{T-1-t}. & \end{aligned} \tag{A.14}$$

Consequently,

$$\limsup_{T\to\infty} \mathbb{E}[F(w^T) - F^*] \le \frac{\overline{J}}{2\mu\eta^2}. \tag{A.15}$$

Thus, the joint learning error controls the residual term in the expected convergence bound. The formal selection objective is the certified pre-decision upper bound $\overline{J}^t(\mathbf{h}^t) \ge J^t_{\text{learn}}(\mathbf{h}^t)$. Substituting $\overline{J}^t$ for J^t_{learn} in (A.7) preserves the descent bound, conditional on the certificate assumptions.

Pre-decision online learning-error bound.. For a candidate profile $\mathbf{h}^t$, let $a_i^t(\mathbf{h}^t)$ be the effective Cloud weight determined by admission and aggregation topology, and let $p_i = n_i / \sum_j n_j$ be the population sample weight. Define the ideal full-gradient step and the ideal client contribution

$$\Delta_*^t = -\eta_* \nabla F(w^t), \qquad v_i^t = -\eta_* \nabla F_i(w^t), \tag{A.16}$$

so that $\Delta_*^t = \sum_i p_i v_i^t$ when the global objective is population-sample-weighted, $F = \sum_i p_i F_i$. The clean Cloud update of the profile is

$$\Delta^t_{\text{clean}}(\mathbf{h}^t) = \gamma \sum_{i \in C^t} a_i^t u_i^t(h_i), \tag{A.17}$$

where $u_i^t(h_i)$ is the noise-free mode update and γ is the Cloud step scale. The privacy-protected Cloud update is $\Delta_s^t = \Delta^t_{\text{clean}} + \xi^t$, with $\xi^t = \gamma \sum_{i \in C^t} a_i^t z_i^t$ and $\mathbb{E}_t[z_i^t] = 0$ for every aggregate share.

Exact decomposition. Let $\hat{v}_i^t$ be a pre-decision reference for v_i^t. Adding and subtracting $\sum_i (\gamma a_i^t - p_i)\hat{v}_i^t$ gives, before any norm inequality,

$$\begin{aligned} \Delta^t_{\text{clean}} - \Delta_*^t = &\sum_i (\gamma a_i^t - p_i)\hat{v}_i^t \\ &+ \sum_i (\gamma a_i^t - p_i)(v_i^t - \hat{v}_i^t) \\ &+ \gamma \sum_{i \in C^t} a_i^t (u_i^t(h_i) - v_i^t). \end{aligned} \tag{A.18}$$

The first term is the certifiable center; the last two terms are the reference and mode radii. The reference may be stored per client, or as a shared direction $\hat{v}_i^t = s_i^t d^t$; in the shared form, $s_i^t d^t$ is a deterministic center and r_i^{ref} must cover both the client heterogeneity and the reference uncertainty.

Certified radii and noise. The certificate supplies

$$\|v_i^t - \hat{v}_i^t\|_2 \le r_i^{\text{ref}}, \qquad \|u_i^t(h_i) - v_i^t\|_2 \le r_i^{\text{mode}}(h_i) \tag{A.19}$$

for every participating client, and an aggregate-share standard deviation σ_i^t with $\mathbb{E}_t\|z_i^t\|_2^2 \le d(\sigma_i^t)^2$. If the shares are conditionally zero-mean and conditionally uncorrelated,

$$\mathbb{E}_t\|\xi^t\|_2^2 \le Q^t(\mathbf{h}^t) = d\sum_{i\in C^t}(\gamma a_i^t\sigma_i^t)^2. \tag{A.20}$$

Local DP-SGD noise is already included in $r_i^{\mathrm{mode}}(h_i)$; it must not be counted again in Q^t. Define

$$C^t = \left\|\sum_i(\gamma a_i^t - p_i)\hat{v}_i^t\right\|_2, \tag{A.21}$$

$$R_{\mathrm{ref}}^t = \sum_i|\gamma a_i^t - p_i|r_i^{\mathrm{ref}}, \tag{A.22}$$

$$R_{\mathrm{mode}}^t = \gamma\sum_{i\in C^t}a_i^t r_i^{\mathrm{mode}}(h_i), \tag{A.23}$$

$$R^t = R_{\mathrm{ref}}^t + R_{\mathrm{mode}}^t. \tag{A.24}$$

Then

$$\left\|\Delta_{\mathrm{clean}}^t - \Delta_*^t\right\|_2 \le C^t + R^t. \tag{A.25}$$

Proposition 5 (Pre-decision online joint-error upper bound)**.** *Condition on the round state, candidate profile, certificates, and common training schedule. Under* (A.19) *and* (A.20)*, with the declared conditional assumptions and a certified numerical RMS error* r_{num}*,*

$$J_{\mathrm{learn}}^t(\mathbf{h}^t) \le \left(\sqrt{(C^t+R^t)^2+Q^t} + r_{\mathrm{num}}\right)^2 = \overline{J}^t(\mathbf{h}^t). \tag{A.26}$$

Proof. Let $b^t = \Delta_{\mathrm{clean}}^t - \Delta_*^t$, which is fixed conditional on the pre-decision information. Since $\mathbb{E}_t[\xi^t] = 0$, the cross term in

$$J_{\mathrm{learn}}^t = \mathbb{E}_t\|b^t+\xi^t\|_2^2 = \|b^t\|_2^2 + \mathbb{E}_t\|\xi^t\|_2^2 \tag{A.27}$$

vanishes. By (A.25), $\|b^t\|_2 \le C^t + R^t$, and by (A.20), $\mathbb{E}_t\|\xi^t\|_2^2 \le Q^t$. Hence

$$\sqrt{J_{\mathrm{learn}}^t} \le \sqrt{(C^t+R^t)^2+Q^t}. \tag{A.28}$$

Adding the certified numerical RMS error in the RMS metric and squaring yields (A.26). □

Bias–variance variant.. If each mode certificate separately proves conditional centering $\mathbb{E}_t[u_i^t - v_i^t \mid \mathcal{G}^t] = b_i^t$ with $\|b_i^t\|_2 \le \beta_i^t$, conditional second moment $\mathbb{E}_t\|u_i^t - v_i^t - b_i^t\|_2^2 \le \nu_i^t$, and cross-client orthogonality of the centered fluctuations given all ideal gradients, then replace R_{mode}^t by $R_{\mathrm{bias}}^t = \gamma\sum_{i\in C^t}a_i^t\beta_i^t$ and add $V^t = \gamma^2\sum_{i\in C^t}(a_i^t)^2\nu_i^t$ inside the square:

$$\overline{J}_{\mathrm{BV}}^t = \left(\sqrt{\left(C^t + R_{\mathrm{ref}}^t + R_{\mathrm{bias}}^t\right)^2 + V^t + Q^t} + r_{\mathrm{num}}\right)^2. \tag{A.29}$$

Conditional independence of training processes does not imply centered mode fluctuations or their cross-client orthogonality. The evaluator requires both assumptions explicitly; otherwise it uses the RMS form.

Parameter-block variant.. When certificates partition the parameter coordinates into disjoint contiguous blocks, the evaluator computes per-block centers C_j and radii R_j and uses

$$\overline{J}_{\mathrm{block}}^t = \left(\sqrt{\sum_j\left(C_j+R_j\right)^2 + Q^t} + r_{\mathrm{num}}\right)^2. \tag{A.30}$$

Distinct coordinate blocks are orthogonal as vectors; independence of the random training errors across blocks is not assumed. The evaluator uses the smaller of the scalar and block bounds. Blocks are supported only with the RMS uncertainty model.

Lower bound and certified interval order.. Because Q^t is an upper bound on noise energy by default, it cannot be used to lower-bound J. If the aggregate noise variance is separately proved exact and orthogonal to the clean update, set $Q_{\mathrm{floor}}^t = Q^t$; otherwise set $Q_{\mathrm{floor}}^t = 0$. Then

$$L^t = \left(\max\left\{0,\ \sqrt{(s^t)^2 + Q_{\mathrm{floor}}^t} - r_{\mathrm{num}}\right\}\right)^2, \qquad s^t = \max\left\{0, C^t - R^t\right\}. \tag{A.31}$$

is a lower bound under the corresponding assumptions. The selection objective remains $\overline{J}^t$. Given two profiles' intervals, a strict order is certified only when $\overline{J}_{\mathrm{left}} < L_{\mathrm{right}}$ or $\overline{J}_{\mathrm{right}} < L_{\mathrm{left}}$; otherwise the order is undetermined. The implementation exposes this comparison as a diagnostic and does not use it to rank candidate profiles.

Manifest and fail-closed requirements.. The evaluator accepts manifests declaring schema `dynfl.online_j.v1` or `dynfl.online_j.v2`, with target `ideal_full_gradient_one_step`. Round t is read from the entry `round:t`; its `round_index` and `available_before_round` must both equal t, and the evidence string must be nonempty. The v2 evaluator requires explicit true assumptions for population-sample weighting, runtime-matching linear client contributions, ideal-reference RMS bounds, mode-relative ideal bounds, pre-secure-aggregation noise timing with fixed weights, conditional zero-mean and uncorrelated shares, aggregate-share second moments, and the numerical RMS bound. Each client-mode certificate must match the exact candidate identity, including mode, link mechanisms, DP execution plan, and noise multipliers and events. Missing, mismatched, or unproved entries raise an error before client training. The evaluator composes supplied certificates; it does not prove that a runtime, privacy accountant, or noise generator satisfies them.

Additive v1 specialization.. The v1 schema supplies a reference gradient g_{ref}, an ideal step η_*, a Cloud step γ, a gradient RMS error r_g, and per-client values s_i, r_i, and σ_i. With

$a_i = n_i / \sum_{j \in C^t} n_j$, the evaluator computes

$$C = \left| \eta_* - \gamma \sum_{i \in C^t} a_i^t s_i \right| \|g_{\text{ref}}\|_2,$$
$$R_{\text{ref}} = \eta_* r_g, \qquad R_{\text{mode}} = \gamma \sum_{i \in C^t} a_i^t r_i, \tag{A.32}$$
$$Q = \gamma^2 d \sum_{i \in C^t} (a_i^t)^2 (\sigma_i^t)^2,$$

and applies (A.26). Its lower bound uses no noise floor and is $\left(\max\{0, C - R_{\text{ref}} - R_{\text{mode}} - r_{\text{num}}\}\right)^2$. The coupled v2 form is preferred because it centers each client's own ideal contribution instead of relying on a single global reference direction.

Optional LIIC optimizer-derived radius.. For LIIC with LeNet-5, a mode radius can be derived from the actual clipped-gradient optimizer instead of being supplied directly. The proof must declare schema `dynfl.liic.sgd.v1`, LeNet-5, a fresh zero-momentum `torch.optim.SGD`, either sample-DP SGD or clipped SGD, the planned batch sizes and optimizer step count, a certified ideal reference radius, a matching Gaussian mechanism, and the absence or explicit modeling of further update transformations. With K steps, learning rate η, weight decay λ, $\alpha = 1 - \eta\lambda$, $b_k = \eta\alpha^{K-1-k}$, $S = \sum_k b_k$, per-step pathwise residual caps E_k, and clipping threshold C,

$$r_i^{\text{mode}} \le \left| \frac{S}{\eta_*} - 1 \right| \|\hat{v}_i^t\|_2 + \lambda S \|\theta_0\|_2 + \sum_k b_k E_k + \sqrt{d \sum_k b_k^2 \left(\frac{2C\sigma_i}{B_k} \right)^2} + r_i^{\text{ref}} + r_{\text{proj}}, \tag{A.33}$$

where the Gaussian term applies to sample-DP SGD, B_k is the actual batch denominator, and r_{proj} is added only when a release update is clipped. This specialization cannot be applied to ResNet-18 with momentum or weight decay, or to any path whose optimizer, batch schedule, noise, or transformations differ from the proof.

Connection with the descent guarantee.. Because (A.26) bounds J_{learn}^t from above, substituting it into (A.7) gives

$$\mathbb{E}_t[F(w^{t+1})] \le F(w^t) - \frac{\eta_t}{2} \|\nabla F(w^t)\|_2^2 + \frac{\overline{J}^t(\mathbf{h}^t)}{2\eta_t}, \tag{A.34}$$

and the PL recursion of Corollary 4 holds with $\overline{J}^t$ in place of J_{learn}^t. This does not turn the certificate into a convergence proof: the radii, noise moments, and assumptions remain conditional inputs, and the selected profile minimizes the certified upper bound rather than the unknown exact joint error.

Connection with the descent guarantee..

References

[1] B. McMahan, E. Moore, D. Ramage, S. Hampson, B. A. y Arcas, Communication-efficient learning of deep networks from decentralized data, in: Artificial intelligence and statistics, PMLR, 2017, pp. 1273–1282.

[2] Q. Zhao, H. Tang, H. Qiu, W. You, Y. Zhao, J. Lv, Flsp: A federated learning method with self-adaptive privacy for ensuring high model performance in edge computing, Future Generation Computer Systems 183 (2026) 108518. doi:https://doi.org/10.1016/j.future.2026.108518.
URL https://www.sciencedirect.com/science/article/pii/S0167739X26001524

[3] L. Liu, J. Zhang, S. Song, K. B. Letaief, Client-edge-cloud hierarchical federated learning, in: ICC 2020 - 2020 IEEE International Conference on Communications (ICC), 2020, pp. 1–6. doi:10.1109/ICC40277.2020.9148862.

[4] V. A. Le, J. Haga, Y. Tanimura, T. T. Nguyen, Flatec: An efficient federated learning scheme across the thing-edge-cloud environment, Future Gener. Comput. Syst. 175 (2026) 108073. doi:10.1016/J.FUTURE.2025.108073.
URL https://doi.org/10.1016/j.future.2025.108073

[5] Z. Yang, W. Qi, L. Guo, Hierarchical federated learning with device association and resource management for edge networks, Phys. Commun. 77 (2026) 103133. doi:10.1016/J.PHYCOM.2026.103133.
URL https://doi.org/10.1016/j.phycom.2026.103133

[6] T.-M. H. Hsu, H. Qi, M. Brown, Measuring the effects of non-identical data distribution for federated visual classification, arXiv preprint arXiv:1909.06335 (2019).

[7] T. Li, A. K. Sahu, M. Zaheer, M. Sanjabi, A. Talwalkar, V. Smith, Federated optimization in heterogeneous networks, Proceedings of Machine learning and systems 2 (2020) 429–450.

[8] S. P. Karimireddy, S. Kale, M. Mohri, S. Reddi, S. Stich, A. T. Suresh, Scaffold: Stochastic controlled averaging for federated learning, in: International conference on machine learning, PMLR, 2020, pp. 5132–5143.

[9] A. N. Khan, A. Rizwan, R. Ahmad, Q. W. Khan, X. Li, D. Kim, Accelerating model convergence in federated learning with layer-wise adaptive weight aggregation, Appl. Soft Comput. 201 (2026) 115676. doi:10.1016/J.ASOC.2026.115676.
URL https://doi.org/10.1016/j.asoc.2026.115676

[10] D. Liao, X. Gao, C. Xu, Mair: Model agnostic instance reweighing for heterogeneous federated learning, IEEE Transactions on Mobile Computing 25 (3) (2026) 4241–4252. doi:10.1109/TMC.2025.3624064.

[11] S. Wang, T. Tuor, T. Salonidis, K. K. Leung, C. Makaya, T. He, K. Chan, Adaptive federated learning in resource constrained edge computing systems, IEEE Journal on Selected Areas in Communications 37 (6) (2019) 1205–1221. doi:10.1109/JSAC.2019.2904348.

[12] L. Fan, Z. Zeng, X. Zhang, M. Duan, K. Sood, Joint client selection and epoch configuration for heterogeneity-aware federated learning in resource-constrained systems,

Future Generation Computer Systems 177 (2026) 108249. doi:https://doi.org/10.1016/j.future.2025.108249.
URL https://www.sciencedirect.com/science/article/pii/S0167739X25005436

[13] C. Ma, X. Li, B. Huang, G. Li, F. Li, Personalized client-edge-cloud hierarchical federated learning in mobile edge computing, Journal of Cloud Computing 13 (12 2024). doi:10.1186/s13677-024-00721-w.

[14] T. Du, X. Chen, G. Kou, Y. Zhao, C. Xu, A clustering federated learning method for cloud-edge personalized model decoupling, Chinese Journal of Computers 48 (2) (2025) 407–432.

[15] C. T. Dinh, N. H. Tran, M. N. H. Nguyen, C. S. Hong, W. Bao, A. Y. Zomaya, V. Gramoli, Federated learning over wireless networks: Convergence analysis and resource allocation, IEEE/ACM Transactions on Networking 29 (1) (2021) 398–409. doi:10.1109/TNET.2020.3035770.

[16] Z. Wu, S. Sun, Y. Wang, M. Liu, B. Gao, Q. Pan, T. He, X. Jiang, Agglomerative federated learning: Empowering larger model training via end-edge-cloud collaboration, IEEE INFOCOM 2024 - IEEE Conference on Computer Communications (2023) 131–140.
URL https://api.semanticscholar.org/CorpusID:266351000

[17] F. Mazloomi, S. Shah-Heydari, K. El-Khatib, A novel multi-server federated learning framework in vehicular edge computing, Future Internet 17 (2025) 315.
URL https://api.semanticscholar.org/CorpusID:280304434

[18] J. Haga, Y. Tanimura, T. T. Nguyen, et al., Sfetec: Split-federated learning scheme optimized for thing-edge-cloud environment, in: 2024 IEEE 20th International Conference on e-Science (e-Science), IEEE, 2024, pp. 1–2.

[19] C. Liu, J. Zhao, Y. Wang, Computation and communication resource optimization for efficient hierarchical federated learning, IEEE Transactions on Networking 34 (2026) 502–517. doi:10.1109/TON.2025.3600163.

[20] B. Yao, C. Li, W. Chen, Y. Chen, Fedcap: Community-aware aggregation and local alignment for personalized federated learning, Future Generation Computer Systems 182 (2026) 108495. doi:https://doi.org/10.1016/j.future.2026.108495.
URL https://www.sciencedirect.com/science/article/pii/S0167739X26001299

[21] C. Dwork, F. McSherry, K. Nissim, A. Smith, Calibrating noise to sensitivity in private data analysis, in: S. Halevi, T. Rabin (Eds.), Theory of Cryptography, Springer Berlin Heidelberg, Berlin, Heidelberg, 2006, pp. 265–284.

[22] I. Mironov, Rényi differential privacy, in: 2017 IEEE 30th Computer Security Foundations Symposium, 2017, pp. 263–275. doi:10.1109/CSF.2017.11.

[23] H. Wang, J. Mai, L. Zhang, L. Cui, F. R. Yu, J. Liu, Toward double-layer data privacy in communication-efficient hierarchical federated learning: A client sampling approach, IEEE Journal on Selected Areas in Communications 44 (2026) 2158–2172. doi:10.1109/JSAC.2025.3636844.

[24] J. H. Cheon, A. Kim, M. Kim, Y. Song, Homomorphic encryption for arithmetic of approximate numbers, in: Advances in Cryptology, ASIACRYPT 2017, Springer, 2017, pp. 409–437. doi:10.1007/978-3-319-70694-8_15.

[25] G. Zhu, W. Shen, Z. Liu, J. Qin, J. Ma, Bpflh: Byzantine-robust privacy-preserving federated learning for heterogeneous data, IEEE Transactions on Dependable and Secure Computing 23 (3) (2026) 6103–6118. doi:10.1109/TDSC.2026.3661522.

[26] M. F. Pervej, R. Jin, H. Dai, Hierarchical federated learning in wireless networks: Pruning tackles bandwidth scarcity and system heterogeneity, IEEE Transactions on Wireless Communications 23 (9) (2024) 11417–11432.

[27] Y. Xu, Y. Liao, H. Xu, Z. Ma, L. Wang, J. Liu, Adaptive control of local updating and model compression for efficient federated learning, IEEE Transactions on Mobile Computing 22 (10) (2023) 5675–5689. doi:10.1109/TMC.2022.3186936.

[28] F. Sattler, K.-R. Müller, W. Samek, Clustered federated learning: Model-agnostic distributed multitask optimization under privacy constraints, IEEE transactions on neural networks and learning systems 32 (8) (2020) 3710–3722.

[29] L. Collins, H. Hassani, A. Mokhtari, S. Shakkottai, Exploiting shared representations for personalized federated learning, in: International conference on machine learning, PMLR, 2021, pp. 2089–2099.

[30] J. Chen, H. Hou, Y. Hou, Z. Li, Hermes: Multi-job federated learning with switching cost in wireless networks, Computer Networks 281 (2026) 112204. doi:https://doi.org/10.1016/j.comnet.2026.112204.
URL https://www.sciencedirect.com/science/article/pii/S1389128626002161

[31] J. Wang, N. Wang, R. Zhou, B. Li, Efficient and intelligent multijob federated learning in wireless networks, IEEE Internet of Things Journal 12 (7) (2025) 8685–8698. doi:10.1109/JIOT.2024.3502403.

[32] S. Dong, R. Hou, Privacy-preserving task offloading scheme based on blockchain federated learning in end-edge-cloud computing environments, IEEE Internet of Things Journal 13 (13) (2026) 28810–28824. doi:10.1109/JIOT.2026.3684948.

[33] C. Zhang, Z. Zheng, Task migration for mobile edge computing using deep reinforcement learning, Future Generation Computer Systems 96 (2019) 111–118. doi:https://doi.org/10.1016/j.future.2019.01.059.
URL https://www.sciencedirect.com/science/article/pii/S0167739X18329674

[34] X. Zhu, W. Yao, W. Wang, Load-aware task migration algorithm toward adaptive load balancing in edge computing, Future Generation Computer Systems 157 (2024) 303–312. doi:https://doi.org/10.1016/j.future.2024.03.014.
URL https://www.sciencedirect.com/science/article/pii/S0167739X24000864

[35] L. Zhu, Z. Liu, S. Han, Deep leakage from gradients, in: H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, R. Garnett (Eds.), Advances in Neural Information Processing Systems, Vol. 32, Curran Associates, Inc., 2019.
URL https://proceedings.neurips.cc/paper_files/paper/2019/file/60a6c4002cc7b29142def8871531281a-Paper.pdf

[36] J. Chen, H. Jiang, Q. Hu, Utility-enhanced personalized privacy preservation in hierarchical federated learning, IEEE Transactions on Mobile Computing 24 (6) (2025) 5264–5279. doi:10.1109/TMC.2025.3531919.

[37] X. Xu, Y. Li, L. Lu, T. Wang, Adpfl: Adaptive differential privacy-enhanced federated learning, IEEE Internet of Things Journal 12 (23) (2025) 50682–50692. doi:10.1109/JIOT.2025.3611410.

[38] A. S. Kalafatelis, V. Nikolakakis, N. Tsoulakos, P. Trakadas, Privacy-preserving hierarchical federated learning over data spaces, in: 2025 IEEE International Conference on Big Data (BigData), 2025, pp. 6426–6435. doi:10.1109/BigData66926.2025.11400909.

[39] M. M. Islam, W. M. Abdullah, B. N. Saha, Privacy-preserving hierarchical fog federated learning (pp-hffl) for iot intrusion detection, Sensors (Basel, Switzerland) 25 (2025).
URL https://api.semanticscholar.org/CorpusID:283618612

[40] C. Dwork, A. Roth, The algorithmic foundations of differential privacy, Foundations and Trends in Theoretical Computer Science 9 (3–4) (2014) 211–407. doi:10.1561/0400000042.

[41] M. Abadi, A. Chu, I. Goodfellow, H. B. McMahan, I. Mironov, K. Talwar, L. Zhang, Deep learning with differential privacy, in: Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security, CCS '16, Association for Computing Machinery, New York, NY, USA, 2016, p. 308–318. doi:10.1145/2976749.2978318.
URL https://doi.org/10.1145/2976749.2978318

[42] I. Mironov, Rényi differential privacy, in: 2017 IEEE 30th Computer Security Foundations Symposium (CSF), 2017, pp. 263–275. doi:10.1109/CSF.2017.11.

[43] T. van Erven, P. Harremos, Rényi divergence and kullback-leibler divergence, IEEE Transactions on Information Theory 60 (7) (2014) 3797–3820. doi:10.1109/TIT.2014.2320500.

[44] L. Li, J. Lv, S. Wang, C. Hu, G. Sun, N. Li, Latency and energy-aware adaptive service migration in mobile edge computing, Scientific Reports 16 (1) (2026) 6178.